Test Run Report




Test Run Overview

Started 18 Oct 2021, 11:54:45 Ended 18 Oct 2021, 12:04:40

Duration (mm:ss) 09:55.136

Test Results Summary





Test Case Summary



- - WebService.testcase

successful

CustomAPI.testcase

Output

- Get First Date Of Current Month: # date
 - (i) Hello from customapis.GetFirstDateOfCurrentMonth

EmailURL.testcase

Output

- Subscribe: Gmail
 - Subscribing to a message source Gmail
 - ⑤ Subscribing to a Google Mail folder. Subscription Name: mail, User: shubham.saini@provartesting.com, Folder: INBOX
- Send Message: SendMail
 - (i) Sending Message from: SendMail
- Wait For: {mail.messageCount > 0}=>{30}
 - (i) Start of attempt 1.
 - Attempt 1
 - 1 The condition was not met sleeping for 30 seconds.
 - ① Received message for Google Mail subscription. Subscription Name: mail, connectionName: Gmail, message Id: 162, from: s6557230@gmail.com, subject: URL
 - (i) Start of attempt 2.
 - Attempt 2
 - (i) Wait ending because the condition has been met.
- Match: {mail.messages.bodyText}=>\b((?:https?|ftp|file)://[-a-zA-Z0-9+&@#/%?=~_|!:,.:]*)=>ExtractedURL
 - ① Compiling pattern. RegEx: \b((?:https?|ftp|file)://[-a-zA-Z0-9+&@#/%?=~_|l:,.;]*), caseInsensitive: false
 - ① Found match. Number: 1, Range: 147-177, Value: https://www.provartesting.com/
 - i End of matching. Match count: 1
 - (i) Stored matches. Result name: ExtractedURL

Service.testcase

Output

- Salesforce Connect: Admin (Test)
 - (i) Connecting to Salesforce as Admin
 - (i) Successfully connected to Salesforce as Admin
- Call Sales
 - Sales
 - Salesforce Connect: Admin (Test)
 - (i) Connecting to Salesforce as Admin
 - (1) Re-using existing connection. Connection: Admin, Result Name: Admin
 - Set Values: LeadCompany
 - (i) Setting value LeadLastName to Sam 4XB
 - Successfully set LeadLastName to Sam 4XB
 - (i) Setting value LeadCompany to abc 4XE
 - Successfully set LeadCompany to abc 4XE
 - Set Values: var.AccountName

- (i) Setting value var. AccountName to Sam Account 4XQ
- Successfully set var.AccountName to Sam Account 4XQ

Set Values: var.ContactLName

- Setting value ContactSalutation to Mr.
- Successfully set ContactSalutation to Mr.
- (i) Setting value var.ContactFName to First 5RS
- (i) Successfully set var.ContactFName to First 5RS
- (i) Setting value var.ContactLName to Last 5RU
- (i) Successfully set var.ContactLName to Last 5RU

Set Values: FullName

- (i) Setting value FullName to First 5RS Last 5RU
- ① Successfully set FullName to First 5RS Last 5RU

Set Values: OppName

- Setting value OppName to New Opp 5SH
- (i) Successfully set OppName to New Opp 5SH

Create Object: Lead=>LeadId

- ① Creating a new Salesforce object. Connection Name: Admin, Name: Lead, field count: 2
- A Failed to connect to Master Lock Manager assuming dead. Host: localhost, port: 54145, cause: Connection refused: no further information
- Setting fields:
- i =Field=> Company = abc 4XE
- i) =Field=> LastName = Sam 4XB
- Lead created successfully. Object Id: 00Q5g000008GnEREA0, Result Name: LeadId
- ① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q5g000008GnEREA0

Sleep for {10} seconds

① Doing timed sleep. Requested duration(seconds): 10

Timed sleep successful. Requested duration(seconds): 10, Actual duration(seconds): 10

On SF Lead All Open Leads list view

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Lead&action=List&listView=AllOpenLeads
- ① Opening Chrome webdriver instance to https://login.salesforce.com/
- (i) Successfully opened Chrome webdriver to https://login.salesforce.com/
- (1) Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Lead, RelatedList: null, Action: List, Page URL: /lightning/o/00Q/list?filterName=00B5g00000ROLjc, Current URL: chrome://new-tab-page/
- Opening Salesforce user home page
- Successfully opened user home page
- Going to update browser window handles.
- Successfully updated browser window handles.

With Lead rows {Name = Sam 4XB AND Company = abc 4XE}

- ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=List%2FlistView%2FlistTable
- ① Find element using xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]// div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]//tbody//tr
- (i) Waiting for element to be present. Timeout(seconds): 10
- (i) Populating webelement cells into the row Row Count: 17

Populated the row elements.

- ① Applying row locator to rows. Row Count: 17, Row Locator: {Name = \$LeadLastName AND Company = \$LeadCompany}
- (i) Testing row number 1
- (i) Resolving EqualTo. Bertha Boxer = Sam 4XB, result: false
- 1 Resolving EqualTo. Farmers Coop. of Florida = abc 4XE, result: false

- (i) Testing row number 2
- (i) Resolving EqualTo. Betty Bair = Sam 4XB, result: false
- (1) Resolving EqualTo. American Banking Corp. = abc 4XE, result: false
- 1 Testing row number 3
- (i) Resolving EqualTo. Brenda Mcclure = Sam 4XB, result: false
- (i) Resolving EqualTo. Cadinal Inc. = abc 4XE, result: false
- Testing row number 4
- (i) Resolving EqualTo. David Monaco = Sam 4XB, result: false
- 1 Resolving EqualTo. Blues Entertainment Corp. = abc 4XE, result: false
- 1 Testing row number 5
- (i) Resolving EqualTo. Jeff Glimpse = Sam 4XB, result: false
- (i) Resolving EqualTo. Jackson Controls = abc 4XE, result: false
- 1 Testing row number 6
- (i) Resolving EqualTo. Kathy Snyder = Sam 4XB, result: false
- (i) Resolving EqualTo. TNR Corp. = abc 4XE, result: false
- Testing row number 7
- (i) Resolving EqualTo. Kristen Akin = Sam 4XB, result: false
- (1) Resolving EqualTo. Aethna Home Products = abc 4XE, result: false
- 1 Testing row number 8
- (i) Resolving EqualTo. Mike Braund = Sam 4XB, result: false
- 1 Resolving EqualTo. Metropolitan Health Services = abc 4XE, result: false
- 1 Testing row number 9
- (i) Resolving EqualTo. Norm May = Sam 4XB, result: false
- (1) Resolving EqualTo. Greenwich Media = abc 4XE, result: false
- 10 Testing row number 10
- (i) Resolving EqualTo. Patricia Feager = Sam 4XB, result: false
- (i) Resolving EqualTo. International Shipping Co. = abc 4XE, result: false
- (i) Testing row number 11
- (i) Resolving EqualTo. Phyllis Cotton = Sam 4XB, result: false
- (1) Resolving EqualTo. Abbott Insurance = abc 4XE, result: false
- 12 Testing row number 12
- (i) Resolving EqualTo. Sam 1I1 = Sam 4XB, result: false
- (i) Resolving EqualTo. abc 1I1 = abc 4XE, result: false
- Testing row number 13
- (1) Resolving EqualTo. Sam 4XB = Sam 4XB, result: true
- (1) Resolving EqualTo. abc 4XE = abc 4XE, result: true
- (i) Row number 13 matched

- Going to update browser window handles.
- Successfully updated browser window handles.
- UI Assert
 - (i) Start of UiAssert. Connection: Admin
 - Resolving field Name
 - ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list? filterName=00B5g00000ROLjc
 - i) Doing before wait. waitUrl: default

- i End of <default> wait.
- ① Found element: [[[[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'listViewContainer')]//tbody//tr]] -> xpath: th//span//*[self::a or self::span[not(contains(@class, 'photoContainer'))]]]
- (i) Asserting field attributes: Name
- ① Asserting Attribute: value to PrimitiveValueImpl [value: Sam 4XB, valueId=0, createdUpdateSeq=55, updatedUpdateSeq=55]
- Assertion successful.Sam 4XB EqualTo Sam 4XB
- (i) Object read successfully. Result Name: Values
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- Going to update browser window handles.
- i Successfully updated browser window handles.

With Lead rows {Name = Sam 4XB}

- Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=List%2FlistView%2FlistTable
- ① Find element using xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]// div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]//tbody//tr
- (i) Waiting for element to be present. Timeout(seconds): 10
- (i) Populating webelement cells into the row Row Count: 31

Populated the row elements.

- ① Applying row locator to rows. Row Count: 31, Row Locator: {Name = \$LeadLastName}
- Testing row number 1
- (i) Resolving EqualTo. Bertha Boxer = Sam 4XB, result: false
- (i) Testing row number 2
- (i) Resolving EqualTo. Betty Bair = Sam 4XB, result: false
- Testing row number 3
- (i) Resolving EqualTo. Brenda Mcclure = Sam 4XB, result: false
- Testing row number 4
- (1) Resolving EqualTo. David Monaco = Sam 4XB, result: false
- (i) Testing row number 5
- (i) Resolving EqualTo. Jeff Glimpse = Sam 4XB, result: false
- 1 Testing row number 6
- (1) Resolving EqualTo. Kathy Snyder = Sam 4XB, result: false
- Testing row number 7
- (i) Resolving EqualTo. Kristen Akin = Sam 4XB, result: false
- Testing row number 8
- (i) Resolving EqualTo. Mike Braund = Sam 4XB, result: false
- (i) Testing row number 9
- (1) Resolving EqualTo. Norm May = Sam 4XB, result: false
- 10 Testing row number 10
- (i) Resolving EqualTo. Patricia Feager = Sam 4XB, result: false
- Testing row number 11
- (i) Resolving EqualTo. Phyllis Cotton = Sam 4XB, result: false
- 1 Testing row number 12
- Resolving EqualTo. Sam 1I1 = Sam 4XB, result: false
- (i) Testing row number 13
- (i) Resolving EqualTo. Sam 4XB = Sam 4XB, result: true

(i) Row number 13 matched

The row locator matched 1 row.

- Going to update browser window handles.
- Successfully updated browser window handles.

Click the Name field

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DName
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list? filterName=00B5g00000ROLjc
- i Interaction: ui:interaction?name=action
- 1 Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'listViewContainer')]//tbody//tr]] -> xpath: th//span//*[self::a or self::span[not(contains(@class, 'photoContainer'))]]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Sam 4XB, href: https://provartesting36-deved.lightning,force.com/lightning/r/00Q5g000008GnEREA0/view]
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (i) Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GnEREA0/view
- (1) Going to update browser window handles.
- Successfully updated browser window handles.

On SF Lead View screen

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Lead&action=View&noOverride=true
- A Partner Connection retry was successful. Method: query
- A Not populating record types for Salesforce Object no objectMetadata. Connection: Admin, object: Calendar, metadataTrace: null
- (i) Opening Page context. Name: screen, data: null, frame: null
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Click the Convert button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Convert&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead %26action%3DConvert, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Convert&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26action%3DConvert
- i) Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GnEREA0/view
- 1 Interaction: ui:interaction?name=action

- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Click element using xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabsert') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]/*[(self::div and contains(@class, 'flexipageBaseRecordHomeTemplateDesktop')) or (self::one-record-home-flexipage2)]/*[(self::header and contains(@role, 'banner')) or (self::force-highlights2)]//ii[(contains(@class, 'slds-dropdown-trigger') and contains(@class, 'slds-button_last')]
- 1 Hover>Clicking WebElement. WebElement [tag: li, text: 0, text: Show more actions]
- Find action link element using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace')) or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))) //*[(self::div and contains(@class, 'fexipageBaseRecordHomeTemplateDesktop')) or (self::one-record-home-flexipage2)]//div[contains(@class, 'actionsContainer')] | // div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//*[self::a or self::button][@name='Convert' or text() = 'Convert']
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabSet') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//*[[self::div and contains(@class, 'flexipageBaseRecordHomeTemplateDesktop')) or (self::one-record-home-flexipage2)]//div[contains(@class, 'actionsContainer')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//*[self::a or self::button][@name='Convert' or text() = 'Convert']]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Convert, href: javascript:void(0)]
- Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- (i) Closing Page context. Name: screen, data: null, frame: null
- Main window reselected. Window: main
- 1 Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GnEREA0/view
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

On SF Lead Convert screen

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Lead&action=Convert
- (1) Opening Page context. Name: screen, data: null, frame: null
- 1 Hover>Clicking WebElement. WebElement [tag: h2, text: Convert Lead]
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Set the Account Name field to Sam Account 4XQ

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount %26field%3Dname, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26field%3Dname
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GnEREA0/view
- i Interaction: ui:interaction?name=set

- ① Find element using xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset')) and ancestor::div[contains(@class, 'wsTabset')) or contains(@class, 'active') and (contains(@class, 'oneWorkspace')) or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'oneWorkspace') hasActiveSubtab')]))))))/div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))]/[1]//div[contains(@class, 'createPanel')]//div[contains(@class, 'uilnputText')]//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- 1 Doing before wait. waitUrl: default
- End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))] and ancestor::div[contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))]// div[contains(@class, 'runtime_sales_leadConvertDesktop')]/[fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][1]//div[contains(@class, 'entityPanel')]//div[contains(@class, 'col2')]// div[contains(@class, 'createPanel')]//div[contains(@class, 'uinputText')]//input]
- (1) Got webElement. tagName: INPUT, id: 1:1919;a, type: text, class: input
- 1 Typing value. tagName: INPUT, type: text, value: Sam Account 4XQ, blur: false
- Doing after wait. waitUrl: default
- ① End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.
- Set the Salutation picklist to Mr.
 - ① Start of Interact. Connection: Admin, Locator: ui:locator?name=salutation&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3Dsalutation, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=salutation&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3Dsalutation
 - ① Interaction: ui:interaction?name=set
 - ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GnEREA0/view
 - 1 Interaction: ui:interaction?name=set
 - ① Expanding the Section: [[[[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: // *[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//div[contains(@class, 'tuntime_sales_leadConvertDesktop')]//fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertDesktop'))]/[2]//div[contains(@class, 'contains(@class, 'contains(@c
 - 1 Hover>Clicking WebElement. WebElement [tag: a, text: Contact, href: javascript:void(0);]
 - ① Find element using xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal')) or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabsat'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'basPinnedRegionTemplate') and contains(@class, 'tabContains(@class, 'tabContains(
 - (1) Waiting for element to be present. Timeout(seconds): 10
 - i Doing before wait. waitUrl: default
 - i End of <default> wait.
 - ① Found element: [[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))] and ancestor::div[contains(@class, 'oneWorkspace') or contains(@class, 'declass, 'decl

'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))]// div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][2]//div[contains(@class, 'entityPanel')]//div[contains(@class, 'col2')]// div[contains(@class, 'createPanel')]//div[contains(@class, 'forceInputPicklist')]//a]

- (i) Got webElement. tagName: A, id: null, type: null, class: select
- 1 Typing value, tagName: A, type: null, value: Mr., blur: false
- Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]
- ① Clicking WebElement. WebElement [tag: a, text: Mr., href: javascript:void(0);]
- i Doing after wait. waitUrl: default
- End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Set the First Name field to First 5RS

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=firstName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DfirstName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=firstName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DfirstName
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GnEREA0/view
- 1 Interaction: ui:interaction?name=set
- ① Find element using xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal')) or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'nasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))] and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace')) or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop')]//div[contains(@class, 'entityPanel')]//div[contains(@class, 'col2')]// div[contains(@class, 'createPanel')]//div[contains(@class, 'uiInputText')]//input
- ① Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'vsTabBarHidden'))] and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]// div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'entityPanel')]//div[contains(@class, 'col2')]// div[contains(@class, 'createPanel')]//div[3]//div[contains(@class, 'uiInputText')]//input]
- Got webElement. tagName: INPUT, id: 39:1975;a, type: text, class: input
- 1 Typing value. tagName: INPUT, type: text, value: First 5RS, blur: false
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

Set the Last Name field to Last 5RU

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=lastName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DlastName, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=lastName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DlastName
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GnEREA0/
- 1 Interaction: ui:interaction?name=set
- ① Find element using xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and

(contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabSarHidden'))]] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'oneWorkspace') hasActiveSubtab')])))]/div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertDesktop')]/div[contains(@class, 'entityPanel')]//div[contains(@class, 'col2')]//div[contains(@class, 'createPanel')]//div[contains(@class, 'uinputText')]//input

- (1) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))] and ancestor::div[contains(@class, 'oneWorkspace') or contains(@class, 'wsTabset') and contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]]// div[contains(@class, 'runtime_sales_leadConvertDesktop')]/[eldset[contains(@class, 'slds-form-element')]//div[contains(@class, 'createPanel')]//div[contains(@class, 'uinput]]//div[contains(@class, 'createPanel')]//div[contains(@class, 'uinput]]//div[contains(@class, 'createPanel')]//div[contains(@class, 'uinput]]//div[contains(@class, 'uinput]]//div[contains(@class, 'uinput]]//div[contains(@class, 'uinput]]//div[contains(@class, 'createPanel')]//div[contains(@class, 'uinput]]//div[contains(@class, 'uinput]//div[contains(@cla
- 1 Got webElement. tagName: INPUT, id: 47:1975;a, type: text, class: input
- ① Typing value. tagName: INPUT, type: text, value: Last 5RU, blur: false
- ① Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

Set the Opportunity Name field to New Opp 5SH

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject %3DOpportunity%26field%3Dname, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26field%3Dname
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GnEREA0/view
- i Interaction: ui:interaction?name=set
- Expanding the Section: [[[[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: // *[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneVorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace')) or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'navexWorkspace')) and contains(@class, 'hasActiveSubtab')])))]//div[contains(@class,'runtime_sales_leadConvertDesktop')]//fieldset[contains(@class,'sids-form-element') and (contains(@class,'runtime_sales_leadConvertDesktop'))]//div[contains(@class,'col2')]// div[contains(@class,'cola
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Opportunity, href: javascript:void(0);]
- ① Find element using xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'nasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))] and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))] and ancestor::div[contains(@class, 'oneWorkspace')) or contains(@class, 'navexWorkspace')) and contains(@class, 'active') and (contains(@class, 'oneWorkspace')) or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'navexWorkspace')) and contains(@class, 'tabcontains(@class, 'tabcontains(@clas
- (i) Waiting for element to be present. Timeout(seconds): 10
- 1 Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))]// div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class,'slds-form-element') and

 $(contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][3]//div[contains(@class, 'entityPanel')]//div[contains(@class, 'col2')]//div[contains(@class, 'col2')]//div[contains(@class, 'untityPanel')]//div[contains(@class, 'untityPanel')]//div[contains(@c$

- 1 Got webElement. tagName: INPUT, id: 1:2029;a, type: text, class: input
- (i) Typing value. tagName: INPUT, type: text, value: New Opp 5SH, blur: false
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

Click the Convert button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=submitConvert&binding=sf%3Aui%3Abinding%3Aobject%3Faction%3DsubmitConvert, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=submitConvert&binding=sf%3Aui%3Abinding%3Aobject%3Faction%3DsubmitConvert
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GnEREA0/view
- 1 Interaction: ui:interaction?name=action
- ① Find element using xpath: (//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))]] and ancestor::div[contains(@class, 'wsTabset')]] and ancestor::div[contains(@class, 'wsTabset')]] and contains(@class, 'navexWorkspace')) and contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))] // div[contains(@class, 'modal-footer') or contains(@class, 'inlineFooter') or contains(@class, 'modal-footer'))][last()]//button[contains(@data-aura-rendered-by, '2134:0')]
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: (//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//div[contains(@class, 'modal_footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')])[[last()]// button[contains(@data-aura-rendered-by, '2134:0')]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Convert]
- 1 Doing after wait, waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- SOQL Query: select Id from Account where Account.Name = '{var.AccountName}'=>AccountId
 - ① Reading a Salesforce object. Connection Name: Admin, Query: select Id from Account where Account.Name = 'Sam Account 4XQ'
 - (i) Query successful. Row Count: 1.
- SOQL Query: select Id from Contact where Contact.FirstName = '{var.ContactFName}' AND Contact.LastName = '{var.ContactLName}' => ContactId
 - ① Reading a Salesforce object. Connection Name: Admin, Query: select Id from Contact where Contact.FirstName = 'First 5RS' AND Contact.LastName = 'Last 5RU'
 - (i) Query successful. Row Count: 1.
- SOQL Query: select Id from Opportunity where Opportunity.Name = 'New Opp 5SH'=>OpportunityId
 - 1 Reading a Salesforce object. Connection Name: Admin, Query: select Id from Opportunity where Opportunity.Name = 'New Opp 5SH'
 - (i) Query successful. Row Count: 1.
- Set Values: Id
 - ① Setting value Id to 00Q5g000008GnEREA0
 - ① Successfully set Id to 00Q5g000008GnEREA0
- Click the Go To Leads button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=convertedGoToLeads&binding=sf%3Aui%3Abinding%3Aobject %3Faction%3DconvertedGoToLeads, before wait: default, after wait: default, auto retry: default
- ⑤ Locator: ui:locator?name=convertedGoToLeads&binding=sf%3Aui%3Abinding%3Aobject%3Faction%3DconvertedGoToLeads
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GnEREA0/view
- 1 Interaction: ui:interaction?name=action
- ① Find element using xpath: (//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'naeWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabsat') and not(contains(@class, 'vsTabsat') and contains(@class, 'navexWorkspace')) and contains(@class, 'navexWorkspace')) and contains(@class, 'navexWorkspace')) and contains(@class, 'navexWorkspace')) and contains(@class, 'navexWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'inlineFooter') or contains(@class, 'inlineFooter') or contains(@class, 'inlineFooter') or contains(@class, 'inlineFooter'))][last()]//button[contains(@data-aura-rendered-by, '16:2315;a')]
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: (//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))]) and ancestor::div[contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//div[contains(@class, 'modal_footer') or contains(@class, 'modal_footer') or contains(@class, 'modal_footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')])[last()]// button[contains(@data-aura-rendered-by, '16:2315;a')]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Go to Leads]
- ① Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (1) Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list?filterName=Recent
- Going to update browser window handles.
- Successfully updated browser window handles.
- Read Object: Lead = 00Q5g000008GnEREA0
 - 1 Reading a Salesforce object. Connection Name: Admin, Name: Lead, Id: 00Q5g000008GnEREA0, field count: 3
 - (i) Object read successfully. Result Name: LeadRead
 - Result assertion 'Check ConvertedAccountId' successful: '0015g00000VZzKLAA1' contains '0015g00000VZzKLAA1'
 - Result assertion 'Check ConvertedContactId' successful: '0035g00000GByOCAA1' contains '0035g00000GByOCAA1'
 - Result assertion 'Check ConvertedOpportunityId' successful: '0065g00000CzvbhAAB' contains '0065g00000CzvbhAAB'
- On SF Account Home screen
 - ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Account&action=ObjectHome
 - (1) Opening Page context. Name: screen, data: null, frame: null
 - ① Opening Salesforce page. Object: Account, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/001/list?filterName=Recent, Current URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list
 - (i) Opening Salesforce user home page
 - (i) Successfully opened user home page
 - Going to update browser window handles.
 - Successfully updated browser window handles.
 - With Account rows {ACCOUNT_NAME = \$var.AccountName}

- 1 Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=ObjectHome%2Frecent%2FrecentTable
- ① Find element using xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/(tbody//tr
- (i) Waiting for element to be present. Timeout(seconds): 10
- (i) Populating webelement cells into the row Row Count: 17

① Applying row locator to rows. Row Count: 17, Row Locator: {ACCOUNT_NAME = \$var.AccountName}

The row locator matched 1 row.

- Going to update browser window handles.
- Successfully updated browser window handles.

Click the Account Name field

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=ACCOUNT_NAME&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26field%3DName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=ACCOUNT_NAME&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26field%3DName
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Account/list? filterName=Recent
- i Interaction: ui:interaction?name=action
- Doing before wait. waitUrl: default
- 1 End of <default> wait.
- ① Found element: [[[[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]//tbody//tr]] -> xpath: th//span//*[self::a or self::span[not(contains(@class, 'photoContainer'))]]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Sam Account 4XQ, href: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0015g00000VZzKLAA1/view]
- Doing after wait. waitUrl: default
- 1 End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- Going to update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (i) Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000VZzKLAA1/view
- Going to update browser window handles.
- Successfully updated browser window handles.

On SF Account View screen

- 1 Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Account&action=View&noOverride=true
- (i) Opening Page context. Name: screen, data: null, frame: null
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- With Contacts rows {FULL_NAME = First 5RS Last 5RU}
 - ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=View%2FContacts%2FContactsTable
 - Activating relatedListsTab tab
 - ① Hover>Clicking WebElement. WebElement [tag: a, text: Related, href: javascript:void(0)]

- ① Scrolling related list into view: ((//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))] | /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'navexWorkspace')) or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))] /ancestor::div[contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))] /ancestor::div[contains(@class, 'navexWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))] /ancestor::div[contains(@class, 'navexWorkspace')) or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::div[contains(@class, 'forceRelatedListSingleContainer'))]]/*[self::article and contains(@class, 'sl
- 1 Find element using xpath: ((//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace')) or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]] | //*[contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))] 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]] /ancestor::div[contains(@class,'oneRecordHomeFlexipage')])//*[self::lst-related-listsingle-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::lst-related-list-single-container)]])[1]//*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]//*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::lst-template-list-item-factory]
- (i) Waiting for element to be present. Timeout(seconds): 10
- (i) Populating webelement cells into the row Row Count: 0

① Applying row locator to rows. Row Count: 1, Row Locator: {FULL_NAME = \$FullName}

- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- UI Assert
 - 1 Start of UiAssert. Connection: Admin
 - Resolving field FULL_NAME
 - ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000VZzKLAA1/view
 - 1 Doing before wait. waitUrl: default
 - i End of <default> wait.
 - ① Found element: [[[[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: ((// *[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]] | // *[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) $or \ (contains(@class, 'tabContent') \ and \ ancestor:: div[contains(@class, 'wsTabset') \ and \ not(contains(@class, 'wsTabset'))) \ and \ not(contains$ 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))]/
 ancestor::div[contains(@class, 'oneRecordHomeFlexipage')])//*[self::lst-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::lst-related $list-single-container)]])[1]//*[(self::article\ and\ contains(@class,\ 'slds-card'))\ or\ (self::div\ and\ contains(@class,\ 'slds-card'))])[1]//*[(self::article\ and\ contains(@class,\ 'slds-card'))]])[1]//*[(self::article\ and\ contains(@class,\ 'slds-card'))]])[1]//*[(self::article\ and\ contains(@class,\ 'slds-card'))]]]]]]$ 'forceRelatedListPreviewAdvancedGrid'))]//*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::list-template-list-item-factory]]] -> xpath: .//div[contains(@class, 'slds-grid')]/h3//*[self::lightning-baseformatted-text or self::a or self::lightning-formatted-text]]
 - Asserting field attributes: FULL_NAME
 - ① Asserting Attribute: value to PrimitiveValueImpl [value: First 5RS Last 5RU, valueId=0, createdUpdateSeq=115, updatedUpdateSeq=115]
 - Assertion successful. First 5RS Last 5RU Contains First 5RS Last 5RU
 - (i) Reading Attribute: visible

- (i) Reading Attribute: disabled
- Reading Attribute: readOnly
- (i) Reading Attribute: focused
- (i) Reading Attribute: inlineEditable
- Reading Attribute: inView
- (i) Reading Attribute: options
- (i) Object read successfully. Result Name: Values
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- Going to update browser window handles.
- Successfully updated browser window handles.
- With Opportunities rows {OPPORTUNITY_NAME = New Opp 5SH}
 - Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=View%2FOpportunities%2FOpportunitiesTable
 - Activating relatedListsTab tab
 - (0) Hover>Clicking WebElement. WebElement [tag: a, text: Related, href: javascript:void(0)]
 - ① Scrolling related list into view: ((//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))] | /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'navexWorkspace')) or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))] /ancestor::div[contains(@class, 'navexWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))] /ancestor::div[contains(@class, 'navexWorkspace')) or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::div[contains(@class, 'forceRelatedListSingleContainer')) or (self::div and contains(@class, 'forceRelatedListSingleContainer')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]
 - ① Find element using xpath: ((//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))] | //*[contains(@class, 'active') and (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'hasActiveSubtab')])) and ancestor::div[contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))) // [active ontains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))) // [active ontains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))) // [active ontains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and conta
 - (i) Waiting for element to be present. Timeout(seconds): 10
 - (i) Populating webelement cells into the row Row Count: 0

① Applying row locator to rows. Row Count: 1, Row Locator: {OPPORTUNITY_NAME = \$OppName}

- (1) Going to update browser window handles.
- Successfully updated browser window handles.
- Ul Assert
 - i Start of UiAssert. Connection: Admin
 - (i) Resolving field OPPORTUNITY_NAME
 - § Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000VZzKLAA1/view
 - Doing before wait. waitUrl: default

- 1 End of <default> wait.
- ⑤ Found element: [[[[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: ((// *[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]] | // *[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@clas 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))] / ancestor:: div[contains(@class, 'oneRecordHomeFlexipage')])//*[self:: lst-related-list-single-container or self:: div[contains(@class, 'oneRecordHomeFlexipage')]])//*[self:: lst-related-list-single-container or self:: div[container or s'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::lst-relatedlist-single-container)]])[2]//*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]//*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::lst-template-list-item-factory]]] -> xpath: .//div[contains(@class,'slds-grid')]/h3//*[self::lightning-baseformatted-text or self::a or self::lightning-formatted-text]]
- ① Asserting field attributes: OPPORTUNITY_NAME
- ① Asserting Attribute: value to PrimitiveValueImpl [value: New Opp 5SH, valueId=0, createdUpdateSeq=121, updatedUpdateSeq=121]
- Assertion successful.New Opp 5SH EqualTo New Opp 5SH
- (i) Object read successfully. Result Name: Values
- Going to update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (1) Closing Page context. Name: screen, data: null, frame: null
- (1) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000VZzKLAA1/view
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- Read Object: Opportunity = {OpportunityId.Id}
 - ① Reading a Salesforce object. Connection Name: Admin, Name: Opportunity, Id: 0065g00000CzvbhAAB, field count: 3
 - ① Object read successfully. Result Name: OpportunityRead
 - Result assertion 'Check StageName' successful: 'Prospecting' = 'Prospecting'
 - Result assertion 'Check Probability' successful: 10.0 = '10.0'
 - Result assertion 'Check ContactId' successful: '0035g00000GByOCAA1' = '0035g00000GByOCAA1'
- On SF Opportunity Products related list
 - Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Opportunity&relatedList=OpportunityLineItems
 - (i) Opening Page context. Name: screen, data: null, frame: null
 - ① Opening Salesforce page. Object: Opportunity, RelatedList: null, Action: null, Page URL: /lightning/r/0065g00000CzoL8AAJ/related/ OpportunityLineItems/view, Current URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000VZzKLAA1/view
 - Opening Salesforce user home page
 - Successfully opened user home page
 - (1) Going to update browser window handles.
 - Successfully updated browser window handles.
 - Click the Products Select Product button
 - ① Start of Interact. Connection: Admin, Locator: ui:locator?name=addProd&binding=sf%3Aui%3Abinding%3Aobject%3Fobject %3DOpportunity%26action%3DaddProd%26relationship%3DOpportunityLineItems, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=addProd&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26action%3DaddProd%26relationship%3DOpportunityLineItems

- Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
- (i) Interaction: ui:interaction?name=action
- ① Find action link element using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabsarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//div[contains(@class, 'forceRelatedListDesktop')]//u[[contains(@class, 'oneActionsRibbon')]] //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]//a[contains(@data-aura-rendered-by, '824:0')]
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'tabContent') and (contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//div[contains(@class, 'navexWorkspace')]//u[contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//div[contains(@class, 'toreRelatedListDesktop')]//u[contains(@class, 'oneActionsRibbon')]] // div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'vsible')])//a[contains(@data-aura-rendered-by, '824:0')]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Add Products, href: javascript:void(0);]
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- (1) Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
- (1) Going to update browser window handles.
- Successfully updated browser window handles.

On SF Opportunity Product Select Product screen

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=OpportunityLineItem&action=addProd
- (i) Opening Page context. Name: screen, data: null, frame: null
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.
- With Search Table {Product2_Name = "SLA: Bronze"}
 - ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=addProd%2FSearchResults%2FSearchTable
 - ① Find element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'decompage (contains()))) and (contains()) and (contains())
 - (i) Waiting for element to be present. Timeout(seconds): 10
 - Populating webelement cells into the row Row Count: 17

Populated the row elements.

① Applying row locator to rows. Row Count: 17, Row Locator: {Product2_Name = "SLA: Bronze"}

- Going to update browser window handles.
- Successfully updated browser window handles.
- Check the Select Row rowSelectionCheckbox

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SelectRow&rowLocator=Product2_Name+%3D+%27SLA%3A+Bronze%27&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelectRow, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=SelectRow&rowLocator=Product2_Name+%3D+%27SLA%3A+Bronze%27&binding=sf%3Aui %3Abinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelectRow
- 1 Interaction: ui:interaction?name=check
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
- i Interaction: ui:interaction?name=check
- i Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'doceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[[last()]//div[contains(@class, 'listViewContent')]//tbody//tr]//div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'uiModal--multiEdit')]//div[contains(@class, 'listViewContent')]//tbody//tr]] -- xpath: td[2]//input]
- (i) Got webElement. tagName: INPUT, id: null, type: checkbox
- 1 Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- Going to update browser window handles.
- (i) Successfully updated browser window handles.
- With Search Table {Product2_Name = "SLA: Gold"}
 - ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=addProd%2FSearchResults%2FSearchTable
 - ① Find element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])/[last()]//div[contains(@class, 'listViewContent')]//tbody//tr|//div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]//preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]//div[contains(@class, 'listViewContent')]//tbody//tr
 - (1) Waiting for element to be present. Timeout(seconds): 10
 - (i) Populating webelement cells into the row Row Count: 17

① Applying row locator to rows. Row Count: 17, Row Locator: {Product2_Name = "SLA: Gold"}

- (1) Going to update browser window handles.
- Successfully updated browser window handles
- Check the Select Row rowSelectionCheckbox
 - ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SelectRow&rowLocator=Product2_Name+%3D+%27SLA%3A+Gold%27&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelectRow, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=SelectRow&rowLocator=Product2_Name+%3D+%27SLA%3A+Gold%27&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelectRow
 - i Interaction: ui:interaction?name=check
 - ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
 - i) Interaction: ui:interaction?name=check
 - 1 Doing before wait. waitUrl: default
 - i End of <default> wait.
 - ① Found element: [[[[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][[last()]//div[contains(@class, 'listViewContent')]//tbody//tr|//div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]//preceding-sibling::div[contains(@class, 'open') and

(contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]//div[contains(@class, 'listViewContent')]//tbody//tr]] -> xpath: td[2]//input]

- (i) Got webElement. tagName: INPUT, id: null, type: checkbox
- Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Click the Select button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Select&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelect, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Select&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelect
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
- 1 Interaction: ui:interaction?name=action
- ① Find element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'doceModal') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//button[contains(@class, 'forceActionButton')][2] | //div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]// preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]// button[contains(@class, 'forceActionButton')][2]
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[[ast()]//button[contains(@class, 'forceActionButton')][2] | //div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]//preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/button[contains(@class, 'forceActionButton')][2]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Next]
- ① Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- i Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
- Going to update browser window handles.
- Successfully updated browser window handles.

On SF Opportunity Product Add Product screen

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=OpportunityLineItem&action=addProd2
- (i) Opening Page context. Name: screen, data: null, frame: null
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- With OpportunityLineItem rows {Product2Id = "SLA: Bronze"}
 - ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=OpportunityLineItemTable
 - ① Find element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'forceFormPageError')])][last()]//div[contains(@class, 'listViewContent')]//tbody//tr|//div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]//

preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]// div[contains(@class, 'listViewContent')]//tbody//tr (i) Waiting for element to be present. Timeout(seconds): 10 Populating webelement cells into the row Row Count: 2 Populated the row elements. ① Applying row locator to rows. Row Count: 2, Row Locator: {Product2Id = "SLA: Bronze"} The row locator matched 1 row. Going to update browser window handles. Successfully updated browser window handles. Set the Quantity field to 2.00 ⑤ Start of Interact. Connection: Admin, Locator: ui:locator?name=Quantity&rowLocator=Product2Id+%3D+%27SLA%3A+Bronze %27&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DQuantity, before wait: default, after wait: default, auto retry: default $\textbf{\textcircled{1}} Locator: ui:locator?name=Quantity\&rowLocator=Product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=sf\%3Aui\%3Abinding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=sf\%3Aui\%3Abinding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=sf\%3Aui\%3Abinding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=sf\%3Aui\%3Abinding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=sf\%3Aui\%3Abinding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=sf\%3Aui\%3Abinding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=sf\%3Aui\%3Abinding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=product2Id+\%3D+\%27SLA\%3A+Bronze\%27\&binding=product2Id+\%27SLA\%3A+Bronze\%27\&binding=product2Id+\%27SLA\%3A+Bronze\%27\&binding=product2Id+\%27\&bindin$ %3Aobject%3Fobject%3DOpportunityLineItem%26field%3DQuantity i Interaction: ui:interaction?name=set ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/ related/OpportunityLineItems/view 1 Interaction: ui:interaction?name=set i Doing before wait. waitUrl: default i End of <default> wait. ① Found element: [[[[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or followingsibling::div[contains(@class, 'forceFormPageError')])][last()]//div[contains(@class, 'listViewContent')]//tbody//tr|//div[contains(@class, 'listViewContent')]//tbody//tr 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]//preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]//div[contains(@class, 'listViewContent')]//tbody//tr]] -> xpath: td[not(contains(@class, 'errorColumn')) and not(./span[contains(@class, 'forceVirtualCheckbox')])][1]/span/*[self::span or (i) Got webElement. tagName: SPAN, id: null, type: null, class: slds-truncate uiOutputNumber ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Edit Quantity: Item 1] ① Typing value. tagName: INPUT, type: text, value: 2.00, blur: false i Doing after wait. waitUrl: default i End of <default> wait. (i) Going to update browser window handles. Successfully updated browser window handles. All Sub-Test Steps were successful. Going to update browser window handles. Successfully updated browser window handles. With OpportunityLineItem rows {Product2Id = "SLA: Gold"} ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=OpportunityLineItemTable ⑤ Find element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))

- and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//div[contains(@class, 'listViewContent')]//tbody//tr|//div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]// preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]// div[contains(@class, 'listViewContent')]//tbody//tr
- (i) Waiting for element to be present. Timeout(seconds): 10
- (i) Populating webelement cells into the row Row Count: 2

Populated the row elements.

Applying row locator to rows. Row Count: 2, Row Locator: {Product2Id = "SLA: Gold"}

- Going to update browser window handles.
- Successfully updated browser window handles.
- Set the Quantity field to 2.00

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Quantity&rowLocator=Product2Id+%3D+%27SLA%3A+Gold %27&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DQuantity, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Quantity&rowLocator=Product2Id+%3D+%27SLA%3A+Gold%27&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DQuantity
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
- i Interaction: ui:interaction?name=set
- i Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'doceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//div[contains(@class, 'listViewContent')]//tbody//tr]//div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'uiModal--multiEdit'))]//div[contains(@class, 'listViewContent')]//tbody//tr]] -> xpath: td[not(contains(@class, 'errorColumn')) and not(./span[contains(@class, 'forceVirtualCheckbox')])][1]/span/*[self::span or self::a][1]]
- ① Got webElement. tagName: SPAN, id: null, type: null, class: slds-truncate uiOutputNumber
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Edit Quantity: Item 2]
- ① Typing value. tagName: INPUT, type: text, value: 2.00, blur: false
- i Doing after wait. waitUrl: default
- 1 End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- Going to update browser window handles.
- (i) Successfully updated browser window handles.

Click the Save button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=save&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunityLineItem%26action%3Dsave, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=save&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunityLineItem%26action%3Dsave
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
- i Interaction: ui:interaction?name=action
- ① Find element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//button[contains(@class, 'forceActionButton')][3] | //div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]// preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]// button[contains(@class, 'forceActionButton')][3]
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//button[contains(@class, 'forceActionButton')][3] | //div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]//preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/button[contains(@class, 'forceActionButton')][3]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- 1 Doing after wait. waitUrl: default
- End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.

- (1) Closing Page context. Name: screen, data: null, frame: null
- i Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

On SF Opportunity Products related list

- 1 Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Opportunity&relatedList=OpportunityLineItems
- (i) Opening Page context. Name: screen, data: null, frame: null
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

With OpportunityLineItems rows {Product2 = "SLA: Bronze"}

- ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=OpportunityLineItems%2FOpportunityLineItemsTable
- ① Find element using xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@id, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace'))]))]//div[contains(@class, 'listViewContent')]/(tbody//tr
- (i) Waiting for element to be present. Timeout(seconds): 10
- (i) Populating webelement cells into the row Row Count: 17

Populated the row elements.

① Applying row locator to rows. Row Count: 17, Row Locator: {Product2 = "SLA: Bronze"}

The row locator matched 1 row.

- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- UI Assert
 - (i) Start of UiAssert. Connection: Admin
 - (i) Resolving field Product2
 - ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
 - Doing before wait. waitUrl: default
 - ① End of <default> wait.
 - ① Found element: [[[[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@id, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace'))]])]]// div[contains(@class, 'listViewContent')]/tbody//tr]] -> xpath: th//span//*[self::a or self::span[not(contains(@class, 'photoContainer'))]]]
 - Asserting field attributes: Product2
 - ① Asserting Attribute: value to PrimitiveValueImpl [value: SLA: Bronze, valueId=0, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 - ☑ Assertion successful.SLA: Bronze EqualTo SLA: Bronze
 - (i) Object read successfully. Result Name: Values
 - (i) Going to update browser window handles.
 - Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

With OpportunityLineItems rows {Product2 = "SLA: Gold"}

- ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=OpportunityLineItems%2FOpportunityLineItemsTable
- ① Find element using xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@id, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace'))]))]//div[contains(@class, 'listViewContent')]//tbody//tr
- (1) Waiting for element to be present. Timeout(seconds): 10
- Populating webelement cells into the row Row Count: 17

Populated the row elements.

① Applying row locator to rows. Row Count: 17, Row Locator: {Product2 = "SLA: Gold"}

The row locator matched 1 row.

- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- UI Assert
 - (i) Start of UiAssert. Connection: Admin
 - Resolving field Product2
 - ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
 - i Doing before wait. waitUrl: default
 - i End of <default&qt; wait.
 - ① Found element: [[[[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@id, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace'))]])]]// div[contains(@class, 'listViewContent')]/tbody//tr]] -> xpath: th//span//*[self::a or self::span[not(contains(@class, 'photoContainer'))]]]
 - i Asserting field attributes: Product2
 - (1) Asserting Attribute: value to PrimitiveValueImpl [value: SLA: Gold, valueId=0, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 - Assertion successful.SLA: Gold EqualTo SLA: Gold
 - (i) Object read successfully. Result Name: Values
 - (i) Going to update browser window handles.
 - Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (1) Closing Page context. Name: screen, data: null, frame: null
- (1) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- Set Values: var.conId
 - ① Setting value var.conId to 0035g00000GByOCAA1
 - Successfully set var.conld to 0035g00000GByOCAA1
- Write: {var}=>templates/writeworkbook.xlsx
 - (i) Writing to URL templates/writeworkbook.xlsx
 - ① Start of Excel Write. WorkbookPath: templates/writeworkbook.xlsx, excludeCols: [none]
 - ① Workbook location: C:\Users\shubham.saini\Training Use Case WS\Training Project\templates\writeworkbook.xlsx
 - Writing data to excel sheet: Sheet1

Completed writing data to excel sheet: Sheet1

- 1 Handling managed resource. Name: Admin
- (1) Salesforce Connection handled successfully. Name: Admin
- Salesforce Connect: Admin (Test)
 - (i) Connecting to Salesforce as Admin
- Read Excel
 - (i) Loading data from Parameter Value Source ...

- (i) Loading Parameter Value Source row 1:
- 🛈 ==Column=> RowNumber = PrimitiveValueImpl [value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> AccountName = PrimitiveValueImpl [value: Sam Account 4XQ, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- 1 ==Column=> ContactFName = PrimitiveValueImpl [value: First 5RS, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- 1 ==Column=> ContactLName = PrimitiveValueImpl [value: Last 5RU, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> ConId = PrimitiveValueImpl [value: 0035g00000GByOCAA1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 Loaded 1 rows from Parameter Value Source.

On SF Case Home screen

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Case&action=ObjectHome
- (i) Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Case, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/500/list?filterName=Recent, Current URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
- Opening Salesforce user home page
- (i) Successfully opened user home page
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.

Click the New Case button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=NewCase&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase %26action%3DNewCase, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=NewCase&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase%26action%3DNewCase
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/list?filterName=Recent
- 1 Interaction: ui:interaction?name=action
- ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]// div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop')or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]//ul[contains(@class, 'oneActionsRibbon')] | // div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '914:0')]
- ① Waiting for element to be present. Timeout(seconds): 10
- 1 Doing before wait. waitUrl: default
- 1 End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]//ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '914:0')]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]
- i Doing after wait. waitUrl: default
- End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- 1 Closing Page context. Name: screen, data: null, frame: null
- (1) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.

Set Values: CaseOrigin

- Setting value CaseStatus to New
- (i) Successfully set CaseStatus to New

- (i) Setting value CaseOrigin to Phone
- (i) Successfully set CaseOrigin to Phone

On SF Case New screen

- 1 Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Case&action=New&noOverride=true
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Hover>Clicking WebElement. WebElement [tag: h2, text: New Case]
- Going to update browser window handles.
- (i) Successfully updated browser window handles.

Set the Status picklist to New

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Status&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase%26field %3DStatus, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Status&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase%26field%3DStatus
- i) Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent
- 1 Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))) and (.//text()[normalize-space()='Status'] or .//text() = 'Status')]/ancestor::div[1]
- ⑤ Find field using relative xpath: //*[self::a or self::input]
- Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@77e705fa -> unknown locator]] -> xpath: .//*[self::a or self::input]]
- ① Got webElement. tagName: INPUT, id: input-162, type: text, class: slds-input slds-combobox__input
- ① Typing value. tagName: INPUT, type: text, value: New, blur: false
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item, text: New]
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

Set the Case Origin picklist to Phone

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Origin&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase%26field %3DOrigin, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Origin&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase%26field%3DOrigin
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent
- 1 Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]//*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide '))) or (self::ghtning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))) and (.//text()[normalize-space()='Case Origin'] or .//text() = 'Case Origin')]/ancestor::div[1]
- ① Find field using relative xpath: .//*[self::a or self::input]
- ① Waiting for element to be present. Timeout(seconds): 10

- i Doing before wait. waitUrl: default
- End of <default> wait.
- ⑤ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@77e705fe -> unknown locator]] -> xpath: .//*[self::a or self::input]]
- (i) Got webElement. tagName: A, id: null, type: null, class: select
- 1 Typing value. tagName: A, type: null, value: Phone, blur: false
- ① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]
- ① Clicking WebElement. WebElement [tag: a, text: Phone, href: javascript:void(0);]
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- i Successfully updated browser window handles.

Lookup the Contact Name reference

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=ContactId&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase %26field%3DContactId, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=ContactId&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase%26field%3DContactId
- (i) Interaction: ui:interaction?name=sfLookup
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent
- 1 Interaction: ui:interaction?name=sfLookup
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))) and (.//text()[normalize-space()='Contact Name'] or ./text() = 'Contact Name')]/ancestor::div[1]
- i Find field using relative xpath: .//input
- i) Waiting for element to be present. Timeout(seconds): 10
- 1 Doing before wait. waitUrl: default
- End of <default> wait.
- ⑤ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@77e70619 -> unknown locator]] -> xpath: .//input]
- (i) Hover>Clicking WebElement. WebElement [tag: input]
- (1) Waiting for lookup dropdown list to appear
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

On SF Contact Lookup screen

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?lookup=Contact
- (1) Opening Page context. Name: screen, data: null, frame: null
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

SettheSearchtexttoFirst 5RS Last 5RU

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SearchName&path=searchFrame, before wait: null, after wait: null, auto retry: default
- ① Locator: ui:locator?name=SearchName&path=searchFrame
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent

- ① Doing before wait. waitUrl: default
- End of <default> wait.
- ① Found element: [org.openqa.selenium.remote.RemoteWebElement@77e7061a -> unknown locator]
- ① Clicking WebElement. WebElement [tag: div, text: Search Contacts "First 5RS Last 5RU" in Contacts]
- 1 Doing after wait. waitUrl: default
- End of <default> wait.
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.

Click the Go! button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=go&path=searchFrame, before wait: null, after wait: null, auto retry: default
- ① Locator: ui:locator?name=go&path=searchFrame
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent
- Doing before wait. waitUrl: default
- i End of <default> wait.
- 1 Found element: com.provar.core.model.ui.java.NullWebElement@7dbbfc59
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

Click the Name button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=1, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=1
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent
- 1 Interaction: ui:interaction?name=action
- (i) Populating webelement cells into the row Row Count: 0

Populated the row elements.

(1) Applying row locator to rows. Row Count: 1, Row Locator: {1}

- Doing before wait. waitUrl: default
- i End of <default> wait.
- 🛈 Found element: [[[org.openqa.selenium.remote.RemoteWebElement@77e7061f -> unknown locator]] -> xpath: td[1]/span|td[1]//a]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: First 5RS Last 5RU, href: https://provartesting36-deved.lightning.force.com/lightning/r/0035g00000GByOCAA1/view]
- 1 Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- 1 Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent

- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent
- Going to update browser window handles.
- Successfully updated browser window handles.

Lookup the Account Name reference

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=AccountId&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase %26field%3DAccountId, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=Accountld&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase%26field%3DAccountld
- 1 Interaction: ui:interaction?name=sfLookup
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent
- Interaction: ui:interaction?name=sfLookup
- Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))) and (.//text()[normalize-space()='Account Name'] or .//text() = 'Account Name')]/ancestor::div[1]
- Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- 1 Doing before wait. waitUrl: default
- End of <default> wait.
- 1 Found element: [[[org.openqa.selenium.remote.RemoteWebElement@77e70621 -> unknown locator]] -> xpath: .//input
- (i) Hover>Clicking WebElement, WebElement [tag: input]
- Waiting for lookup dropdown list to appear
- 1 Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

On SF Account Lookup screen

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?lookup=Account
- (1) Opening Page context. Name: screen, data: null, frame: null
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Set the Search text to Sam Account 4XQ

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SearchName&path=searchFrame, before wait: null, after wait: null, auto retry: default
- (i) Locator: ui:locator?name=SearchName&path=searchFrame
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent
- 1 Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [org.openqa.selenium.remote.RemoteWebElement@77e70622 -> unknown locator]
- ① Clicking WebElement. WebElement [tag: div, text: Search Accounts "Sam Account 4XQ" in Accounts]
- i Doing after wait. waitUrl: default
- 1 End of <default> wait.
- Going to update browser window handles.

(i) Successfully updated browser window handles.

Click the Go! button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=go&path=searchFrame, before wait: null, after wait: null, auto retry: default
- (i) Locator: ui:locator?name=go&path=searchFrame
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent
- ① Doing before wait. waitUrl: default
- i End of <default> wait.
- 1 Found element: com.provar.core.model.ui.java.NullWebElement@5434d6ca
- i) Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Click the Account Name button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=1, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=1
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent
- 1 Interaction: ui:interaction?name=action
- (i) Populating webelement cells into the row Row Count: 0

Populated the row elements.

(1) Applying row locator to rows. Row Count: 1, Row Locator: {1}


The row locator matched 1 row.

- ① Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@77e7063c -> unknown locator]] -> xpath: td[1]/span|td[1]//a]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Sam Account 4XQ, href: https://provartesting36-deved.lightning.force.com/lightning/r/0015g00000VZzKLAA1/view]
- Doing after wait. waitUrl: default
- End of <default> wait.
- (1) Going to update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (i) Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext=%2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent
- Going to update browser window handles.
- Successfully updated browser window handles.

Click the Save button

Start of Interact. Connection: Admin, Locator: ui:locator?name=save&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase%26action %3Dsave, before wait: default, after wait: default, auto retry: default

- 1 Locator: ui:locator?name=save&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase%26action%3Dsave Interaction: ui:interaction?name=action ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163453878989742447&backgroundContext= %2Flightning%2Fo%2FCase%2Flist%3FfilterName%3DRecent i Interaction: ui:interaction?name=action 1 Find action link element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//button[contains(@data-aura-rendered-by, (i) Waiting for element to be present. Timeout(seconds): 10 i Doing before wait. waitUrl: default i End of <default> wait. 1 Found element: [[ChromeDriver: chrome on XP (20a8fa87decff7193803abc3d631e948)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//button[contains(@data-aura-rendered-by, '1267:0')]] ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save] i Doing after wait. waitUrl: default i End of <default> wait. Going to update browser window handles. Successfully updated browser window handles. SOQL Query: select CaseNumber from Case where ContactId = '{SourceData.ConId}'=>CaseNumber 1 Reading a Salesforce object. Connection Name: Admin, Query: select CaseNumber from Case where ContactId = '0035g00000GByOCAA1' (i) Query successful. Row Count: 1. i All Sub-Test Steps were successful. ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000Fjcg0AAB/view (i) Injecting script to get created object ID from aura component Fetching created Id from URL Storing created Salesforce Object ID. Result Name: caseld, created ID: 5005g00000Fjcg0AAB, location: https://provartesting36-deved.lightning.force.com/lightning/r/Case/5005g00000Fjcg0AAB/view Logging Salesforce Object Id for clean up. Object Name: Case, id: 5005g00000Fjcg0AAB (1) Closing Page context. Name: screen, data: null, frame: null i Main window reselected. Window: main ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000Fjcg0AAB/view (i) Going to update browser window handles. Successfully updated browser window handles.
- On SF Related Record (Case) component in Case view
 - ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?flexiPage=support__Case_rec_L_3col&flexiPath=leftsidebar%3A%3A0&lightningComponent=console%3ArelatedRecord
 - ① The related record component's updateQuickActionName isn't populated.FlexiPage: support__Case_rec_L_3col; FlexiPath: leftsidebar::0; Region: leftsidebar; Flexi component: console:relatedRecord
 - (1) Opening Page context. Name: screen, data: null, frame: null
 - (i) Going to update browser window handles.
 - Successfully updated browser window handles.
 - UI Assert

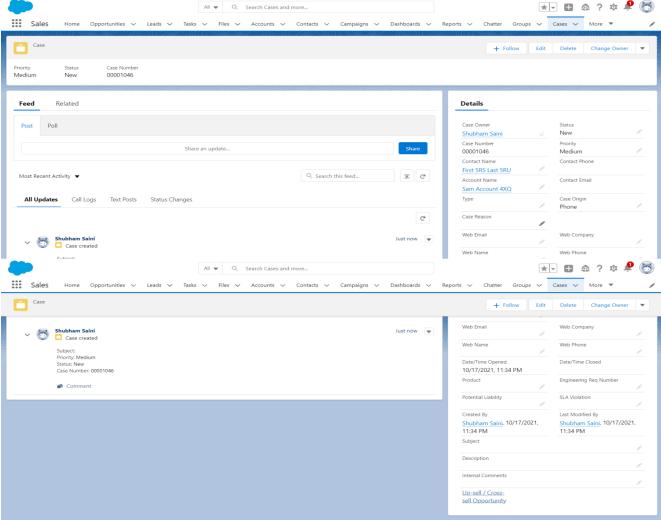

Error Screenshot

- ① Start of UiAssert. Connection: Admin
- (i) Resolving field CaseNumber
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000Fjcg0AAB/view
- ① Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'navexWorkspace')) or ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'navexWorkspace')) and contains(@class, 'navexWorkspace') or contains(@class, 'active') and contains(@class, 'hasActiveSubtab')]]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasPinnedRegionTemplate') and contains(@class,
- ① Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- i End of <default> wait.
- The Salesforce Object definition could not be found. Target: sf:ui:target?flexiPage=support__Case_rec_L_3col&flexiPath=leftsidebar%3A%3A0&lightningComponent=console%3ArelatedRecord, object: null
- (1) Asserting field attributes: CaseNumber
- ① Asserting Attribute: value to PrimitiveValueImpl [value: 00001046, valueId=100000000009, createdUpdateSeq=238, updatedUpdateSeq=238]
- Assertion Failed.null EqualTo 00001046

- (i) Object read successfully. Result Name: Values
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- One or more Sub-Test Steps failed.
- (i) Closing Page context. Name: screen, data: null, frame: null
- i Main window reselected. Window: main
- ⑤ Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000Fjcg0AAB/view
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- On SF Record Detail component in Case view
- On SF Account View screen
- On SF Record Detail component in Case view
- On SF Contact View screen
- Read Object: Case = {caseId}

WebService.testcase

Output

- Web Connect: JsonAPI
 - (i) Opening RestService connection Connection name: JsonAPI
 - ① Connecting to restservice. Address: https://jsonplaceholder.typicode.com/

Connection name: JsonAPI, ResultName: JsonAPI, resultScope: Test

- ① Connection details. Connection name: JsonAPI, urlString: restservice:url= https://jsonplaceholder.typicode.com/;authenticationType=NO_AUTHENTICATION, url: https://jsonplaceholder.typicode.com/
- Web Request (REST): #GetRestResponse
 - ① Calling a Web Service. Connection Name: JsonAPI, target: rest:untyped?method=GET&bodyStyle=JSON
 - ① Connecting to website. Address: https://jsonplaceholder.typicode.com/posts/1
 - ① Reading response. Content Type: application/json; charset=utf-8, Encoding: null
 - (i) Parsing JSON response.
 - (i) REST Response stored successfully. Name: GetRestResponse
 - (i) Web Response Status stored successfully. Name: RestResponseStatus
- Web Request (REST): #PostRestResponse
 - ① Calling a Web Service. Connection Name: JsonAPI, target: rest:untyped?method=POST&bodyStyle=JSON
 - ① Connecting to website. Address: https://jsonplaceholder.typicode.com/posts/
 - (i) Sending body. Length: 85
 - (i) Reading response. Content Type: application/json; charset=utf-8, Encoding: null
 - Parsing JSON response.
 - (i) REST Response stored successfully. Name: PostRestResponse
 - ① Web Response Status stored successfully. Name: RestResponseStatus
- Web Request (REST): #PutRestResponse
 - ① Calling a Web Service. Connection Name: JsonAPI, target: rest:untyped?method=PUT&bodyStyle=JSON
 - ① Connecting to website. Address: https://jsonplaceholder.typicode.com/posts/1
 - Sending body. Length: 85
 - ① Reading response. Content Type: application/json; charset=utf-8, Encoding: null
 - (i) Parsing JSON response.

- ① REST Response stored successfully. Name: PutRestResponse
- $\textcircled{1} \ \mathsf{Web} \ \mathsf{Response} \ \mathsf{Status} \ \mathsf{stored} \ \mathsf{successfully}. \ \mathsf{Name:} \ \mathsf{RestResponse} \ \mathsf{Status}$