

Test Run Report




Test Run Overview

Started 18 Oct 2021, 14:25:14
Ended 18 Oct 2021, 14:32:32
Duration (mm:ss) 07:17.796

Test Results Summary

Passed 4
Failed 0
Skipped 0

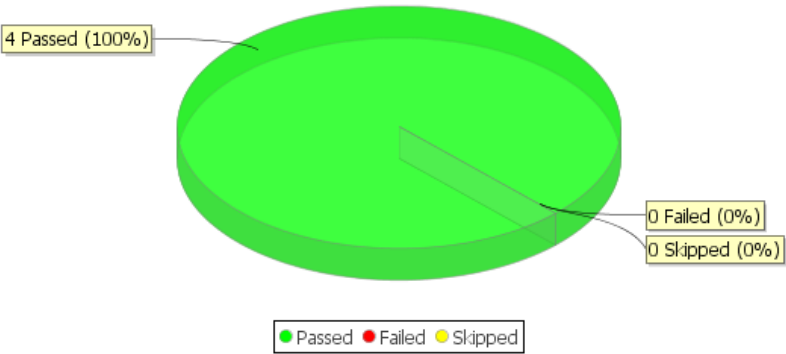

Test Case Summary

tests	successful
CustomAPI.testcase	successful
EmailURL.testcase	successful
Sale & Service	successful
Service.testcase	successful
WebService.testcase	successful

CustomAPI.testcase

Output

- Get First Date Of Current Month: # date
 - ① Hello from customapis.GetFirstDateOfCurrentMonth

EmailURL.testcase

Output

- Subscribe: Gmail
 - ① Subscribing to a message source Gmail
 - ① Subscribing to a Google Mail folder. Subscription Name: mail, User: shubham.saini@provartesting.com, Folder: INBOX
- Send Message: SendMail
 - ① Sending Message from: SendMail
- Wait For: {mail.messageCount > 0}=>{30}
 - ① Start of attempt 1.
 - Attempt 1
 - ① The condition was not met - sleeping for 30 seconds.
 - ① Received message for Google Mail subscription. Subscription Name: mail, connectionName: Gmail, message Id: 172, from: s6557230@gmail.com, subject: URL
 - ① Start of attempt 2.
 - Attempt 2
 - ① Wait ending because the condition has been met.
- Match: {mail.messages.bodyText}>=>b((?:https?|ftp|file):/[a-zA-Z0-9+&@#/%?=_~!|:.,;]*)=>ExtractedURL
 - ① Compiling pattern. RegEx: \b((?:https?|ftp|file):/[a-zA-Z0-9+&@#/%?=_~!|:.,;]*)
 - ① Found match. Number: 1, Range: 147-177, Value: https://www.provartesting.com/
 - ① End of matching. Match count: 1
 - ① Stored matches. Result name: ExtractedURL

Service.testcase

Output

- Salesforce Connect: Admin (Test)
 - ① Connecting to Salesforce as Admin
 - ① Successfully connected to Salesforce as Admin
- Call Sales
 - Sales
 - Salesforce Connect: Admin (Test)
 - ① Connecting to Salesforce as Admin
 - ① Re-using existing connection. Connection: Admin, Result Name: Admin
 - Set Values: LeadCompany
 - ① Setting value LeadLastName to Sam OH2
 - ① Successfully set LeadLastName to Sam OH2
 - ① Setting value LeadCompany to abc OH3
 - ① Successfully set LeadCompany to abc OH3
 - Set Values: var.AccountName

- ① Setting value var.AccountName to Sam Account OHH
 - ① Successfully set var.AccountName to Sam Account OHH
- Set Values: var.ContactLName
 - ① Setting value ContactSalutation to Mr.
 - ① Successfully set ContactSalutation to Mr.
 - ① Setting value var.ContactFName to First P4U
 - ① Successfully set var.ContactFName to First P4U
 - ① Setting value var.ContactLName to Last P4V
 - ① Successfully set var.ContactLName to Last P4V
- Set Values: FullName
 - ① Setting value FullName to First P4U Last P4V
 - ① Successfully set FullName to First P4U Last P4V
- Set Values: OppName
 - ① Setting value OppName to New Opp P5G
 - ① Successfully set OppName to New Opp P5G
- Create Object: Lead=>LeadId
 - ① Creating a new Salesforce object. Connection Name: Admin, Name: Lead, field count: 2
 - ⚠ Failed to connect to Master Lock Manager in timeout period - assuming dead. Host: localhost, port: 59316
 - ① Setting fields:
 - ① =Field=> Company = abc OH3
 - ① =Field=> LastName = Sam OH2
 - 📋 Lead created successfully. Object Id: 00Q5g000008GonWEAS, Result Name: LeadId
 - ① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q5g000008GonWEAS
- On SF Lead All Open Leads list view
 - ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Lead&action=List&listView=AllOpenLeads
 - ① Opening Chrome webdriver instance to https://login.salesforce.com/
 - ① Successfully opened Chrome webdriver to https://login.salesforce.com/
 - ① Opening Page context. Name: screen, data: null, frame: null
 - ① Opening Salesforce page. Object: Lead, RelatedList: null, Action: List, Page URL: /lightning/o/00Q/list?filterName=00B5g00000ROLjc, Current URL: chrome://new-tab-page/
 - ① Opening Salesforce user home page
 - ① Successfully opened user home page
 - ① Going to update browser window handles.
 - ① Successfully updated browser window handles.
- Sleep for {10} seconds
 - ① Doing timed sleep. Requested duration(seconds): 10
 - Timed sleep successful. Requested duration(seconds): 10, Actual duration(seconds): 10
- With Lead rows {Name = Sam OH2 AND Company = abc OH3}
 - ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=List%2FlistView%2FlistTable
 - ① Find element using xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody/tr
 - ① Waiting for element to be present. Timeout(seconds): 10
 - ① Populating webelement cells into the row Row Count: 17
 - Populated the row elements.
 - ① Applying row locator to rows. Row Count: 17, Row Locator: {Name = \$LeadLastName AND Company = \$LeadCompany}
 - ① Testing row number 1
 - ① Resolving EqualTo. Bertha Boxer = Sam OH2, result: false
 - ① Resolving EqualTo. Farmers Coop. of Florida = abc OH3, result: false

- ① Testing row number 2
 - ① Resolving EqualTo. Betty Bair = Sam OH2, result: false
 - ① Resolving EqualTo. American Banking Corp. = abc OH3, result: false
- ① Testing row number 3
 - ① Resolving EqualTo. Brenda McClure = Sam OH2, result: false
 - ① Resolving EqualTo. Cadinal Inc. = abc OH3, result: false
- ① Testing row number 4
 - ① Resolving EqualTo. David Monaco = Sam OH2, result: false
 - ① Resolving EqualTo. Blues Entertainment Corp. = abc OH3, result: false
- ① Testing row number 5
 - ① Resolving EqualTo. Jeff Glimpse = Sam OH2, result: false
 - ① Resolving EqualTo. Jackson Controls = abc OH3, result: false
- ① Testing row number 6
 - ① Resolving EqualTo. Kathy Snyder = Sam OH2, result: false
 - ① Resolving EqualTo. TNR Corp. = abc OH3, result: false
- ① Testing row number 7
 - ① Resolving EqualTo. Kristen Akin = Sam OH2, result: false
 - ① Resolving EqualTo. Aethna Home Products = abc OH3, result: false
- ① Testing row number 8
 - ① Resolving EqualTo. Mike Braund = Sam OH2, result: false
 - ① Resolving EqualTo. Metropolitan Health Services = abc OH3, result: false
- ① Testing row number 9
 - ① Resolving EqualTo. Norm May = Sam OH2, result: false
 - ① Resolving EqualTo. Greenwich Media = abc OH3, result: false
- ① Testing row number 10
 - ① Resolving EqualTo. Patricia Feager = Sam OH2, result: false
 - ① Resolving EqualTo. International Shipping Co. = abc OH3, result: false
- ① Testing row number 11
 - ① Resolving EqualTo. Phyllis Cotton = Sam OH2, result: false
 - ① Resolving EqualTo. Abbott Insurance = abc OH3, result: false
- ① Testing row number 12
 - ① Resolving EqualTo. Sam 111 = Sam OH2, result: false
 - ① Resolving EqualTo. abc 111 = abc OH3, result: false
- ① Testing row number 13
 - ① Resolving EqualTo. Sam A5V = Sam OH2, result: false
 - ① Resolving EqualTo. abc A5V = abc OH3, result: false
- ① Testing row number 14
 - ① Resolving EqualTo. Sam EC5 = Sam OH2, result: false
 - ① Resolving EqualTo. abc EC5 = abc OH3, result: false
- ① Testing row number 15
 - ① Resolving EqualTo. Sam EY0 = Sam OH2, result: false
 - ① Resolving EqualTo. abc EY3 = abc OH3, result: false
- ① Testing row number 16
 - ① Resolving EqualTo. Sam GWV = Sam OH2, result: false
 - ① Resolving EqualTo. abc GWV = abc OH3, result: false

① Testing row number 17

① Resolving EqualTo. Sam GYB = Sam OH2, result: false

① Resolving EqualTo. abc GYB = abc OH3, result: false

① The row locator did not match any rows. Hence doing pagination

① Scrolling the page to lazy load the records

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list?filterName=00B5g00000ROLjc>

① Find element using xpath: `//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody/tr[position() > 17]`

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 15

Populated the row elements.

① Applying row locator to rows. Row Count: 15

① Testing row number 1

① Resolving EqualTo. Sam KIC = Sam OH2, result: false

① Resolving EqualTo. abc KIE = abc OH3, result: false

① Testing row number 2

① Resolving EqualTo. Sam L2I = Sam OH2, result: false

① Resolving EqualTo. abc = abc OH3, result: false

① Testing row number 3

① Resolving EqualTo. Sam L3M = Sam OH2, result: false

① Resolving EqualTo. abc L3O = abc OH3, result: false

① Testing row number 4

① Resolving EqualTo. Sam LN8 = Sam OH2, result: false

① Resolving EqualTo. abc LN9 = abc OH3, result: false

① Testing row number 5

① Resolving EqualTo. Sam MV3 = Sam OH2, result: false

① Resolving EqualTo. abc MV7 = abc OH3, result: false

① Testing row number 6

① Resolving EqualTo. Sam NVU = Sam OH2, result: false

① Resolving EqualTo. abc NVW = abc OH3, result: false

① Testing row number 7

① Resolving EqualTo. Sam OH2 = Sam OH2, result: true

① Resolving EqualTo. abc OH3 = abc OH3, result: true

① Row number 7 matched

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

● UI Assert

① Start of UiAssert. Connection: Admin

① Resolving field Name

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list?filterName=00B5g00000ROLjc>

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class,`

'listViewContent') or contains(@class, 'listViewContainer'))//tbody//tr[position() > 17]]] -> xpath: th//span//*[self::a or self::span[not(contains(@class,'photoContainer'))]]]

① Asserting field attributes: Name

① Asserting Attribute: value to PrimitiveValueImpl [value: Sam OH2, valueId=0, createdUpdateSeq=55, updatedUpdateSeq=55]

✅ Assertion successful.Sam OH2 EqualTo Sam OH2

① Object read successfully. Result Name: Values

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Going to update browser window handles.

① Successfully updated browser window handles.

● With Lead rows {Name = Sam OH2}

① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=List%2FlistView%2FlistTable

① Find element using xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody//tr

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 32

Populated the row elements.

① Applying row locator to rows. Row Count: 32, Row Locator: {Name = \$LeadLastName}

① Testing row number 1

① Resolving EqualTo. Bertha Boxer = Sam OH2, result: false

① Testing row number 2

① Resolving EqualTo. Betty Bair = Sam OH2, result: false

① Testing row number 3

① Resolving EqualTo. Brenda McClure = Sam OH2, result: false

① Testing row number 4

① Resolving EqualTo. David Monaco = Sam OH2, result: false

① Testing row number 5

① Resolving EqualTo. Jeff Glimpse = Sam OH2, result: false

① Testing row number 6

① Resolving EqualTo. Kathy Snyder = Sam OH2, result: false

① Testing row number 7

① Resolving EqualTo. Kristen Akin = Sam OH2, result: false

① Testing row number 8

① Resolving EqualTo. Mike Braund = Sam OH2, result: false

① Testing row number 9

① Resolving EqualTo. Norm May = Sam OH2, result: false

① Testing row number 10

① Resolving EqualTo. Patricia Feager = Sam OH2, result: false

① Testing row number 11

① Resolving EqualTo. Phyllis Cotton = Sam OH2, result: false

① Testing row number 12

① Resolving EqualTo. Sam 111 = Sam OH2, result: false

① Testing row number 13

① Resolving EqualTo. Sam A5V = Sam OH2, result: false

① Testing row number 14

- ① Resolving EqualTo. Sam EC5 = Sam OH2, result: false
 - ① Testing row number 15
 - ① Resolving EqualTo. Sam EY0 = Sam OH2, result: false
 - ① Testing row number 16
 - ① Resolving EqualTo. Sam GWV = Sam OH2, result: false
 - ① Testing row number 17
 - ① Resolving EqualTo. Sam GYB = Sam OH2, result: false
 - ① Testing row number 18
 - ① Resolving EqualTo. Sam KIC = Sam OH2, result: false
 - ① Testing row number 19
 - ① Resolving EqualTo. Sam L2I = Sam OH2, result: false
 - ① Testing row number 20
 - ① Resolving EqualTo. Sam L3M = Sam OH2, result: false
 - ① Testing row number 21
 - ① Resolving EqualTo. Sam LN8 = Sam OH2, result: false
 - ① Testing row number 22
 - ① Resolving EqualTo. Sam MV3 = Sam OH2, result: false
 - ① Testing row number 23
 - ① Resolving EqualTo. Sam NVU = Sam OH2, result: false
 - ① Testing row number 24
 - ① Resolving EqualTo. Sam OH2 = Sam OH2, result: true
 - ① Row number 24 matched
- The row locator matched 1 row.
- ① Going to update browser window handles.
 - ① Successfully updated browser window handles.

● Click the Name field

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DName, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DName
 - ① Interaction: ui:interaction?name=action
 - ① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list?filterName=00B5g00000ROLjc>
 - ① Interaction: ui:interaction?name=action
 - ① Doing before wait. waitUrl: default
 - ① End of <default> wait.
 - ① Found element: [[[[[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody/tr] -> xpath: th/span/*[self::a or self::span[not(contains(@class, 'photoContainer'))]]]]]]
 - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Sam OH2, href: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/00Q5g000008GonWEAS/view>]
 - ① Doing after wait. waitUrl: default
 - ① End of <default> wait.
 - ① Going to update browser window handles.
 - ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Going to update browser window handles.
 - ① Successfully updated browser window handles.

- ① All Sub-Test Steps were successful.

- ❗ Closing Page context. Name: screen, data: null, frame: null
- ❗ Main window reselected. Window: main
- ❗ Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GonWEAS/view>
- ❗ Going to update browser window handles.
- ❗ Successfully updated browser window handles.

● On SF Lead View screen

- ❗ Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Lead&action=View&noOverride=true
- ❗ Opening Page context. Name: screen, data: null, frame: null
- ❗ Activating detailTab tab
- ❗ Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ❗ Going to update browser window handles.
- ❗ Successfully updated browser window handles.

● Click the Convert button

- ❗ Start of Interact. Connection: Admin, Locator: ui:locator?name=Convert&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DConvert, before wait: default, after wait: default, auto retry: default
- ❗ Locator: ui:locator?name=Convert&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DConvert
- ❗ Interaction: ui:interaction?name=action
- ❗ Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GonWEAS/view>
- ❗ Interaction: ui:interaction?name=action
- ❗ Activating detailTab tab
- ❗ Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ❗ Click element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]]//*[self::div and contains(@class, 'flexipageBaseRecordHomeTemplateDesktop') or (self::one-record-home-flexipage2)]//*[self::header and contains(@role, 'banner') or (self::force-highlights2)]/li[contains(@class, 'slds-dropdown-trigger') and contains(@class, 'slds-button_last')]`
- ❗ Hover>Clicking WebElement. WebElement [tag: li, text: 0, text: Show more actions]
- ❗ Find action link element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]]//*[self::div and contains(@class, 'flexipageBaseRecordHomeTemplateDesktop') or (self::one-record-home-flexipage2)]/div[contains(@class, 'actionsContainer')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/*[self::a or self::button][@name='Convert' or text()='Convert']`
- ❗ Waiting for element to be present. Timeout(seconds): 10
- ❗ Doing before wait. waitUrl: default
- ❗ End of <default>> wait.
- ❗ Found element: [[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]]//*[self::div and contains(@class, 'flexipageBaseRecordHomeTemplateDesktop') or (self::one-record-home-flexipage2)]/div[contains(@class, 'actionsContainer')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/*[self::a or self::button][@name='Convert' or text()='Convert']`
- ❗ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Convert, href: javascript:void(0)]
- ❗ Doing after wait. waitUrl: default
- ❗ End of <default>> wait.
- ❗ Going to update browser window handles.
- ❗ Successfully updated browser window handles.

- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GonWEAS/view>
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● On SF Lead Convert screen

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Lead&action=Convert
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Hover>Clicking WebElement. WebElement [tag: h2, text: Convert Lead]
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● Set the Account Name field to Sam Account OHH

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3Dname, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3Dname
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GonWEAS/view>
- ① Interaction: ui:interaction?name=set
- ① Find element using xpath: `//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]//div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][1]//div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[contains(@class, 'uiInputText')]/input`
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: `[[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]//div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][1]//div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[contains(@class, 'uiInputText')]/input`
- ① Got webElement. tagName: INPUT, id: 1:1897;a, type: text, class: input
- ① Typing value. tagName: INPUT, type: text, value: Sam Account OHH, blur: false
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● Set the Salutation picklist to Mr.

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=salutation&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3Dsalutation, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=salutation&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3Dsalutation
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GonWEAS/view>
- ① Interaction: ui:interaction?name=set

❗ Expanding the Section : [[[[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: // *[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]]]/div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][2]/div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/ancestor::div[contains(@class, 'entityPanel')]/div[contains(@class, 'col1')]/section]] -> xpath: ../h3// *[self::button or self::a]]

❗ Hover>Clicking WebElement. WebElement [tag: a, text: Contact, href: javascript:void(0);]

❗ Find element using xpath: // *[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]]]/div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][2]/div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[contains(@class, 'forceInputPicklist')]/a

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <default> wait.

❗ Found element: [[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: // *[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]]]/div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][2]/div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[contains(@class, 'forceInputPicklist')]/a]

❗ Got webElement. tagName: A, id: null, type: null, class: select

❗ Typing value. tagName: A, type: null, value: Mr., blur: false

❗ Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

❗ Clicking WebElement. WebElement [tag: a, text: Mr., href: javascript:void(0);]

❗ Doing after wait. waitUrl: default

❗ End of <default> wait.

❗ Going to update browser window handles.

❗ Successfully updated browser window handles.

● Set the First Name field to First P4U

❗ Start of Interact. Connection: Admin, Locator: ui:locator?name=firstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DfirstName, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=firstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DfirstName

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GonWEAS/view

❗ Interaction: ui:interaction?name=set

❗ Find element using xpath: // *[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]]]/div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][2]/div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[contains(@class, 'uiInputText')]/input

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <default> wait.

❗ Found element: [[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: // *[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section

and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden')) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))//div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][2]//div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[3]/div[contains(@class, 'uiInputText')]/input

① Got webElement. tagName: INPUT, id: 39:1953;a, type: text, class: input

① Typing value. tagName: INPUT, type: text, value: First P4U, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Set the Last Name field to Last P4V

① Start of Interact. Connection: Admin, Locator: ui:locator?name=lastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DlastName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=lastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DlastName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GonWEAS/view

① Interaction: ui:interaction?name=set

① Find element using xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden')) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))//div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][2]//div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[5]/div[contains(@class, 'uiInputText')]/input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden')) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))//div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][2]//div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[5]/div[contains(@class, 'uiInputText')]/input]

① Got webElement. tagName: INPUT, id: 47:1953;a, type: text, class: input

① Typing value. tagName: INPUT, type: text, value: Last P4V, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Set the Opportunity Name field to New Opp P5G

① Start of Interact. Connection: Admin, Locator: ui:locator?name=name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOppportunity%26field%3Dname, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOppportunity%26field%3Dname

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GonWEAS/view

① Interaction: ui:interaction?name=set

① Expanding the Section : [[[[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))

or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) //div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][3]//div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/ancestor::div[contains(@class, 'entityPanel')]/div[contains(@class, 'col1')]/section]] -> xpath: ../h3//*[self::button or self::a]]

① Hover>Clicking WebElement. WebElement [tag: a, text: Opportunity, href: javascript:void(0);]

① Find element using xpath: /*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) //div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][3]//div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[contains(@class, 'uiInputText')]/input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: /*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) //div[contains(@class, 'runtime_sales_leadConvertDesktop')]/fieldset[contains(@class, 'slds-form-element') and (contains(@class, 'runtime_sales_leadConvertSectionDesktop'))][3]//div[contains(@class, 'entityPanel')]/div[contains(@class, 'col2')]/div[contains(@class, 'createPanel')]/div[contains(@class, 'uiInputText')]/input]

① Got webElement. tagName: INPUT, id: 1:2007;a, type: text, class: input

① Typing value. tagName: INPUT, type: text, value: New Opp P5G, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Click the Convert button

① Start of Interact. Connection: Admin, Locator: ui:locator?name=submitConvert&binding=sf%3Aui%3AAbinding%3AObject%3Faction%3DsubmitConvert, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=submitConvert&binding=sf%3Aui%3AAbinding%3AObject%3Faction%3DsubmitConvert

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GonWEAS/view

① Interaction: ui:interaction?name=action

① Find element using xpath: /*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) //div[contains(@class, 'modal-footer') or contains(@class, 'modal__footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')][last()]/button[contains(@data-aura-rendered-by, '2145:0')]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: /*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) //div[contains(@class, 'modal-footer')]

or contains(@class, 'modal__footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')))[last()]/button[contains(@data-aura-rendered-by, '2145:0')]]

Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Convert]

Doing after wait. waitUrl: default

End of <default> wait.

Going to update browser window handles.

Successfully updated browser window handles.

● SOQL Query: select Id from Account where Account.Name = '{var.AccountName}'=>AccountId

Reading a Salesforce object. Connection Name: Admin, Query: select Id from Account where Account.Name = 'Sam Account OHH'

Query successful. Row Count: 1.

● SOQL Query: select Id from Contact where Contact.FirstName = '{var.ContactFName}' AND Contact.LastName = '{var.ContactLName}'=>ContactId

Reading a Salesforce object. Connection Name: Admin, Query: select Id from Contact where Contact.FirstName = 'First P4U' AND Contact.LastName = 'Last P4V'

Query successful. Row Count: 1.

● SOQL Query: select Id from Opportunity where Opportunity.Name = 'New Opp P5G'=>OpportunityId

Reading a Salesforce object. Connection Name: Admin, Query: select Id from Opportunity where Opportunity.Name = 'New Opp P5G'

Query successful. Row Count: 1.

● Set Values: Id

Setting value Id to 00Q5g000008GonWEAS

Successfully set Id to 00Q5g000008GonWEAS

● Click the Go To Leads button

Start of Interact. Connection: Admin, Locator: ui:locator?name=convertedGoToLeads&binding=sf%3Aui%3AAbinding%3Aobject%3Faction%3DconvertedGoToLeads, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=convertedGoToLeads&binding=sf%3Aui%3AAbinding%3Aobject%3Faction%3DconvertedGoToLeads

Interaction: ui:interaction?name=action

Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Lead/00Q5g000008GonWEAS/view

Interaction: ui:interaction?name=action

Find element using xpath: (//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden')) and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[contains(@class, 'modal-footer') or contains(@class, 'modal__footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')])[last()]/button[contains(@data-aura-rendered-by, '16:2294;a')]

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: (//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden')) and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[contains(@class, 'modal-footer') or contains(@class, 'modal__footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')])[last()]/button[contains(@data-aura-rendered-by, '16:2294;a')]]

Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Go to Leads]

Doing after wait. waitUrl: default

End of <default> wait.

Going to update browser window handles.

Successfully updated browser window handles.

All Sub-Test Steps were successful.

Closing Page context. Name: screen, data: null, frame: null

- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list?filterName=Recent>
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- Read Object: Lead = 00Q5g000008GonWEAS
 - ① Reading a Salesforce object. Connection Name: Admin, Name: Lead, Id: 00Q5g000008GonWEAS, field count: 3
 - ① Object read successfully. Result Name: LeadRead
 - ✓ Result assertion 'Check ConvertedAccountId' successful: '0015g00000Va4uLAAR' contains '0015g00000Va4uLAAR'
 - ✓ Result assertion 'Check ConvertedContactId' successful: '0035g00000GC2jtAAD' contains '0035g00000GC2jtAAD'
 - ✓ Result assertion 'Check ConvertedOpportunityId' successful: '0065g00000CzvwLAAR' contains '0065g00000CzvwLAAR'
- On SF Account Home screen
 - ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Account&action=ObjectHome
 - ① Opening Page context. Name: screen, data: null, frame: null
 - ① Opening Salesforce page. Object: Account, RelatedList: null, Action: ObjectHome, Page URL: </lightning/o/001/list?filterName=Recent>, Current URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/o/Lead/list>
 - ① Opening Salesforce user home page
 - ① Successfully opened user home page
 - ① Going to update browser window handles.
 - ① Successfully updated browser window handles.
- With Account rows {ACCOUNT_NAME = \$var.AccountName}
 - ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=ObjectHome%2Frecent%2FrecentTable
 - ① Find element using xpath: `//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody//tr`
 - ① Waiting for element to be present. Timeout(seconds): 10
 - ① Populating webelement cells into the row Row Count: 17
Populated the row elements.
 - ① Applying row locator to rows. Row Count: 17, Row Locator: {ACCOUNT_NAME = \$var.AccountName}
The row locator matched 1 row.
 - ① Going to update browser window handles.
 - ① Successfully updated browser window handles.
- Click the Account Name field
 - ① Start of Interact. Connection: Admin, Locator: ui:locator?name=ACCOUNT_NAME&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DName, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=ACCOUNT_NAME&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26field%3DName
 - ① Interaction: ui:interaction?name=action
 - ① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/o/Account/list?filterName=Recent>
 - ① Interaction: ui:interaction?name=action
 - ① Doing before wait. waitUrl: default
 - ① End of <default> wait.
 - ① Found element: `[[[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody//tr] -> xpath: th//span["self::a or self::span[not(contains(@class, 'photoContainer'))]]`
 - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Sam Account OHH, href: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0015g00000Va4uLAAR/view>]
 - ① Doing after wait. waitUrl: default
 - ① End of <default> wait.
 - ① Going to update browser window handles.
 - ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000Va4uLAAR/view

① Going to update browser window handles.

① Successfully updated browser window handles.

● On SF Account View screen

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Account&action=View&noOverride=true

① Opening Page context. Name: screen, data: null, frame: null

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Going to update browser window handles.

① Successfully updated browser window handles.

● With Contacts rows {FULL_NAME = First P4U Last P4V}

① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=View%2FContacts%2FContactsTable

① Activating relatedListsTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Related, href: javascript:void(0)]

① Scrolling related list into view: ((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] | /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/*[self::lst-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::lst-related-list-single-container)]]][1]/*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]

① Find element using xpath: ((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] | /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/*[self::lst-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::lst-related-list-single-container)]]][1]/*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]]/*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::lst-template-list-item-factory]

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 0

Populated the row elements.

① Applying row locator to rows. Row Count: 1, Row Locator: {FULL_NAME = \$FullName}

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

● UI Assert

① Start of UiAssert. Connection: Admin

① Resolving field FULL_NAME

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000Va4uLAAR/view>

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: ((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] | /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] / ancestor::div[contains(@class, 'oneRecordHomeFlexipage')])/*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]][1]/*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]/*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout') or self::list-template-list-item-factory]] -> xpath: ./div[contains(@class, 'slds-grid')]/h3/*[self::lightning-base-formatted-text or self::a or self::lightning-formatted-text]]

① Asserting field attributes: FULL_NAME

① Asserting Attribute: value to PrimitiveValueImpl [value: First P4U Last P4V, valueId=0, createdUpdateSeq=115, updatedUpdateSeq=115]

✓ Assertion successful.First P4U Last P4V Contains First P4U Last P4V

① Reading Attribute: visible

① Reading Attribute: disabled

① Reading Attribute: readOnly

① Reading Attribute: focused

① Reading Attribute: inlineEditable

① Reading Attribute: inView

① Reading Attribute: options

① Object read successfully. Result Name: Values

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Going to update browser window handles.

① Successfully updated browser window handles.

● With Opportunities rows {OPPORTUNITY_NAME = New Opp P5G}

① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=View%2FOpportunities%2FOpportunitiesTable

① Activating relatedListsTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Related, href: javascript:void(0)]

① Scrolling related list into view: ((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] | /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] / ancestor::div[contains(@class, 'oneRecordHomeFlexipage')])/*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]][2]/*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]

① Find element using xpath: ((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] | /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] / ancestor::div[contains(@class, 'oneRecordHomeFlexipage')])/*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]][2]/*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]

and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] | /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/*[self::lst-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::lst-related-list-single-container)]]][2]/*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]/*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::lst-template-list-item-factory]

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Populating webelement cells into the row Row Count: 0

Populated the row elements.

ⓘ Applying row locator to rows. Row Count: 1, Row Locator: {OPPORTUNITY_NAME = \$OppName}

The row locator matched 1 row.

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

● UI Assert

ⓘ Start of UiAssert. Connection: Admin

ⓘ Resolving field OPPORTUNITY_NAME

ⓘ Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000Va4uLAAR/view>

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: ((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] | /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] / ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/*[self::lst-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::lst-related-list-single-container)]]][2]/*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]/*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::lst-template-list-item-factory]] -> xpath: //div[contains(@class, 'slds-grid')]/h3/*[self::lightning-base-formatted-text or self::a or self::lightning-formatted-text]

ⓘ Asserting field attributes: OPPORTUNITY_NAME

ⓘ Asserting Attribute: value to PrimitiveValueImpl [value: New Opp P5G, valueId=0, createdUpdateSeq=121, updatedUpdateSeq=121]

✓ Assertion successful.New Opp P5G EqualTo New Opp P5G

ⓘ Object read successfully. Result Name: Values

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

ⓘ All Sub-Test Steps were successful.

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

ⓘ All Sub-Test Steps were successful.

ⓘ Closing Page context. Name: screen, data: null, frame: null

ⓘ Main window reselected. Window: main

ⓘ Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000Va4uLAAR/view>

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

● Read Object: Opportunity = {OpportunityId.Id}

- ① Reading a Salesforce object. Connection Name: Admin, Name: Opportunity, Id: 0065g00000CzvwLAAR, field count: 3
- ① Object read successfully. Result Name: OpportunityRead
- ✓ Result assertion 'Check StageName' successful: 'Prospecting' = 'Prospecting'
- ✓ Result assertion 'Check Probability' successful: 10.0 = '10.0'
- ✓ Result assertion 'Check ContactId' successful: '0035g00000GC2jtAAD' = '0035g00000GC2jtAAD'

● On SF Opportunity Products related list

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Opportunity&relatedList=OpportunityLineItems
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Opportunity, RelatedList: null, Action: null, Page URL: /lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view, Current URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000Va4uLAAR/view
- ① Opening Salesforce user home page
- ① Successfully opened user home page
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● Click the Products Select Product button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=addProd&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26action%3DaddProd%26relationship%3DOpportunityLineItems, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=addProd&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26action%3DaddProd%26relationship%3DOpportunityLineItems
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
- ① Interaction: ui:interaction?name=action
- ① Find action link element using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[contains(@class, 'forceRelatedListDesktop')]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '824:0')]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[contains(@class, 'forceRelatedListDesktop')]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '824:0')]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Add Products, href: javascript:void(0);]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
- ① Going to update browser window handles.

① Successfully updated browser window handles.

● On SF Opportunity Product Select Product screen

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=OpportunityLineItem&action=addProd

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

● With Search Table {Product2_Name = "SLA: Bronze"}

① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=addProd%2FSearchResults%2FSearchTable

① Find element using xpath: `//div[contains(@class, 'open')] and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[last()]/div[contains(@class, 'listViewContent')]/tbody/tr//div[contains(@class, 'active')] and contains(@class, 'open') and contains(@class, 'slds-theme--error')//preceding-sibling::div[contains(@class, 'open')] and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))//div[contains(@class, 'listViewContent')]/tbody/tr`

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 17

Populated the row elements.

① Applying row locator to rows. Row Count: 17, Row Locator: {Product2_Name = "SLA: Bronze"}

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Check the Select Row rowSelectionCheckbox

① Start of Interact. Connection: Admin, Locator: ui:locator?name=SelectRow&rowLocator=Product2_Name+%3D+%27SLA%3A+Bronze%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelectRow, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=SelectRow&rowLocator=Product2_Name+%3D+%27SLA%3A+Bronze%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelectRow

① Interaction: ui:interaction?name=check

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view>

① Interaction: ui:interaction?name=check

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: //div[contains(@class, 'open')] and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[last()]/div[contains(@class, 'listViewContent')]/tbody/tr//div[contains(@class, 'active')] and contains(@class, 'open') and contains(@class, 'slds-theme--error')//preceding-sibling::div[contains(@class, 'open')] and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))//div[contains(@class, 'listViewContent')]/tbody/tr]] -> xpath: td[2]/input`

① Got webElement. tagName: INPUT, id: null, type: checkbox

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Going to update browser window handles.

① Successfully updated browser window handles.

● With Search Table {Product2_Name = "SLA: Gold"}

① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=addProd%2FSearchResults%2FSearchTable

① Find element using xpath: `//div[contains(@class, 'open')] and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[last()]/div[contains(@class, 'listViewContent')]/tbody/tr//div[contains(@class, 'active')] and contains(@class, 'open') and contains(@class, 'slds-theme--error')//preceding-sibling::div[contains(@class, 'open')] and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))//div[contains(@class, 'listViewContent')]/tbody/tr`

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 17

Populated the row elements.

① Applying row locator to rows. Row Count: 17, Row Locator: {Product2_Name = "SLA: Gold"}

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Check the Select Row rowSelectionCheckbox

① Start of Interact. Connection: Admin, Locator: ui:locator?name=SelectRow&rowLocator=Product2_Name+%3D+%27SLA%3A+Gold%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelectRow, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=SelectRow&rowLocator=Product2_Name+%3D+%27SLA%3A+Gold%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelectRow

① Interaction: ui:interaction?name=check

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view

① Interaction: ui:interaction?name=check

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/div[contains(@class, 'listViewContent')]/tbody/tr/div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit')]/div[contains(@class, 'listViewContent')]/tbody/tr]] -> xpath: td[2]/input]

① Got webElement. tagName: INPUT, id: null, type: checkbox

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Click the Select button

① Start of Interact. Connection: Admin, Locator: ui:locator?name=Select&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelect, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Select&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLineItem%26field%3DSelect

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view

① Interaction: ui:interaction?name=action

① Find element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/button[contains(@class, 'forceActionButton')][2] | //div[contains(@class, 'active') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/button[contains(@class, 'forceActionButton')][2]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/button[contains(@class, 'forceActionButton')][2] | //div[contains(@class, 'active') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/button[contains(@class, 'forceActionButton')][2]]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Next]

① Doing after wait. waitUrl: default

① End of <default>; wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLinelItems/view>

① Going to update browser window handles.

① Successfully updated browser window handles.

● On SF Opportunity Product Add Product screen

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=OpportunityLinelItem&action=addProd2

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

● With OpportunityLinelItem rows {Product2Id = "SLA: Bronze"}

① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=OpportunityLinelItemTable

① Find element using xpath: `//div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/div[contains(@class, 'listViewContent')]/tbody/tr/div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/div[contains(@class, 'listViewContent')]/tbody/tr`

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 2

Populated the row elements.

① Applying row locator to rows. Row Count: 2, Row Locator: {Product2Id = "SLA: Bronze"}

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Set the Quantity field to 2.00

① Start of Interact. Connection: Admin, Locator: ui:locator?name=Quantity&rowLocator=Product2Id+%3D+%27SLA%3A+Bronze%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLinelItem%26field%3DQuantity, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Quantity&rowLocator=Product2Id+%3D+%27SLA%3A+Bronze%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunityLinelItem%26field%3DQuantity

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLinelItems/view>

① Interaction: ui:interaction?name=set

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: `[[[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/div[contains(@class, 'listViewContent')]/tbody/tr/div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/div[contains(@class, 'listViewContent')]/tbody/tr]] -> xpath: td[not(contains(@class, 'errorColumn')) and not(/span[contains(@class, 'forceVirtualCheckbox')])[1]/span["self::span or self::a"]]`

① Got webElement. tagName: SPAN, id: null, type: null, class: slds-truncate uiOutputNumber

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Edit Quantity: Item 1]

① Typing value. tagName: INPUT, type: text, value: 2.00, blur: false

① Doing after wait. waitUrl: default

① End of <default>; wait.

- ① Going to update browser window handles.
 - ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- With OpportunityLineItem rows {Product2Id = "SLA: Gold"}
 - ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=OpportunityLineItemTable
 - ① Find element using xpath: `//div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/div[contains(@class, 'listViewContent')]/tbody/tr/div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/div[contains(@class, 'listViewContent')]/tbody/tr`
 - ① Waiting for element to be present. Timeout(seconds): 10
 - ① Populating webelement cells into the row Row Count: 2
 - Populated the row elements.
 - ① Applying row locator to rows. Row Count: 2, Row Locator: {Product2Id = "SLA: Gold"}
 - The row locator matched 1 row.
 - ① Going to update browser window handles.
 - ① Successfully updated browser window handles.
- Set the Quantity field to 2.00
 - ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Quantity&rowLocator=Product2Id+%3D+%27SLA%3A+Gold%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOppportunityLineItem%26field%3DQuantity, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=Quantity&rowLocator=Product2Id+%3D+%27SLA%3A+Gold%27&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOppportunityLineItem%26field%3DQuantity
 - ① Interaction: ui:interaction?name=set
 - ① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view>
 - ① Interaction: ui:interaction?name=set
 - ① Doing before wait. waitUrl: default
 - ① End of <default>; wait.
 - ① Found element: `[[[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/div[contains(@class, 'listViewContent')]/tbody/tr/div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/div[contains(@class, 'listViewContent')]/tbody/tr]] -> xpath: td[not(contains(@class, 'errorColumn')) and not(.span[contains(@class, 'forceVirtualCheckbox')])][1]/span["self::span or self::a"]`
 - ① Got webElement. tagName: SPAN, id: null, type: null, class: slds-truncate uiOutputNumber
 - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Edit Quantity: Item 2]
 - ① Typing value. tagName: INPUT, type: text, value: 2.00, blur: false
 - ① Doing after wait. waitUrl: default
 - ① End of <default>; wait.
 - ① Going to update browser window handles.
 - ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- Click the Save button
 - ① Start of Interact. Connection: Admin, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOppportunityLineItem%26action%3Dsave, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOppportunityLineItem%26action%3Dsave
 - ① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view>

① Interaction: ui:interaction?name=action

① Find element using xpath: `//div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/button[contains(@class, 'forceActionButton')][3] | //div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/button[contains(@class, 'forceActionButton')][3]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/button[contains(@class, 'forceActionButton')][3] | //div[contains(@class, 'active') and contains(@class, 'open') and contains(@class, 'slds-theme--error')]/preceding-sibling::div[contains(@class, 'open') and (contains(@class, 'uiModal--multiAdd') or contains(@class, 'uiModal--multiEdit'))]/button[contains(@class, 'forceActionButton')][3]]`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view>

① Going to update browser window handles.

① Successfully updated browser window handles.

● On SF Opportunity Products related list

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Opportunity&relatedList=OpportunityLineItems

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

● With OpportunityLineItems rows {Product2 = "SLA: Bronze"}

① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=OpportunityLineItems%2FOpportunityLineItemsTable

① Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@id, 'oneConsoleTab') and ancestor::div[contains(@class, 'active')] and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace'))))]/div[contains(@class, 'listViewContent')]/tbody/tr`

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 17

Populated the row elements.

① Applying row locator to rows. Row Count: 17, Row Locator: {Product2 = "SLA: Bronze"}

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

● UI Assert

① Start of UiAssert. Connection: Admin

① Resolving field Product2

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view>

① Doing before wait. waitUrl: default

① End of <default> wait.

- ① Found element: [([[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)) -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@id, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')))))]/div[contains(@class, 'listViewContent')]/tbody/tr]] -> xpath: th//span//*[self::a or self::span[not(contains(@class, 'photoContainer'))]])]
- ① Asserting field attributes: Product2
- ① Asserting Attribute: value to PrimitiveValueImpl [value: SLA: Bronze, valueId=0, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ✅ Assertion successful.SLA: Bronze EqualTo SLA: Bronze
- ① Object read successfully. Result Name: Values
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- With OpportunityLineItems rows {Product2 = "SLA: Gold"}
 - ① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=OpportunityLineItems%2FOpportunityLineItemsTable
 - ① Find element using xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@id, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')))))]/div[contains(@class, 'listViewContent')]/tbody/tr
 - ① Waiting for element to be present. Timeout(seconds): 10
 - ① Populating webelement cells into the row Row Count: 17
 - Populated the row elements.
 - ① Applying row locator to rows. Row Count: 17, Row Locator: {Product2 = "SLA: Gold"}
 - The row locator matched 1 row.
 - ① Going to update browser window handles.
 - ① Successfully updated browser window handles.
- UI Assert
 - ① Start of UiAssert. Connection: Admin
 - ① Resolving field Product2
 - ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view
 - ① Doing before wait. waitUrl: default
 - ① End of <default>> wait.
 - ① Found element: [([[ChromeDriver: chrome on XP (fa15f09f92c69780a12059b83e59c2cd)) -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@id, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')))))]/div[contains(@class, 'listViewContent')]/tbody/tr]] -> xpath: th//span//*[self::a or self::span[not(contains(@class, 'photoContainer'))]])]
 - ① Asserting field attributes: Product2
 - ① Asserting Attribute: value to PrimitiveValueImpl [value: SLA: Gold, valueId=0, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 - ✅ Assertion successful.SLA: Gold EqualTo SLA: Gold
 - ① Object read successfully. Result Name: Values
 - ① Going to update browser window handles.
 - ① Successfully updated browser window handles.
 - ① All Sub-Test Steps were successful.
 - ① Going to update browser window handles.
 - ① Successfully updated browser window handles.
 - ① All Sub-Test Steps were successful.
 - ① Closing Page context. Name: screen, data: null, frame: null
 - ① Main window reselected. Window: main
 - ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0065g00000CzoL8AAJ/related/OpportunityLineItems/view

① Going to update browser window handles.

① Successfully updated browser window handles.

● Set Values: var.conId

① Setting value var.conId to 0035g00000GC2jtAAD

① Successfully set var.conId to 0035g00000GC2jtAAD

● Write: {var}=>templates/writeworkbook.xlsx

① Writing to URL templates/writeworkbook.xlsx

① Start of Excel Write. WorkbookPath: templates/writeworkbook.xlsx, excludeCols: [none]

① Workbook location: C:\Users\shubham.saini\Training Use Case WS\Training Project\templates\writeworkbook.xlsx

① Writing data to excel sheet: Sheet1

① Got NamedValueList: NamedValueListValueImpl [valueCount: 4, valueId=1000000000007, createdUpdateSeq=34, updatedUpdateSeq=189, values: [[id: 1000000000008,entryName: AccountName,entryId: 59],[id: 1000000000009,entryName: ContactFName,entryId: 68],[id: 100000000000a,entryName: ContactLName,entryId: 6f],[id: 10000000000094,entryName: conId,entryId: 1000000000029]]]

Completed writing data to excel sheet: Sheet1

① Handling managed resource. Name: Admin

① Salesforce Connection handled successfully. Name: Admin

● Salesforce Connect: Admin (Test)

① Connecting to Salesforce as Admin

① Successfully connected to Salesforce as Admin

● Read Excel

① Loading data from Parameter Value Source ...

① Loading Parameter Value Source row 1:

① ==Column=> RowNumber = PrimitiveValueImpl [value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> AccountName = PrimitiveValueImpl [value: Sam Account OHH, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ContactFName = PrimitiveValueImpl [value: First P4U, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ContactLName = PrimitiveValueImpl [value: Last P4V, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ConId = PrimitiveValueImpl [value: 0035g00000GC2jtAAD, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loaded 1 rows from Parameter Value Source.

● On SF Case Home screen

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Case&action=ObjectHome

① Opening Chrome webdriver instance to https://login.salesforce.com/

① Successfully opened Chrome webdriver to https://login.salesforce.com/

① Opening Page context. Name: screen, data: null, frame: null

① Opening Salesforce user home page

① Successfully opened user home page

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/list?filterName=Recent

① Hover>Clicking WebElement. WebElement [tag: button, text: Show Navigation Menu]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Cases, href: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/home]

① Hover>Clicking WebElement. WebElement [tag: span, text: Recently Viewed]

① Clicking WebElement. WebElement [tag: span, text: Recently Viewed]

① Going to update browser window handles.

① Successfully updated browser window handles.

● Click the New Case button

① Start of Interact. Connection: Admin, Locator: ui:locator?name=NewCase&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26action%3DNewCase, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=NewCase&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26action%3DNewCase

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/list?filterName=Recent>

① Interaction: ui:interaction?name=action

① Find action link element using xpath: `((div[contains(@class, 'active')] and (contains(@class, 'oneContent') or contains(@class, 'main-content')))/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '3875:0')]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (8521d435401ac9ab870f07a95ad1ee29)] -> xpath: `((div[contains(@class, 'active')] and (contains(@class, 'oneContent') or contains(@class, 'main-content')))/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '3875:0')]`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454762566439250

① Going to update browser window handles.

① Successfully updated browser window handles.

● Set Values: CaseOrigin

① Setting value CaseStatus to New

① Successfully set CaseStatus to New

① Setting value CaseOrigin to Phone

① Successfully set CaseOrigin to Phone

● On SF Case New screen

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Case&action=New&noOverride=true

① Opening Page context. Name: screen, data: null, frame: null

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454762566439250

① Clicking the New Button

① Find action link element using xpath: `((div[contains(@class, 'active')] and (contains(@class, 'oneContent') or contains(@class, 'main-content')))/div[contains(@class, 'forceListViewManager')]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '3875:0')]`

① Clicking WebElement. WebElement [tag: a, href: javascript:void(0);]

① Going to update browser window handles.

① Successfully updated browser window handles.

● Sleep for {10} seconds

① Doing timed sleep. Requested duration(seconds): 10

Timed sleep successful. Requested duration(seconds): 10, Actual duration(seconds): 10

● Set the Status picklist to New

① Start of Interact. Connection: Admin, Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DStatus, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DStatus

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Status'] or ./text() = 'Status'))/ancestor::div[1]`

① Find field using relative xpath: `//*[self::a or self::input]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@8552af44 -> unknown locator]] -> xpath: //*[self::a or self::input]`

① Got webElement. tagName: INPUT, id: input-430, type: text, class: slds-input slds-combobox__input

① Typing value. tagName: INPUT, type: text, value: New, blur: false

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item, text: New]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Set the Case Origin picklist to Phone

① Start of Interact. Connection: Admin, Locator: ui:locator?name=Origin&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DCase%26field%3DOOrigin, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Origin&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DCase%26field%3DOOrigin

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Case Origin'] or ./text() = 'Case Origin'))/ancestor::div[1]`

① Find field using relative xpath: `//*[self::a or self::input]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@8552af5d -> unknown locator]] -> xpath: //*[self::a or self::input]`

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: Phone, blur: false

① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: Phone, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● Lookup the Contact Name reference

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=ContactId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DContactId, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=ContactId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DContactId
- ① Interaction: ui:interaction?name=sfLookup
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467
- ① Interaction: ui:interaction?name=sfLookup
- ① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]//*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (//text()[normalize-space()='Contact Name'] or //text()='Contact Name')]/ancestor::div[1]`
- ① Find field using relative xpath: `./input`
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@8552af63 -> unknown locator]] -> xpath: `./input`]
- ① Hover>Clicking WebElement. WebElement [tag: input]
- ① Waiting for lookup dropdown list to appear
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● On SF Contact Lookup screen

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?lookup=Contact
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● Set the Search text to First P4U Last P4V

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SearchName&path=searchFrame, before wait: null, after wait: null, auto retry: default
- ① Locator: ui:locator?name=SearchName&path=searchFrame
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [org.openqa.selenium.remote.RemoteWebElement@8552af79 -> unknown locator]
- ① Clicking WebElement. WebElement [tag: div, text: Search Contacts "First P4U Last P4V" in Contacts]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● Click the Go! button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=go&path=searchFrame, before wait: null, after wait: null, auto retry: default
- ① Locator: ui:locator?name=go&path=searchFrame
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467
- ① Doing before wait. waitUrl: default
- ① End of <default>; wait.
- ① Found element: com.provar.core.model.ui.java.NullWebElement@7b14c868
- ① Doing after wait. waitUrl: default
- ① End of <default>; wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● Click the Name button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=1, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=1
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467
- ① Interaction: ui:interaction?name=action
- ① Populating webelement cells into the row Row Count: 0
- Populated the row elements.
- ① Applying row locator to rows. Row Count: 1, Row Locator: {1}
- The row locator matched 1 row.
- ① Doing before wait. waitUrl: default
- ① End of <default>; wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@8552af7e -> unknown locator]] -> xpath: td[1]/span[td[1]/a]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: First P4U Last P4V, href: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0035g00000GC2jtAAD/view]
- ① Doing after wait. waitUrl: default
- ① End of <default>; wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467

① Going to update browser window handles.

① Successfully updated browser window handles.

● Lookup the Account Name reference

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=AccountId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DAccountId, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=AccountId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DAccountId
- ① Interaction: ui:interaction?name=sfLookup
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467
- ① Interaction: ui:interaction?name=sfLookup

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Account Name'] or ./text() = 'Account Name'))/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@8552af80 -> unknown locator]] -> xpath: ./input]`

① Hover>Clicking WebElement. WebElement [tag: input]

① Waiting for lookup dropdown list to appear

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

● On SF Account Lookup screen

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?lookup=Account

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

● Set the Search text to Sam Account OHH

① Start of Interact. Connection: Admin, Locator: ui:locator?name=SearchName&path=searchFrame, before wait: null, after wait: null, auto retry: default

① Locator: ui:locator?name=SearchName&path=searchFrame

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[org.openqa.selenium.remote.RemoteWebElement@8552af81 -> unknown locator]`

① Clicking WebElement. WebElement [tag: div, text: Search Accounts "Sam Account OHH" in Accounts]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Click the Go! button

① Start of Interact. Connection: Admin, Locator: ui:locator?name=go&path=searchFrame, before wait: null, after wait: null, auto retry: default

① Locator: ui:locator?name=go&path=searchFrame

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `com.provar.core.model.ui.java.NullWebElement@32180cea`

① Doing after wait. waitUrl: default

- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● Click the Account Name button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=1, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=1
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467
- ① Interaction: ui:interaction?name=action
- ① Populating webelement cells into the row Row Count: 0
- Populated the row elements.
- ① Applying row locator to rows. Row Count: 2, Row Locator: {1}
- The row locator matched 1 row.
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@8552af9b -> unknown locator]] -> xpath: td[1]/span[td[1]/a]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Sam Account OHH, href: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0015g00000Va4uLAAR/view]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467

① Going to update browser window handles.

① Successfully updated browser window handles.

● Click the Save button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DCase%26action%3Dsave, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DCase%26action%3Dsave
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/o/Case/new?count=2&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=163454763443293467
- ① Interaction: ui:interaction?name=action
- ① Find action link element using xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden')) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))] button[contains(@data-aura-rendered-by, '5963:0')]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (8521d435401ac9ab870f07a95ad1ee29)] -> xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class,

'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))])]/button[contains(@data-aura-rendered-by, '5963:0')]]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

● SOQL Query: select CaseNumber from Case where ContactId = '{SourceData.ConId}'=>CaseNumber

① Reading a Salesforce object. Connection Name: Admin, Query: select CaseNumber from Case where ContactId = '0035g00000GC2tAAD'

① Query successful. Row Count: 1.

① All Sub-Test Steps were successful.

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjeONAAZ/view

① Injecting script to get created object ID from aura component

① Fetching created Id from URL

■ Storing created Salesforce Object ID. Result Name: caseId, created ID: 5005g00000FjeONAAZ, location: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjeONAAZ/view

① Logging Salesforce Object Id for clean up. Object Name: Case, id: 5005g00000FjeONAAZ

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjeONAAZ/view

① Going to update browser window handles.

① Successfully updated browser window handles.

● On SF Related Record (Case) component in Case view

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?flexiPage=support__Case_rec_L_3col&flexiPath=leftsidebar%3A%3A0&lightningComponent=console%3ArelatedRecord

① The related record component's updateQuickActionName isn't populated. FlexiPage: support__Case_rec_L_3col; FlexiPath: leftsidebar::0; Region: leftsidebar; Flexi component: console:relatedRecord

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjeONAAZ/view

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

● UI Assert

① Start of UiAssert. Connection: Admin

① Resolving field CaseNumber

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjeONAAZ/view

① Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))])]//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))])]//ancestor::div[contains(@class, 'oneRecordHomeFlexipage') and position()=1])//*[contains(@class, 'col') and contains(@class, 'left-col')] or (contains(@class, 'slds-region__pinned-left') and contains(@class, 'slds-region')) or contains(@name, 'leftsidebar')]//*[starts-with(@data-component-id, 'console_relatedRecord') and not(ancestor::*[contains(@data-component-id, 'flexipage_tabset')])[1]//*[contains(@class, 'VIEW forceQuickActionLayout')]/div[contains(@class, 'forcePageBlockSectionView')]/div[contains(@class, 'labelCol') or contains(@class, 'field-label-container')] and (span/text()[normalize-space()='Case Number' or (.)='Case Number'])]/following-sibling::div[1]//*[self::div and contains(@class, 'dataCol')] or (self::span and contains(@class, 'test-id__field-value'))]

① Waiting for element to be present. Timeout(seconds): 10

① Finding field elements using relativePath: ./span

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [ChromeDriver: chrome on XP (8521d435401ac9ab870f07a95ad1ee29)] -> xpath: /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/ancestor::div[contains(@class, 'oneRecordHomeFlexipage') and position()=1)]/*[(contains(@class, 'col') and contains(@class, 'left-col')) or (contains(@class, 'slds-region__pinned-left') and contains(@class, 'slds-region')) or contains(@name, 'leftsidebar')]//*[starts-with(@data-component-id, 'console_relatedRecord') and not(ancestor::*[contains(@data-component-id, 'flexipage_tabset')])[1]/*[contains(@class, 'VIEW forceQuickActionLayout')]/div[contains(@class, 'forcePageBlockSectionView')]/div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Case Number' or .()='Case Number'])/following-sibling::div[1]/*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]] -> xpath: ./span]

ⓘ Asserting field attributes: CaseNumber

ⓘ Asserting Attribute: value to PrimitiveValueImpl [value: 00001049, valueId=100000000009a, createdUpdateSeq=240, updatedUpdateSeq=240]

✓ Assertion successful.00001049 EqualTo 00001049

ⓘ Object read successfully. Result Name: Values

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

ⓘ All Sub-Test Steps were successful.

ⓘ Closing Page context. Name: screen, data: null, frame: null

ⓘ Main window reselected. Window: main

ⓘ Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjeONAAZ/view

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

● On SF Record Detail component in Case view

ⓘ Start of With Screen. Connection Name: Admin, target: sf:ui:target?flexiPage=support__Case_rec_L_3col&flexiPath=main%3AdetailTabContent%3A0&lightningComponent=force%3AdetailPanel

ⓘ Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjeONAAZ/view

ⓘ Activating detailTab tab

ⓘ Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

ⓘ Opening Page context. Name: screen, data: null, frame: null

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

● Click the Account Name reference

ⓘ Start of Interact. Connection: Admin, Locator: ui:locator?name=AccountId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DAccountId, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=AccountId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DAccountId

ⓘ Interaction: ui:interaction?name=action

ⓘ Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjeONAAZ/view

ⓘ Interaction: ui:interaction?name=action

ⓘ Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/ancestor::div[contains(@class, 'oneRecordHomeFlexipage') and position()=1)]/*[(contains(@class, 'region') and contains(@class, 'region-main') and contains(@class, 'region-full-width')) or (contains(@class, 'col') and contains(@class, 'main-col'))]

```
or (contains(@class, 'column') and contains(@class, 'region-main')) or (contains(@class, 'slds-col') and contains(@class, 'main-container-wrapper')) or contains(@name, 'main')]]/flexipage-component2[contains(@data-component-id, 'flexipage_tabset')]/li[contains(@class, 'slds-tabs_default__item')]/a[starts-with(@data-tab-value, 'detailTab-') or starts-with(@data-tab-value, 'detailTab')]/ancestor:flexipage-component2//flexipage-tab2[contains(@class, 'slds-show')]/"["starts-with(@data-component-id, 'force_detailPanel')]]1["["(self::force-record-layout-section) or (self::div and contains(@class, 'forcePageBlockSectionView'))]]1["div["(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()["normalize-space()='Account Name' or (.) = 'Account Name'"])]following-sibling::div1["["(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]]
```

ⓘ Waiting for element to be present. Timeout(seconds): 10

④ Finding elements using relativePath: `./a`

ⓘ Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [|||||ChromeDriver: chrome on XP (8521d435401ac9ab870f07a95ad1ee29)] -> xpath: (//*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]//*(contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]//ancestor::div[contains(@class, 'oneRecordHomeFlexpage') and position()=1])/*[(@class=region') or (contains(@class, 'region-main') and contains(@class, 'region-full-width')) or(contains(@class, 'col') and contains(@class, 'main-col')) or(contains(@class, 'column') and contains(@class, 'region-main')) or (contains(@class, 'slds-col') and contains(@class, 'main-container-wrapper')) or contains(@name, 'main')]]//flexpage-component2[contains(@data-component-id, 'flexipage_tabset')]/li[contains(@class, 'slds-tabs_default_item')]/a[starts-with(@data-tab-value, 'detailTab-') or starts-with(@data-tab-value, 'detailTab')]/ancestor::flexipage-component2/flexipage-tab2[contains(@class, 'slds-show')]/[starts-with(@data-component-id, 'force_detailPanel')]/1/*[(self::force-record-layout-section) or (self::div and contains(@class, 'forcePageBlockSectionView'))]/1//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Account Name' or (.) = 'Account Name'])/following-sibling::div[1]/*[(self::div and contains(@class, 'dataCol') or (self::span and contains(@class, 'test-id__field-value')))] -> xpath: /*[(self::a and not(contains(@class, 'changeOwnerLink')) or (self::span and contains(@class, 'owner-name') and not(self::span/a)))]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, href: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/0015g00000Va4uLAAR/view>]

① Doing after wait. waitUrl: default

① End of <default> wait.

④ Going to update browser window handles.

① Successfully updated browser window handles.

 All Sub-Test Steps were successful.

❗ Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000Va4uLAAR/view?ws=%2Flightning%2Fr%2FCCase%2F5005g00000FieONAAZ%2Fview>

➤ Going to update browser window handles.

④ Successfully updated browser window handles.

- On SF Account View screen

Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Account&action=View&noOverride=true

📘 Opening Page context. Name: screen, data: null, frame: null

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000Va4uLAAR/view?ws=%2Flightning%2Fr%2FCCase%2F5005g00000FjeONAAZ%2Fview>

Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

➤ Going to update browser window handles.

① Successfully updated browser window handles.

- With Cases rows {CASES CASE NUMBER = \$CaseNumber.CaseNumber}

Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=View%2FCases%2FCasesTable

Activating relatedListsTab tab

Hover>Clicking WebElement. WebElement [tag: a, text: Related, href: javascript:void(0)]

① Scrolling related list into view: (`//*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] | /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]/*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]` [contains(@data-aura-rendered-by, '11210:0')]

① Find element using xpath: (`//*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] | /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]/*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]` [contains(@data-aura-rendered-by, '11210:0')]]/*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::list-template-list-item-factory]

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 0

Populated the row elements.

① Applying row locator to rows. Row Count: 1, Row Locator: {CASES_CASE_NUMBER = \$CaseNumber.CaseNumber}

The row locator matched 1 row.

① Going to update browser window handles.

① Successfully updated browser window handles.

● UI Assert

① Start of UiAssert. Connection: Admin

① Resolving field CASES_CASE_NUMBER

① Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Account/0015g00000V4uLAAR/view?ws=%2Fflightning%2Fr%2FCase%2F5005g00000FjeONAAZ%2Fview>

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (8521d435401ac9ab870f07a95ad1ee29)] -> xpath: (`//*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] | /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]/*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]` [contains(@data-aura-rendered-by, '11210:0')]]/*[self::div[contains(@class, 'listViewContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::list-template-list-item-factory]] -> xpath: `//*[@self::div or self::article][contains(@class, 'listItemBody')]/h3//a`]

① Asserting field attributes: CASES_CASE_NUMBER

① Asserting Attribute: value to PrimitiveValueImpl [value: 00001049, valueId=100000000009a, createdUpdateSeq=240, updatedUpdateSeq=240]

✓ Assertion successful.00001049 EqualTo 00001049

① Object read successfully. Result Name: Values

① Going to update browser window handles.

① Successfully updated browser window handles.

- ① All Sub-Test Steps were successful.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Tab of type : CurrentTab

① Clicking WebElement. WebElement [tag: button, text: Close Sam Account OHH]

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjeONAAZ/view

① Going to update browser window handles.

① Successfully updated browser window handles.

● On SF Record Detail component in Case view

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?lightningComponent=force%3AdetailPanel&flexiPath=main%3AdetailTabContent%3A0&flexiPage=support__Case_rec_L_3col

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjeONAAZ/view

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

● Click the Contact Name reference

① Start of Interact. Connection: Admin, Locator: ui:locator?name=ContactId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DContactId, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=ContactId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DContactId

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Case/5005g00000FjeONAAZ/view

① Interaction: ui:interaction?name=action

① Finding field placeholder using xpath: (((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))])//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))])/ancestor::div[contains(@class, 'oneRecordHomeFlexipage') and position()=1])//*[(@class='region') or (contains(@class, 'region-main') and contains(@class, 'region-full-width')) or (contains(@class, 'col') and contains(@class, 'main-col')) or (contains(@class, 'column') and contains(@class, 'region-main')) or (contains(@class, 'slds-col') and contains(@class, 'main-container-wrapper')) or contains(@name, 'main')]/flexipage-component2[contains(@data-component-id, 'flexipage_tabset')]/li[contains(@class, 'slds-tabs_default__item')]/a[starts-with(@data-tab-value, 'detailTab--') or starts-with(@data-tab-value, 'detailTab')]/ancestor::flexipage-component2//flexipage-tab2[contains(@class, 'hasActiveSubtab')]//*[starts-with(@data-component-id, 'force_detailPanel')][1]//*[self::force-record-layout-section or (self::div and contains(@class, 'forcePageBlockSectionView'))][1]/div[contains(@class, 'labelCol') or contains(@class, 'field-label-container')] and (span/text()[normalize-space()='Contact Name' or (.)='Contact Name']]/following-sibling::div[1]//*[self::div and contains(@class, 'dataCol')] or (self::span and contains(@class, 'test-id__field-value'))]

① Waiting for element to be present. Timeout(seconds): 10

① Finding elements using relativePath: ./a

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[ChromeDriver: chrome on XP (8521d435401ac9ab870f07a95ad1ee29)] -> xpath: (((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))])//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))])/ancestor::div[contains(@class, 'oneRecordHomeFlexipage') and position()=1])//*[(@class='region') or (contains(@class, 'region-main') and contains(@class, 'region-full-width')) or (contains(@class, 'col') and contains(@class, 'main-col')) or (contains(@class, 'column') and contains(@class, 'region-main')) or (contains(@class, 'slds-col') and contains(@class, 'main-container-wrapper')) or contains(@name, 'main')]/flexipage-component2[contains(@data-component-id, 'flexipage_tabset')]/li[contains(@class, 'slds-tabs_default__item')]/a[starts-with(@data-tab-value, 'detailTab--') or starts-with(@data-tab-value, 'detailTab')]/ancestor::flexipage-component2//flexipage-tab2[contains(@class, 'hasActiveSubtab')]//*[starts-with(@data-component-id, 'force_detailPanel')][1]//*[self::force-record-layout-section or (self::div and contains(@class, 'forcePageBlockSectionView'))][1]/div[contains(@class, 'labelCol') or contains(@class, 'field-label-container')] and (span/text()[normalize-space()='Contact Name' or (.)='Contact Name']]/following-sibling::div[1]//*[self::div and contains(@class, 'dataCol')] or (self::span and contains(@class, 'test-id__field-value'))]

'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]])))]/ancestor::div[contains(@class, 'oneRecordHomeFlexipage') and position()=1)]/[(@class='region') or (contains(@class, 'region-main') and contains(@class, 'region-full-width')) or (contains(@class, 'col') and contains(@class, 'main-col')) or (contains(@class, 'column') and contains(@class, 'region-main')) or (contains(@class, 'slds-col') and contains(@class, 'main-container-wrapper')) or contains(@name, 'main')]/flexipage-component2[contains(@data-component-id, 'flexipage_tabset')]/li[contains(@class, 'slds-tabs_default_item')]/a[starts-with(@data-tab-value, 'detailTab--') or starts-with(@data-tab-value, 'detailTab')]/ancestor::flexipage-component2/flexipage-tab2[contains(@class, 'slds-show')]/["starts-with(@data-component-id, 'force_detailPanel')][1]/["(self::force-record-layout-section) or (self::div and contains(@class, 'forcePageBlockSectionView'))][1]/div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text())[normalize-space()='Contact Name' or (.)='Contact Name']]/following-sibling::div[1]/["(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]] -> xpath: ./["(self::a and not(contains(@class, 'changeOwnerLink')) or (self::span and contains(@class, 'owner-name') and not(self::span/a)))]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, href: https://provartesting36-dev-ed.lightning.force.com/lightning/r/0035g00000GC2jtAAD/view]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Contact/0035g00000GC2jtAAD/view?ws=%2Flightning%2Fr%2FCCase%2F5005g00000FjeONAAZ%2Fview

① Going to update browser window handles.

① Successfully updated browser window handles.

● On SF Contact View screen

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&action=View&noOverride=true

① Opening Page context. Name: screen, data: null, frame: null

① Switched focus to main window. URL: https://provartesting36-dev-ed.lightning.force.com/lightning/r/Contact/0035g00000GC2jtAAD/view?ws=%2Flightning%2Fr%2FCCase%2F5005g00000FjeONAAZ%2Fview

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Going to update browser window handles.

① Successfully updated browser window handles.

● With Cases rows {CASES_CASE_NUMBER = \$CaseNumber.CaseNumber}

① Start of With Row. Connection Name: Admin, target: sf:ui:locator:row?table=View%2FCases%2FCasesTable

① Activating relatedListsTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Related, href: javascript:void(0)]

① Scrolling related list into view: (/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))])] /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))])] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]/["self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]/["(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid')) [contains(@data-aura-rendered-by, '12907:0')]

① Find element using xpath: (/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))])] /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))])] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]/["self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-

single-container)]/*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]
[contains(@data-aura-rendered-by, '12907:0')/*[self::div[contains(@class, 'listViewItemContent')] or self::li[contains(@class, 'forceRecordLayout')]] or
self::list-template-list-item-factory]

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Populating webelement cells into the row Row Count: 0

Populated the row elements.

ⓘ Applying row locator to rows. Row Count: 1, Row Locator: {CASES_CASE_NUMBER = \$CaseNumber.CaseNumber}

The row locator matched 1 row.

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

● UI Assert

ⓘ Start of UIAssert. Connection: Admin

ⓘ Resolving field CASES_CASE_NUMBER

ⓘ Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Contact/0035g00000GC2jtAAD/view?ws=%2Flightning%2Fr%2FCase%2F5005g00000FjeONAAZ%2Fview>

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [[[[ChromeDriver: chrome on XP (8521d435401ac9ab870f07a95ad1ee29)] -> xpath: (/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]] /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]] / ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]/*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))][contains(@data-aura-rendered-by, '12907:0')/*[self::div[contains(@class, 'listViewItemContent')] or self::li[contains(@class, 'forceRecordLayout')] or self::list-template-list-item-factory]] -> xpath: /*[self::div or self::article][contains(@class, 'listItemBody')]/h3/a]

ⓘ Asserting field attributes: CASES_CASE_NUMBER

ⓘ Asserting Attribute: value to PrimitiveValueImpl [value: 00001049, valueId=100000000009a, createdUpdateSeq=240, updatedUpdateSeq=240]

✅ Assertion successful.00001049 EqualTo 00001049

ⓘ Object read successfully. Result Name: Values

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

ⓘ All Sub-Test Steps were successful.

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

ⓘ All Sub-Test Steps were successful.

ⓘ Closing Page context. Name: screen, data: null, frame: null

ⓘ Main window reselected. Window: main

ⓘ Switched focus to main window. URL: <https://provartesting36-dev-ed.lightning.force.com/lightning/r/Contact/0035g00000GC2jtAAD/view?ws=%2Flightning%2Fr%2FCase%2F5005g00000FjeONAAZ%2Fview>

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

● Read Object: Case = 5005g00000FjeONAAZ

ⓘ Reading a Salesforce object. Connection Name: Admin, Name: Case, Id: 5005g00000FjeONAAZ, field count: 2

ⓘ Object read successfully. Result Name: CaseRead

✅ Result assertion 'Check Status' successful: 'New' = 'New'

✅ Result assertion 'Check Subject' successful: <null> is empty

WebService.testcase

Output

● Web Connect: JsonAPI

- ① Opening RestService connection Connection name: JsonAPI
- ① Connecting to restservice. Address: <https://jsonplaceholder.typicode.com/>
Connection name: JsonAPI, ResultName: JsonAPI, resultScope: Test
- ① Connection details. Connection name: JsonAPI, urlString: restservice:url= <https://jsonplaceholder.typicode.com/>; authenticationType=NO_AUTHENTICATION, url: <https://jsonplaceholder.typicode.com/>

● Web Request (REST): #GetRestResponse

- ① Calling a Web Service. Connection Name: JsonAPI, target: rest:untyped?method=GET&bodyStyle=JSON
- ① Connecting to website. Address: <https://jsonplaceholder.typicode.com/posts/1>
- ① Reading response. Content Type: application/json; charset=utf-8, Encoding: null
- ① Parsing JSON response.
- ① REST Response stored successfully. Name: GetRestResponse
- ① Web Response Status stored successfully. Name: RestResponseStatus

● Web Request (REST): #PostRestResponse

- ① Calling a Web Service. Connection Name: JsonAPI, target: rest:untyped?method=POST&bodyStyle=JSON
- ① Connecting to website. Address: <https://jsonplaceholder.typicode.com/posts/>
- ① Sending body. Length: 85
- ① Reading response. Content Type: application/json; charset=utf-8, Encoding: null
- ① Parsing JSON response.
- ① REST Response stored successfully. Name: PostRestResponse
- ① Web Response Status stored successfully. Name: RestResponseStatus

● Web Request (REST): #PutRestResponse

- ① Calling a Web Service. Connection Name: JsonAPI, target: rest:untyped?method=PUT&bodyStyle=JSON
- ① Connecting to website. Address: <https://jsonplaceholder.typicode.com/posts/1>
- ① Sending body. Length: 85
- ① Reading response. Content Type: application/json; charset=utf-8, Encoding: null
- ① Parsing JSON response.
- ① REST Response stored successfully. Name: PutRestResponse
- ① Web Response Status stored successfully. Name: RestResponseStatus