

# UbiBOS Platform API v1

## Table of Contents

- 1. Introduction
- 2. API Reference
  - 2.1. Device API
    - 2.1.1. Create Device Connection
    - 2.1.2. Submit Task
    - 2.1.3. Trigger a intent to Device
    - 2.1.4. Send Command To Device
    - 2.1.5. Get Device Status
  - 2.2. Chat API
    - 2.2.1. Chat
  - 2.3. Chat with NPC
    - 2.3.1. Chat
  - 2.4. Request API
    - 2.4.1. Get Request status
  - 2.5. Model Provider ( Draft )
    - 2.5.1. Register Model Provider
    - 2.5.2. Register Model
    - 2.5.3. List Providers
    - 2.5.4. List Available Model
    - 2.5.5. List registered models
  - 2.6. Knowledge ( Draft )
    - 2.6.1. Create Knowledge
    - 2.6.2. Preview Document
    - 2.6.3. Upload Document
    - 2.6.4. Get Document Status
    - 2.6.5. Search Knowledge
    - 2.6.6. Update Document Status
  - 2.7. Knowledge Pipeline ( Draft )
    - 2.7.1. Create Pipeline
    - 2.7.2. Get Pipeline
    - 2.7.3. Run Pipeline
- 3. Management API
  - 3.1. Shokunins
    - 3.1.1. List Shokunins
    - 3.1.2. Get Shokunin
    - 3.1.3. Upsert Shokunin
  - 3.2. Workflows
    - 3.2.1. List workflows
    - 3.2.2. Get workflow
  - 3.3. Planner
    - 3.3.1. List Planners
    - 3.3.2. Get Planner

## 1. Introduction

## 2. API Reference

### 2.1. Device API

#### 2.1.1. Create Device Connection

##### 2.1.1.1. Request

Operation

```
ws://<domain>/nagato/v1/devices/connect
```

#### Header

| Name               | Required | Description                                  |
|--------------------|----------|----------------------------------------------|
| Ubitus-Channel     | Yes      | The channel name that the device belongs to. |
| Ubitus-Device-SN   | Yes      | The serial number of the device              |
| Ubitus-Device-Type | Yes      | luckibot_plus or use user agent??            |

#### 2.1.1.2. Success Response

|           |                         |
|-----------|-------------------------|
| Http Code | 101 Switching Protocols |
|-----------|-------------------------|

The detail of websocket protocol, please refer to [Page](#).

#### 2.1.2. Submit Task

Deprecated. Use intent device instead.

##### 2.1.2.1. Request

```
POST /nagato/admin/v1/devices/tasks
```

#### Body

| Name     | Type   | Required | Description                                |
|----------|--------|----------|--------------------------------------------|
| deviceSN | string | Y        | the SN of the device which you want to ask |
| input    | string | Y        | the for device                             |

#### 2.1.2.2. Response

|        |              |                 |
|--------|--------------|-----------------|
| Status | 202 Accepted | It means for ok |
|--------|--------------|-----------------|

no content now

#### 2.1.3. Trigger a intent to Device

```
POST /nagato/api/v1/devices/intents
```

##### 2.1.3.1. Request

| Name     | Type   | Required | Description |
|----------|--------|----------|-------------|
| deviceSN | string | Y        |             |
| input    | string | Y        |             |

### 2.1.3.2. Response

|        |              |                 |
|--------|--------------|-----------------|
| Status | 202 Accepted | It means for ok |
|--------|--------------|-----------------|

### 2.1.4. Send Command To Device

POST /nagato/api/v1/devices/commands

#### 2.1.4.1. Request

| Name        | Type   | Required | Description |
|-------------|--------|----------|-------------|
| deviceSN    | string | Y        |             |
| commandName | string | Y        |             |
| args        | object | N        |             |

#### 2.1.4.2. Response

|        |              |                 |
|--------|--------------|-----------------|
| Status | 202 Accepted | It means for ok |
|--------|--------------|-----------------|

#### 2.1.4.3. Example

```
curl -X POST 'https://ubibos-preview.ubitus.ai/nagato/api/v1/devices/commands' \
  --header 'Content-Type: application/json' \
  --data '{
    "deviceSN": "9249b549-20bc-4ef7-a84b-fe4f3349f3c1",
    "commandName": "ADMINISTRATE",
    "args": [""]
  }'
```

### 2.1.5. Get Device Status

GET /nagato/api/v1/devices/<deviceSN>/status

#### 2.1.5.1. Request

| Name     | Type   | Required | Description          |
|----------|--------|----------|----------------------|
| deviceSN | string | Y        | the sn of the device |

### 2.1.5.2. Response

#### Header

| Name         | Value            |
|--------------|------------------|
| Content-Type | application/json |

#### Body

| Name     | Type   | Description       |
|----------|--------|-------------------|
| deviceSN | string |                   |
| status   | object | The device status |

#### Example

```
{
  "deviceSN": "f9aa079d-546e-4425-8496-8433c60f5207",
  "status": {
    "mode": "xddd",
    "power": 23.0
  }
}
```

## 2.2. Chat API

### 2.2.1. Chat

#### 2.2.1.1. Request

```
POST /nagato/api/v1/chat
```

#### Header

| Name          | Required | Value                            | Description                                                                                                                                                                                                                                        |
|---------------|----------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Accept        | Y        | text/plain,<br>text/event-stream | enable streaming mode when you set text/event-stream                                                                                                                                                                                               |
| Ubitus-Accept | N        | ubichat                          | Per the SSE specification, data content is automatically trimmed of leading and trailing whitespace, which can lead to unexpected output.<br>Adding this HTTP header ensures the response data is formatted as JSON, thereby resolving this issue. |

#### Body

| Name            | Type   | Required | Description                                            |
|-----------------|--------|----------|--------------------------------------------------------|
| clientSessionId | string | N        | if client want to control the lifecycle of the session |

|           |             |                            |                                                           |
|-----------|-------------|----------------------------|-----------------------------------------------------------|
| agentName | string      | Y                          | which agent you want hit first                            |
| input     | string      | Y ( input or messages 擇一 ) | chat input                                                |
| messages  | JSON Array  |                            | the message JSON object, please refer to the bellow table |
| metadata  | JSON object | N                          | attributes put in key-value pair                          |

Input

When you want to use Input, you can add follow option field at same layer.

| Name  | Type   | Required | Description                   |
|-------|--------|----------|-------------------------------|
| image | string | N        | data URL with Base64 encoding |

For example

```
{
  "agentName": "ubichan",
  "input": "?",
  "image": "data:image/jpeg;base64,<base64 encoded>",
  "metadata": {
    "vlm": {
      "agent": "describe_picture"
    }
  }
}
```

Message

When you choose Message, you can add Message object into array like bellow.

| Name    | Type       | Required | Description                                                                   |
|---------|------------|----------|-------------------------------------------------------------------------------|
| role    | string     | Y        | only support user now                                                         |
| content | JSON ARRAY | Y        | must contains at least one content, please refer to the bellow content types. |

Text Content

| Name | Type   | Description  |
|------|--------|--------------|
| type | string | must be text |
| text | string | text content |

Image URI Content

| Name      | Type                                                                                | Description                                                                                                                            |     |                                                                                     |
|-----------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-----|-------------------------------------------------------------------------------------|
| type      | string                                                                              | must be image_url                                                                                                                      |     |                                                                                     |
| image_url | JSON Object                                                                         | <table><tr><td>url</td><td>data URL with Base64 encoding, for example. data:image/jpeg;base64,&lt;base64 encoded&gt;</td></tr></table> | url | data URL with Base64 encoding, for example. data:image/jpeg;base64,<base64 encoded> |
| url       | data URL with Base64 encoding, for example. data:image/jpeg;base64,<base64 encoded> |                                                                                                                                        |     |                                                                                     |

metadata

To enable some feature in the workflow, you can add some specific metadata.

## VLM

如果你想要有解析圖片, 可以透過 VLM 來達到, 我們會在丟給 Agent 前, 先用 VLM Agent 解析圖片, 然後再把解析結果和使用者的輸入一起餵給Agent來達到類似LLM可以看懂圖片的目的

| Name | Type        | Required | Description                                                        |
|------|-------------|----------|--------------------------------------------------------------------|
| vlm  | JSON object | Y        | We will use the VLM Agent to parse image if user provide the image |

For example

```
{
  "metadata": {
    "vlm": {
      "agent": "describe_picture"
    }
  }
}
```

## Suggestion

如果你想要有類似 後續提示, 對話引導, 主動式引導的功能, 可以透過 Suggestion Feature 來達到目的, 主要流程是在正常流程跑完後, 我們會再把這次的對話紀錄 ( 包含使用者input, LLM 回答, Tool calling ) 都丟給 Suggestion Agent, 來讓 Suggestion Agent 產生後續提示

For example

```
{
  "metadata": {
    "suggestion": {
      "suggestionAgent": "1to3"
    }
  }
}
```

## BAW

如果你有自己的Thinking Agent, 可以透過這組設定來傳遞需要的資訊給Thinking Agent , 目前是為了機器人用的, 通常機器人的主要流程不是設定在nagato身上, 但這流程很客製化且限定, 請了解詳細spec

For example

```
{
  "metadata": {
    "baw": {
      "robotType": "NMNS-whale",
      "execName": "test_20250808"
    }
  }
}
```

### 2.2.1.2. Response

## Status

| Code | Description                                         |
|------|-----------------------------------------------------|
| 200  | 代表這個 Task 是 Blocking                                |
| 202  | 代表這個 Task 是 Long running Task, 需要走 polling task 的流程 |

## Header

| Name         | Required | Value                         | Description |
|--------------|----------|-------------------------------|-------------|
| Content-Type | Y        | text/plain, text/event-stream |             |

### 2.2.1.3. Example

Normal Task with text/plain

#### Request

```
curl -X POST 'http://IP:PORT/nagato/api/v1/chat' \  
  --header 'Content-Type: application/json' \  
  --data-raw '{  
    "agentName": "ubichan",  
    "input": "",  
    "metadata": {}  
  }'
```

#### Response

```
HTTP/1.1 200 OK  
content-type: text/plain  
date: Thu, 29 May 2025 03:53:14 GMT  
vary: Origin  
vary: Access-Control-Request-Method  
vary: Access-Control-Request-Headers  
  
[paint]
```

Normal Task with SSE

#### Request

```
curl -X POST 'http://127.0.0.1:6580/nagato/api/v1/chat' \  
  --header 'Content-Type: application/json' \  
  --header 'Accept: text/event-stream' \  
  --header 'Ubitus-Accept: ubichat' \  
  --data '{  
    "agentName": "planner",  
    "input": "?",  
    "image": "data:image/jpeg;base64,/9j/4...",  
    "metadata": {  
      "baw": {  
        "robotType": "ubiChan01",  
        "execName": "874affb4-3da4-413b-ab70-1af5b099fa09"  
      }  
    }  
  }'  
'
```

Response

```
HTTP/1.1 200 OK  
content-type: text/event-stream  
transfer-encoding: chunked  
date: Mon, 15 Sep 2025 02:15:33 GMT  
  
...  
data:{"id":"2abbe40c-d79e-4404-8a05-cd5cbb33ad74","message":"","created":1757901464}  
  
data:{"id":"2abbe40c-d79e-4404-8a05-cd5cbb33ad74","message":"","created":1757901464}  
...
```

Long running Task ( Polling )

Request



```
curl -X POST 'http://127.0.0.1:6580/nagato/api/v1/chat' \
  --header 'Content-Type: application/json' \
  --header 'Accept: text/event-stream' \
  --header 'Ubitus-Accept: ubichat' \
  --data '{
    "clientId": "48f20450-4362-4dab-bedf-26b26be53f2d",
    "agentName": "protein",
    "input":
    "{\\"pdb_ids\\":\\"8XYD\\",\\"smiles\\":\\"CC1=C2C(=CC=C1C3C2C(=O)OC4(C3(C(=O)O4)C)C5(C6C(C7C5(C)C(C(=C6O)C)O7)O)C)C\\",\\"num_molecules\\":5,\\"algorithm\\":\\"CMA-ES\\"}"
  }'
```

Response

```
HTTP/1.1 200 OK
content-length: 50
content-type: application/json
date: Mon, 15 Sep 2025 02:15:33 GMT

{
  "id": "3543bb66-aded-4ee2-a685-d30a0e90aaf3"
}
```

The you need use the id of the response to polling request status.

## 2.3. Chat with NPC

### 2.3.1. Chat

#### 2.3.1.1. Request

```
POST /nagato/api/v1/npc/chat
```

Body

The basic body is follow the [UbiGPT NPC spec](#), but we need more config to fulfill the request. Please add the bellow properties in the metadata JSON object.

metadata

| Name       | Required | Type   | Description                                      |
|------------|----------|--------|--------------------------------------------------|
| hostAgent  | Y        | string | which Agent you want to hit first                |
| apiKey     | Y        | string | the api key to call UbiChat api                  |
| suggestion | N        | order  | Add this object if you want to enable suggestion |

suggestion

| Name            | Required | Type   | Description                                     |
|-----------------|----------|--------|-------------------------------------------------|
| suggestionAgent | Y        | string | the agent which provide the suggestion feature. |

### 2.3.1.2. Response

#### Header

| Name         | Required | Value                         | Description                                                               |
|--------------|----------|-------------------------------|---------------------------------------------------------------------------|
| Content-Type | Y        | text/plain, text/event-stream | the value is text/event-stream if stream is true, otherwise is text/plain |

#### Body

When you enable stream, the response will transfer via http SSE protocol.  
And the event type of Usage will be

```
event: usage
data:{"id":"npc-a1b1261e8a19474ab248028a9063ee92","message":"","created":1754041482,"model":"llama-3.3-70b","usage":{"prompt_tokens":3367,"completion_tokens":271,"total_tokens":3638}}
```

### 2.3.1.3. Example

#### Request

```
curl -X POST 'http://<address>/nagato/api/v1/npc/chat' \
  --header 'Content-Type: application/json' \
  --data '{
    "thread_id": "67b8d41a-02ac-4e83-8ce4-a5da17415d4c",
    "message": "Ubiart ?",
    "max_tokens": 1024,
    "stream": true,
    "temperature": 0.2,
    "stop": [
      "<|eot_id|>",
      "<|end_of_text|>"
    ],
    "metadata": {
      "hostAgent": "testNPC",
      "apiKey": "Basic
Zjh1ODBiNjAtZTVkZS00ZDI4LWFiMWUtYTA1MWRjYTgxODU1OnFfUmJJMkdWNC5rOF9NejBYMV
hkX3ZsOXRz",
      "suggestion": {
        "suggestionAgent": "1to3"
      }
    }
  }'
```

## Response

```
data:{ "id": "npc-a1b1261e8a19474ab248028a9063ee92", "message":
"UbiArt</link>\u3002", "created": 1754041482, "model": "llama-3.3-70b",
"object": "npc"}

event:usage
data:{ "id": "npc-a1b1261e8a19474ab248028a9063ee92", "message": "", "created": 1
754041482, "model": "llama-3.3-70b", "usage": { "prompt_tokens": 3367, "completi
on_tokens": 271, "total_tokens": 3638}}

data:<!-- opt

data:[DONE]
```

## 2.4. Request API

### 2.4.1. Get Request status

```
GET /nagato/api/v1/requests/<requestId>
```

#### 2.4.1.1. Response

##### Header

| Name         | Value            |
|--------------|------------------|
| Content-Type | application/json |

##### Body

| Name   | Type   | Description                                            |
|--------|--------|--------------------------------------------------------|
| id     | string | the request id                                         |
| status | string | the request status enum. PROCESSING, FAILED, COMPLETED |

#### 2.4.1.2. Example

If the Task is PROCESSING

```
{
  "id": "3543bb66-aded-4ee2-a685-d30a0e90aaf3",
  "status": "PROCESSING"
}
```

If the Task is COMPLETED

```
{
  "id": "3543bb66-aded-4ee2-a685-d30a0e90aaf3",
  "status": "COMPLETED",
  "output": {
    "role": "assistant",
    "content": [
      {
        "type": "output_text",
        "text":
        "{\"columns\": [\"SMILES\", \"8XYD_Position_Confidence\"], \"index\": [0.0, 1.0, 2.0, 3.0, 4.0], \"data\": [[\"SMILES_0\", [-0.6284567714, -0.7081673145, -2.3804171085, -4.4703845978, -4.6610193253, -4.6928834915, -4.8627567291, -4.9147996902, -4.9459152222, -5.2726774216]], [\"SMILES_1\", [-1.9240059853, -3.6071617603, -3.7263255119, -3.7641475201, -3.9775886536, -4.1204609871, -4.6265082359, -4.6597371101, -4.7508087158, -4.843706131]], [\"SMILES_2\", [-1.18932724, -2.7201216221, -3.0394990444, -3.190877676, -3.2303802967, -3.3037340641, -3.4200923443, -3.6399400234, -3.7847011089, -3.9454762936]], [\"SMILES_3\", [-3.9549446106, -4.2089562416, -4.2106313705, -4.2780427933, -4.4594340324, -4.5305423737, -4.643119812, -4.6673030853, -4.7813777924, -5.1617064476]], [\"SMILES_4\", [-2.1217567921, -3.4277534485, -3.6578536034, -3.6700329781, -3.7262814045, -3.9040346146, -4.2032308578, -4.3594059944, -4.488471508, -4.625184536]]]\""
      }
    ]
  }
}
```

## 2.5. Model Provider ( Draft )

You shall register provider first then register models. The provider can register multiple models.

### 2.5.1. Register Model Provider

```
POST /nagato/api/v1/tenants/{tenantId}/management/providers
```

#### 2.5.1.1. Request

Header

| Name         | Value            |
|--------------|------------------|
| Content-Type | application/json |

Properties

| Name | Type | Description |
|------|------|-------------|
|------|------|-------------|

|              |        |                                                           |
|--------------|--------|-----------------------------------------------------------|
| name         | string | the provider name                                         |
| providerType | string | ubisage for UbiSage API, openai for openAI compatible API |
| endpointUrl  | string |                                                           |
| apiKey       | string |                                                           |

2.5.1.2. Response

Properties

| Name         | Type   | Description           |
|--------------|--------|-----------------------|
| id           | string | the model provider id |
| tenantId     | string | the tenant id         |
| name         | string |                       |
| providerType | string |                       |
| endpointUrl  | string |                       |
| apiKey       | string |                       |

2.5.1.3. Example

Register ubisage provider

Request

```
curl -X POST 'http://localhost:6580/nagato/api/v1/tenants/default/management/providers' \
  --header 'Content-Type: application/json' \
  --data '{
    "name": "ubisage",
    "providerType": "ubisage",
    "endpointUrl": "https://sage-stg.ubitus.ai/ubillm/api/v1/resource/grant",
    "apiKey": "QZ8NinK..."
  }'
```

Response

```
{
  "id": "836851356180368034",
  "tenantId": "default",
  "name": "ubisage",
  "providerType": "ubisage",
  "endpointUrl": "https://sage-stg.ubitus.ai/ubillm/api/v1/resource/grant",
  "apiKey": "*****",
  "modelCount": 0,
  "status": "active",
  "createdAt": "2026-04-28T14:28:31.263302",
  "updatedAt": "2026-04-28T14:28:31.263302"
}
```

## 2.5.2. Register Model

### 2.5.2.1. Request

POST /nagato/api/v1/tenants/default/management/providers/{provider\_ID}/models

#### Header

| Name         | Value            |
|--------------|------------------|
| content-type | application/json |

#### Properties

| Name       | Type        | Required        | Description                    |
|------------|-------------|-----------------|--------------------------------|
| name       | string      | Y               | the name of the model          |
| modelType  | string      | Y               | embedding   llm   reranker     |
| modelName  | string      | Y               |                                |
| dim        | number      | Y for embedding | the dim for embeddedding model |
| parameters | json object | N               |                                |

### 2.5.2.2. Response

#### Properties

| Name       | Type   | Description     |
|------------|--------|-----------------|
| id         | string | the model id    |
| providerId | string | the provider id |
| name       | string |                 |
| modelType  | string |                 |

|           |        |                   |
|-----------|--------|-------------------|
| modelName | string |                   |
| dim       | number |                   |
| status    | string | active   inactive |
| createdAt | string |                   |
| updatedAt | string |                   |

### 2.5.2.3. Example

register embedding model

Request

```
curl -X POST
'http://localhost:6580/nagato/api/v1/tenants/default/management/providers/836851356180368034/models' \
--header 'Content-Type: application/json' \
--data '{
  "name": "qwen3-embedding-4b2",
  "modelType": "embedding",
  "modelName": "qwen3-embedding-4b",
  "dim": 2560
}'
```

Response

```
{
  "id": "836851373712558755",
  "providerId": "836851356180368034",
  "name": "qwen3-embedding-4b2",
  "modelType": "embedding",
  "modelName": "qwen3-embedding-4b",
  "dim": 2560,
  "status": "active",
  "createdAt": "2026-04-28T14:28:35.442374",
  "updatedAt": "2026-04-28T14:28:35.442374"
}
```

register LLM model

Request

```
curl -X POST
'http://localhost:6580/nagato/api/v1/tenants/default/management/providers/836851356180368034/models' \
--header 'Content-Type: application/json' \
--data '{
  "name": "qwen35",
  "modelType": "llm",
  "modelName": "qwen35-4b"
}'
```

#### Response

```
{
  "id": "836851373712558755",
  "providerId": "836851356180368034",
  "name": "qwen35",
  "modelType": "llm",
  "modelName": "qwen35-4b",
  "status": "active",
  "createdAt": "2026-04-28T14:28:35.442374",
  "updatedAt": "2026-04-28T14:28:35.442374"
}
```

### 2.5.3. List Providers

```
GET /nagato/api/v1/tenants/{tenantId}/management/providers
```

#### 2.5.3.1. Response

#### 2.5.3.2. Example

```
[
  {
    "id": "840071165045420431",
    "tenantId": "default",
    "name": "ubisage",
    "providerType": "ubisage",
    "endpointUrl": "https://sage-stg.ubitus.ai",
    "apiKey": "*****",
    "modelCount": 1,
    "status": "active",
    "createdAt": 1778125373517,
    "updatedAt": 1778125373517
  }
]
```



2.5.4. List Available Model

GET /nagato/api/v1/tenants/{tenantId}/management/providers/{provider\_ID}/available-models

2.5.4.1. Response

| Name      | Type   | Description                           |
|-----------|--------|---------------------------------------|
| name      | string | the name of the model                 |
| modelName | string | the display name                      |
| modelType | string | llm   embedding   reranker            |
| dim       | number | the dimensions of the embedding model |

2.5.4.2. Example

```
{
  "models": [
    {
      "name": "cosmos-reason2-8b",
      "modelName": "cosmos-reason2-8b",
      "modelType": "llm"
    },
    {
      "name": "qwen3-8b-fp8",
      "modelName": "qwen3-8b-fp8",
      "modelType": "llm"
    },
    {
      "name": "qwen3-embedding-4b",
      "modelName": "qwen3-embedding-4b",
      "modelType": "embedding",
      "dim": 2560
    }
  ]
}
```

2.5.5. List registered models

GET /nagato/api/v1/tenants/{tenantId}/management/providers/{provicder\_ID}/models

2.5.5.1. Response

## Properties

| Name       | Type   | Description     |
|------------|--------|-----------------|
| id         | string | the model id    |
| providerId | string | the provider id |
| name       | string |                 |
| modelType  | string | llm, embedding  |
| modelName  | string |                 |
| dim        | number |                 |
| status     | string |                 |
| createdAt  | number |                 |
| updatedAt  | number |                 |


### 2.5.5.2. Example


#### Response

```
[
  {
    "id": "840128638110669053",
    "providerId": "840128610252101884",
    "name": "qwen3-embedding-4b2",
    "modelType": "embedding",
    "modelName": "qwen3-embedding-4b",
    "dim": 2560,
    "status": "active",
    "createdAt": 1778139076161,
    "updatedAt": 1778139076161
  }
]
```


## 2.6. Knowledge ( Draft )


### Ingestion Pipeline

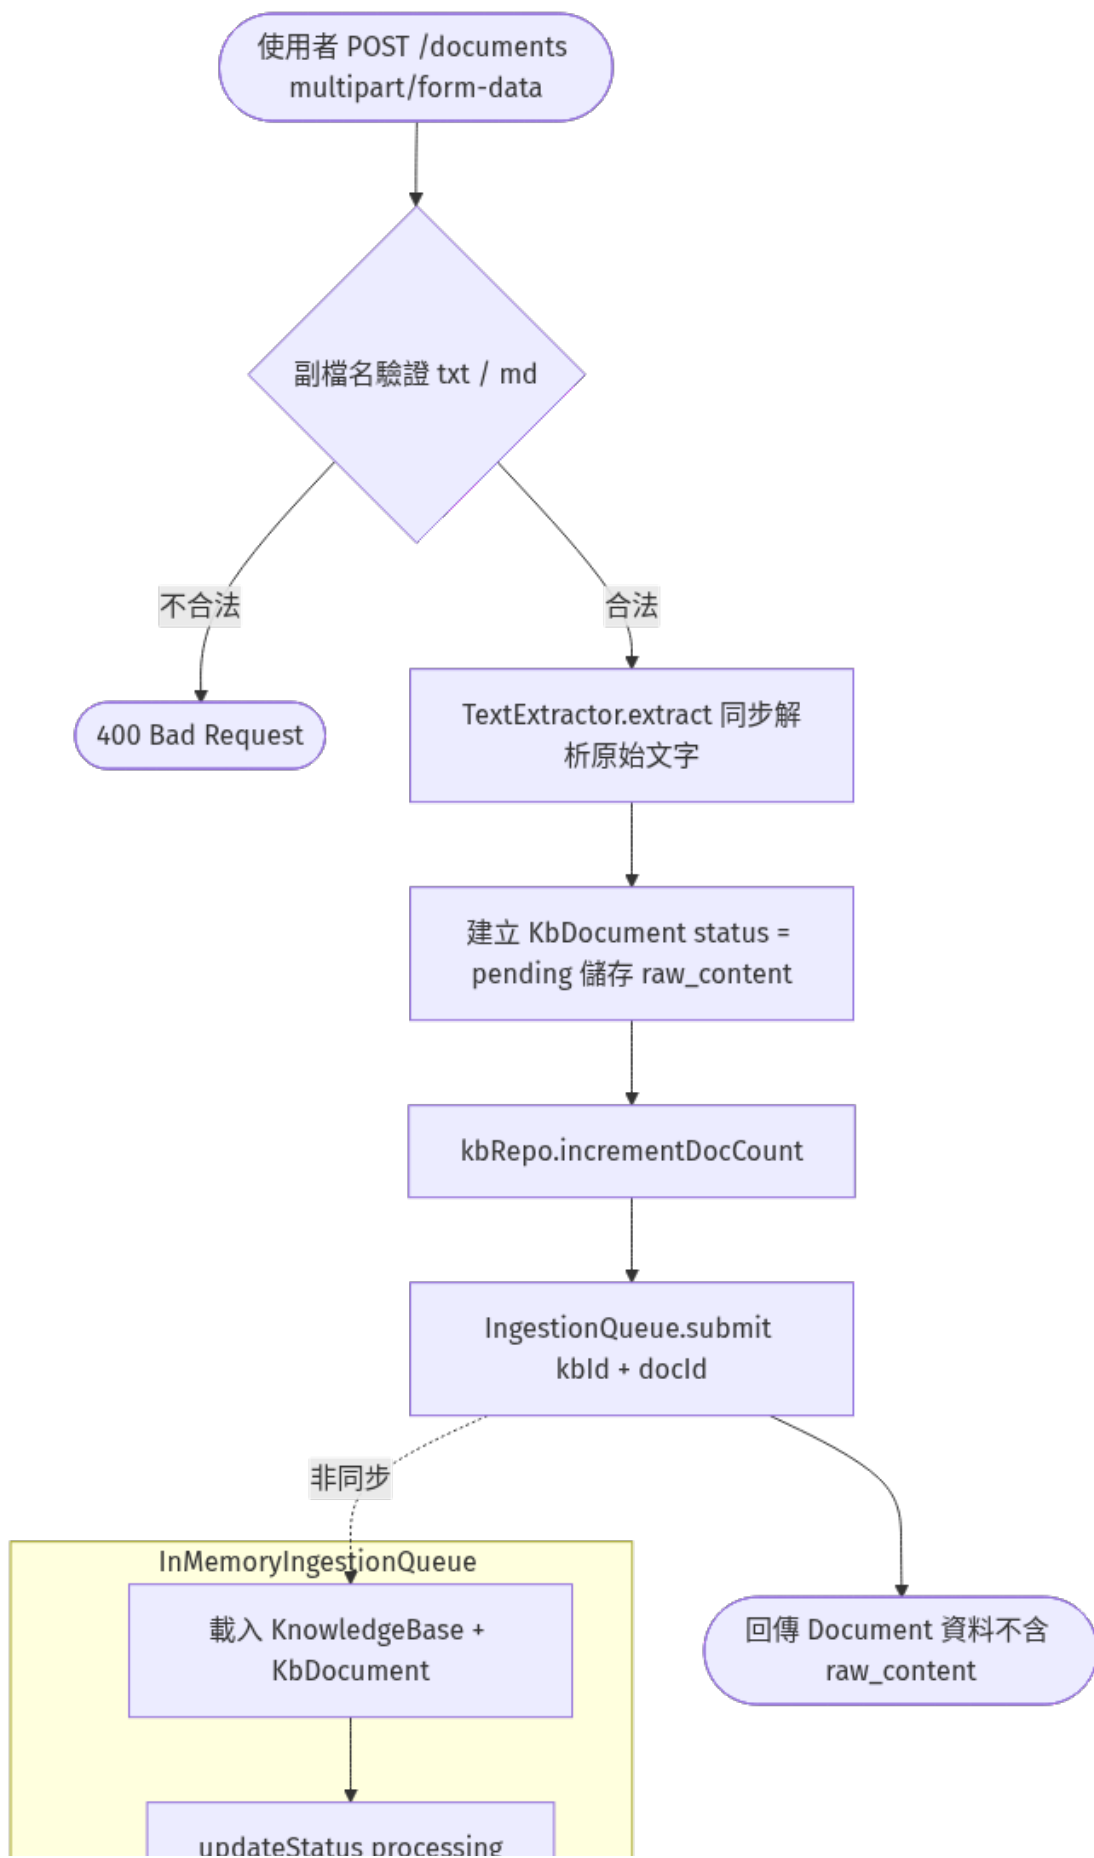

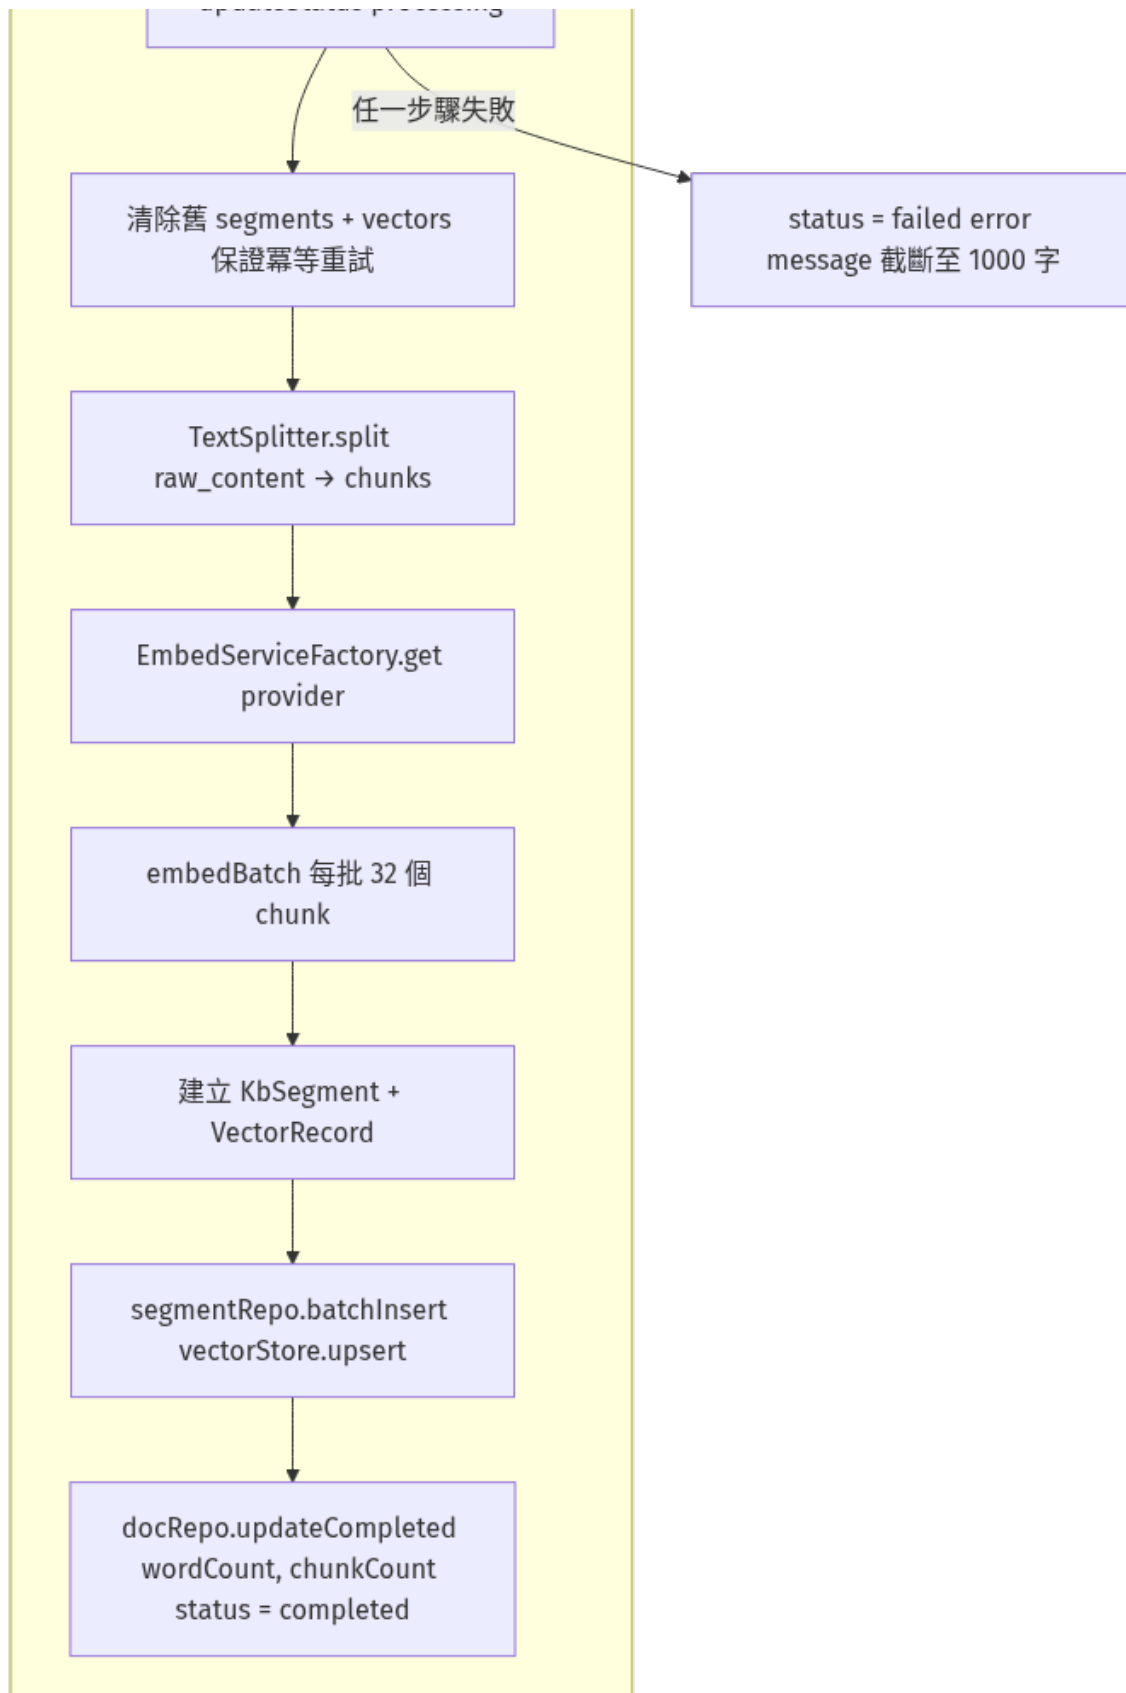

Search Flow

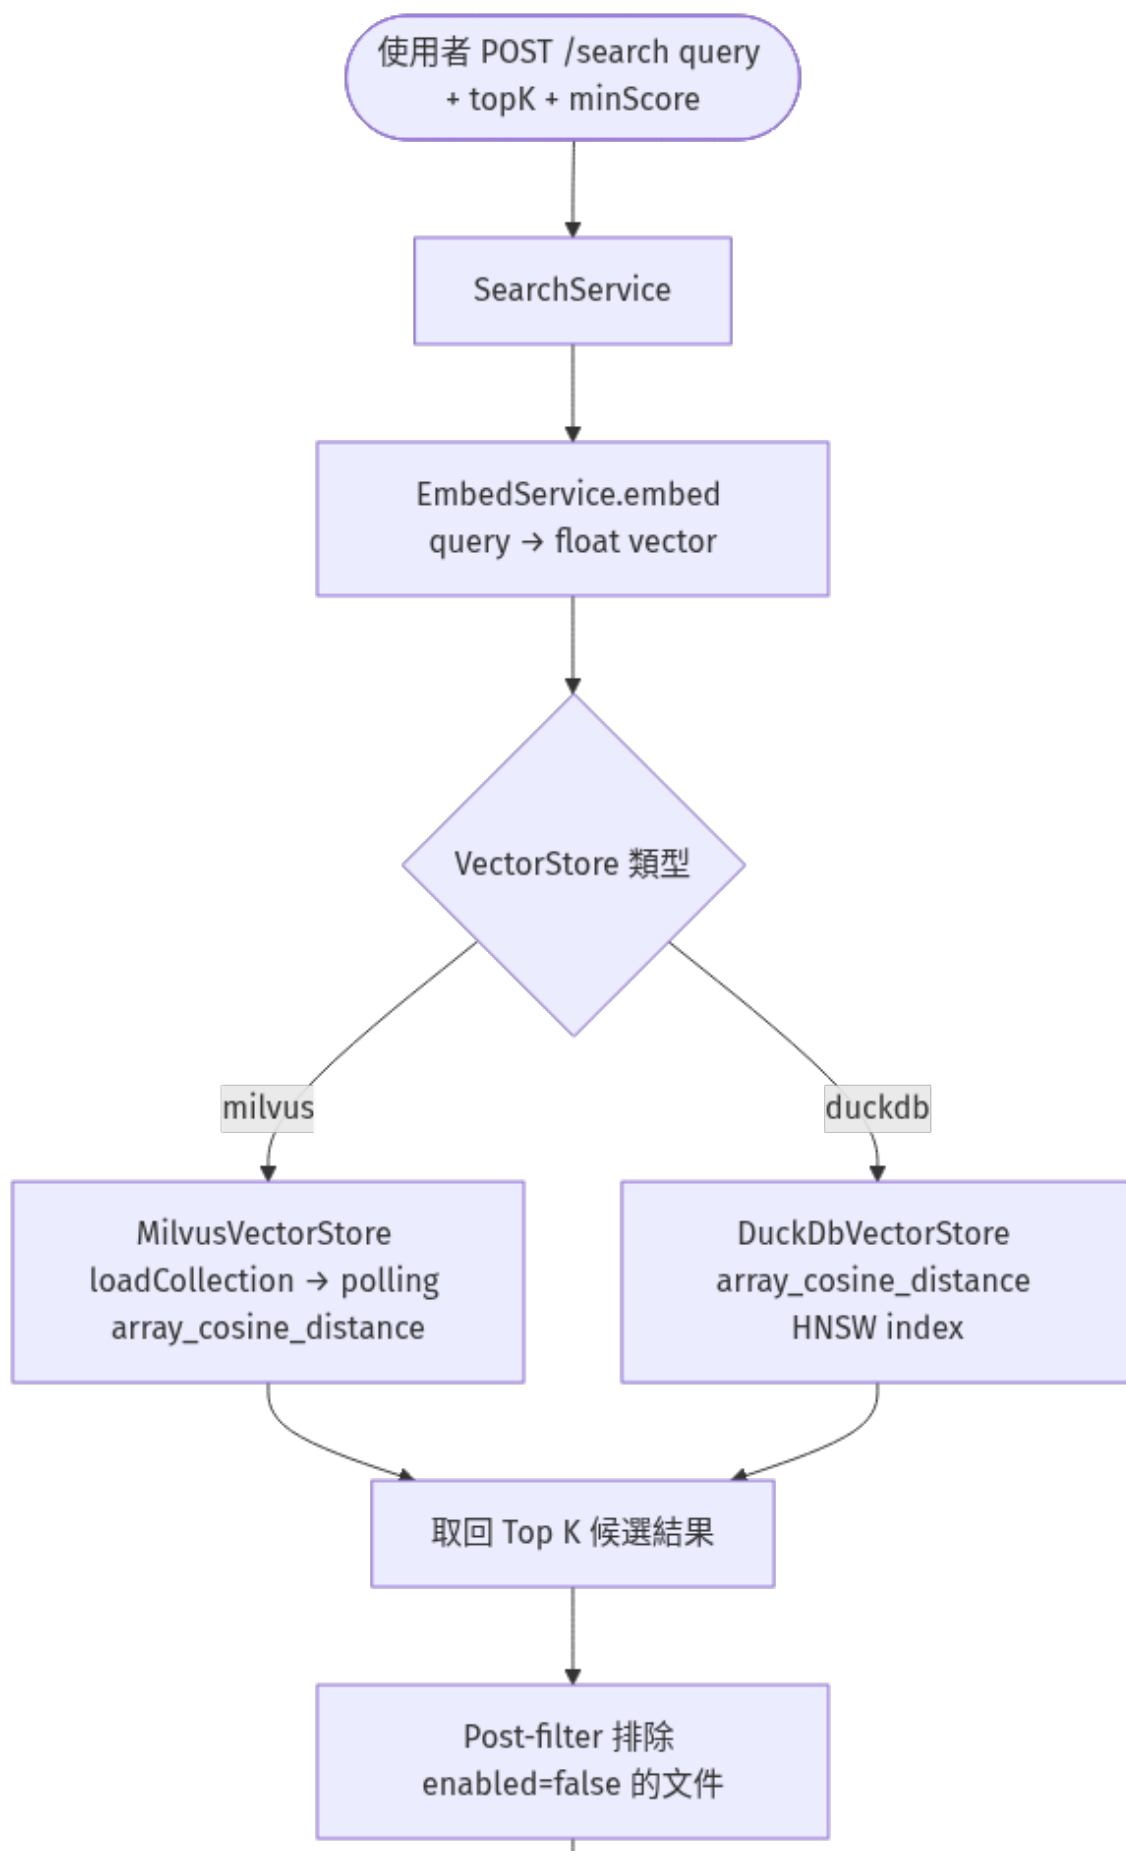

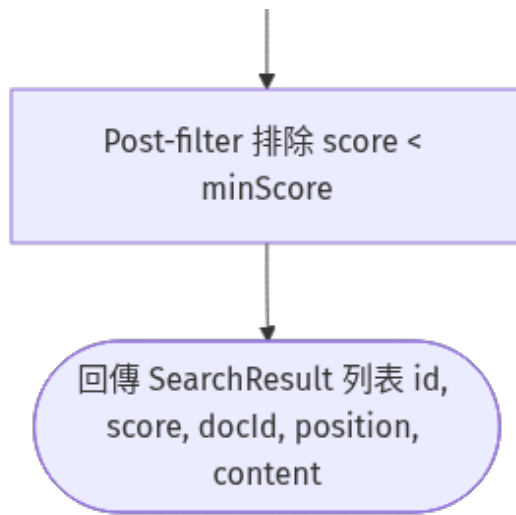

### 2.6.1. Create Knowledge

POST /nagato/api/knowledge/v1/tenants/{tenantId}/kbs

#### 2.6.1.1. Request

##### Header

| Name         | Value            |
|--------------|------------------|
| Content-Type | application/json |

##### Properties

| Name             | Type   | Description                                                |
|------------------|--------|------------------------------------------------------------|
| name             | string | the name of knowledge                                      |
| description      | string | the description                                            |
| embeddingModelId | string | the id of the embedding model from register model response |
| ingestionMode    | string | STANDARD   PARENT_CHILD   QA                               |
| ingestionConfig  | object |                                                            |

##### Ingestion Config ( For parent-child mode )

| Name            | Type    | Description                 |
|-----------------|---------|-----------------------------|
| fullDocAsParent | boolean | use full document as parent |
| parentChunkSize | number  |                             |
| parentSeparator | string  |                             |
| childChunkSize  | number  |                             |
| childSeparator  | string  |                             |

|                     |         |  |
|---------------------|---------|--|
| childChunkOverlap   | number  |  |
| parentKeepSeparator | boolean |  |
| childKeepSeparator  | boolean |  |

### 2.6.1.2. Response

#### Properties

| Name             | Type   | Description                                                     |
|------------------|--------|-----------------------------------------------------------------|
| id               | string | the id of the knowledge                                         |
| tenantId         | string | the id of the tenant                                            |
| name             | string |                                                                 |
| description      | string |                                                                 |
| embeddingModelId | string | the id of the embedding model                                   |
| vectorDim        | number | the dimension of the vector filed, based on the embedding model |
| vectorStoreKey   | string |                                                                 |
| status           | string | active                                                          |
| docCount         | number |                                                                 |

### 2.6.1.3. Example

#### Request

```
curl -X POST 'http://127.0.0.1:6580/nagato/api/knowledge/v1/tenants/default/kbs' \
--header 'Content-Type: application/json' \
--data '{
  "name": "testing KB - 4",
  "description": "test desc",
  "embeddingModelId": "836851373712558755"
}'
```

#### Response

```
{
  "id": "0Q0EYT8WVCAMN",
  "tenantId": "default",
  "name": "testing KB - 4",
  "description": "test desc",
  "embeddingProvider": "doki",
  "embeddingModel": "qwen3-embedding-4b",
  "vectorDim": 2560,
  "vectorStoreKey": "default_kb_0q0eyt8wvcamn",
  "status": "active",
  "docCount": 0
}
```

## 2.6.2. Preview Document

POST /nagato/api/knowledge/v1/tenants/{tenantId}/kbs/{kbId}/documents/preview

### 2.6.2.1. Request

#### Header

| Name         | Value               |
|--------------|---------------------|
| Content-Type | multipart/form-data |

#### Properties

| Name        | Required | Type   | Description                    |
|-------------|----------|--------|--------------------------------|
| file        | Y        | file   | the multipart file             |
| processRule | N        | string | the process rule based on mode |

#### Segmentation (一般模式)

| Name         | Required | Type   | Description     |
|--------------|----------|--------|-----------------|
| chunkSize    | N        | number |                 |
| chunkOverlap | N        | number |                 |
| separator    | N        | string | default is \n\n |

#### Parent-Child

| Name               | Required | Type   | Description |
|--------------------|----------|--------|-------------|
| parent.chunkSize   | N        | number |             |
| child.chunkSize    | N        | number |             |
| child.chunkOverlap | N        | number |             |



### 2.6.2.2. Response

| Name          | Type       | Description                  |
|---------------|------------|------------------------------|
| mode          | string     | STANDARD   PARENT_CHILD   QA |
| totalSegments | number     |                              |
| segments      | JSON ARRAY |                              |

### 2.6.2.3. Example

General Mode

Request

```
curl -X POST
'http://localhost:6580/nagato/api/knowledge/v1/tenants/default/kbs/839453689315430065/documents/preview' \
--header 'Content-Type: multipart/form-data' \
--form file=@Cdoc_asia_economy.txt \
--form 'processRule={"segmentation": {"chunkSize": 100, "chunkOverlap": 1, "separator": "\n\n"}}'
```

Response

```
{
  "mode": "STANDARD",
  "totalSegments": 7,
  "segments": [
    {"content": "\n\n"},
    {"content": "TSEUFJ"},
    {"content": ""},
    {"content": ""},
    {"content": "chaebolLGDP"},
    {"content": "NCR"},
    {"content": ""}
  ]
}
```

Parent-Child mode

Request

```
curl -X POST
'http://localhost:6580/nagato/api/knowledge/v1/tenants/default/kbs/839453689315430065/documents/preview
' \
  --header 'Content-Type: multipart/form-data' \
  --form file=@Cdoc_asia_economy.txt \
  --form
'processRule={"parentChild":{"parent":{"chunkSize":1024},"child":{"chunkSize":150,"chunkOverlap":0}}}'
```

## Response

```
{
  "mode": "PARENT_CHILD",
  "totalSegments": 1,
  "segments": [
    {
      "content": "\n\n\nTSEUFJ\n\n\nchaebolLGGDP\n\nNCR\n\n",
      "children": [
        {"content": "\n"},
        {"content": "TSEUFJ"},
        {"content": ""},
        {"content": "chaebolLGGDP"},
        {"content": "NCR\n"}
      ]
    }
  ]
}
```

## QA

## Request

```
curl -X POST
'http://localhost:6580/nagato/api/knowledge/v1/tenants/default/kbs/841617773880412915/documents/preview
' \
  --header 'Content-Type: multipart/form-data' \
  --form file=@C:\Users\miles.chen\Desktop\maizuru\qa_knowledge\qa_test.json
```

## Response

```

{
  "mode": "QA",
  "totalSegments": 10,
  "segments": [
    {
      "content": "embedding",
      "question": ""
    },
    {
      "content": "TXTMDPDFDOCXDOCHTMLODTEPUBXLSXXLSCSVJSON",
      "question": "Knowledge Base "
    },
    {
      "content": "Ingestion Mode STANDARD embed SUMMARYLLM embedPARENT_CHILD parent embed
childQAembed ",
      "question": " Ingestion Mode"
    },
    {
      "content": "PARENT_CHILD ",
      "question": "PARENT_CHILD "
    },
    {
      "content": " DELETE /nagato/api/knowledge/v1/tenants/{tenantId}/kbs/{kbId} cascade
documentssegments vector store",
      "question": " Knowledge Base"
    },
    {
      "content": "chunk_count chunkSTANDARD PARENT_CHILD parent QA Q&A pair ",
      "question": " chunk_count"
    },
    {
      "content": " application.properties knowledge.enabled=true knowledge.vector-storeduckdb /
pgvector / qdrant / milvus",
      "question": " Knowledge Module"
    },
    {
      "content": "HYBRID RRFReciprocal Rank Fusion 0.7 0.3",
      "question": "HYBRID "
    },
    {
      "content": " FAQ QA ",
      "question": " QA "
    },
    {
      "content": "ingestion_config ingestion mode SUMMARY llmProviderId summaryPromptPARENT_CHILD
parentChunkSizechildChunkSize STANDARD QA ",
      "question": "ingestion_config "
    }
  ]
}

```

### 2.6.3. Upload Document

POST /nagato/api/knowledge/v1/tenants/{tenantId}/kbs/{kbId}/documents

### 2.6.3.1. Request

#### Header

| Name         | Value            |
|--------------|------------------|
| Content-Type | application/json |

#### Properties

| Name        | Required | Type   | Description              |
|-------------|----------|--------|--------------------------|
| sourceType  | Y        | string | sftp, local              |
| sourcePath  | Y        | string | The path of the document |
| processRule | N        | object |                          |

#### ProcessRule

| Name                | Required | Type    | Description                  |
|---------------------|----------|---------|------------------------------|
| normalizeWhitespace | N        | boolean | 連續空白/Tab → 單一空格；3+ 換行 → 2 換行 |
| removeUrlsAndEmails | N        | boolean | 移除 URL 與 Email，以空格取代         |

#### Segmentation (一般模式)

| Name         | Required | Type   | Description     |
|--------------|----------|--------|-----------------|
| chunkSize    | N        | number |                 |
| chunkOverlap | N        | number |                 |
| separator    | N        | string | default is \n\n |

#### Parent-Child

| Name            | Required | Type    | Description                                   |
|-----------------|----------|---------|-----------------------------------------------|
| fullDocAsParent | N        | boolean | use full document as parent. default is false |
| parent          | N        | object  | please refer to the below table               |
| child           | N        | object  | please refer to the below table               |

#### Parent/child Properties

| Name          | Required | Type    | Description      |
|---------------|----------|---------|------------------|
| chunkSize     | N        | number  |                  |
| chunkOverlap  | N        | number  |                  |
| separator     | N        | string  | \n\n             |
| keepSeparator | N        | boolean | default is false |

### 2.6.3.2. Response

#### Properties

| Name     | Type    | Description                         |
|----------|---------|-------------------------------------|
| id       | string  | the id of the document              |
| tenantId | string  | the id of the tenant                |
| kbId     | string  | the id of the knowledge             |
| name     | string  | the filename of the document        |
| fileType | string  | the file type. for example, md, txt |
| status   | string  | pending, completed                  |
| enabled  | boolean | enable for search or not            |

### 2.6.3.3. Example

#### Normal

#### Request

```
curl -X POST
'http://localhost:6580/nagato/api/knowledge/v1/tenants/default/kbs/0Q0EYT8WVCAMN/documents' \
--header 'Content-Type: application/json' \
--data '{
  "sourceType": "sftp",
  "sourcePath": "/knowledges/0gjiovjmo/documents/bhohj23hr3.md"
}'
```

#### Response

```
{
  "id": "0Q0EYTXW7CAMP",
  "tenantId": "default",
  "kbId": "0Q0EYT8WVCAMN",
  "name": "bhohj23hr3.md",
  "fileType": "md",
  "status": "pending",
  "enabled": true
}
```

#### General mode With custom process rule

#### Request

```
curl -X POST
'http://localhost:6580/nagato/api/knowledge/v1/tenants/default/kbs/839701504638195043/documents' \
--header 'Content-Type: application/json' \
--data '{
  "sourceType": "local",
  "sourcePath":
"D:\\workspace\\ai\\nagato\\assembly\\target\\nagato-assembly-0.0.65-SNAPSHOT\\nagato-assembly-0.0.65-S
NAPSHOT\\storage\\knowledge\\uploads\\8fe5bb26-8413-414b-a1bd-cd6a895ec380\\doc_population_rank.txt",
  "processRule": {
    "segmentation": {
      "chunkSize": 64,
      "chunkOverlap": 1,
      "separator": "\n\n"
    }
  }
}'
```

Parent-Child mode With custom process rule

```
curl -X POST
'http://localhost:6580/nagato/api/knowledge/v1/tenants/default/kbs/839701504638195043/documents' \
--header 'Content-Type: application/json' \
--data '{
  "sourceType": "local",
  "sourcePath":
"D:\\workspace\\ai\\nagato\\assembly\\target\\nagato-assembly-0.0.65-SNAPSHOT\\nagato-assembly-0.0.65-S
NAPSHOT\\storage\\knowledge\\uploads\\8fe5bb26-8413-414b-a1bd-cd6a895ec380\\doc_population_rank.txt",
  "processRule": {
    "parentChild": {
      "parent": {"chunkSize": 500},
      "child": {"chunkSize": 100, "chunkOverlap": 10}
    }
  }
}'
```

## 2.6.4. Get Document Status

```
GET /nagato/api/knowledge/v1/tenants/{tenantId}/kbs/{kbId}/documents/{doc_id}
```

### 2.6.4.1. Response

| Name     | Type   | Description                               |
|----------|--------|-------------------------------------------|
| id       | string |                                           |
| tenantId | string |                                           |
| kbId     | string |                                           |
| status   | string | pending   processing   completed   failed |

|            |         |                    |
|------------|---------|--------------------|
| enabled    | boolean | enabled for search |
| wordCount  | number  |                    |
| chunkCount | number  |                    |

#### 2.6.4.2. Example

```
{
  "id": "841617798178015988",
  "tenantId": "default",
  "kbId": "841617773880412915",
  "name": "qa_test.csv",
  "fileType": "csv",
  "status": "completed",
  "enabled": true,
  "sourceType": "local",
  "sourcePath": "qa_test.csv",
  "wordCount": 73,
  "chunkCount": 10,
  "createdAt": 1778494119589,
  "updatedAt": 1778494121838
}
```

#### 2.6.5. Search Knowledge

```
POST /nagato/api/knowledge/v1/tenants/{tenantId}/kbs/{kbId}/search
```

##### 2.6.5.1. Request

###### Header

| Name         | Value            |
|--------------|------------------|
| Content-Type | application/json |

###### Properties

| Name             | Type   | Required | Description                                    |
|------------------|--------|----------|------------------------------------------------|
| query            | string | Y        | the keyword                                    |
| topK             | number | Y        | the total number of entities to return         |
| minScore         | number | N        | search threshold                               |
| retrievalMode    | string | N        | VECTOR   FULL_TEXT   HYBRID, default is VECTOR |
| vectorWeight     | number | N        | 0~1                                            |
| textWeight       | number | N        | 0~1                                            |
| rerankProviderId | string | N        | the rerank model id                            |

### 2.6.5.2. Response

#### Properties

| Name  | Type              | Description               |
|-------|-------------------|---------------------------|
| total | number            |                           |
| data  | JSON OBJECT Array | a list of entity objects. |

#### Entity

| Name    | Type   | Description              |
|---------|--------|--------------------------|
| id      | string | the id of the chunk      |
| score   | number |                          |
| docId   | string | the id of the document   |
| content | string | the content of the chunk |


### 2.6.5.3. Example

#### VECTOR Search

##### Request

```
curl -X POST 'http://localhost:6580/nagato/api/knowledge/v1/tenants/default/kbs/0Q0EYT8WVCAMN/search' \
--header 'Content-Type: application/json' \
--data '{
  "query": "collections",
  "topK": 3,
  "minScore": 0.3
}'
```

##### Response





```

{
  "total": 3,
  "data": [
    {
      "id": "0Q0EYTY17CAMY",
      "score": 0.6163859963417053,
      "docId": "0Q0EYTXW7CAMP",
      "position": 7,
      "content": "tabases/{dbId}/collections/{colId}/search| Collection | / API (Admin) | Method |
Path | | :----- | :----- | :----- |
POST | /nagato/admin/v1/devices/tasks | () | GET | /nagato/admin/v1/logs/{devId}/{date} | | GET |
/nagato/admin/v1/auditLogs/{channel} | channel | SPA | Method | Path | | :----- |
:----- | :----- | | G"
    },
    {
      "id": "0Q0EYTY13CAMR",
      "score": 0.5376864671707153,
      "docId": "0Q0EYTXW7CAMP",
      "position": 1,
      "content": " | GET | /nagato/api/v1/requests/{reqId} | | API (Management) | Method | Path |
| :----- | :----- |
:----- | | GET | /nagato/api/v1/management/shokunins | Shokunin | | GET |
/nagato/api/v1/management/shokunins/{name} | Shokunin | | POST |
/nagato/api/v1/management/shokunins/{name} | Shokunin | | DELETE |
/nagato/api/v1/management/shokunins/{name} | Shokunin"
    },
    {
      "id": "0Q0EYTY17CAMS",
      "score": 0.5374147295951843,
      "docId": "0Q0EYTXW7CAMP",
      "position": 2,
      "content": "pi/v1/management/shokunins/{name} | Shokunin | | GET |
/nagato/api/v1/management/shokunin-skills | (New) Shokunin | | GET |
/nagato/api/v1/management/workflows | Workflow | | GET | /nagato/api/v1/management/workflows/{id} |
Workflow | | POST | /nagato/api/v1/management/workflows | Workflow | | POST |
/nagato/api/v1/management/workflows/{id} | Workflow | | DELETE |
/nagato/api/v1/management/workflows/{id} | Workflow | | GET | /nagat"
    }
  ]
}

```

FULL TEXT Search

request

```
curl -X POST
'http://localhost:6580/nagato/api/knowledge/v1/tenants/default/kbs/834692249788487138/search' \
--header 'Content-Type: application/json' \
--data '{
  "query": "",
  "topK": 5,
  "minScore": 0.0,
  "retrievalMode": "FULL_TEXT"
}'
```

response

HYBRID Search

request

```
curl -X POST
'http://localhost:6580/nagato/api/knowledge/v1/tenants/default/kbs/834692249788487138/search' \
--header 'User-Agent: yaak' \
--header 'Accept: */*' \
--header 'Content-Type: application/json' \
--data '{
  "query": "",
  "topK": 5,
  "minScore": 0.0,
  "retrievalMode": "HYBRID",
  "vectorWeight": 0.7,
  "textWeight": 0.3,
  "rerankProviderId": "834690508457243197" // with rerank model
}'
```

## 2.6.6. Update Document Status

```
PATCH /nagato/api/knowledge/v1/tenants/{tenantId}/kbs/{kbId}/documents/{docId}
```

### 2.6.6.1. Request

Header

| Name         | Value            |
|--------------|------------------|
| Content-Type | application/json |

Properties

---

| Name    | Type    | Description         |
|---------|---------|---------------------|
| enabled | boolean | true for searchable |

### 2.6.6.2. Response

| Name    | Type    | Description            |
|---------|---------|------------------------|
| enabled | boolean | true for searchable    |
| docId   | string  | the id of the document |

### 2.6.6.3. Example

Request

```
curl -X PATCH
'http://127.0.0.1:6580/nagato/api/knowledge/v1/tenants/default/kbs/0PYXNVK44M823/documents/0PYM3F1PGBJG
H' \
--header 'Content-Type: application/json' \
--data '{
  "enabled": false
}'
```

Response

```
{
  "enabled": false,
  "docId": "0PYM3F1PGBJGH"
}
```

## 2.7. Knowledge Pipeline ( Draft )

### 2.7.1. Create Pipeline

```
PUT /nagato/api/knowledge/v1/tenants/{tenantId}/kbs/{kbId}/pipeline/config
```

#### 2.7.1.1. Request

Header

| Name         | Value            |
|--------------|------------------|
| Content-Type | application/json |

Request

一言難盡...

### 2.7.1.2. Response

Properties

| Name  | Type    | Description |
|-------|---------|-------------|
| nodes | number  |             |
| ok    | boolean |             |

### 2.7.1.3. Example

Request

```
curl -X PUT
'http://127.0.0.1:6580/nagato/api/knowledge/v1/tenants/default/kbs/832139928304694018/pipeline/config' \
--header 'User-Agent: yaak' \
--header 'Accept: */*' \
--header 'Content-Type: application/json' \
--data '{
  "pipelineConfig": {
    "nodes": [
      {
        "type": "xlsx_reader",
        "options": {
          "allSheets": true
        }
      },
      {
        "type": "row_renderer",
        "options": {
          "idColumn": "",
          "template": "{} {} {} {} {} {} {} {}, {}"
        }
      },
      {
        "type": "embedder"
      },
      {
        "type": "vector_upsert"
      }
    ]
  }
}'
```

Response

```
{
  "nodes": 4,
  "ok": true
}
```

## 2.7.2. Get Pipeline

```
GET /nagato/api/knowledge/v1/tenants/{tenantId}/kbs/{kbId}/pipeline/config
```

### 2.7.2.1. Response

| Name         | Value            |
|--------------|------------------|
| content-type | application/json |

## 2.7.3. Run Pipeline

```
POST /nagato/api/knowledge/v1/tenants/{tenantId}/kbs/{kbId}/pipeline/run
```

### 2.7.3.1. Request

#### Header

| Name         | Value            |
|--------------|------------------|
| Content-Type | application/json |

#### Properties

| Name       | Type   | Description                                                         |
|------------|--------|---------------------------------------------------------------------|
| sourceName | string | the name of the source, override the source if the name is the same |
| sourceType | string | local or sftp                                                       |
| sourcePath | string | the source path                                                     |

### 2.7.3.2. Response

#### Properties

| Name       | Type   | Description                     |
|------------|--------|---------------------------------|
| sourceName | string |                                 |
| docId      | string |                                 |
| processed  | number | how many entities are processed |

### 2.7.3.3. Example

#### Request

```
curl -X POST
'http://127.0.0.1:6580/nagato/api/knowledge/v1/tenants/default/kbs/832139928304694018/pipeline/run' \
--header 'User-Agent: yaak' \
--header 'Accept: */*' \
--header 'Content-Type: application/json' \
--data '{
  "sourceName": "dnc",
  "sourceType": "local",
  "sourcePath":
"D:\\workspace\\ai\\nagato\\assembly\\target\\nagato-assembly-0.0.57-SNAPSHOT\\nagato-assembly-0.0.57-S
NAPSHOT\\..\\data\\knowledge\\uploads\\adb87e53-1e6e-4725-9d64-af70b5dd1c92\\dnc_extensions.xlsx"
}'
```

#### Response

```
{
  "sourceName": "dnc",
  "docId": "832140941023589123",
  "processed": 50
}
```

## 3. Management API

### 3.1. Shokunins

#### 3.1.1. List Shokunins

```
GET /nagato/api/v1/management/shokunins
```

##### 3.1.1.1. Response

#### Example

```
[
  {
    "name": "chokimaru-planner",
    "base": "ubigpt",
    "desc": "...",
```

```

"url": "https://g.ubitus.ai/v1/chat/completions",
"props": {
  "model": "llama-4-maverick-fp8",
  "accessToken": "Bearer FIKQP5SiwBfKqGEa+6A+4i+Gn...",
  "prompt": "# Lead Agent (Workflow Planner)\n\n JSON (Action List)\n\n# Target Persona Context\n(Downstream Agent)\n**You are planning workflows for a specific persona:**\n- **Identity**: Official Mascot of **Maizuru, Kyoto, Japan ()**.\n- **Goal**: To introduce Maizuru's tourist spots, events, and food, and **assist tourists in communicating with locals**.\n\n# Current Environmental Context\n**Use this objective time and location for all relative references.**\n- Current Time: {{CURRENT_TIME_STRING}}\n- User Location: Taipei, Taiwan (Default)\n\n# \n1. ****: `<img ... />` \n2. ****: \n3. ****: \n4. ****: **** `CHAT` \n\n# (CRITICAL)\n- ***** JSON ****\n- **** Markdown code block\n- ****\n- `[` `]` \n- JSON `[{"action": "ACTION_NAME", "parameters": {"key": "value"}}]` \n\n# (Available Action Library)\n\n1. **`CHAT`**: \n\t- : **** \n\t- `parameters`: `{}` \n\t()\n\n2. **`CHECK_WEATHER`**: \n\t- : **** `CHAT` \n\t- `parameters`: \n\t\t- `city` (string, required): 'Taipei'. \n\t\t- `latitude` (number, optional): 25.0330. \n\t\t- `longitude` (number, optional): 121.5654. \n\t\t- `days` (number, optional): (1-7)1. \n\t\t- `detail_level` (string, optional): 'simple' 'full' 'simple'. \n\n3. **`WEB_SEARCH`**: \n\t- : **** `CHAT` \n\t- `parameters`: \n\t\t- `query` (string, required): Optimized search keywords. \n\t\t- **CRITICAL RULE**: Convert relative time to specific dates. If asking about Maizuru local info, translate keywords to **Japanese**. \n\n4. **`TRANSLATOR`**: \n\t- ****: **** `CHAT` \n\t- ****: \n\t\t- (e.g., `"?`, `"...`"). \n\t\t- (e.g., `"...`, `"`"). \n\t\t- **`parameters`**: \n\t\t\t- `text` (string, **required**) (The content to be translated.) \n\t\t\t- `target_lang` (string, **required**) (The target language code, e.g., `ja` for Japanese, `zh-TW` for Traditional Chinese, `en` for English. Infer this from context: if the user wants to talk to a local in Japan, it's likely `ja`.) \n\n-----\n\n# \n\n** 1: **\n- User Input: `""` \n- Your Output: \n[{"action": "CHAT", "parameters": {}}] \n\n** 2: **\n- User Input: `"?` \n- Your Output: \n[{"action": "CHECK_WEATHER", "parameters": {"city": "Maizuru", "latitude": 35.45, "longitude": 135.3333, "detail_level": "simple", "days": 1 } }, {"action": "CHAT", "parameters": {}}] \n\n** 3: **\n- User: `?` \n- Output: \n[{"action": "CHECK_WEATHER", "parameters": {"city": "Osaka", "latitude": 34.69374, "longitude": 135.50218, "detail_level": "full", "days": 7 } }, {"action": "CHAT", "parameters": {}}] \n\n** 4: **\n- User Input: `"?` \n- Your Output: \n[{"action": "WEB_SEARCH", "parameters": {"query": " 202511"}}, {"action": "CHAT", "parameters": {}}] \n\n** 5: **\n- User Input: `""` \n- Your Output: \n[{"action": "TRANSLATOR", "parameters": {"text": "", "target_lang": "ja"}}, {"action": "CHAT", "parameters": {}}] \n\n** 6: **\n- User Input: `""` \n- Your Output: \n[{"action": "TRANSLATOR", "parameters": {"text": "", "target_lang": "ja"}}, {"action": "CHAT", "parameters": {}}] \n\n",
  "supportStreamPlan": false
},
"plannerMappingId": "e52b892e-d8f0-4edb-b8dc-3d49b4baa381"
},
{
  "name": "1to3",
  "base": "ubincp",
  "url": "https://g-stg.ubitus.ai/v1",
  "props": {
    "apiKey": "Bearer cjXxt4mPD62hpgBHrDnlkrH1egdIo...",
    "npcId": "a7e3c597-5a98-46d3-9957-b2d409d24d00"
  }
},
{
  "name": "confluence_mcp",
  "base": "mcp",
  "desc": "",
  "url": "http://172.16.80.37:7756",
  "skills": [
    {

```

```

        "name": "search_confluence",
        "desc": " confluence ",
        "declaration":
        "{ \"type\": \"object\", \"properties\": { \"query\": { \"type\": \"string\", \"description\": \"\" }, \"required\": [] }, \"isDefault\": false } }",
    ]
}
]

```

### 3.1.2. Get Shokunin

```
GET /nagato/api/v1/management/shokunins/{shokunin_name}
```

#### 3.1.2.1. Response

Example

```

{
  "name": "1to3",
  "base": "ubincp",
  "url": "https://g-stg.ubitus.ai/v1",
  "async": false,
  "props": {
    "apiKey": "Bearer
cjXxt4mPD62hpgBHRDnlkrH1egdIobv8ykhFbdwEdG2t5t5PsqTDQssKEYimKkjsJkNuGSQMfvbk0LX2pm1LGw==",
    "npcId": "a7e3c597-5a98-46d3-9957-b2d409d24d00"
  },
  "tools": [],
  "skills": [],
  "requiredContext": []
}

```

### 3.1.3. Upsert Shokunin

```
POST /nagato/api/v1/management/shokunins/{shokunin_name}
```

#### 3.1.3.1. Request

#### 3.1.3.2. Response

## 3.2. Workflows




### 3.2.1. List workflows

```
GET /nagato/api/v1/management/workflows
```

#### 3.2.1.1. Response

Example



```
[
  {
    "id": "cf80819b-c5ab-44c9-ae8-9284315bb458",
    "name": "maizuru_post_search",
    "description": "Memory search workflow: embed query text search Milvus by vector similarity",
    "nodes": [

{"id":"embed_node","type":"skillNode","position":{"x":12.0,"y":12.0},"data":{"toolName":"toEmbed","description":"","args":{"text":"{{user_input.text}}"},"responseToClient":false,"streamToClient":false,"responseToContext":false}},

{"id":"search_node","type":"skillNode","position":{"x":116.66666666666667,"y":20.0},"data":{"toolName":"maizuru_post.milvus_search","description":"","args":{"top_k":5.0,"vector":"{{nodes.embed_node.output.vector}}"},"responseToClient":false,"streamToClient":false,"responseToContext":true}},
    ],
    "edges": [
      {"id":"xy-edge__embed_node-search_node","source":"embed_node","target":"search_node"}
    ]
  },
  {
    "id": "f32df062-dbf4-476d-a372-8aa11e4dc32a",
    "name": "maizuru_post_upsert",
    "description": "update maizuru post workflow: embed text assemble payload upsert to Milvus",
    "nodes": [

{"id":"embed_node","type":"skillNode","position":{"x":-234.66666666666669,"y":34.66666666666667},"data":{"toolName":"toEmbed","description":"","args":{"text":"{{#json user_input.text}}{{rich_text_for_embedding}}{/json}}"},"responseToClient":false,"streamToClient":false,"responseToContext":true}},

{"id":"mapper_node","type":"skillNode","position":{"x":-125.33333333333334,"y":31.333333333333336},"data":{"toolName":"payload_mapper","description":"Milvus collection schema payload","args":{"id":"{{uuid}}","title":"{{#json user_input.text}}{title}}{/json}}","vector":"{{nodes.embed_node.output.vector}}","summary":"{{#json user_input.text}}{summary}}{/json}}","entities":"{{#json user_input.text}}{json entities}}{/json}}","location":"{{#json user_input.text}}{location}}{/json}}","time_context":"{{#json user_input.text}}{time_context}}{/json}}"},"responseToClient":false,"streamToClient":false,"responseToContext":true}},

{"id":"upsert_node","type":"skillNode","position":{"x":6.0,"y":30.666666666666664},"data":{"toolName":"maizuru_post.milvus_upsert","description":"payload Milvus","args":{"payload#json":"{{toJson nodes.mapper_node.output.payload}}"},"responseToClient":false,"streamToClient":false,"responseToContext":true}},
    ],
    "edges": [
      {"id":"xy-edge__embed_node-mapper_node","source":"embed_node","target":"mapper_node"},
      {"id":"xy-edge__mapper_node-upsert_node","source":"mapper_node","target":"upsert_node"}
    ]
  }
]

```

### 3.2.2. Get workflow

```
GET /nagato/api/v1/management/workflows/{workflow_id}
```

### 3.2.2.1. Response

Example

```
{
  "id": "cf80819b-c5ab-44c9-ae8-9284315bb458",
  "name": "maizuru_post_search",
  "description": "Memory search workflow: embed query text  search Milvus by vector similarity",
  "nodes": [

{"id":"embed_node","type":"skillNode","position":{"x":12.0,"y":12.0},"data":{"toolName":"toEmbed","description":"","args":{"text":"{{user_input.text}}"},"responseToClient":false,"streamToClient":false,"responseToContext":false}},

{"id":"search_node","type":"skillNode","position":{"x":116.66666666666667,"y":20.0},"data":{"toolName":"maizuru_post.milvus_search","description":"","args":{"top_k":5.0,"vector":"{{nodes.embed_node.output.vector}}"},"responseToClient":false,"streamToClient":false,"responseToContext":true}}
  ],
  "edges": [
    {
      "id": "xy-edge__embed_node-search_node",
      "source": "embed_node",
      "target": "search_node"
    }
  ]
}
```

## 3.3. Planner

### 3.3.1. List Planners

```
GET /nagato/api/v1/management/planner-mappings
```

#### 3.3.1.1. Response

Example

```
[
  {
    "id": "e52b892e-d8f0-4edb-b8dc-3d49b4baa381",
    "name": "chokimaru planner",
    "mappings": [

      {"action": "CHAT", "graph": {"nodes": [{"id": "chat_node", "data": {"toolName": "talkToChokimaru", "args": {"user Prompt": "{{ user_input.text}}", "tool_results": "{{ nodes}}"}}, "responseToClient": true, "streamToClient": true, "responseToContext": true}], "edges": []}},

      {"action": "WEB_SEARCH", "graph": {"nodes": [{"id": "search_by_duckduckgo_node", "type": "skillNode", "position": {"x": 12.0, "y": 12.0}, "data": {"toolName": "search_by_duckduckgo", "args": {"query": "[[ external.parameters.query]]", "max_results": 10.0}, "responseToClient": false, "streamToClient": false, "responseToContext": true}], "edges": []}},

      {"action": "CHECK_WEATHER", "condition": "", "graph": {"nodes": [{"id": "29f8f778-a698-409d-99c3-0cd2b9e3bca4", "type": "skillNode", "position": {"x": 523.5, "y": 358.5}, "data": {"toolName": "get_weather", "description": "Get current weather for a specific city", "args": {"city_name": "[[ external.parameters.city]]"}, "responseToClient": false, "streamToClient": false, "responseToContext": true}], "edges": []}},

      {"action": "MAPS_SEARCH", "condition": "", "graph": {"nodes": [{"id": "d71ffb5f-a2ed-4e69-99da-19e38b5772ca", "type": "skillNode", "position": {"x": 523.5, "y": 358.5}, "data": {"toolName": "maps_search_places", "description": "Search for places using Google Places API. Returns: array of places with names, addresses, locations.\n", "args": {"query": "[[ external.parameters.query]]", "lang_code": "[[ external.parameters.lang_code]]", "location_name": "[[ external.parameters.location_name]]", "radius#number": "[[ external.parameters.radius]]"}, "responseToClient": false, "streamToClient": false, "responseToContext": true}], "edges": []}},

      {"action": "TRANSLATOR", "condition": "", "graph": {"nodes": [{"id": "2831da33-5fc0-43c0-8b5c-d06a6181d159", "type": "skillNode", "position": {"x": 523.5, "y": 358.5}, "data": {"toolName": "doTranslate", "description": "", "args": {"text": "[[ external.parameters.text]]", "outputLang": "[[ external.parameters.target_lang]]"}, "responseToClient": false, "streamToClient": false, "responseToContext": true}], "edges": []}}
    ]
  }
]
```

### 3.3.2. Get Planner

```
GET /nagato/api/v1/management/planner-mappings/{planner_id}
```

#### 3.3.2.1. Response

Example

```

{
  "id": "e52b892e-d8f0-4edb-b8dc-3d49b4baa381",
  "name": "chokimaru planner",
  "mappings": [

{"action": "CHAT", "graph": {"nodes": [{"id": "chat_node", "data": {"toolName": "talkToChokimaru", "args": {"user Prompt": "{ { user_input.text } }", "tool_results": "{ { nodes } }"}, "responseToClient": true, "streamToClient": true, "responseToContext": true}}], "edges": []}},

{"action": "WEB_SEARCH", "graph": {"nodes": [{"id": "search_by_duckduckgo_node", "type": "skillNode", "position": {"x": 12.0, "y": 12.0}, "data": {"toolName": "search_by_duckduckgo", "args": {"query": "[[ external.parameters.query ]]", "max_results": 10.0}, "responseToClient": false, "streamToClient": false, "responseToContext": true}}], "edges": []}},

{"action": "CHECK_WEATHER", "condition": "", "graph": {"nodes": [{"id": "29f8f778-a698-409d-99c3-0cd2b9e3bca4", "type": "skillNode", "position": {"x": 523.5, "y": 358.5}, "data": {"toolName": "get_weather", "description": "Get current weather for a specific city", "args": {"city_name": "[[ external.parameters.city ]]", "responseToClient": false, "streamToClient": false, "responseToContext": true}}], "edges": []}},

{"action": "MAPS_SEARCH", "condition": "", "graph": {"nodes": [{"id": "d71ffb5f-a2ed-4e69-99da-19e38b5772ca", "type": "skillNode", "position": {"x": 523.5, "y": 358.5}, "data": {"toolName": "maps_search_places", "description": "Search for places using Google Places API. Returns: array of places with names, addresses, locations.\n", "args": {"query": "[[ external.parameters.query ]]", "lang_code": "[[ external.parameters.lang_code ]]", "location_name": "[[ external.parameters.location_name ]]", "radius#number": "[[ external.parameters.radius ]]", "responseToClient": false, "streamToClient": false, "responseToContext": true}}], "edges": []}},

{"action": "TRANSLATOR", "condition": "", "graph": {"nodes": [{"id": "2831da33-5fc0-43c0-8b5c-d06a6181d159", "type": "skillNode", "position": {"x": 523.5, "y": 358.5}, "data": {"toolName": "doTranslate", "description": "", "args": {"text": "[[ external.parameters.text ]]", "outputLang": "[[ external.parameters.target_lang ]]", "responseToClient": false, "streamToClient": false, "responseToContext": true}}], "edges": []}}
  ]
}

```