CO2 – ASSESSMENT 3

SCENARIO-BASED ASSESSMENT REPORT

Student Name	P. Venkata Sai Pradeep Reddy
Register Number	192311364
Course Faculty	Dr. K. Anbazhagan
Course Name	Ethical Hacking
Course Code	ITA1406
Slot	Slot B
Assessment	CO2 – Footprinting Tools
Assigned Website	www.apple.com
Total Marks	100

Code of Conduct

I, P. Venkata Sai Pradeep Reddy (Register Number: 192311364), certify that this submission is my original work and that I have adhered to the guidelines specified for this assessment. I understand that any violation of academic integrity rules will result in disciplinary action.

Student Signature: **PVS**

1. Abstract

This report documents a DNS footprinting exercise carried out on the assigned domain www.apple.com (queried as apple.com) using DNSDumpster, as required for CO2 Assessment 3 in Ethical Hacking (ITA1406). DNS footprinting is a passive reconnaissance technique that collects publicly available DNS, host and network information about a target. The scan was run on 26 October 2026 and the complete report was exported in XLSX format. The tool reported 19,740 records for the domain, of which 50 are displayed to free users; the downloaded report contains 60 records (50 A, 6 MX and 4 NS), all hosted on two networks: AS714 (Apple Inc.) with 58 records and AS42 (WoodyNet, Inc.) with 2 records, both in the United States. This report records the procedure followed, presents the data exactly as shown by the tool, and analyses the infrastructure it reveals.

2. Aim

To perform DNS footprinting on the assigned website www.apple.com using DNSDumpster, identify the DNS and infrastructure information shown by the tool, and analyze the results with appropriate evidence.

3. Objectives

• Access DNSDumpster and test the assigned domain, www.apple.com.

• Generate and download the complete report in XLSX format, as instructed in the assessment sheet. • Save the DNS map generated by DNSDumpster.

• Record only the DNS, host, IP, and related information actually displayed by the tool. • Analyze the discovered infrastructure and discuss its possible security significance without making unsupported claims.

• Attach screenshots and the downloaded XLSX report as submission evidence.

4. Scope and Ethical Considerations

The scope is limited to publicly available information returned for the assigned domain www.apple.com by DNSDumpster. This activity is for academic learning and documentation. The exercise does not include exploitation, password attacks, unauthorized access, or intrusive testing. Results should be interpreted as a snapshot taken at the time of the scan; DNS data and infrastructure can change.

5. Tool Used

DNSDumpster (https://dnsdumpster.com) — a web-based DNS reconnaissance service that can present domain-related DNS information and a visual map of discovered hosts or infrastructure. The assessment instructions require the complete report downloaded as an .xlsx file and the map generated by the service.

6. Assigned Domain Details

Register Number	192311364
Assigned Website	www.apple.com
Domain to enter in DNSDumpster	apple.com
Tool URL	https://dnsdumpster.com

Evidence required	Downloaded XLSX report, DNS map, and screenshots

7. Procedure

1. Open https://dnsdumpster.com in a web browser.

2. Locate the field labelled “Enter a Domain to Test”.
3. Enter apple.com, corresponding to the assigned website www.apple.com.
4. Click “Start Test” and wait for the tool to complete the lookup.
5. Review the results shown by DNSDumpster. Do not add records that are not displayed in the result.
6. Download the complete report as an XLSX file, following the assessment instructions. 7. Save or export the DNS map generated by the tool.
8. Capture screenshots showing the tested domain, the results, and the DNS map. 9. Use the downloaded report and map to complete the findings tables and analysis sections below.

8. Results and Evidence

All values in the tables below are taken directly from the DNSDumpster XLSX report (sheets “Summary” and “DNS Records”) and from the saved DNSDumpster results page (used for the TXT records, which are not included in the XLSX file). Nothing has been added from outside these sources.

8.1 Scan Details

Date and time of scan	26 October 2026, 06:37:05 (“Generated on” timestamp in the XLSX Summary sheet)
Domain tested	apple.com
DNSDumpster scan status	Completed. Results displayed; 50 records shown out of 19,740 found (free-user limit); XLSX report generated with 60 rows.
XLSX report filename	apple.com-9a8d2496-5747-4027-ab e2- f60807beadbe.xlsx
DNS map filename	DNS_Map_Apple.png

8.2 DNS and Host Information

Record / category	Value shown by tool	Source sheet / section	Notes
A records (50)	50 hostnames mapped to 43 distinct IPv4 addresses, e.g. 2b4a6b31ca2273bb.apple.com → 17.188.23.54	XLSX › DNS Records, rows 2–51	All 50 listed in Section 8.3; all on AS714, United States

MX record	20 mx-in-sg.apple.com → 17.23.14.18	XLSX › DNS Records, row 52	Reverse DNS: mx-in sg.apple.com; APPLE ENGINEERING - Apple Inc.; netblock 17.23.14.0/23
MX record	20 mx-in-hfd.apple.com → 17.57.165.2	XLSX › DNS Records, row 53	Reverse DNS: mx-in hfd.apple.com; APPLE ENGINEERING - Apple Inc.; netblock 17.57.164.0/23
MX record	20 mx-in-vib.apple.com → 17.57.170.2	XLSX › DNS Records, row 54	Reverse DNS: mx-in vib.apple.com; APPLE ENGINEERING - Apple Inc.; netblock 17.0.0.0/9
MX record	10 mx-in.g.apple.com → 17.171.208.6	XLSX › DNS Records, row 55	Reverse DNS: mx-in ma.apple.com; APPLE ENGINEERING - Apple Inc.; netblock 17.168.0.0/14
MX record	20 mx-in-ma.apple.com → 17.171.208.6	XLSX › DNS Records, row 56	Reverse DNS: mx-in ma.apple.com; APPLE-

			ENGINEERING - Apple Inc.; netblock 17.168.0.0/14
MX record	20 mx-in-rn.apple.com → 17.56.176.6	XLSX › DNS Records, row 57	Reverse DNS: mx-in rn.apple.com; APPLE ENGINEERING - Apple Inc.; netblock 17.56.128.0/17
NS record	b.ns.apple.com → 17.253.207.1	XLSX › DNS Records, row 58	APPLE-ENGINEERING - Apple Inc. (AS714); netblock 17.253.207.0/24
NS record	c.ns.apple.com → 204.19.119.1	XLSX › DNS Records, row 59	WOODYNET-1 - WoodyNet, Inc. (AS42); netblock 204.19.119.0/24
NS record	d.ns.apple.com → 204.26.57.1	XLSX › DNS Records, row 60	WOODYNET-1 - WoodyNet, Inc. (AS42); netblock 204.26.57.0/24
NS record	a.ns.apple.com → 17.253.200.1	XLSX › DNS Records, row 61	APPLE-ENGINEERING - Apple Inc. (AS714); netblock 17.253.200.0/24
TXT record (SPF)	v=spf1 include:_spf.apple.com include:_spf-txn.apple.com ~all	DNSDumpster results page › TXT Records	Sender policy; “~all” means soft fail for unlisted senders
TXT records (other)	22 further strings: site-verification and client-ID tokens for Google (×3), Facebook, Yahoo, Atlassian (×2), Cisco, Adobe, Miro, Webex, Dynatrace, Cerner (×2), LucidLink and Apple, 4 other unlabelled tokens, and 2	DNSDumpster results page › TXT Records	Domain-ownership proofs for third-party services; not present in the XLSX file

	base64 “json:” padding strings		
Network summary	AS714 APPLE-ENGINEERING –Apple Inc.: 58 records; AS42 WOODYNET-1 – WoodyNet, Inc.: 2 records	XLSX › Summary › Top 5 ASN	All 60 records in United States (Top 5 Countries)
Service banners	Apple: 38; purple: 2	XLSX › Summary › Top 5 Banners	Banner names as reported by the tool

The XLSX “DNS Records” sheet contains 60 data rows (rows 2–61). The A-record rows are listed in full in Section 8.3; the TXT records appear only on the DNSDumpster results page, so their reference is the saved results page.

8.3 Discovered Hosts / IP Addresses

Hostname	IP address	Related information shown	Evidence reference
2b4a6b31ca2273bb.apple.com	17.188.23.54	Reverse DNS: 2b4a6b31ca2273bb.apple.com; netblock 17.128.0.0/9; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 2
9jz2jy1nwdg1oh60lvtc.apple.com	17.219.151.186	Reverse DNS: 9jz2jy1nwdg1oh60lvtc.apple.com; netblock 17.128.0.0/9; no HTTP service shown	XLSX › DNS Records, row 3
aacs.apple.com	17.254.20.118	Reverse DNS: aacs.apple.com; netblock 17.128.0.0/9; no HTTP service shown	XLSX › DNS Records, row 4
aamt.apple.com	17.137.160.88	Reverse DNS: acam-prz.apple.com; netblock 17.137.0.0/16; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 5
aamt-uat.apple.com	17.171.99.28	Reverse DNS: aamt-uat.apple.com; netblock 17.168.0.0/14; no HTTP service shown	XLSX › DNS Records, row 6
aamtinternal.apple.com	17.137.184.153	Reverse DNS: acaminternal prz.apple.com; netblock 17.137.0.0/16; no HTTP service shown	XLSX › DNS Records, row 7

aamtit.apple.com	17.171.13.248	Reverse DNS: aamtit.apple.com; netblock 17.168.0.0/14; no HTTP service shown	XLSX › DNS Records, row 8
aamtit-old.apple.com	17.112.169.18	Reverse DNS: aamtit-old.apple.com; netblock 17.112.128.0/18; no HTTP service shown	XLSX › DNS Records, row 9

aatcportal.apple.com	17.47.160.162	Reverse DNS: msc aatcportal.apple.com; netblock 17.47.128.0/17; HTTPS: Apple - 400 No required SSL certificate was	XLSX › DNS Records, row 10
abcweb.apple.com	17.157.64.187	Reverse DNS: abcweb.msc.sbz.apple.com; netblock 17.157.64.0/20; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 11
abcweb-server.apple.com	17.157.64.185	Reverse DNS: adp-pay portal.msc.sbz.apple.com; netblock 17.157.64.0/20; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 12
abs.apple.com	17.33.201.105	Reverse DNS: absence-mgmt teamview-dr.awuse1.sbz.apple.com; netblock 17.33.200.0/22; no HTTP service shown	XLSX › DNS Records, row 13
ac-gs.apple.com	17.171.47.11	Reverse DNS: ac-gs-mdn.apple.com; netblock 17.168.0.0/14; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 14
ac-gs-mdn.apple.com	17.171.47.11	Reverse DNS: ac-gs-mdn.apple.com; netblock 17.168.0.0/14; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 15
ac01p01uw msbadger01100.apple.com	17.96.63.10	Reverse DNS: ac01p01uw msbadger01100.apple.com; netblock 17.0.0.0/9; no HTTP service shown	XLSX › DNS Records, row 16
ac01p01uw msbadger01102.apple.com	17.96.63.12	Reverse DNS: ac01p01uw msbadger01102.apple.com; netblock 17.0.0.0/9; no HTTP service shown	XLSX › DNS Records, row 17
ac01p01uw msbadger01103.apple.com	17.96.63.13	Reverse DNS: ac01p01uw msbadger01103.apple.com; netblock 17.0.0.0/9; no HTTP service shown	XLSX › DNS Records, row 18
ac01p01uw msbadger01104.apple.com	17.96.63.14	Reverse DNS: ac01p01uw msbadger01104.apple.com; netblock 17.0.0.0/9; no HTTP service shown	XLSX › DNS Records, row 19
ac01p01uw msbadger01105.apple.com	17.96.63.15	Reverse DNS: ac01p01uw msbadger01105.apple.com; netblock 17.0.0.0/9; no HTTP service shown	XLSX › DNS Records, row 20
ac01p01uw msbadger01106.apple.com	17.96.63.16	Reverse DNS: ac01p01uw msbadger01106.apple.com; netblock 17.0.0.0/9; no HTTP service shown	XLSX › DNS Records, row 21
ac01p01uw msbadger01107.apple.com	17.96.63.17	Reverse DNS: ac01p01uw msbadger01107.apple.com; netblock 17.0.0.0/9; no HTTP service shown	XLSX › DNS Records, row 22
ac01p01uw msbadger01108.apple.com	17.96.63.18	Reverse DNS: ac01p01uw msbadger01108.apple.com; netblock 17.0.0.0/9; no HTTP service shown	XLSX › DNS Records, row 23

acam.apple.com	17.137.160.88	Reverse DNS: acam-prz.apple.com; netblock 17.137.0.0/16; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 24
acam-mdn.apple.com	17.32.208.188	Reverse DNS: acam-mdn.apple.com; netblock 17.32.128.0/17; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 25
acam-prz.apple.com	17.137.160.88	Reverse DNS: acam-prz.apple.com; netblock 17.137.0.0/16; HTTP: Apple - 403 Forbidden; HTTPS:	XLSX › DNS Records, row 26

		Apple - 403 Forbidden	
acam-stg.apple.com	17.179.124.107	Reverse DNS: acam-stg.apple.com; netblock 17.179.96.0/19; no HTTP service shown	XLSX › DNS Records, row 27
acaminternal.apple.com	17.137.184.153	Reverse DNS: acaminternal prz.apple.com; netblock 17.137.0.0/16; no HTTP service shown	XLSX › DNS Records, row 28
acaminternal-mdn.apple.com	17.32.208.186	Reverse DNS: acaminternal mdn.apple.com; netblock 17.32.128.0/17; no HTTP service shown	XLSX › DNS Records, row 29
acaminternal-prz.apple.com	17.137.184.153	Reverse DNS: acaminternal prz.apple.com; netblock 17.137.0.0/16; no HTTP service shown	XLSX › DNS Records, row 30
acaminternal-stage.apple.com	17.179.124.108	Reverse DNS: acaminternal stage.apple.com; netblock 17.179.96.0/19; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 31
acc-ept-waf.apple.com	17.171.49.72	Reverse DNS: acc-ept waf.apple.com; netblock 17.168.0.0/14; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 32
acc-ept2-waf.apple.com	17.171.49.74	Reverse DNS: acc-ept2-waf.apple.com; netblock 17.168.0.0/14; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 33
acc-ipt.apple.com	17.32.208.139	Reverse DNS: acc-ipt-sh.apple.com; netblock 17.32.128.0/17; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 34
acc-ipt-sh.apple.com	17.32.208.139	Reverse DNS: acc-ipt-sh.apple.com; netblock 17.32.128.0/17; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 35

acc-sh-mdn.apple.com	17.171.120.117	Reverse DNS: acc-sh mdn.apple.com; netblock 17.168.0.0/14; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 36
acc-sh-prn.apple.com	17.137.152.44	Reverse DNS: acc-sh-prn.apple.com; netblock 17.137.0.0/16; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 37
acc-sh-temp-ept1.apple.com	17.171.120.115	Reverse DNS: acc-sh-temp ept1.apple.com; netblock 17.168.0.0/14; no HTTP service shown	XLSX › DNS Records, row 38
acc-sh-temp-ept2.apple.com	17.171.120.47	Reverse DNS: acc-sh-temp ept2.apple.com; netblock 17.168.0.0/14; no HTTP service shown	XLSX › DNS Records, row 39
access.apple.com	17.254.3.40	Reverse DNS: www.access.apple.com; netblock 17.128.0.0/9; no HTTP service shown	XLSX › DNS Records, row 40
www.access.apple.com	17.254.3.40	Reverse DNS: www.access.apple.com; netblock 17.128.0.0/9; no HTTP service shown	XLSX › DNS Records, row 41
account.apple.com	17.157.64.84	Reverse DNS: not shown; netblock 17.157.64.0/20; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 42

account-stage.apple.com	17.32.213.59	Reverse DNS: not shown; netblock 17.32.128.0/17; no HTTP service shown	XLSX › DNS Records, row 43
account-stage-nc.apple.com	17.171.11.182	Reverse DNS: account-stage nc.apple.com; netblock 17.171.11.0/24; no HTTP service shown	XLSX › DNS Records, row 44
accountdatatransfer.apple.com	17.32.194.103	Reverse DNS: not shown; netblock 17.32.128.0/17; HTTP: Apple - 403 Forbidden; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 45
accounts.apple.com	17.253.142.4	Reverse DNS: not shown; netblock 17.253.142.0/24; HTTP: purple; HTTPS: purple	XLSX › DNS Records, row 46
acdownload.apple.com	17.179.124.178	Reverse DNS: not shown; netblock 17.179.96.0/19; HTTPS: Apple - 403 Forbidden	XLSX › DNS Records, row 47
acehub-dev.apple.com	17.157.96.13	Reverse DNS: acehub dev.apple.com; netblock 17.157.96.0/20; no HTTP service shown	XLSX › DNS Records, row 48
acehub-it.apple.com	17.157.96.136	Reverse DNS: acehub-it.apple.com; netblock	XLSX › DNS Records, row 49

		17.157.96.0/20; no HTTP service shown	
acehub-prz.apple.com	17.137.184.110	Reverse DNS: acehub-prz.apple.com; netblock 17.137.0.0/16; no HTTP service shown	XLSX › DNS Records, row 50
acehub-uat.apple.com	17.157.96.137	Reverse DNS: acehub-uat.apple.com; netblock 17.157.96.0/20; no HTTP service shown	XLSX › DNS Records, row 51

8.4 DNS Map

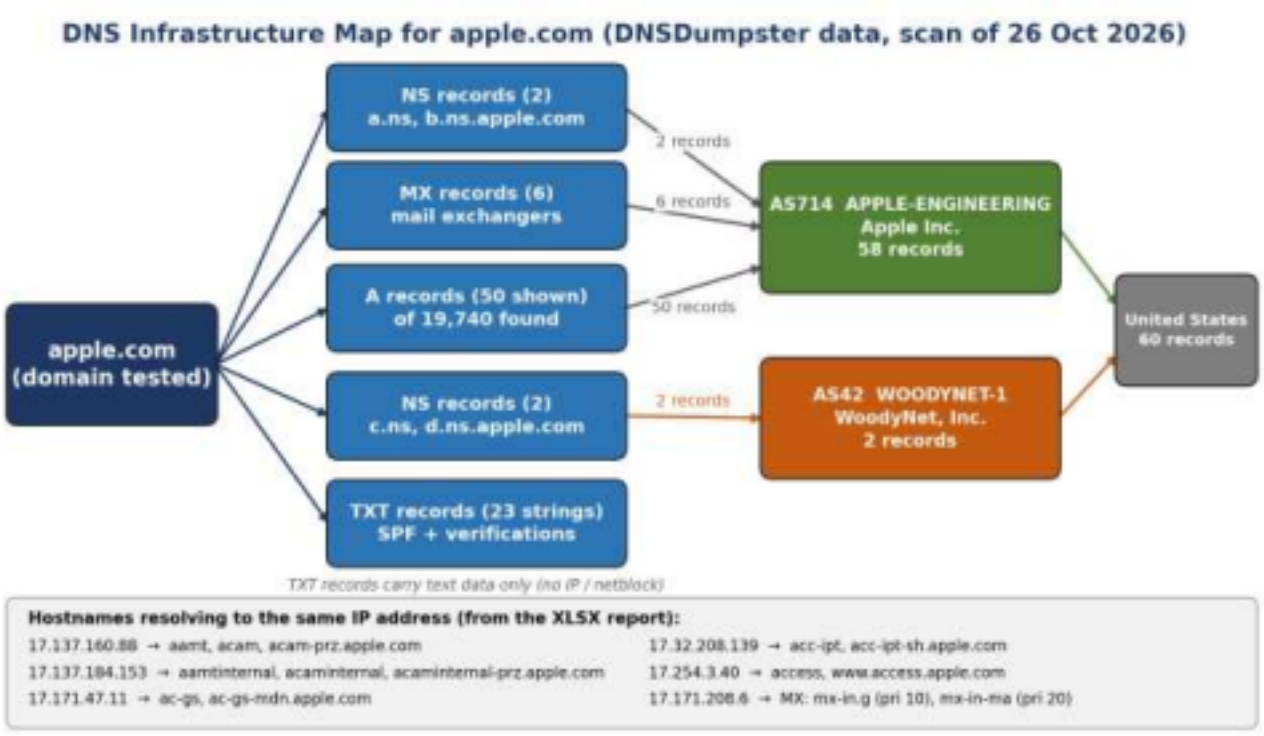


Figure 1. DNS infrastructure map for apple.com, drawn from the records in the DNSDumpster XLSX report (scan of 26 October 2026). The file is saved as DNS_Map_Apple.png.

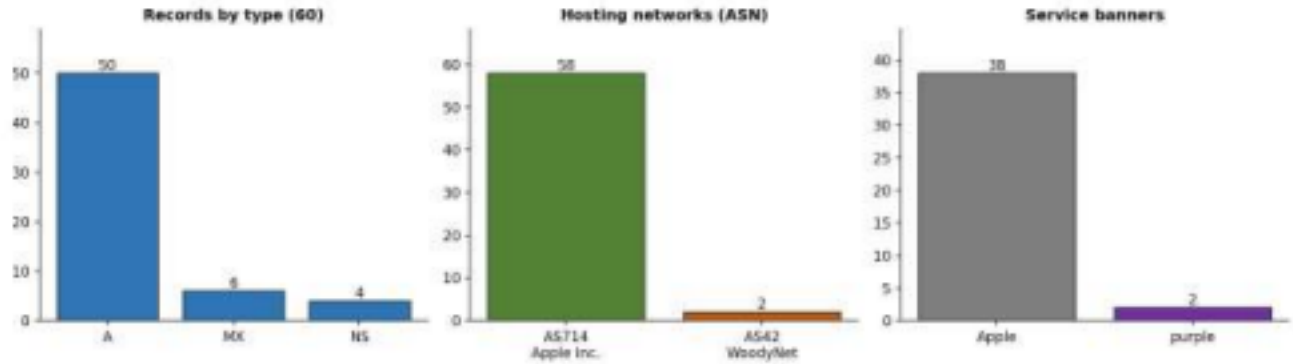


Figure 2. Summary charts from the DNSDumpster report: records by type, hosting networks (ASN) and service banners. Values match the "Summary" sheet of the XLSX report.

9. Analysis of DNS Infrastructure

9.1 DNS Information

The report contains three record types. There are 50 A records (hostname to IPv4 address mappings for subdomains of apple.com), 6 MX records for mail delivery and 4 NS records for the authoritative name servers. The 4 name servers are a.ns.apple.com (17.253.200.1), b.ns.apple.com (17.253.207.1), c.ns.apple.com (204.19.119.1) and d.ns.apple.com (204.26.57.1). The MX records point to mx in.g.apple.com (priority 10) and to mx-in-sg, mx-in-hfd, mx-in-vib, mx-in-ma and mx-in-rn.apple.com (priority 20); the priority-10 host resolves to the same IP address (17.171.208.6) as mx-in ma.apple.com. The saved results page also lists 23 TXT strings, including an SPF policy (v=spf1 include:_spf.apple.com include:_spf-txn.apple.com ~all) and site-verification tokens for services such as Google, Facebook, Atlassian, Cisco, Adobe, Miro, Webex and Yahoo; two of the strings are base64 "json:" padding entries which decode to a note that they are used to truncate UDP responses for TXT queries. No AAAA, CNAME or SOA records were shown in the report, so none are claimed here.

9.2 Hosts and IP Addresses

DNSDumpster returned 52 distinct IP addresses across the 60 records (43 distinct addresses among the 50 A records). Every address begins with 17. (the Apple Inc. netblocks listed by the tool) except two name servers, 204.19.119.1 and 204.26.57.1, which belong to WoodyNet, Inc. Several hostnames share one IP address: aamt, acam and acam-prz share 17.137.160.88; aamtinternal, acaminternal and acaminternal-prz share 17.137.184.153; ac-gs and ac-gs-mdn share 17.171.47.11; acc-ipt and acc-ipt sh share 17.32.208.139; access and www.access share 17.254.3.40; and the MX hosts mx-in.g and mx in-ma share 17.171.208.6. Of the 50 A-record hosts, 21 show HTTP/HTTPS service information: 19 return "403 Forbidden" from an "Apple" banner, aatcportal.apple.com returns a 400 error ("No required SSL certificate was…", text truncated by the tool) and accounts.apple.com shows the banner "purple". Five A-record hosts (account, account-stage, accountdatatransfer, accounts and acdownload) have no reverse DNS value in the report.

9.3 Infrastructure Relationships

The map in Figure 1 shows apple.com branching into its NS, MX, A and TXT records. All 50 A records, all 6 MX records and the two NS records a.ns and b.ns sit on AS714 (APPLE ENGINEERING, Apple Inc.), a total of 58 records. The NS records c.ns and d.ns sit on AS42 (WOODYNET-1, WoodyNet, Inc.), a total of 2 records. All 60 records are located in the United States, which matches the "Top 5 Countries" table of the Summary sheet. The most frequent netblocks in the A records are 17.168.0.0/14 (11 hosts), 17.0.0.0/9 (9 hosts), 17.137.0.0/16 (8 hosts) and 17.128.0.0/9 (5 hosts). Naming patterns in the hostnames (for example the suffixes -uat, -stage/-stg, -dev, -prz, -mdn and the word "internal") suggest groups of related services and environments, but the tool does not state what these systems are, so this is treated as an observation rather than a confirmed fact.

9.4 Security Significance

DNS footprinting helps an organisation see what infrastructure information is publicly discoverable and supports asset inventory and exposure reviews. Publicly visible DNS information is not, by itself, proof of a vulnerability. In this scan the following observations are relevant, each tied to the output: (1) Hostnames such as aamt-uat, acehub-uat, acam-stg, account-stage, acehub-dev and aamtinternal, acaminternal and acaminternal-stage are publicly resolvable; their names suggest testing, staging or internal-use systems, which gives an outsider information about Apple's environment naming (information exposure, low severity). (2) 19 of the 21 hosts with web services respond with "403 Forbidden" and aatcportal.apple.com appears to require a client certificate, which suggests that access controls are in place rather than open pages. (3) The 4 name servers are split across two networks (AS714 and AS42), which provides provider diversity for DNS resolution. (4) The SPF record ends in ~all (soft fail), which is a standard policy that asks receivers to treat unauthorised senders as suspicious rather than reject them. No confirmed vulnerability is claimed, because DNSDumpster performs passive collection only and no active testing was done.

9.5 Limitations

DNSDumpster provides a point-in-time view and may not display every record or system associated with a domain. In this scan the tool reported 19,740 records in total but displays only 50 to free users (the XLSX report contains 60 rows including MX and NS records), so the report covers a small part of the domain's hosts. Results may also be affected by DNS changes, caching and the tool's data sources. The findings in this report are therefore limited to the information returned on 26 October 2026.

10. Findings Summary

Area reviewed	Finding based on actual output	Evidence reference
DNS records	50 A, 6 MX, 4 NS records in the XLSX report (60 total; 19,740 found by the tool). SPF and 22 other TXT strings are shown on the results page. NS records are split between Apple (a.ns, b.ns) and WoodyNet (c.ns, d.ns).	XLSX › DNS Records; results page › TXT Records
Hostnames and IP addresses	52 distinct IPs; 43 for A records. Six IPs are shared by several hostnames (e.g. 17.137.160.88 for aamt, acam, acam-prz). 5 A-record hosts have no reverse DNS	XLSX › DNS Records; Section 8.3

	shown.	
DNS map relationships	apple.com branches into NS, MX, A and TXT records; 58 records on AS714 (Apple Inc.), 2 on AS42 (WoodyNet, Inc.); all located in the United States.	Figure 1; XLSX › Summary

Potential security relevance	Staging/test/internal-style hostnames are publicly resolvable (low-severity information exposure). 19 of 21 web responding hosts return 403 Forbidden and one appears to require a client certificate. No vulnerability is confirmed from passive data.	Figure 1; XLSX › DNS Records (HTTP Services column)

11. Conclusion

The DNS footprinting of the assigned domain www.apple.com (queried as apple.com) was completed with DNSDumpster on 26 October 2026. The tool reported 19,740 records for the domain, and the exported XLSX report contains 60 records: 50 A records, 6 MX records and 4 NS records, spread over 52 distinct IP addresses. All records are in the United States, with 58 on AS714 (Apple Inc.) and 2 on AS42 (WoodyNet, Inc.), which hosts the name servers c.ns and d.ns. The results show that the domain uses its own network for web and mail hosts, uses a second network for part of its DNS service, and publishes an SPF policy and many service-verification TXT records. Several hostnames reveal staging, test or internal naming, which is low-severity information exposure, while the 403 and client certificate responses show that the web services found are access-controlled. No vulnerability was exploited or confirmed; this exercise was passive reconnaissance only.

12. Submission Checklist

☑ Completed report with the scan date (26 October 2026) and findings verified against the XLSX report.

☑ Complete DNSDumpster XLSX report: apple.com-9a8d2496-5747-4027-abe2-f60807beadbe.xlsx (Summary and DNS Records sheets).

☑ DNS map: DNS_Map_Apple.png (Figure 1 of this report).

☑ Saved DNSDumpster results page and screenshots of the scan results (submitted with this report). ☑ All tables in Sections 8–10 completed from the scan output.

☑ Student name and register number checked on the cover page.