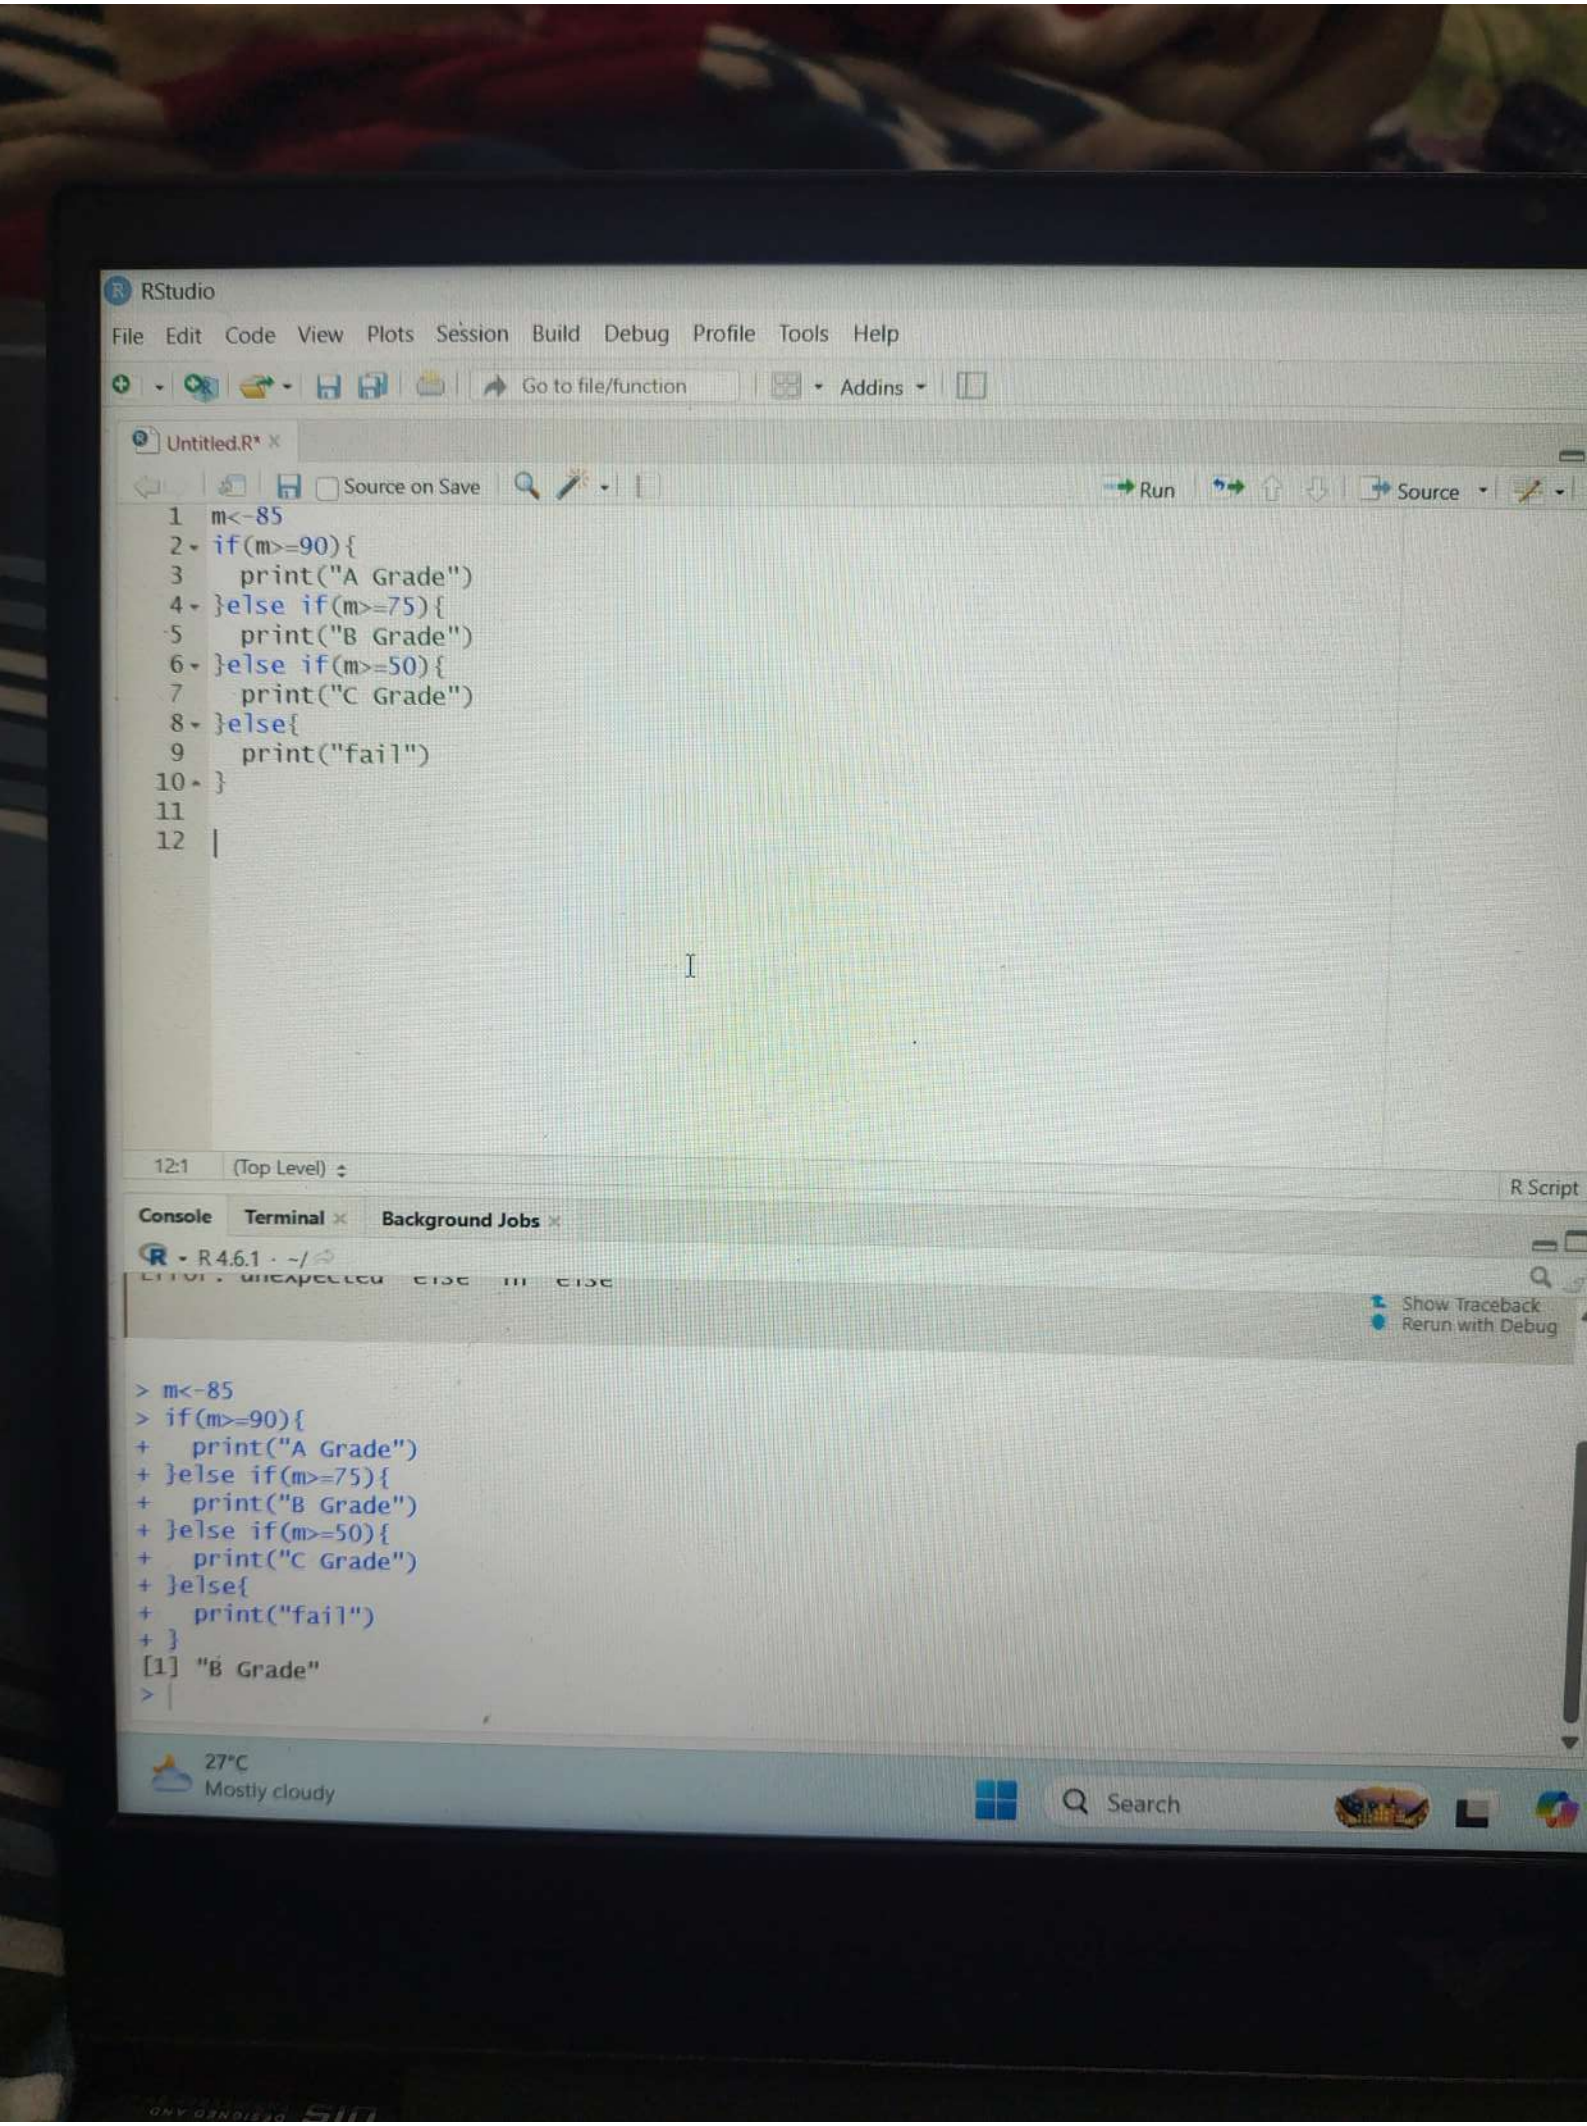
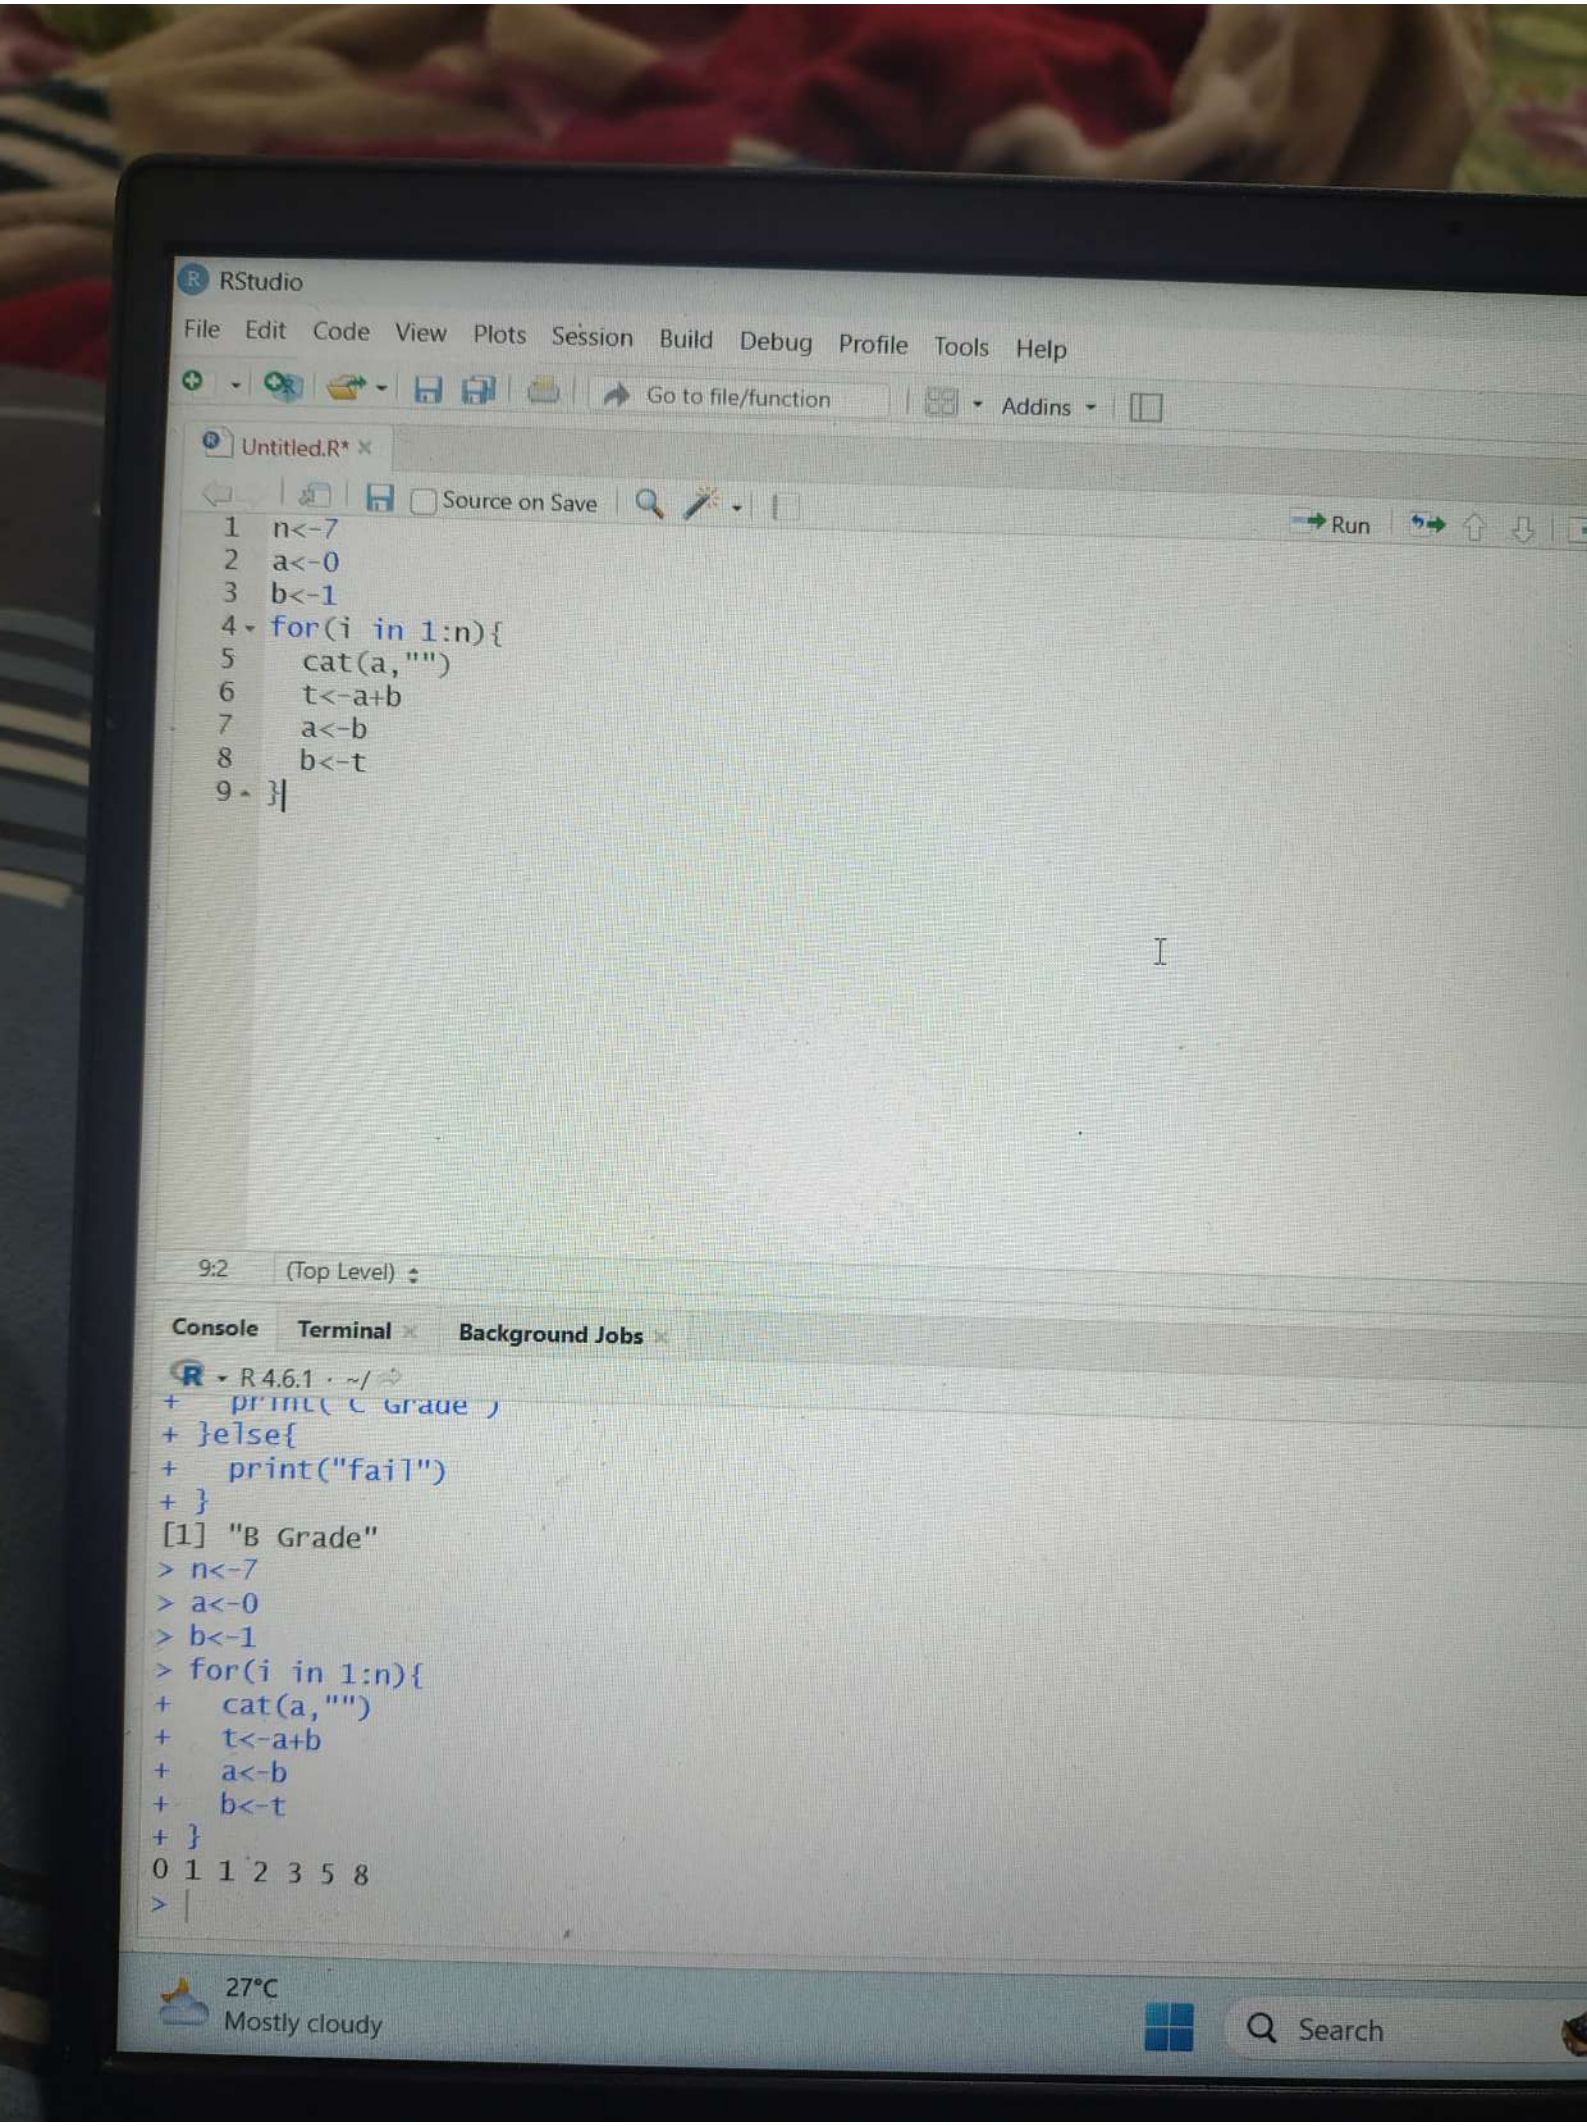

RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Go to file/function
Addins
Untitled.R*
Source on Save
Run
Source
1 m<-85
2 if(m>=90){
3 print("A Grade")
4 }else if(m>=75){
5 print("B Grade")
6 }else if(m>=50){
7 print("C Grade")
8 }else{
9 print("fail")
10 }
11
12
12:1
(Top Level)
R Script
Console
Terminal
Background Jobs
R 4.6.1 · ~/
Show Traceback
Rerun with Debug
> m<-85
> if(m>=90){
+ print("A Grade")
+ }else if(m>=75){
+ print("B Grade")
+ }else if(m>=50){
+ print("C Grade")
+ }else{
+ print("fail")
+ }
[1] "B Grade"
>
27°C
Mostly cloudy
Search


RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Go to file/function
Addins
Untitled.R*
Source on Save
Run
1 n<-7
2 a<-0
3 b<-1
4 for(i in 1:n){
5 cat(a,"")
6 t<-a+b
7 a<-b
8 b<-t
9 }
9:2
(Top Level)
Console
Terminal
Background Jobs
R 4.6.1 · ~/
+ print(C Grade)
+ }else{
+ print("fail")
+ }
[1] "B Grade"
> n<-7
> a<-0
> b<-1
> for(i in 1:n){
+ cat(a,"")
+ t<-a+b
+ a<-b
+ b<-t
+ }
0 1 1 2 3 5 8
>
27°C
Mostly cloudy
Search

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins

Untitled.R*

Source on Save | Run

```
1  a<-c(TRUE,FALSE,TRUE)
2  b<-c(FALSE,TRUE,TRUE)
3  print(a&b)
4  print(a|b)
5  print(!a)
6  print(xor(a,b))
```

6:16 (Top Level)


Console Terminal Background Jobs

R 4.6.1 · ~/

```
> a<-c(TRUE,FALSE,TRUE)
> b<-c(FALSE,TRUE,TRUE)
> print(a&b)
[1] FALSE FALSE  TRUE
> print(a|b)
[1] TRUE TRUE TRUE
> print(!a)
[1] FALSE  TRUE FALSE
> print(xor(a,b))
[1]  TRUE  TRUE FALSE
>
```

27°C
Mostly cloudy

Search

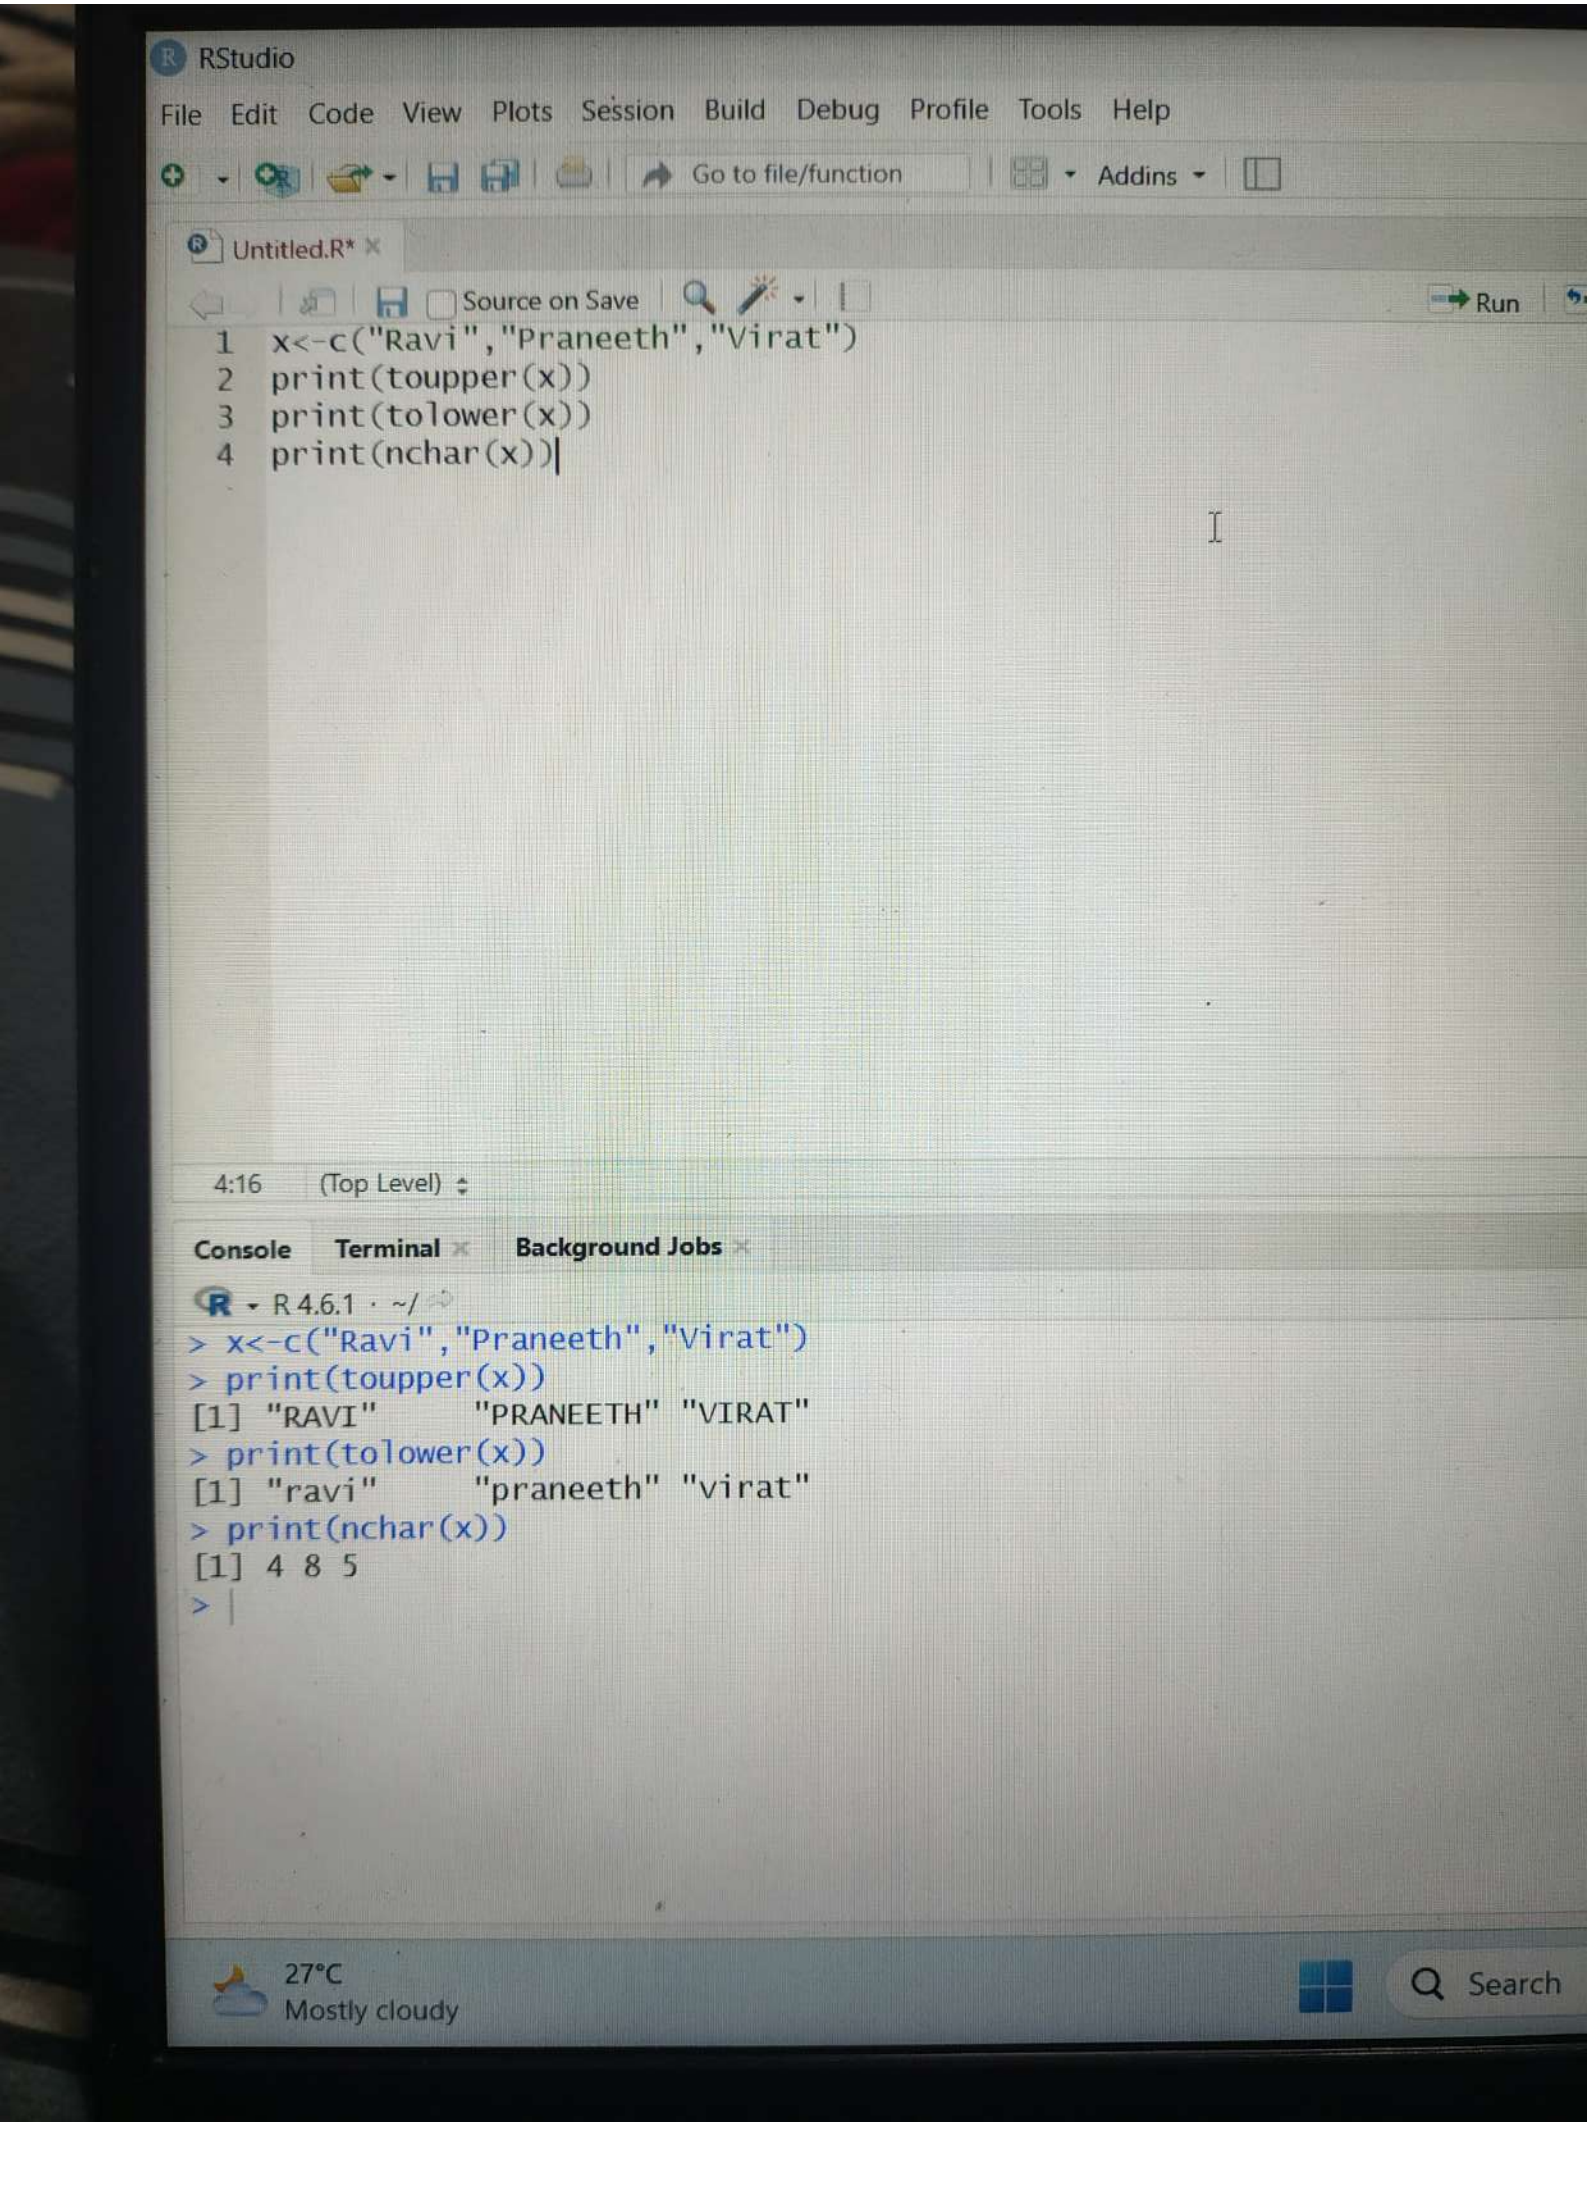
RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Go to file/function
Addins
Untitled.R*
Source on Save
Run
1 x<-c("Ravi","Praneeth","Virat")
2 print(toupper(x))
3 print(tolower(x))
4 print(nchar(x))
4:16 (Top Level)
Console Terminal Background Jobs
R 4.6.1 · ~/
> x<-c("Ravi","Praneeth","Virat")
> print(toupper(x))
[1] "RAVI" "PRANEETH" "VIRAT"
> print(tolower(x))
[1] "ravi" "praneeth" "virat"
> print(nchar(x))
[1] 4 8 5
>
27°C
Mostly cloudy
Search

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins

Untitled.R*

Source on Save | Run

```
1  x<-c(2,3,4,5,6,7)
2  for(n in x){
3    count<-0
4    for(i in 1:n){
5      if(n%%i==0) count<-count+1
6    }
7    if(count==2) print(paste(n,"prime"))
8    else print(paste(n,"not prime"))
9  }
10
```

10:5 (Top Level)

Console Terminal Background Jobs

R 4.6.1 · ~/

```
> x<-c(2,3,4,5,6,7)
> for(n in x){
+   count<-0
+   for(i in 1:n){
+     if(n%%i==0) count<-count+1
+   }
+   if(count==2) print(paste(n,"prime"))
+   else print(paste(n,"not prime"))
+ }
[1] "2 prime"
[1] "3 prime"
[1] "4 not prime"
[1] "5 prime"
[1] "6 not prime"
[1] "7 prime"
>
```

27°C
Mostly cloudy

Search

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins

Untitled.R*

Source on Save

```
1  calc<-function(a,b,op){
2    if(op=="+")return(a+b)
3    else if(op=="-")return(a-b)
4    else if(op=="*")return(a*b)
5    else if(op=="/")return(a/b)
6    else return("invalid")
7  }
8  print(calc(10,5,"+"))
9  print(calc(10,5,"*"))
10
```


10:5 (Top Level)

Console Terminal Background Jobs

R 4.6.1 · ~/

```
> calc<-function(a,b,op){
+   if(op=="+")return(a+b)
+   else if(op=="-")return(a-b)
+   else if(op=="*")return(a*b)
+   else if(op=="/")return(a/b)
+   else return("invalid")
+ }
> print(calc(10,5,"+"))
[1] 15
> print(calc(10,5,"*"))
[1] 50
>
```

27°C

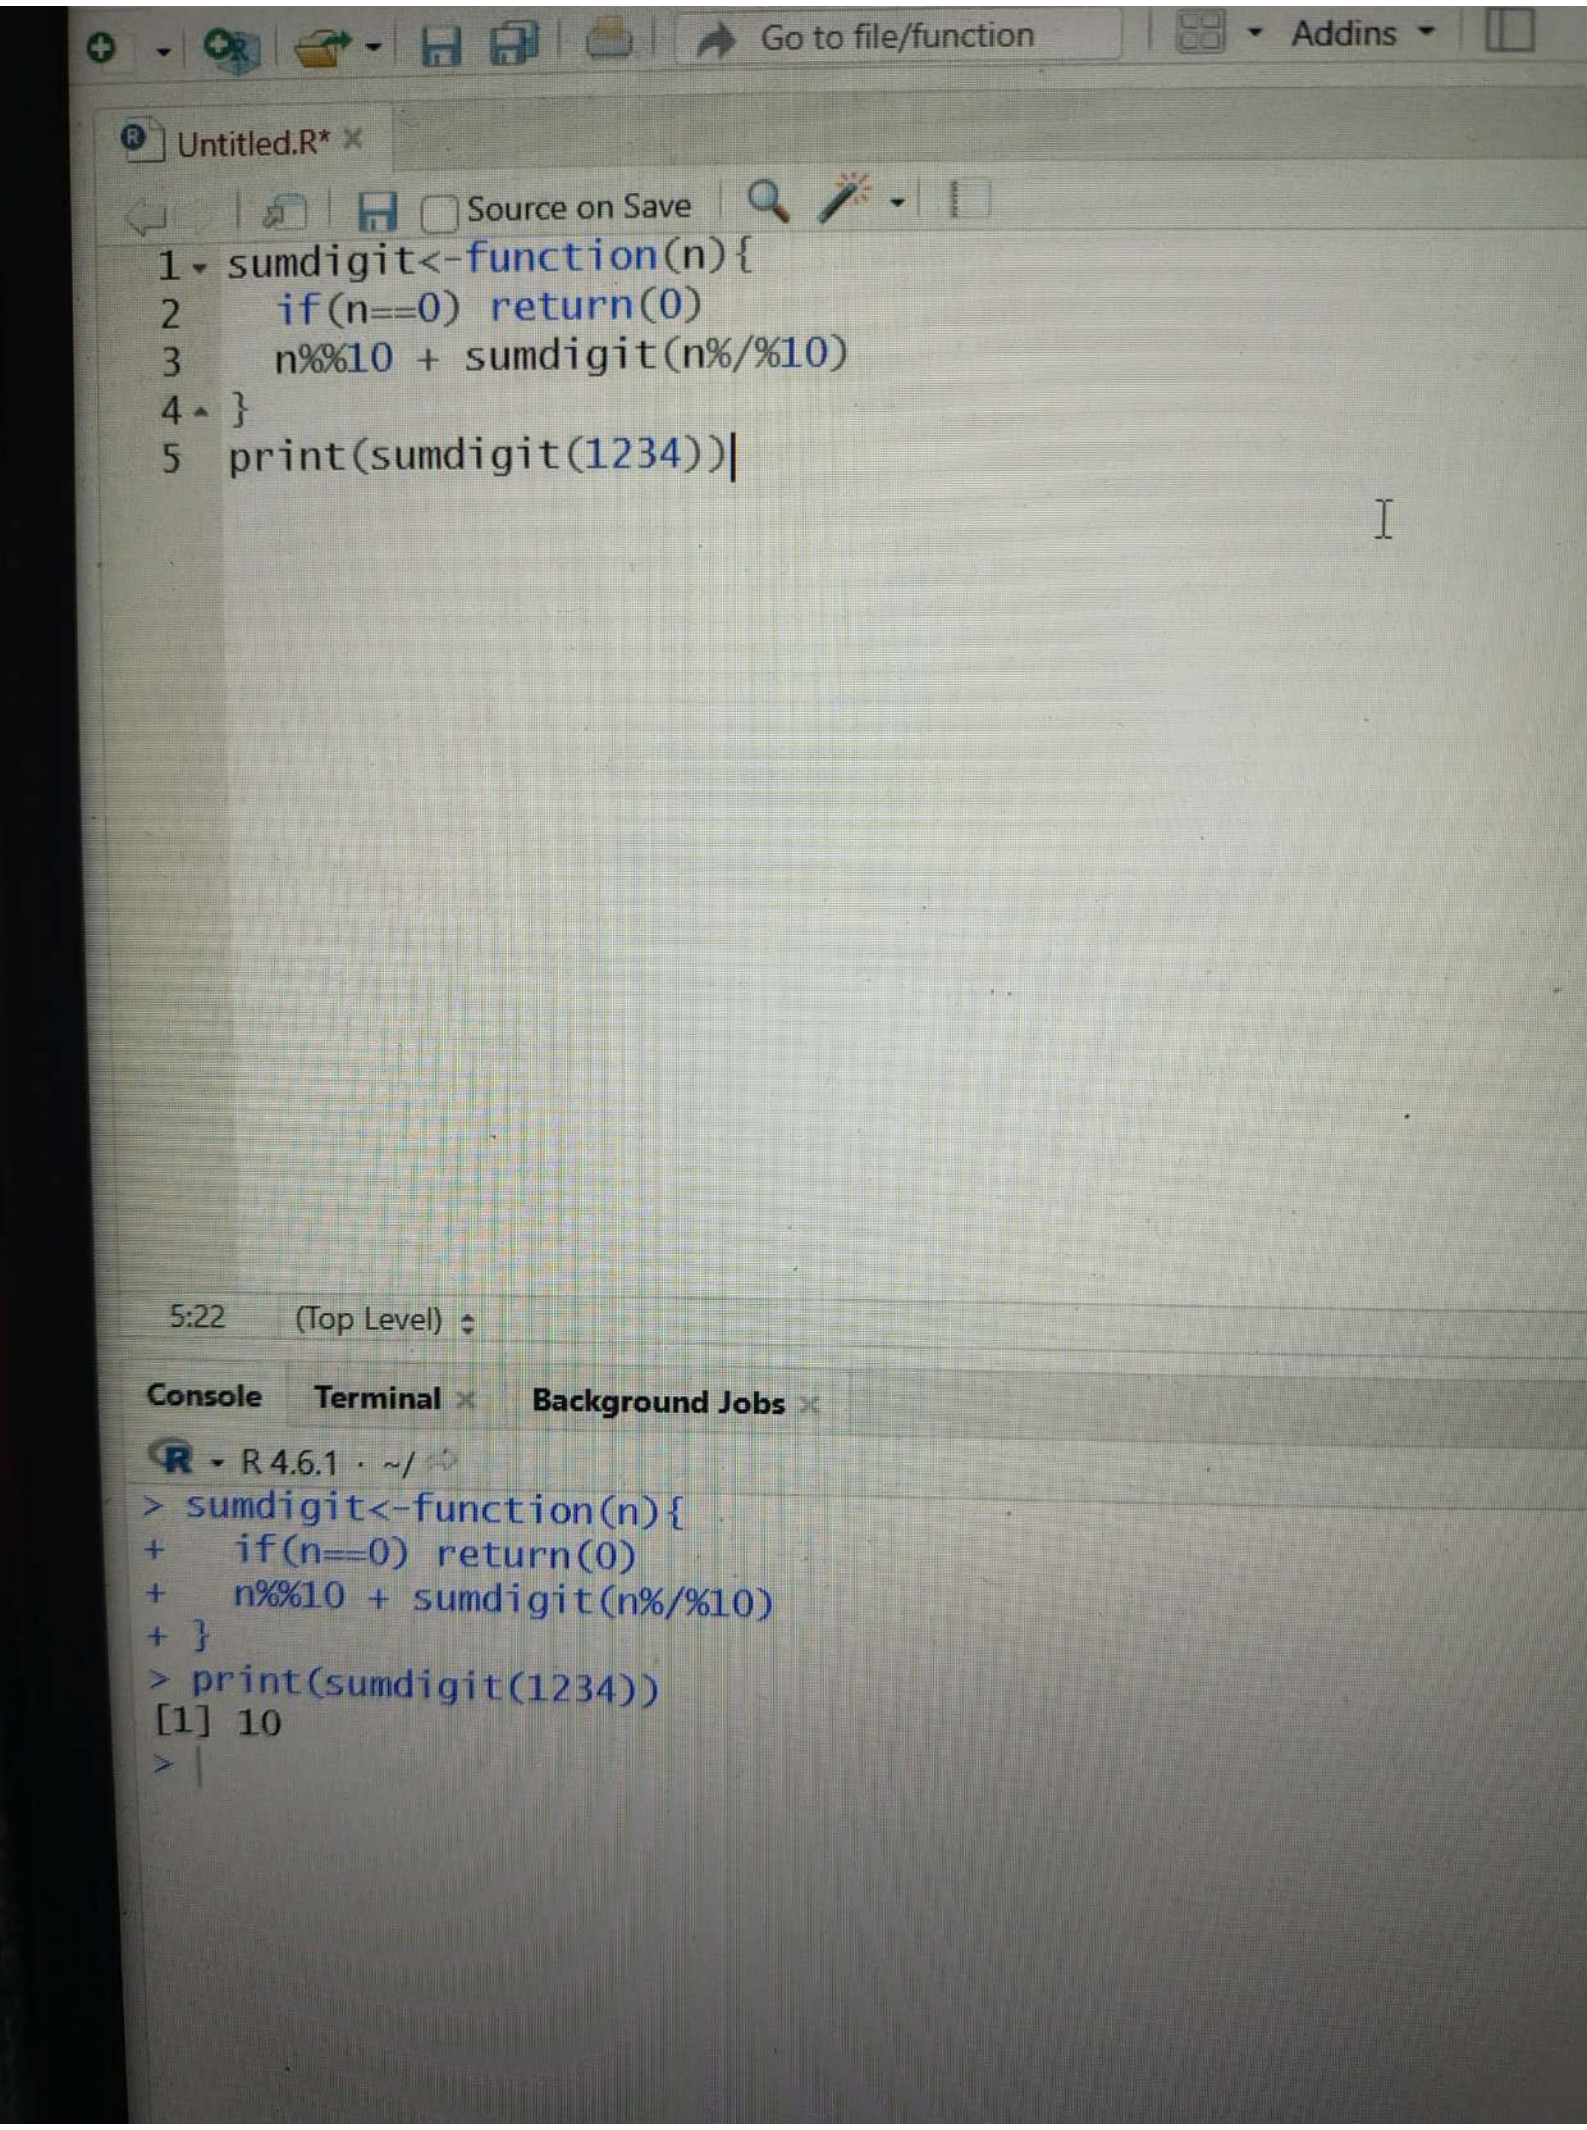
Go to file/function
Addins
Untitled.R*
Source on Save
1 sumdigit<-function(n){
2 if(n==0) return(0)
3 n%%10 + sumdigit(n%/%10)
4 }
5 print(sumdigit(1234))
5:22
(Top Level)
Console
Terminal
Background Jobs
R 4.6.1 · ~/
> sumdigit<-function(n){
+ if(n==0) return(0)
+ n%%10 + sumdigit(n%/%10)
+ }
> print(sumdigit(1234))
[1] 10
>

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins

Untitled.R*

Source on Save

```
1  a<-matrix(c(1,2,2,3),2,2)
2  s<-TRUE
3  for(i in 1:2)
4    for(j in 1:2)
5      if(a[i,j]!=a[j,i]) s<-FALSE
6  print(s)
```

6:9 (Top Level)

Console Terminal Background Jobs

R 4.6.1 · ~/

```
> a<-matrix(c(1,2,2,3),2,2)
> s<-TRUE
> for(i in 1:2)
+   for(j in 1:2)
+     if(a[i,j]!=a[j,i]) s<-FALSE
> print(s)
[1] TRUE
>
```

27°C
Mostly cloudy

Searc

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins

Untitled.R*

Source on Save

```
1  s<-data.frame(
2    name=c("A","B","C","D","E","F"),
3    marks=c(70,90,60,85,95,18)
4  )
5  s<-s[order(-s$marks),]
6  print(head(s,5))
```

6:17 (Top Level)

Console Terminal Background Jobs

R 4.6.1 · ~/

```
4    D     85
1    A     70
3    C     60
> s<-data.frame(
+   name=c("A","B","C","D","E","F"),
+   marks=c(70,90,60,85,95,18)
+ )
> s<-s[order(-s$marks),]
> print(head(s,5))
  name marks
5    E    95
2    B    90
4    D    85
1    A    70
3    C    60
>
```

27°C
Mostly cloudy

Untitled.R*

Source on Save

```
1 power<-function(a,n){
2   if(n==0) return(1)
3   a*power(a,n-1)
4 }
5 print(power(2,4))
```

5:18 (Top Level)

Console Terminal Background Jobs

R 4.6.1 · ~/

```
> power<-function(a,n){
+   if(n==0) return(1)
+   a*power(a,n-1)
+ }
> print(power(2,4))
[1] 16
>
```

27°C
Mostly cloudy