


I utilized web links to access content from the web using jsoup. The paragraphs from the webpages are parsed, and words are extracted and organized within a trie data structure.

To locate the word input by the user, the trie data structure is employed for searching as follows:

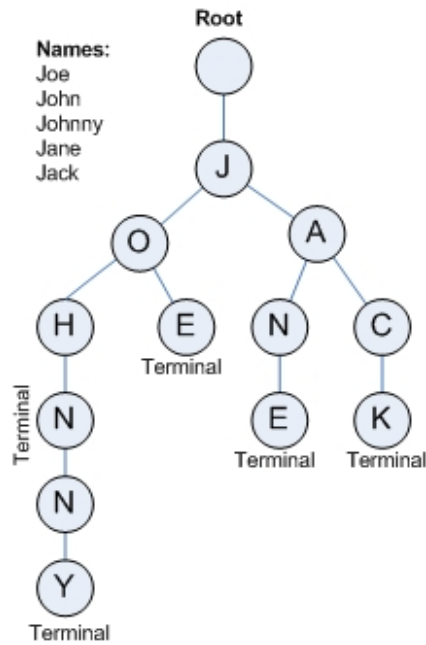

A hashmap is utilized to tally the occurrences of each word across multiple webpages. This hashmap exhibits the word counts individually, with any absent words in a document denoted by a count of zero. To eliminate stop words during the reading of words from webpage paragraphs, each word is passed through a stopwords function containing a list of such stop words (stored in stopwords.txt).

If a match is identified, the word is excluded from insertion into a trie data structure, as well as the hashmap. Additionally, to showcase the total count of all words across documents, a separate map is maintained, displaying the words alongside their total occurrences found across all documents. For ranking purposes, words are ranked based on their frequency within a page, and sorting is accomplished using mergesort for efficiency and speed.

```
pages.sort(new PageComparator());
    for (PageRanking page : pages) {
        System.out.println(page.getName() + " has " + word + " " +
page.getRank() + " times");
    }
```