


airbnb trip-planner chat card specification

prototype: one typed message plans a weekend, returned as three cards
single page / a3 landscape / real text + vector shapes

1 card sketches (numbered badges map to the field lists in section 2)

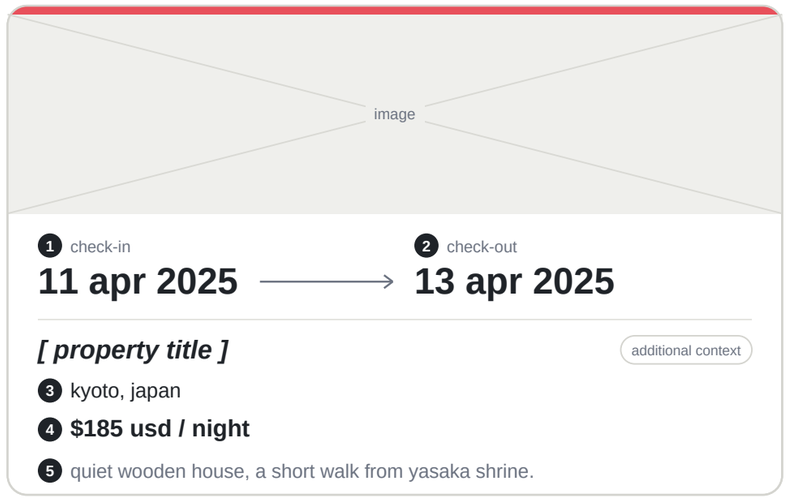

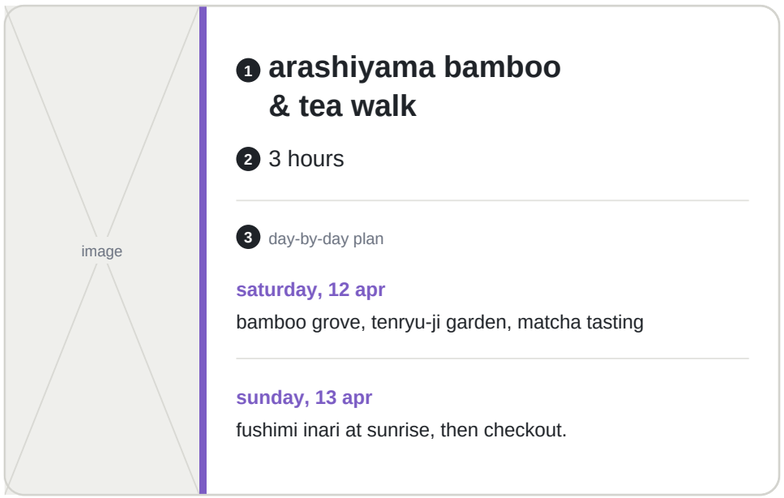

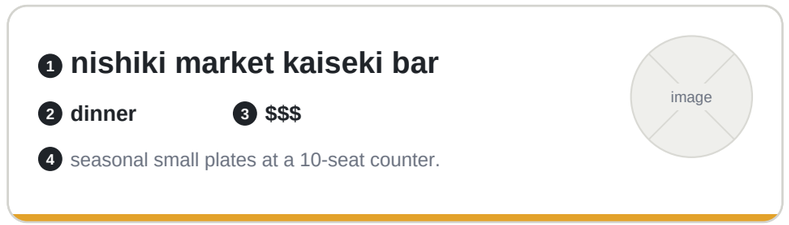

reading the sketches

- image placeholder (no real imagery in the prototype spec)
- 1 required field; number matches its row in section 2
- Aa bold, largest text = the card's strongest element
- accent: coral stay / purple experience / amber food

2 field lists (label → exact camelCase key; identical to the keys in section 4)

card 1 / stay

	label → key
1 check-in date	→ `checkIn`
2 check-out date	→ `checkOut`
3 destination	→ `destination`
4 nightly price	→ `nightlyPrice`
5 short description	→ `description`
○ *property title*	→ *no key (additional context, not required)*


card 2 / experience

	label → key	
1 activity name	→ `activityName`	
2 duration	→ `duration`	
3 day-by-day plan	→ `dayPlan`	array of { day, plan }, one per day

card 3 / food

	label → key
1 restaurant name	→ `restaurantName`
2 meal type	→ `mealType`
3 price range	→ `priceRange`
4 short description	→ `description`

3 structural layout differences

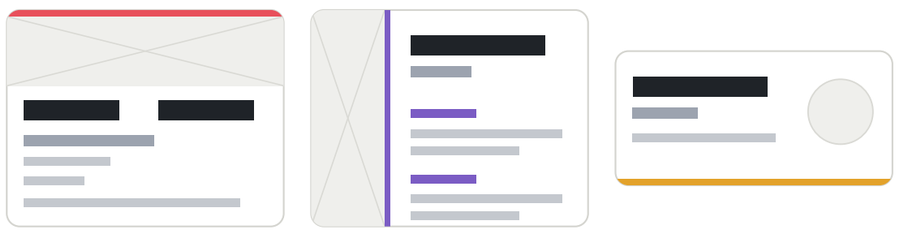

	stay	experience	food
image	wide, spans top	tall strip, left	small circle, right
main text	dates	activity name	restaurant name
layout	content flows vertically	day-by-day plan on right	compact horizontal
accent	coral	purple	amber

provenance of example values

inherited / supplied brief	all example values, accent hues (coral / purple / amber), layouts, ?fail=once and error copy
chosen / this spec	camelCase keys + dayPlan item shape (review feedback), accent hex e8505b / 7b5cc4 / e3a22a, type scale, title placeholder
unverified examples	mock listings, prices and place details are not verified; real-world source unknown. the host reservation card reference was not supplied.

4 mock response shape

schema: keys are exact, values are empty placeholders; not a complete response. keys match section 2.

```
[
  { "cardType": "stay", "details": {
      "destination": "", "checkIn": "",
      "checkOut": "", "nightlyPrice": "",
      "description": "" } },
  { "cardType": "experience", "details": {
      "activityName": "", "duration": "",
      "dayPlan": [ { "day": "", "plan": "" } ] } },
  { "cardType": "food", "details": {
      "restaurantName": "", "mealType": "",
      "priceRange": "", "description": "" } }
]
```


array order = render order

[0] stay → [1] experience → [2] food

5 forced-failure trigger + error bubble

`?fail=once` append to the prototype url. the first request fails; subsequent requests succeed normally.

1. guest submits a trip request
2. thinking state appears
3. first request returns a mock failure
4. friendly error bubble appears
5. tapping "try again" retries the same request
6. retry succeeds: stay → experience → food, in order

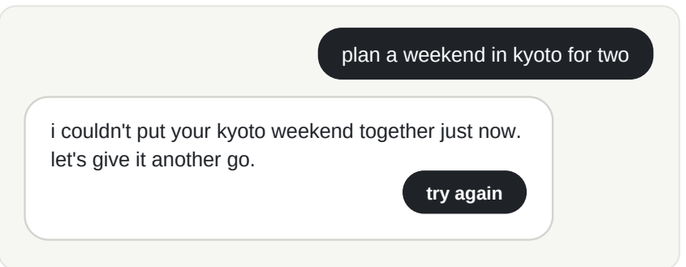

user message stays visible; button inside bubble, bottom right.