




**okta**



## What is okta?

- Okta is Cloud based identity and access management IAM platform that enables the organizations to manage user identities and access across multiple applications or systems. Both on premises and cloud based it provides features such as single sign on, Multifactor authentication and User lifecycle management.

# Why Okta?

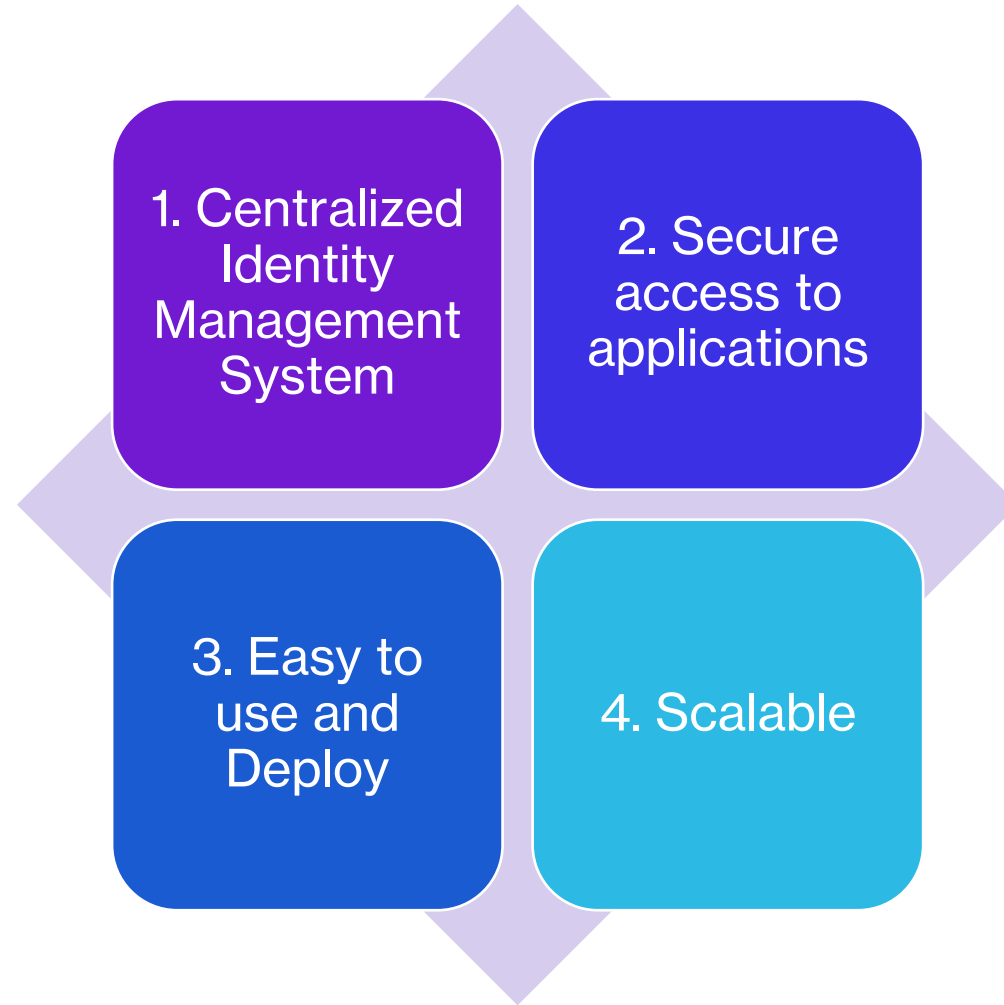

# Features of Okta:

DMS (Directory  
Management  
Services)

Applications  
Onboarding

Single Sign On

MFA  
(Multifactor  
Factor  
Authentication)

System Logs

API


Lifecycle  
Management

Reporting and  
Monitoring

User Self  
Service

OIN (Okta  
Integration  
Network)

# Okta account creation

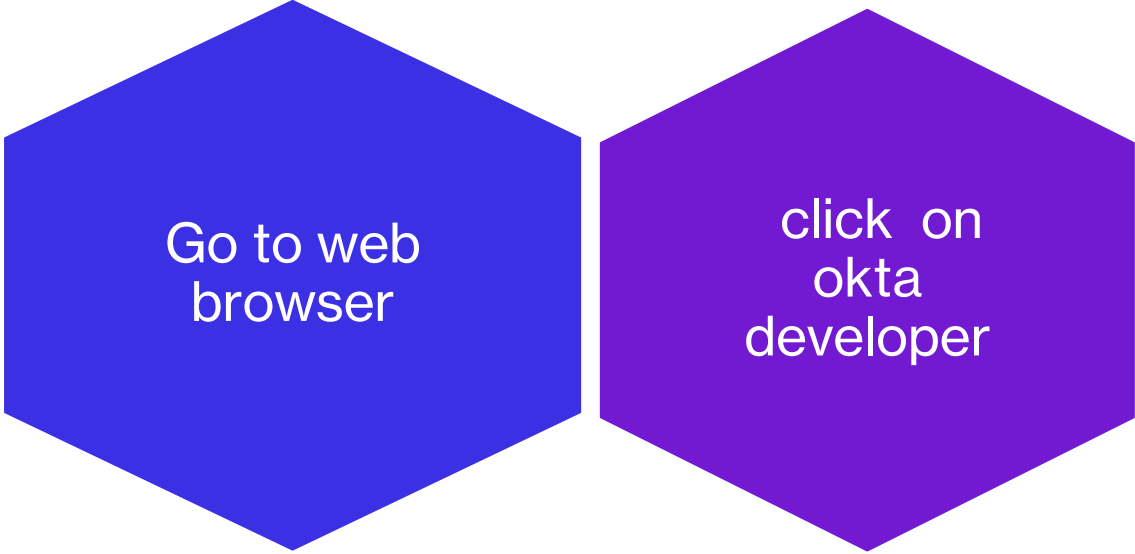

Go to web  
browser

click on  
okta  
developer



# Okta Developer

Our developer portal enables you to deploy auth that protects your users, apps, APIs, and infrastructure.

# Welcome back to Okta

**Sign In With Email**

or






**Continue with GitHub**



**Continue with Google**

Need an account? [Sign up](#)

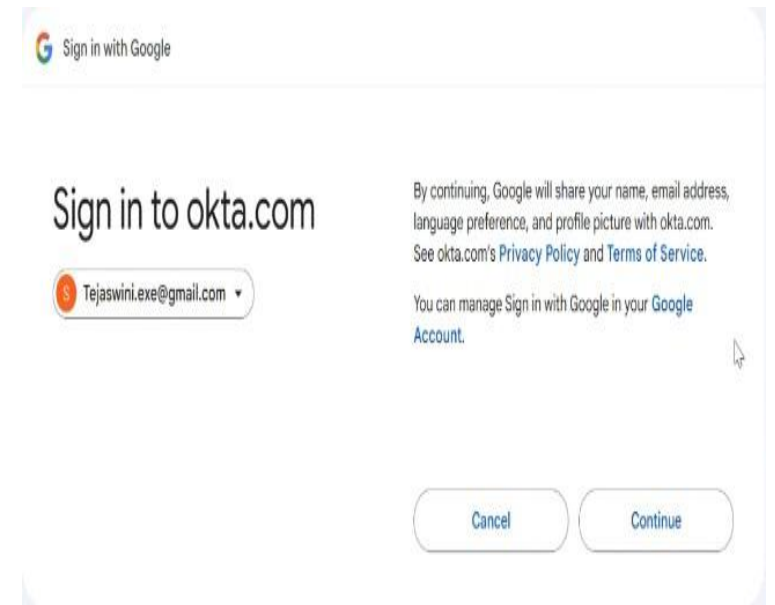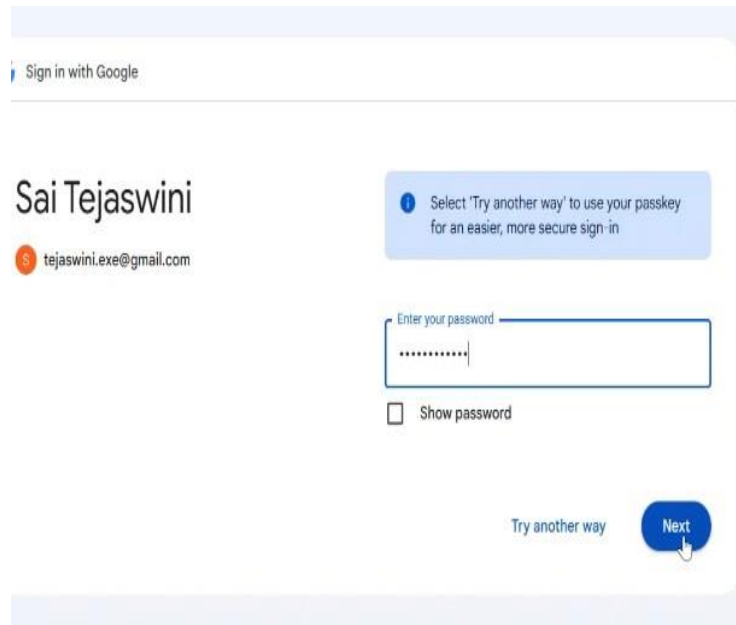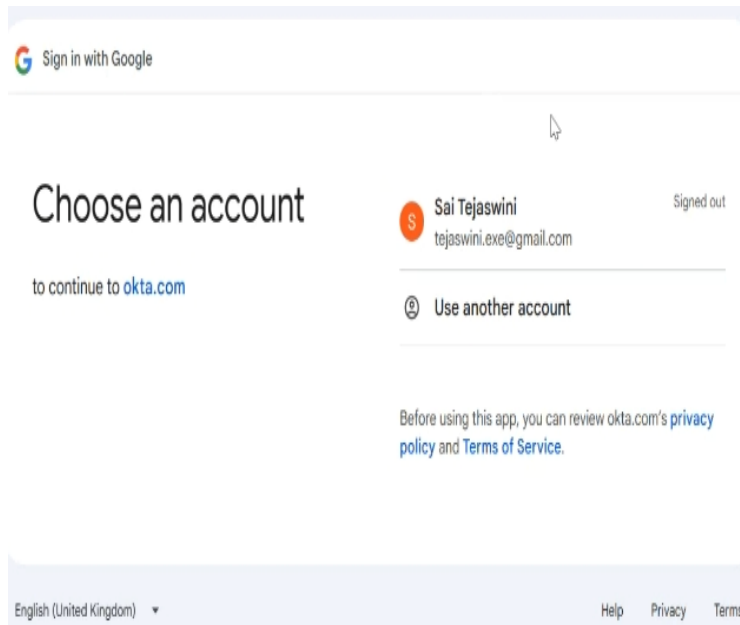



okta



### Setup Okta Verify

Select your device type

- ☐ iPhone
- ☒ Android



Download [Okta Verify from the Google Play Store](#) onto your mobile device.

Next

[Back to factor list](#)

okta



### Setup Okta Verify

Launch Okta Verify on your mobile device and select "Add an account". Scan the QR code to continue.



[Can't scan?](#)

Next

[Back to factor list](#)

okta



### Setup Okta Verify

Enter code displayed from the application

Enter Code

Verify

[Back to factor list](#)

report account

112

age might be suspicious or spam.



## Welcome to the Okta developer platform!

Your Domain [dev-11730793.okta.com](https://dev-11730793.okta.com)

### Sign in using Google

Sign in at any time using your Google account at [developer.okta.com/login](https://developer.okta.com/login)

Sign In

Want to log in directly to your Okta domain using an email and a password?

[Set password](#)

Link expires in 7 days.

[Documentation](#)

Learn how to power your app with Okta.

# okta

Reset your okta-dev-11730793 password

Password requirements:

- At least 8 characters
- No parts of your username
- Password can't be the same as your last 4 passwords

New password

Repeat password

☐ Sign me out of all other devices.

Reset Password

🔍 Search for people, apps and groups

## Getting started

For more topics, see [all developer documentation](#).

### Tell Us About Yourself



#### Customize your goals

Unlock an Okta guided experience tailored for your needs

Customize Goals





# Get Started

There are two user interfaces they are

1. End user dashboard
2. Administrator console

**End user dashboard :** It is platform to access your applications From the dashboard, you can manage your Okta account, read notifications from your administrator, organize, or request apps.


**Admin console:** Okta's administrator console is simple and straightforward to use. From pre-built app integrations to out of the box setup and configuration tools, Okta makes it simple and straightforward to secure and manage your users and their access. Free up your time to do more.

# User management


- Manage users with Universal Directory to let you store an unlimited amount of user and attribute data from apps and other sources such as directories or human resources apps. User profiles help you manage app and device access and group membership.



## Add users manually:

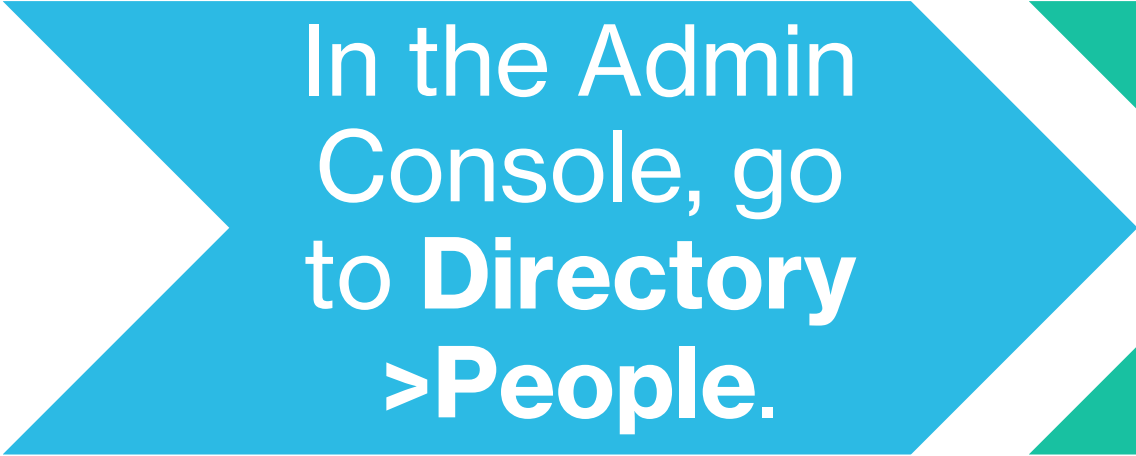

In the Admin  
Console, go  
to **Directory**  
>**People**.

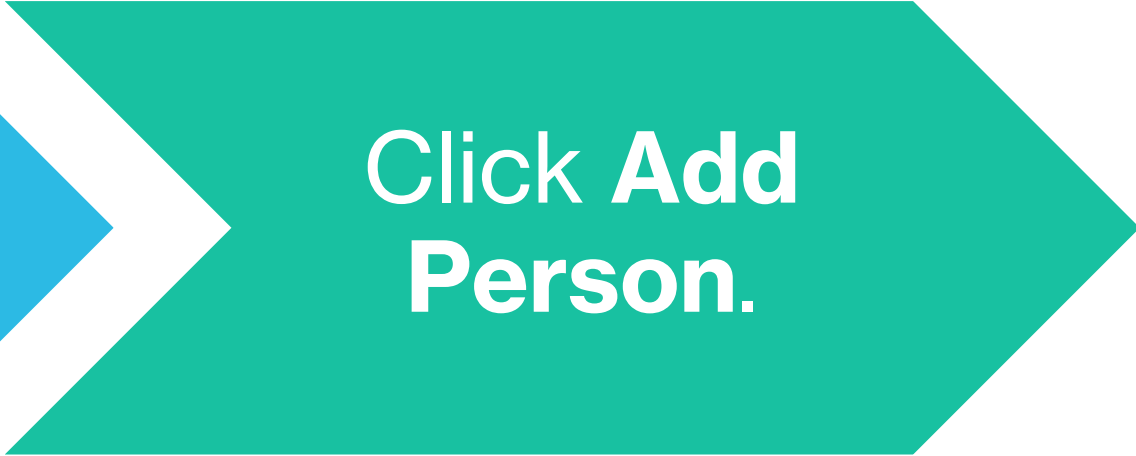

Click **Add**  
**Person**.

Search for people, apps and groups

# Getting started

For more topics, see [all developer documentation](#).


## Tell Us About Yourself



### Customize your goals

Unlock an Okta guided experience tailored for your needs


Customize Goals





# Import users from a csv file

You can add new users or update existing Okta users by uploading a CSV file of user information. This includes validation and error reporting of the imported data.

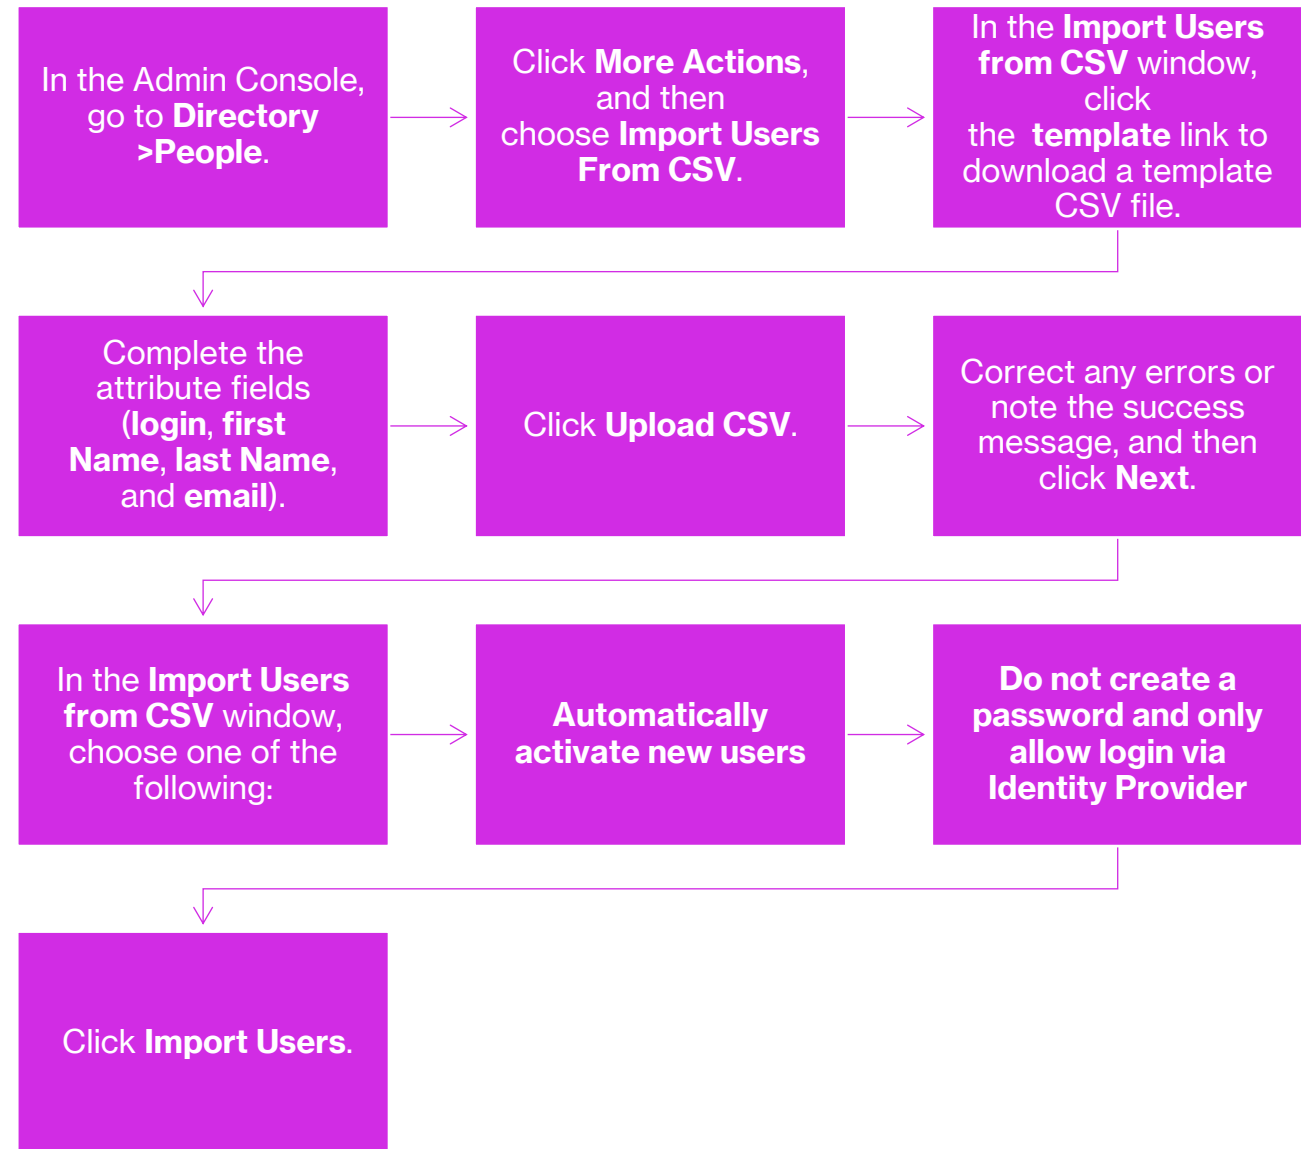



## Directory



People

Groups

Profile Editor

More actions ▾

 Import users from CSV

 Activate

 Deactivate

 Expire passwords

 Unlock people

### Import Users from CSV



Format your CSV file (max 10MB and 10,000 users) according to [this template](#).

CSV file

Browse

Upload CSV

Next

Cancel

### Import Users from CSV



Format your CSV file (max 10MB and 10,000 users) according to [this template](#).

CSV file

Browse

Upload CSV

Next

Cancel

×

Import Users from CSV

ⓘ

Please review the CSV file and correct the following error(s):

- Invalid attribute in CSV header: firstname
- Invalid attribute in CSV header: lastname
- Missing required attribute from CSV header: lastName
- Missing required attribute from CSV header: firstName

Format your CSV file (max 10MB and 10,000 users) according to [this template](#).

CSV file

Browse

Upload CSV

×

Import Users from CSV

Format your CSV file (max 10MB and 10,000 users) according to [this template](#).

CSV file

myFile0 (1).csv

Browse

Upload CSV

✓

CSV file parsed successfully!

NextCancel

×

Import Users from CSV

Click Import Users to start importing your users.

☐ Automatically activate new users

When selected, new imported users will be automatically activated.

☐ Do not create a password and only allow login via Identity Provider

Only use this option for users who will authenticate via an external Identity Provider. When selected, users will not be sent activation emails and will not set up an Okta password.

Import UsersCancel

×


Import Users from CSV

50 users imported!

- 50 new users
- 0 updated users
- 0 users unchanged
- 0 users with errors

Done

## Assigning Permissions:



1. Okta provides a role based access control system to assign permissions to users.




Roles defines set of permissions that determine the actions and resources accessible to users.



By assigning appropriate roles, administrators can control user access to applications and resources.

# Create a group and add users manually

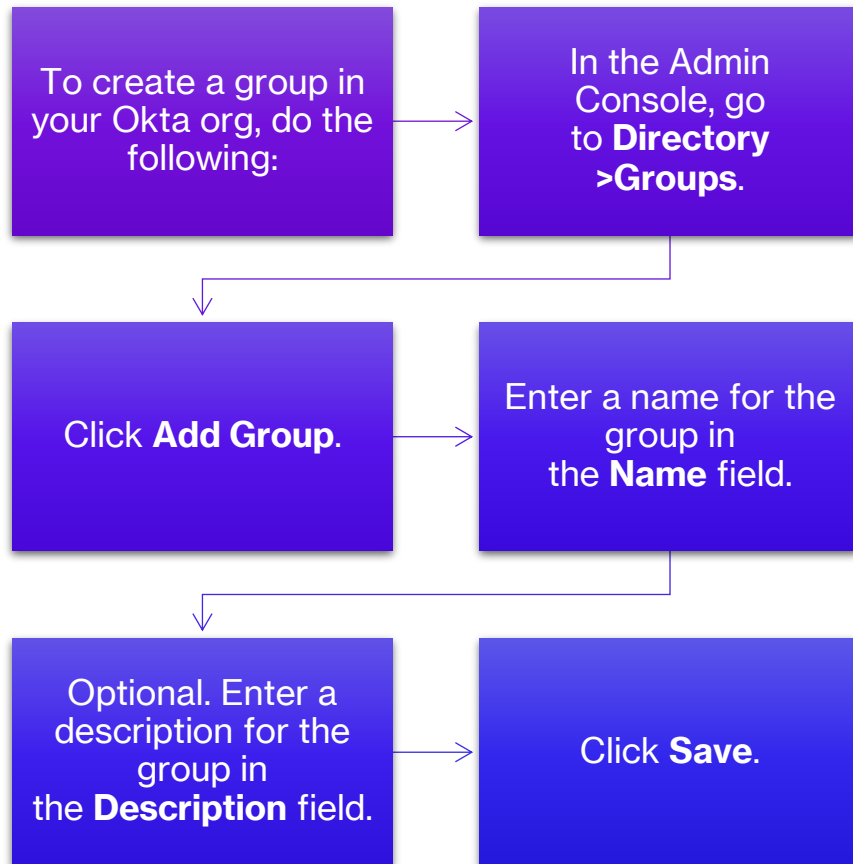

The image shows the Okta Admin Console interface. On the left is a sidebar with navigation links: Directory, People, Groups (highlighted), Profile Editor, Directory Integrations, Self-Service Registration, and Profile Sources. The main content area is titled 'Groups' and includes a search bar at the top with the placeholder 'Search for people, apps and groups'. Below the search bar are tabs for 'All' and 'Rules'. A search box labeled 'Search by group name' with a magnifying glass icon and an 'Add group' button are also present. Below this is an 'Advanced search' dropdown. The bottom part of the image shows a modal window titled 'Add group' with two input fields: 'Name' and 'Description (optional)'. At the bottom right of the modal are 'Save' and 'Cancel' buttons.

People

Search for users by first name, primary email or username

Q

⋮

Assign people

Advanced search ▾

Showing 0 of 0

| Person & username | Status |
|-------------------|--------|
|-------------------|--------|

|                           |        |            |
|---------------------------|--------|------------|
| Sheree Oster              | Staged | +          |
| Sheree.Oster@yopmail.com  |        |            |
| Cyndie Thad               | Staged | ✔ Assigned |
| Cyndie.Thad@yopmail.com   |        | Remove     |
| Raquela Tyson             | Staged | ✔ Assigned |
| Raquela.Tyson@yopmail.com |        | Remove     |

Assign people to testing



Search for users by first name, primary email or username

Q


More actions ▾

Advanced search ▾

Showing 10

# Create group rules:

You can create a group rule to assign a user to groups or exclude them from a group

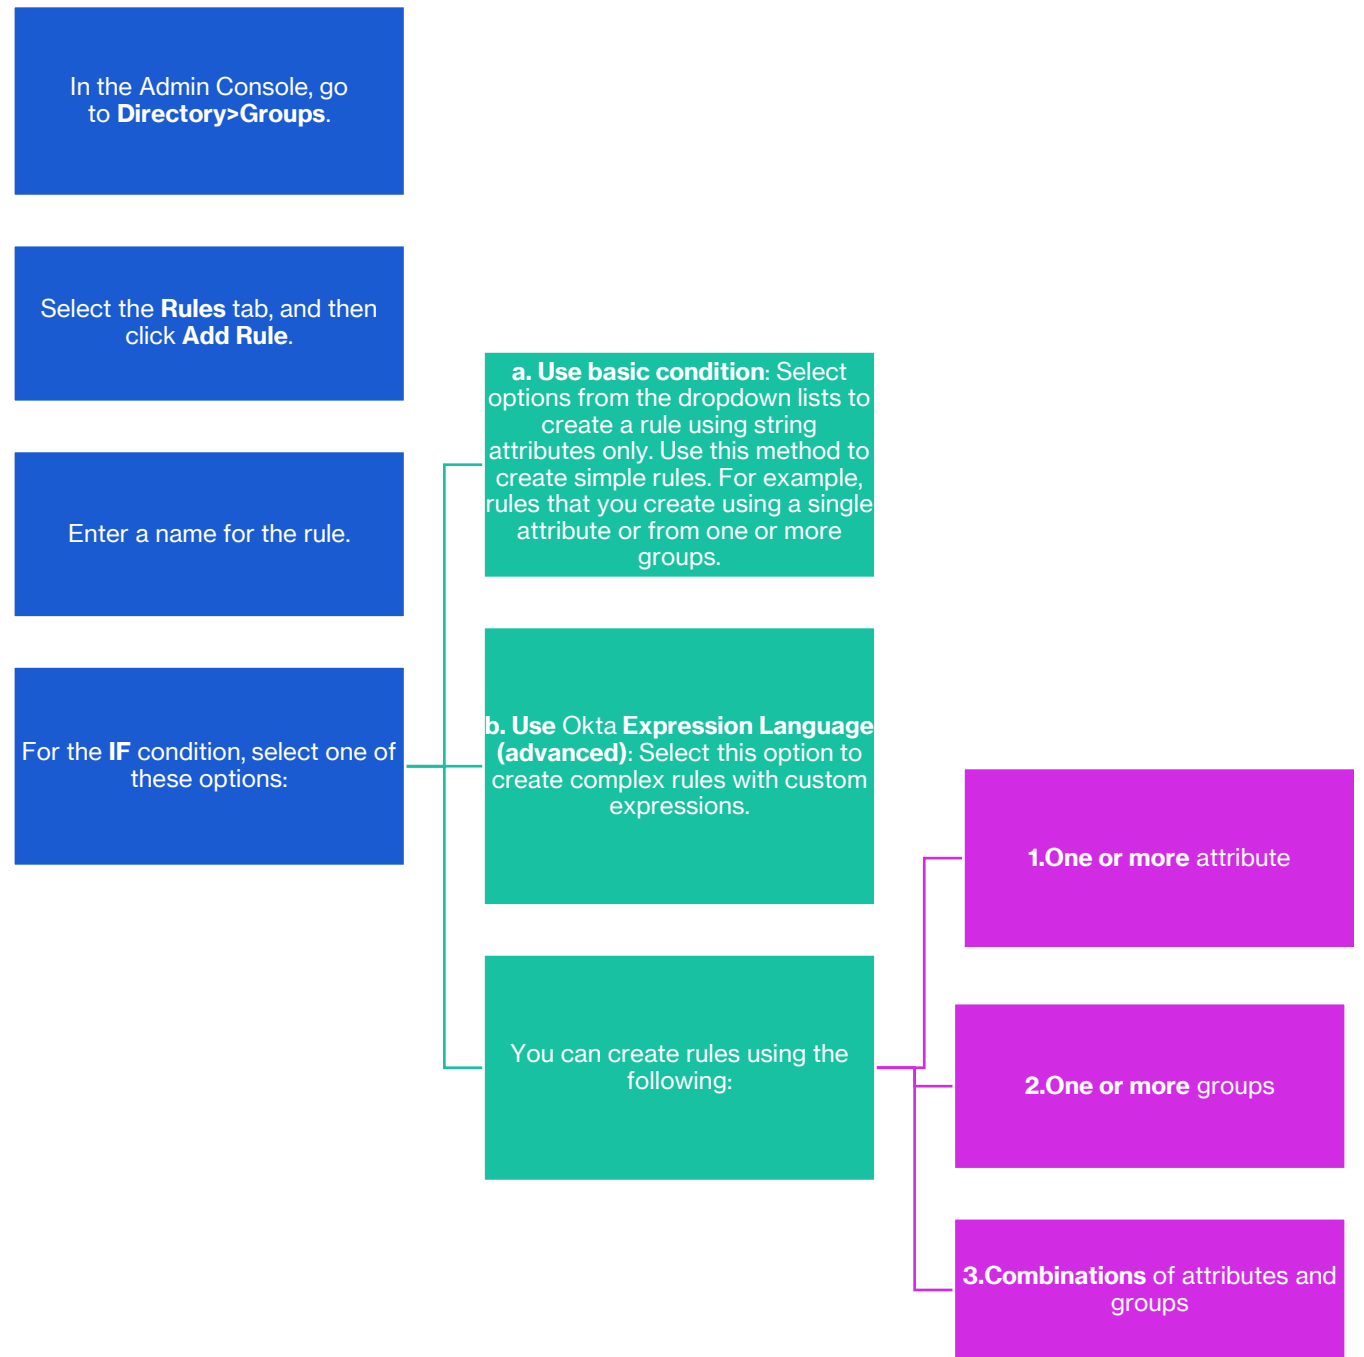

# Next steps:

5. In **Then Assign to**, enter a single group or multiple groups to which the user should be assigned if the rule condition is met.

A light blue downward-pointing arrow indicating the flow from step 5 to step 6.

6. In **Except The following users**, enter the names of any users that you want to exclude from the rule.

A light blue downward-pointing arrow indicating the flow from step 6 to step 7.

7. Click **Save**.

## Add Rule

Name

GB

IF

☒ Use basic condition ☐ Use Okta Expression Language (advanced)

User attribute

login | string

Equals

Enter a value

THEN Assign to

This rule will not add users to a group they've been manually removed from.

EXCEPT The following users

 Preview

Enter an Okta user to preview this rule

Save

Cancel

## Groups

 Help

All

Rules

 Add Rule

 Search...

Name

Status ▲

▸ GB

Inactive

Actions ▼



# Profile Editor

The profile editor in Okta is a feature that allows the users to view and modify their personal information and settings in the Okta platform. This includes details such as their names, email addresses, phone numbers, and any other attributes configured by the organization.

The Okta platform allows users to create custom attributes and user types based on their specific needs. This feature is particularly useful for managing users with varying levels of access and permissions.

# SSO(Single sign-on):

Single sign-on (SSO) is a user authentication system that allows users to log in to multiple applications and websites with one set of credentials.

## **TYPES OF SSO:**

1. SAML
2. OAUTH
3. OIDC
4. KERBEROS
5. SMART CARD AUTHENTICATION

## **SSO sub terms:**

1. Identity provider(IDP) : The trusted entity that authenticates user and provides identity information to the applications.
2. Service provider(SP) : The applications that relies on the IdP for user authentication and authorization.
3. SSO Token : It is a secure token issued by the IdP to the user, allowing seamless access to multiple service providers without repeated authentication.

# APPLICATIONS:

Applications refers to the services that users can access and authenticate using Okta's Single sign-on (SSO) capabilities. It allows organizations to centrally manage access to various applications.

This simplifies user authentication and enhance security by enforcing consistent access policies across all applications.

# SSO METHODS:

We have four types of  
single sign on  
Methods are available:

Open ID Connect (OIDC) :Token based OAuth 2.0 authentication for single sign on (SSO) through API endpoints.  
Recommended if you intend to built a custom app integration with the Okta Sign-in widget.

SAML 2.0 :XML based open standard for SSO. use if the Identity Provider for your application only supports SAML.

SWA (Secure Web Authentication) Okta specific SSO method. use if your application doesn't support OIDC or SAML.

API Services: Interact with okta APIs using the scoped OAuth2.0 access tokens for machine - machine authentication.


# SAML:

- SAML or Security Assertion Markup Language, is an XML based open standard for exchanging authentication and authorization data.
- It enables SSO by securely transferring the user information from the identity provider to the service provider.

## **SAML integration with OKTA:**

- SAML configuration with okta enables secure and seamless single sign on.
- Setting up SAML identity providers allows for external authentication integration
- The integration of okta with an organization centralizes user management and enhances security.

# OKTA INTEGRATION NETWORK(OIN):

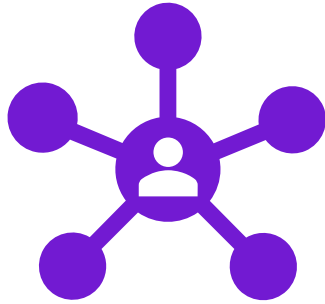

The Okta Integration Network (OIN) is a catalog of pre-built integrations that connect third party applications to Okta's identity platform.



It enables features like Single Sign-On, Multifactor authentication, and user Lifecycle management. OIN supports thousands of apps, streamlining authentication and access management.

# SAML FLOWS:

In SSO using SAML you can initiate user login either from identity provider or service provider .

## **IDP Initiated Flow:**

- An IdP initiated flow or Identity Provider initiated flow refers to the process where authentication begins at the Identity Provider's (IdP) side.
- IDP initiated SSO - Single Sign On process initiated from the IdP side.

Here we have two methods for the IDP initiated flow:

1. By Using End-user Dashboard.
2. By using Embed Link.

## **SP Initiated Flow:**

- In contrast to an IDP initiated flow, an SP-Initiated flow or Service Provider flow, begins authentication from the Service or Application side.
- For example whenever we start the login process directly from the website or app you want access, like entering the username and password on a login page.

# Bookmark Application:

- A Bookmark app integration contains a description and a link to a specific URL, usually the sign-in location for an external application.
- No password is stored or shared with the external application. The end user must manually sign in to the external application using a username and password known only to them.

1 General Settings

General settings · Required

Application label

Bookmark App

This label displays under the app on your home page

URL

The URL of the sign-in page for this app

Request Integration

☐

Would you like Okta to add an integration for this app?

Application Visibility

☐ Do not display application icon to users



# SAML TRACER:

SAML Tracer is an add on extension in browser and very useful when troubleshooting SAML for service provider Initiated flows (SP - Initiated flow) or the Identity Provider Initiated flows (IdP Initiated). When you start an IdP initiated flow SP - Initiated flow while the SAML tracer is enabled , it captures the SAML Request Response.

## **SAML REQUEST:**

- SAML authentication request it is used when a user tries to log in to salesforce using the Okta as the identity provider.

## **SAML RESPONSE:**

- SAML (Security Assertion Markup Language) is a protocol used for Single Sign-On (SSO) to allows users to authenticate with one Service and to Gain access to another application.

# SAML RESPONSE:

```
saml2p:Response xmlns:saml2p="urn:oasis:names:tc:SAML:2.0:protocol"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  Destination="https://page-dream-6582.my.salesforce.com"
  ID="id17892378309930781430054705"
  IssueInstant="2024-11-14T05:28:25.102Z"
  Version="2.0"
>
  <saml2:Issuer xmlns:saml2="urn:oasis:names:tc:SAML:2.0:assertion"
    Format="urn:oasis:names:tc:SAML:2.0:nameid-format:entity"
    >http://www.okta.com/exkl1ygx9mIwFhfrg5d7</saml2:Issuer>
  <ds:Signature xmlns:ds="http://www.w3.org/2000/09/xmldsig#">
    <ds:SignedInfo>
      <ds:CanonicalizationMethod Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#"
    >
      <ds:SignatureMethod Algorithm="http://www.w3.org/2001/04/xmldsig-more#rsa-
ha256" />
      <ds:Reference URI="#id17892378309930781430054705">
        <ds:Transforms>
          <ds:Transform Algorithm="http://www.w3.org/2000/09/xmldsig#enveloped-
```

# RESPONSE OVERVIEW:

## 1. Response Overview

### **Destination:**

This response is intended for <https://business-saaas-1234.my.salesforce.com>

### **ID and Issue Instant**

A unique identifier and timestamp indicate when the response was issued.

### **Version:**

The protocol version is 2.0.

## 2. Issuer

The <saml2:Issuer> element identifies provider (IdP), which in this case is OKTA

**Issuer Value:** <http://www.okta.com/exkk94vd49OEfbMqG5f8>

## 3. Signature

This part ensures that the response was not tampered with during transmission. The digital signature is created using RSA-SHA256.

### **Certificate:**

The public key (X.509 Certificate) used to verify the signature.

### **Digest and Signature Value:**

These Cryptographic hashes ensuring the integrity and authenticity of the message.

# response

## 4. Status:

- The <saml2p:Status> indicates whether the authentication was successful or failure.
- Status Code Value:  
urn:oasis:names:tc:SAML:2.0:status:Success
- This is indicating that the SSO Authentication was Successful.

**5. ASSERTION :** The <<saml2:Assertion> element contains the actual identity information (attributes) about the authenticated user.

## Issuer:

- This reiterate that the assertion comes from the OKTA.
- Subject (User Identity) Name ID : The user identifier is : abcd1213-3tc@force.com

## Subject Confirmation:

- This ensures the assertion is valid for Salesforce and includes a Not On Or After time stamp (2024-10-10T05:24:50.471Z), after which the assertion expires

## 6. Conditions:

- Not Before / Not On Or After:
- The assertion is valid only between Not Before="2024-10-10T05:14:50.471Z" and Not On Or After="2024-10-10T05:24:50.471Z"
- Audience Restriction The assertion is intended for https://business-saas-1324.my.salesforce.com

# NEXT

## 7. Auth Statement (Authentication Info)

It provides the information about the authentication event.

Auth Instant:

The authentication happened at "2024-10-10T05:19:50.470Z"

Session Index:

A unique session identifier is provided.

Authn Context Class Ref:

The user authenticated using

Password Protected Transport

(e.g., username and password over HTTPS).

8.AttributeStatement (User Attributes):

This contains user specific attributes passed to salesforce;

- firstname:Aditya
- lastname: Swamy
- email: swamyaditya@example.com

these attributes are typically used by salesforce to create r update the user profile with the system.

Conclusion:

In this response it shows a "Successful Authentication" of the USER via OKTA with attributes passed to salesforce for SSO.

It confirms the user identity using certificates and digital signatures, and the assertion is valid only for a short period.

# SAML REQUEST:

```
HTTP Parameters SAML Summary
<saml2p:AuthnRequest xmlns:saml2p="urn:oasis:names:tc:SAML:2.0:protocol"
  AssertionConsumerServiceURL="https://inspiration-efficiency-1942.my.salesforce.com"
  Destination="https://dev-09230698.okta.com/app/dev-
09230698_meghanath_1/exkl4ygtH9OLjy3bk5d7/sso/saml"

  ID="_2CAAAAZO_OxbpMDAwMDAwMDAwMDAwMDAwAAAA_J13zI5yYrIjT64cyCbxyLvDPu0qm6qpmGwdWAZsFSHe5JlgjP8mJJ7AMlh_H73I7DKN69
q3G2HlyFghuUwCwyomCldMiH0uTA8ObI865QemvOgZ83BVII8TniFsp1orCAHYD2qTabokdu45wSERnBvcOvk_cJexTCXpFny37CkBMEJf7_AIrh
F3B_YDvno_lKfDIr0clwi3xBZbF-S_uoM1NxxkhaBd5Y46UzpTu0YHHxiMVynhACKwUj_ifGdFca"
  IssueInstant="2024-11-15T08:55:41.453Z"
  ProtocolBinding="urn:oasis:names:tc:SAML:2.0:bindings:HTTP-POST"
  Version="2.0"
>
  <saml2:Issuer xmlns:saml2="urn:oasis:names:tc:SAML:2.0:assertion">https://inspiration-efficiency-
1942.my.salesforce.com</saml2:Issuer>
  <ds:Signature xmlns:ds="http://www.w3.org/2000/09/xmldsig#">
    <ds:SignedInfo>
      <ds:CanonicalizationMethod Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
      <ds:SignatureMethod Algorithm="http://www.w3.org/2001/04/xmldsig-more#rsa-sha256" />
      <ds:Reference
URI="#_2CAAAAZO_OxbpMDAwMDAwMDAwMDAwMDAwAAAA_J13zI5yYrIjT64cyCbxyLvDPu0qm6qpmGwdWAZsFSHe5JlgjP8mJJ7AMlh_H73I7DKN
69q3G2HlyFghuUwCwyomCldMiH0uTA8ObI865QemvOgZ83BVII8TniFsp1orCAHYD2qTabokdu45wSERnBvcOvk_cJexTCXpFny37CkBMEJf7_AI
rhF3B_YDvno_lKfDIr0clwi3xBZbF-S_uoM1NxxkhaBd5Y46UzpTu0YHHxiMVynhACKwUj_ifGdFca">
        <ds:Transforms>
```