


# Overall Architecture in ELITR

- Components can run distributed, connected via “bi-sockets”.

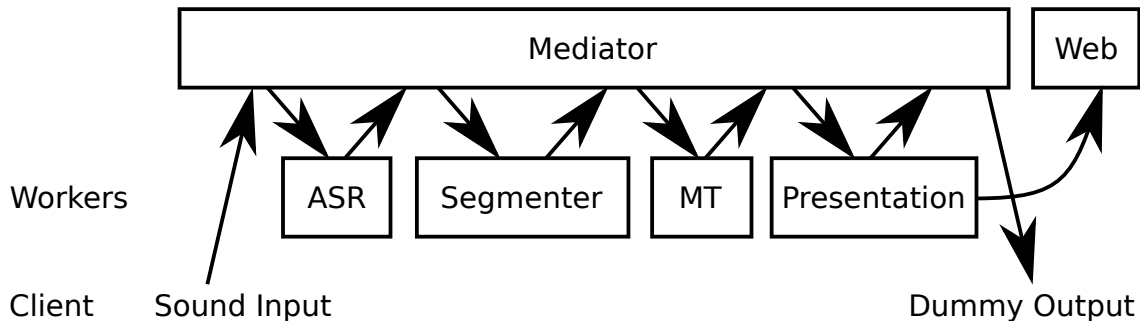

- Connections always open, reused across clients.
- TCP communication  $\Rightarrow$  relies on network capacity.