

EAM: Emergency Access Management

VIRSA 4.0 -----> Fire Fighter (FF)

GRC AC 5.1, 5.2, 5.3 ----- > Super user Privilege Management (SPM)

GRC AC 10, 10.1,12 -----> EAM

Background of this Concept:

- ▮ 70% of the Authorizations assigned to users were never used.
- ▮ Within the Authorization used by user, 15 - 20% of the Authorizations are rarely used.

T-codes have been categorized as below.

- ▮ **Daily used** - Assigned to user on permanent basis
Ex, SU01, PFCG, SU10, PFUD, and SUIM.....
- ▮ **Rarely used = Critical** - this access would be assigned only when required and requested by user (30% T-codes) Ex, **SU25**, SU24, SU20, SU21

When critical access is needed,

Requested --- > User

Approved ---- > Approver - FF ID/FF Role - Owner

Granted (linking)---- > Security/GRC

Usage of FFID/FF role ----- > User

Monitored --- > Monitor ---- > FF ID/FF Role Controller

Granting is done in 2 ways.


§ **ID based**

§ Role based

Firefighter Concept based on granting/providing access:


ID based

Normal user id will be linked to **FF ID** (which has critical Access assigned) for short duration - 1 to 5 days.

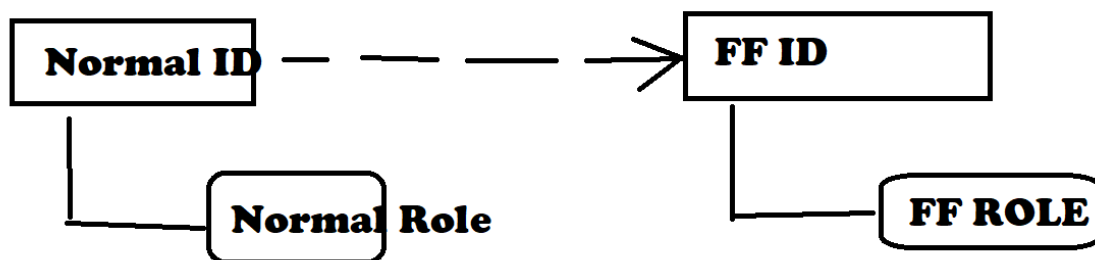

Role Based

FF role will be assigned to **Normal user** based on the request and for short duration - 1 to 5 days.

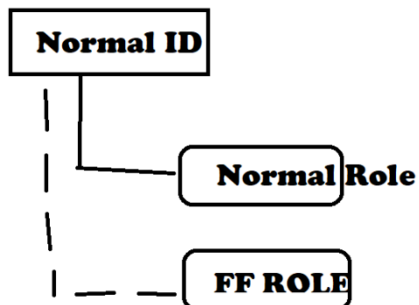

ID Based FF Concept:


To use Critical T-codes assigned to user through **FF ID**, user must launch the **EAM Launch Pad /FF Launch Pad**

This can be launched in 2 ways.

- 1) GRC system ----- > **Centralized** FF ID Concept
- 2) Plug in system (S4HANA/ECC/BW) ----- > **Decentralized** FF ID Concept

FF ID Concept based on Login:

- ▮ **Centralized FF** - Login from GRC system - **GRAC_SPM** or **GRAC_EAM** (T-codes)
- ▮ **Decentralized FF** - Login from Plug In system and execute T-code **/n/GRCPI/GRIA_EAM**

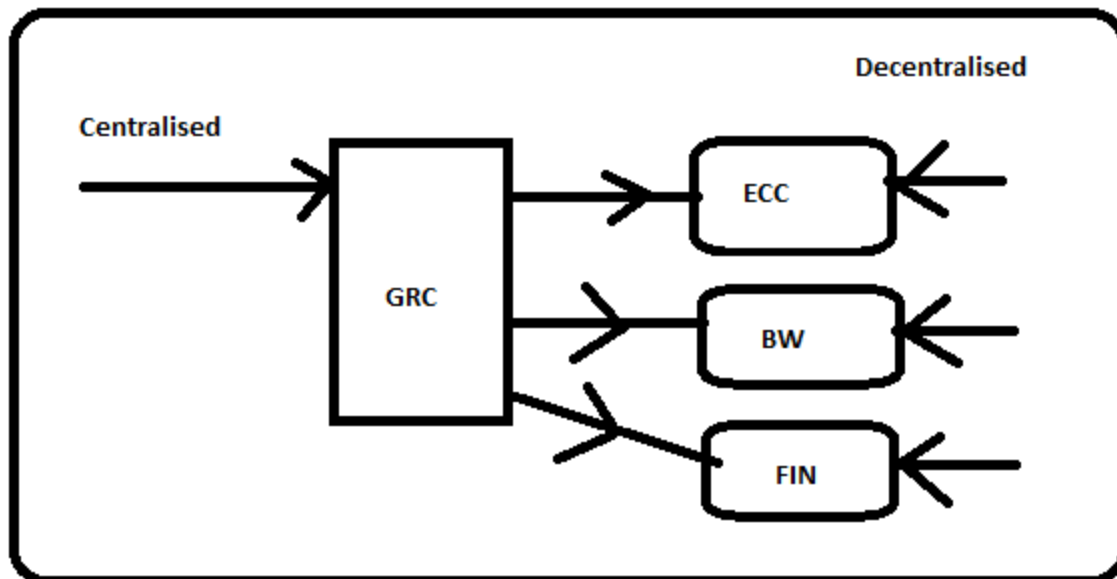



Possible concepts in EAM:

1. ID Based (Launch pad Concept)

- ▮ **Centralised FF Concept** (User should exist in GRC)
- ▮ **Decentralised FF Concept** (User should exist in Plug in system)

2. Role Based (No Launch pad Concept)

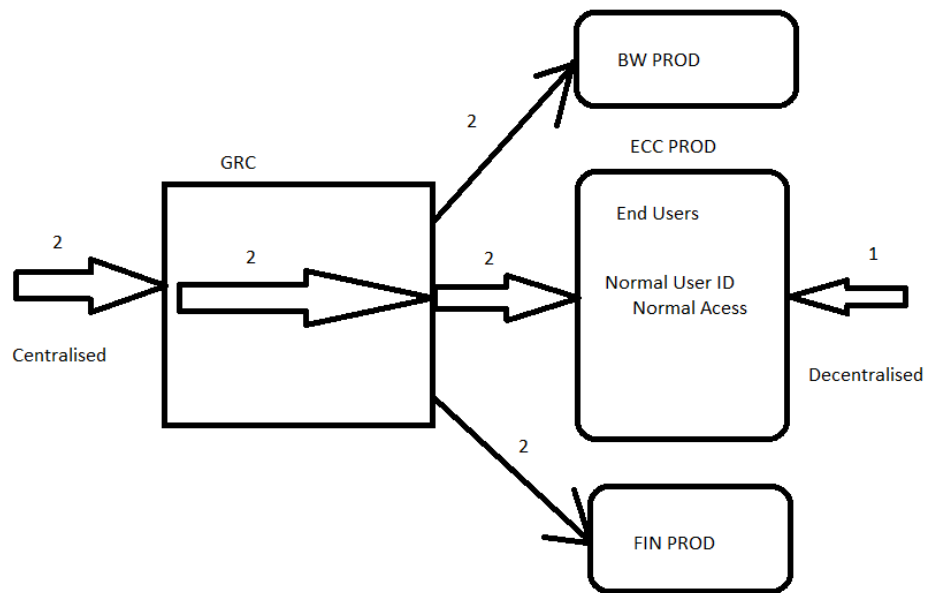

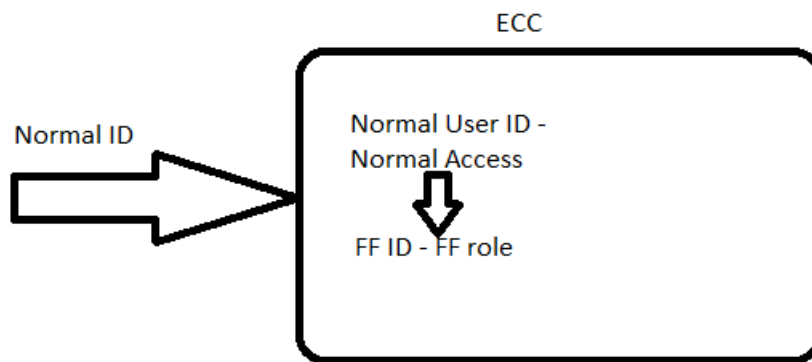

	GRC	Plug In (ECC)
Centralized FF ID Based	Owner, Controller, FF	FF, FF ID
Decentralized FF ID Based	Owner, Controller	FF, FFID
Role Based	Owner, Controller	FF, FF Role

What is FF ID?

- Special ID assigned with FF Role -Critical T-codes
- Exist in Plug-In Systems – ECC/S4HANA/BW.....
- FF IDs are used by non-business users/Technical Users


Non-Business users/Technical Users Ex, Sec, ABAP, BASIS, SAP FI, SAP SD, SAP MM etc.


Business users Ex, Create PO, Approve PO

Give some examples/scenarios where FF ID is used?

1. Security team --- > Upgrade SU25
2. BASIS team ---- > Client Opening SCC4
3. ABAP team ---- > Debug the PROG SE38
4. Finance team ---- > Master Data Set up – Vendor/Customer Master data
5. MM team ---- >
6. SD team ----- >

Centralized- ID based firefighting concept set up:

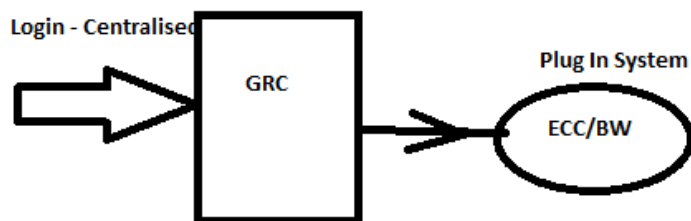

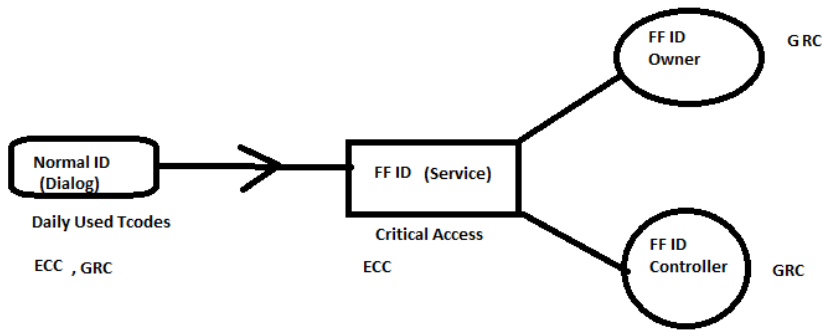

1) We need the following ids as mentioned below

GRC system - FF, FF ID Owner, FF ID Controller

Plug in System (S4HANA/ECC) - FF, FF ID

ID Based:

- ▯ **Firefighter** - Normal User (dialog) or person who uses FF ID.
GRC System - Launch Pad T-code access - **GRAC_EAM or GRAC_SPM**
 Role Name: SAP_GRAC_SUPER_USER_MGMT_USER
Plug In System - Access to daily operations
- ▯ **FF ID** - Special id which is of **Service** User Type assigned with **critical access (FF ROLE)** and **SAP_GRAC_SPM_FFID**: Role that must be assigned to every FF ID
- ▯ **FF ID Owner** - Person who approves FF ID (FF Role) access to user and responsible for assigning FF ID to normal user
 SAP_GRAC_SUPER_USER_MGMT_OWNER
- ▯ **FF ID Controller** - person who monitors/reviews the activity done by user (FF) using the FF ID
 SAP_GRAC_SUPER_USER_MGMT_CNTLRL

2) Define /Declare **FF ID Owner** and **FF ID Controller** in the Set Up ---- > Access Control Owners link. (**Not required in GRC 12 since it embedded in 3rd step**)

NWBC -----> Set Up ----- > Access Owners

3) Mapping **FF ID Owner** and **FF ID controller** to the **FF ID**

NWBC ---- > Set Up ---- > Emergency Access Assignment ----- > Owners.

NWBC ---- > Set Up ---- > Emergency Access Maintenance ----- > Controllers

4) Define Reason Codes

NWBC ---- > Set Up ---- > Super User Maintenance ----- > Reason Codes

Raising FF ID requests and FF ID Linking with Normal User is done in 2 ways.

- ▯ Manually - Approval and Linking
- ▯ Automated - Workflow - ARM

5) Linking FF ID with FF (normal user id)

NWBC ---- > Set Up ---- > Emergency Access Assignment ----
-- > FF IDs

Or

NWBC ---- > Set Up ---- > Emergency Access Maintenance ---
--- > Firefighters

FF Logs:

Path: NWBC --> Reports & Analytics ---- > EAM reports ----- > FF log Report

FF logs will be reviewed by the controller.

Time based FF ID Log: **GRAC_EAM_LOG_SYNC_TIMEBASED**

Timestamp: 20.231.130.010.101 (YYYYMMDDHHMMSS)

20260510010101 to 20260511230101

20250405010101 to 20250405230101

20230918220101 to 20240918220101

Note:

New t-code **GRAC_FFSESSION** to replace above program

<https://community.sap.com/t5/financial-management-blogs-by-sap/firefighter-session-maintenance-grac-ffsession/ba-p/13580608>

In VIRSA 4.0 and GRC 5.1, 5.2, 5.3 (1990 - 2010) ---- >

DECENTRALISED Concept

In GRC 10 SP01 to SP09 (2011) -----> **CENTRALISED** concept

In GRC 10 SP10 and above (2012) --- > **CENTRALISED & DECENTRALISED** concept

De-Centralised ID Based Firefighting Concept:

1. 4015 parameter - enable it - YES.

2. Create all required users in

GRC ---- > FFID Owner and FFID Controller

ECC system ---- > FF, FFID

Ensure FF has access to Launch Pad T-code:

/n/GRCPI/GRIA_EAM in Plug in System (**Role:**

SAP_GRIA_SUPER_USER_MGMT_USER)

3. Mapping **FF ID Owner** and **FF ID controller** to the **FF ID**

NWBC ---- > Set Up ---- > Super User Assignment ----- > Owners

NWBC ---- > Set Up ---- > Super User Maintenance ----- >
Controllers

4. Define Reason Codes

NWBC ---- > Set Up ---- > Super User Maintenance ----- >
Reason Codes

5. Linking FF ID with FF (normal user id)


NWBC ---- > Set Up ---- > Super User Assignment ----- >FF
IDs

Or

NWBC ---- > Set Up ---- > Super User Maintenance ----- >
Firefighters.

6. Additional Config in Plug In(ECC/BW) system:

Local RFC must be created

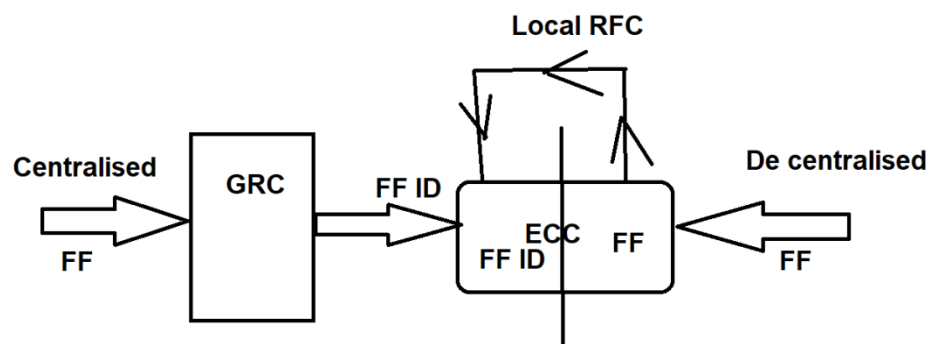

SPRO --- > GRC (Plug-In) ----- > Access Control ---- >
Maintain Plug-In Configuration Settings

1000 Parameter - Maintain Local RFC Name pointing to
same system and it is like your Connector name between
GRC and Plug in System.

Change View "For System Details": Overview			
New Entries			
For System Details			
Param Id	Sequence	Parameter Value	Short Description
1000	1	DCCLNT800	Please maintain Plug-in Connector
1001	1	FR1CLNT800	Please maintain GRC connector
4000	1	1	Application type
4001	1	30	Default Firefighter Validity Period (Days)
4008	1	YES	Send FirefightId Login Notification
4010	1	Z_A_XXX_FFIDROLE_FIREFIGHTER	Firefighter ID role name

7. Sync Job – **EAM_MASTER_DATA_SYNC** – run this job for only for De-centralised Concept.

Role based Firefighting Concept:

- 1) Define 4000 Parameter with value 2 – Role based.
- 2) Role must be created in **BRM** with setting **ENABLE for FIRE FIGHTING**

Single Role:Z_DGD_FFID_CRITICALROLE

< Previous Next > Save & Continue Save Edit Close Certify Reapply Methodology Go To Phase

Role Type: Single Role

☒ Define Role
 ☒ Maintain Authorizations
 ☒ Analyze Access Risks
 ☒ Generate Roles
 ☒ Complete

Define Role Additional Details

Details **Properties** Functional Area Company Custom Fields Owners/Approvers Prerequisite Role Mapping

Certification

Certification Period in Days: 0
 Next Certification:
 Last Certified:
 Certified By:
 Comments History:

Properties

Critical Level: HIGH
 Sensitivity: Critical
 Derivation Allowed: Yes
 Identifier:

Role Reaffirm

Reaffirm Period in Days: 0
 Next Reaffirm:
 Last Reaffirmed:
 Reaffirmed by:

User Provisioning

Comments Mandatory: ☐
 Enable for Firefighting: ☒

JJ Single Role:Z:BS:FF_ROLE:ABB

< Previous Next > Save & Continue Save Edit Close Certify Reapply Methodology Go To Phase

Role Type: JJ Single Role

☒ Define Role
 ☒ Maintain Authorizations
 ☒ Derive Role
 ☒ Analyze Access Risks
 ☒ Generate Roles
 ☒ Maintain Test Cases
 ☒ Complete

Define Role **Additional Details**

Detailed Description **Provisioning** Where-Used Roles Assigned Users Attachments Change History PFCG Change History

Role Status: Production

Systems

Set Default Period

System	Environment	Role Exists	Provisioning Allowed	Allow Auto-provisioning	Sy
ABBCLNT800	Production	Yes	Yes	Yes	
BMWCLNT800	Production	No	Yes	Yes	

- 3) Ensure user ids are existing for FF ROLE OWNER and FF ROLE CONTROLLER.
- 4) Declare them under SET UP --- > Access Control Owners (Not required in GRC 12)
- 5) Mapping of FF ROLE with FF ROLE OWNER and FF ROLE CONTROLLER
- 6) Linking FF ROLE to the FF (Normal User)

7) User can login into ECC and perform the Firefighting Concept

If the FF ID is not visible in GRC system what could be the Reasons?

- 1) 4010 Parameter role - **SAP_GRAC_SPM_FFID** is not assigned to FF ID
- 2) **Repository Sync job** is not run after creating FF ID and assigning the above role

ZSAP_GRAC_SPM_FFID: Role that must be assigned to every FF ID.

Whichever role is mentioned in parameter **4010**, that role must be assigned to every FF ID in plug in systems. If this is custom role, that should be copy of SAP_GRAC_SPM_FFID

Imp parameters related to EAM:

4000 Series is related to **EAM/FF**

4010: FF ID role - **SAP_GRAC_SPM_FFID** (Identifier Role – Which ever user id is assigned with this role, that ID is considered as FF ID in GRC system)

4000: ID based or Role based

4001: Default Firefighter Validity Period (Days)

4015: Activate Decentralized

Note: **4015** Parameter was launched from **SP10 in GRC 10** and above. Earlier than that, only **centralized** concept was available by default.

Disadvantages of Role Based:

- 1) Users are confused or not conscious about using the FF role.

GRC Centralized (ID Based)

User1 ----> GRC **GRAC_SPM/EAM** -----> Logon Pad ----> ECC New Screen (FFID)

Decentralized - ECC (ID Based)

User1 -----> ECC /n/**GRCPI/GRIA_EAM** -----> Logon Pad ----> ECC New Screen (FFID)

Role Based

User1 -----> ECC GUI ----> Same Screen User1(FF_ROLE)

Disadvantages of ID Based: (fixable)

- 1) Sequence of steps in a t-code or internal calling of t-codes
EX, LSMW
Initial Steps - Create Project (recording) ----> Not critical ---> Assign to NORMAL ID
Later Steps - Execute project ----> Critical -----> Assign to FF ID



or

SM30/SE16 (Table: TCDCOUPLES)

SM30 (Edit Table) + SE16 ----> FF ID
SE16 (Display Table) -----> Normal ID

Disadvantages of Centralized FF concept:

- 1) All the users who ever want to use FF ID in Plug in systems, they should also exist in GRC system - Additional Maintenance for Security/GRC team.
- 2) Users who do not exist in Plug-in system (ECC) and if they exist in GRC system, they can use the FF ID in the Plug-in system (ECC)

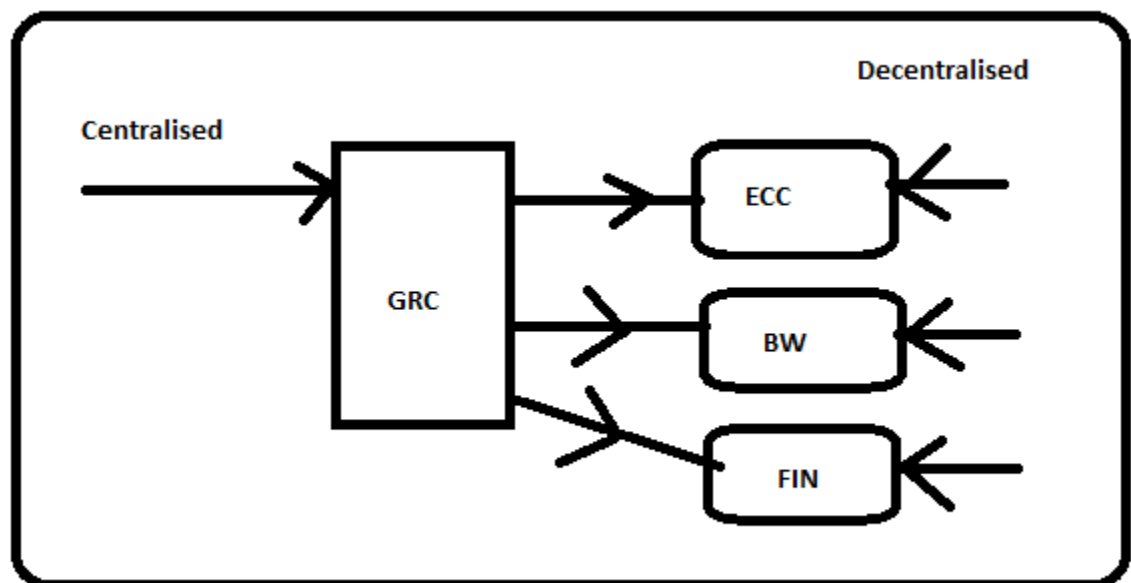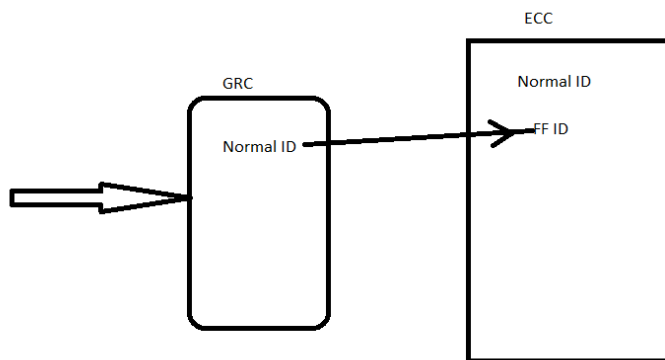

Usage:

Decentralized >>> Centralized >>> Role based

Real time:

BASIS Team (10)

- ▯ FFID_OS_BS1 -- > OS related T-codes
- ▯ FFID_DB_BS1 --- > DB related T-codes

- ▯ FFID_BASIS1 --- > BASIS FF role
- ▯ FFID_BASIS2 --- > BASIS FF role
- ▯ FFID_BASIS3 --- > BASIS FF role

Finance Team

- ▯ FFID_FIN1
- ▯ FFID_FIN2
- ▯ FFID_FIN3

Some Clients have dedicated FFID to every user in the Org. Any changes in PROD system should be done by FF ID

- ▯ U1: FFID_U1 --- > One year
- ▯ U2: FFID_U2
- ▯ U3: FFID_U3

SAP_ALL should not be assigned to FF ID?

(Daily used t-codes should not be assigned to FF ID)

- ▯ There is no use in creating separate FF ID team wise. Segregation (SOD) is not possible.
- ▯ Unnecessary logs will be generated, and it is difficult for the Controller to monitor. He will lose interest in reviewing the logs.

Advantages of FF concept:

- 1) Tracking the usage of critical T-Codes
- 2) Minimize the total Access risk count in the organization – Risk Analysis

Disadvantages of EAM:


1. Not possible with JAVA/ABAP Web Dynpro based systems Ex, CRM, SOLMAN, PI-PO, EP, FIORI
2. Time based FF ID access cannot be granted (**ER Emergency Repair -Security Weaver** – Mins based)

FF LOGS:

NWBC ---- > Reports & Analytics ----- > EAM Reports

- 1) FF log Summary Report

Try this: Assignment

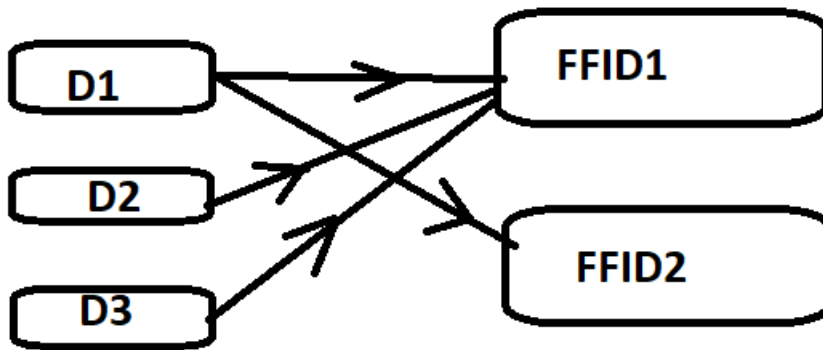

New Features in GRC 12 for EAM:

- 1) No need to maintain EAM approvers in Access Control Owners Link
- 2) EAM concept can be used in HANA Database level – HANA DB – We have concept of Privileges (T-codes). It will record privileges.
Ex,, System privilege ---- > **User Admin** – Create User, Modify User, Delete User
System privilege ---- > **System Admin** ---- >

Example:

ECC/S4HANA - Month end period opening - Finance IT team

ABB_FI_USER1

Normal Role --- > FB01, FB02, FB03

FF ID --- > FF role

OB52 --- > Critical t-code

ABB_FI_USER1 ---- > FF ID Access

Centralized FF ID concept

#####

1. **ABB_FI_USER1** login into GRC system
2. Launch the EAM /FF Launch pad - GRAC_EAM/GRAC_SPM
3. Login into ECC through FF ID -- > **ABB_FI_FFID1**
4. Then execute OB52 and open the period
5. Log out of FF ID