

# Data Modeling Report

## Interim Data Model

Version 1.0 • Proposed



Date/Time Generated:

5/20/2026 4:58:51 PM

Author:

fredrto

EA Repository : C:\Users\fredrto\migrate.EAP

# Table of Contents

|                           |          |
|---------------------------|----------|
| <b>Interim Data Model</b> | <b>3</b> |
| Categories diagram        | 3        |
| Guidances diagram         | 3        |
| Processes diagram         | 4        |
| Roles diagram             | 5        |
| Tasks diagram             | 6        |
| WBS diagram               | 7        |
| WorkProducts diagram      | 8        |
| ActivityDefinition        | 9        |
| Category                  | 11       |
| CategoryContents          | 11       |
| Context                   | 12       |
| DeliverableDefinition     | 13       |
| DeliverableParts          | 14       |
| DeliveryProcessDefinition | 15       |
| GettingStarted            | 16       |
| GuidanceDefinition        | 17       |
| GuidanceToGuidance        | 20       |
| MilestoneDefinition       | 21       |
| OutcomeDefinition         | 22       |
| PlanAttachments           | 23       |
| Predecessor               | 24       |
| ProcessToGuidance         | 25       |
| ProjectPlan               | 25       |
| PursuitSupport            | 26       |
| ReleaseInformation        | 27       |
| RoleDefinition            | 29       |
| RoleToGuidance            | 30       |
| StepDefinition            | 31       |
| TaskDefinition            | 31       |
| TaskToGuidance            | 33       |
| TaskToRole                | 33       |
| TaskToStep                | 34       |
| TaskToWorkProduct         | 34       |
| TaskUsage                 | 35       |
| TeamDefinition            | 36       |
| TeamToTask                | 37       |
| WBS                       | 38       |
| WorkProductDefinition     | 39       |
| WorkProductToGuidance     | 40       |
| WorkProductToWorkProduct  | 41       |
| Workstream                | 42       |
| WorkstreamDefinition      | 42       |
| WorkstreamToTask          | 43       |

## Interim Data Model

Package in package 'Data Model'

Interim Data Model  
Version 1.0 Phase 1.0 Proposed  
EA created on 4/16/2026. Last modified 5/1/2026  
Alias

## Categories diagram

Data Modeling diagram in package 'Interim Data Model'

Categories  
Version 1.0  
fredrto created on 4/27/2026. Last modified 5/20/2026

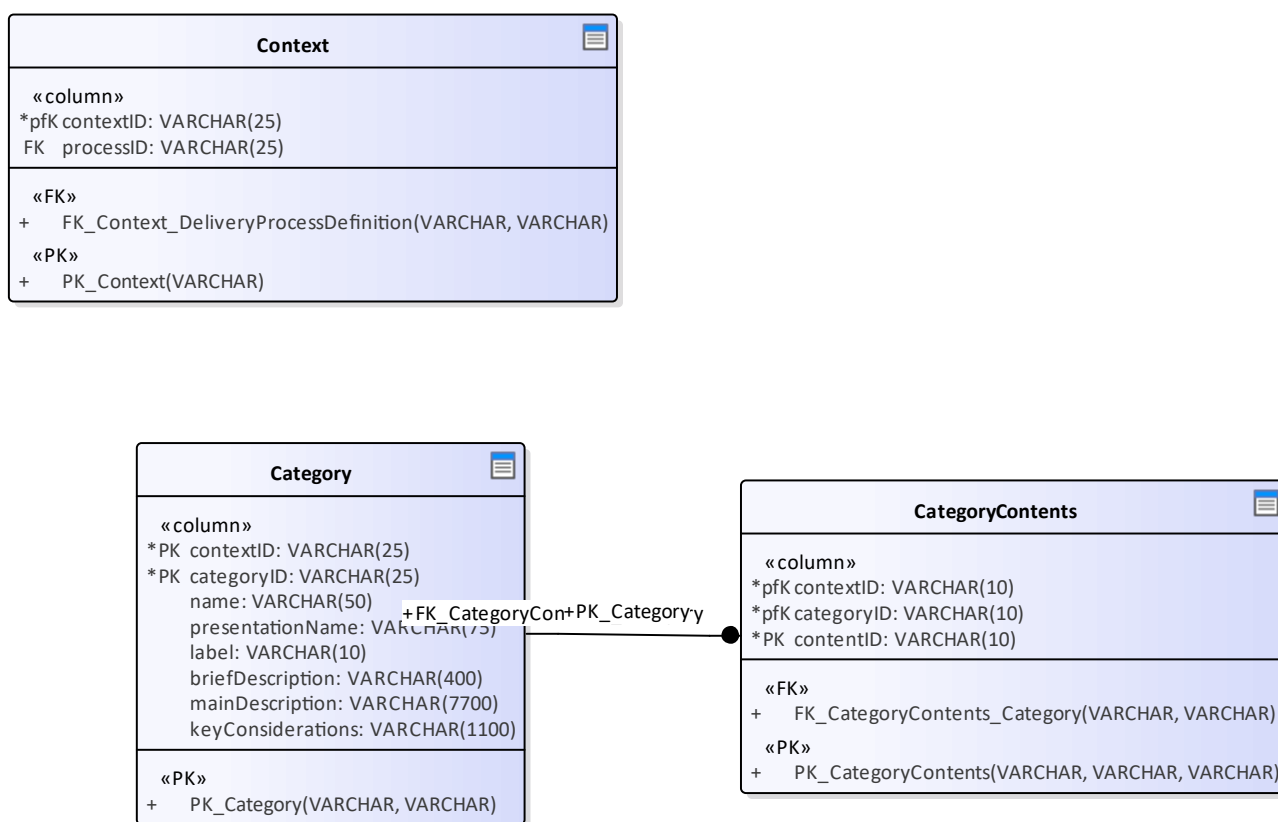


Figure 1: Categories

## Guidances diagram

Data Modeling diagram in package 'Interim Data Model'

Guidances  
Version 1.0  
fredrto created on 4/16/2026. Last modified 4/30/2026

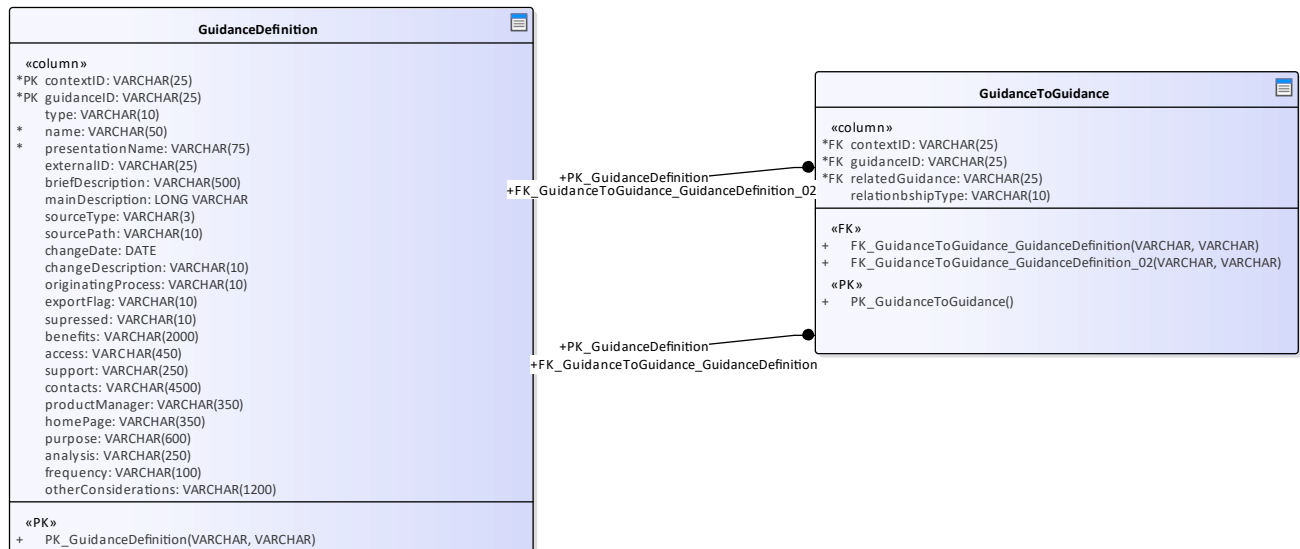


Figure 2: Guidances

## Processes diagram

Data Modeling diagram in package 'Interim Data Model'

Processes  
Version 1.0

fredrto created on 4/16/2026. Last modified 4/30/2026

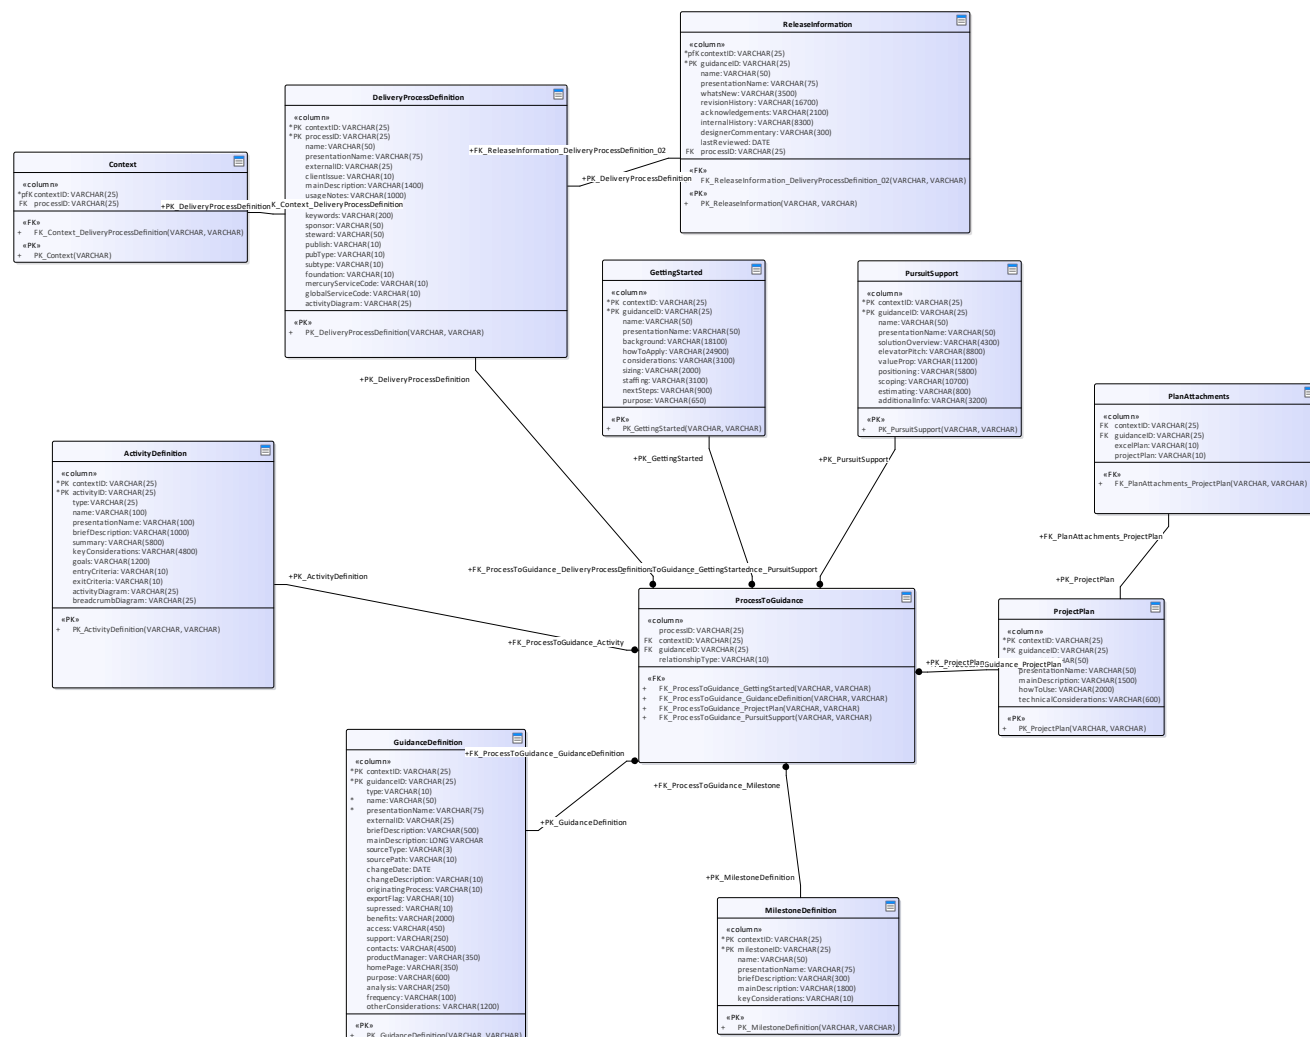


Figure 3: Processes

## Roles diagram

*Data Modeling diagram in package 'Interim Data Model'*

Roles  
Version 1.0

fredrto created on 4/16/2026. Last modified 5/1/2026


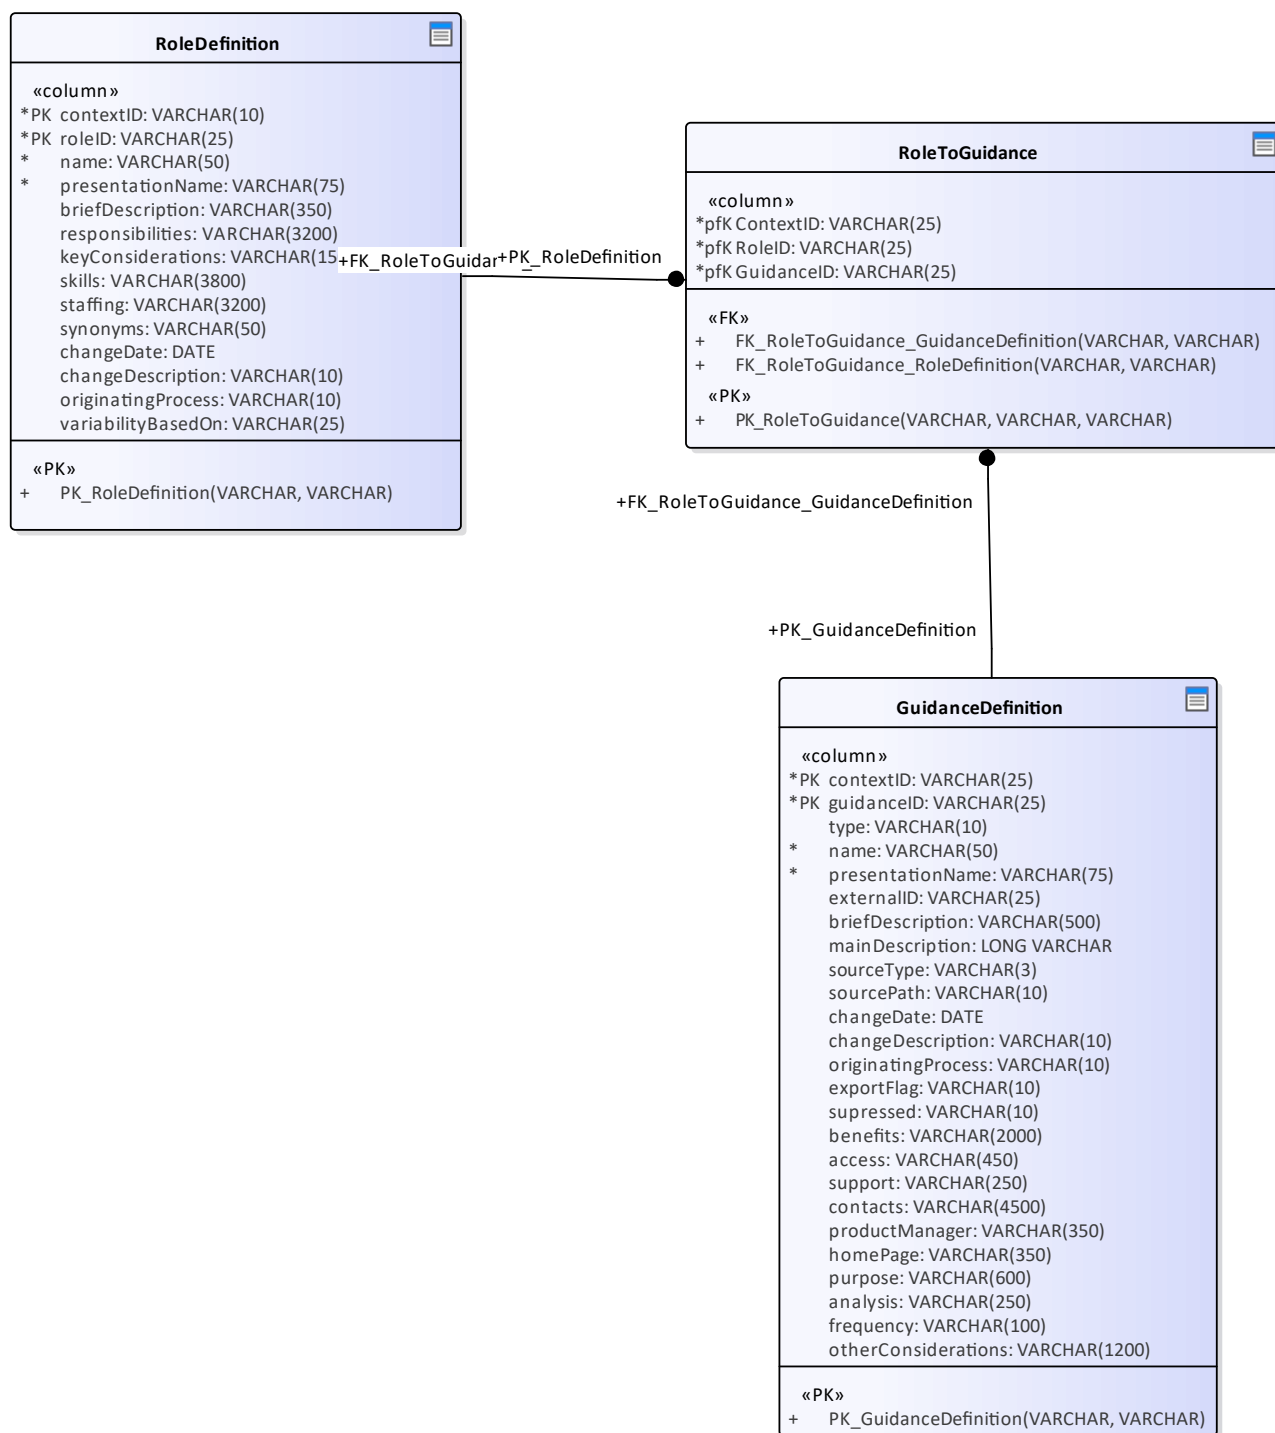


Figure 4: Roles

## Tasks diagram

Data Modeling diagram in package 'Interim Data Model'

Tasks  
Version 1.0  
fredrto created on 4/16/2026. Last modified 5/1/2026



## Data Modeling diagram in package 'Interim Data Model'

WBS  
Version 1.0  
fredrto created on 4/28/2026. Last modified 4/30/2026


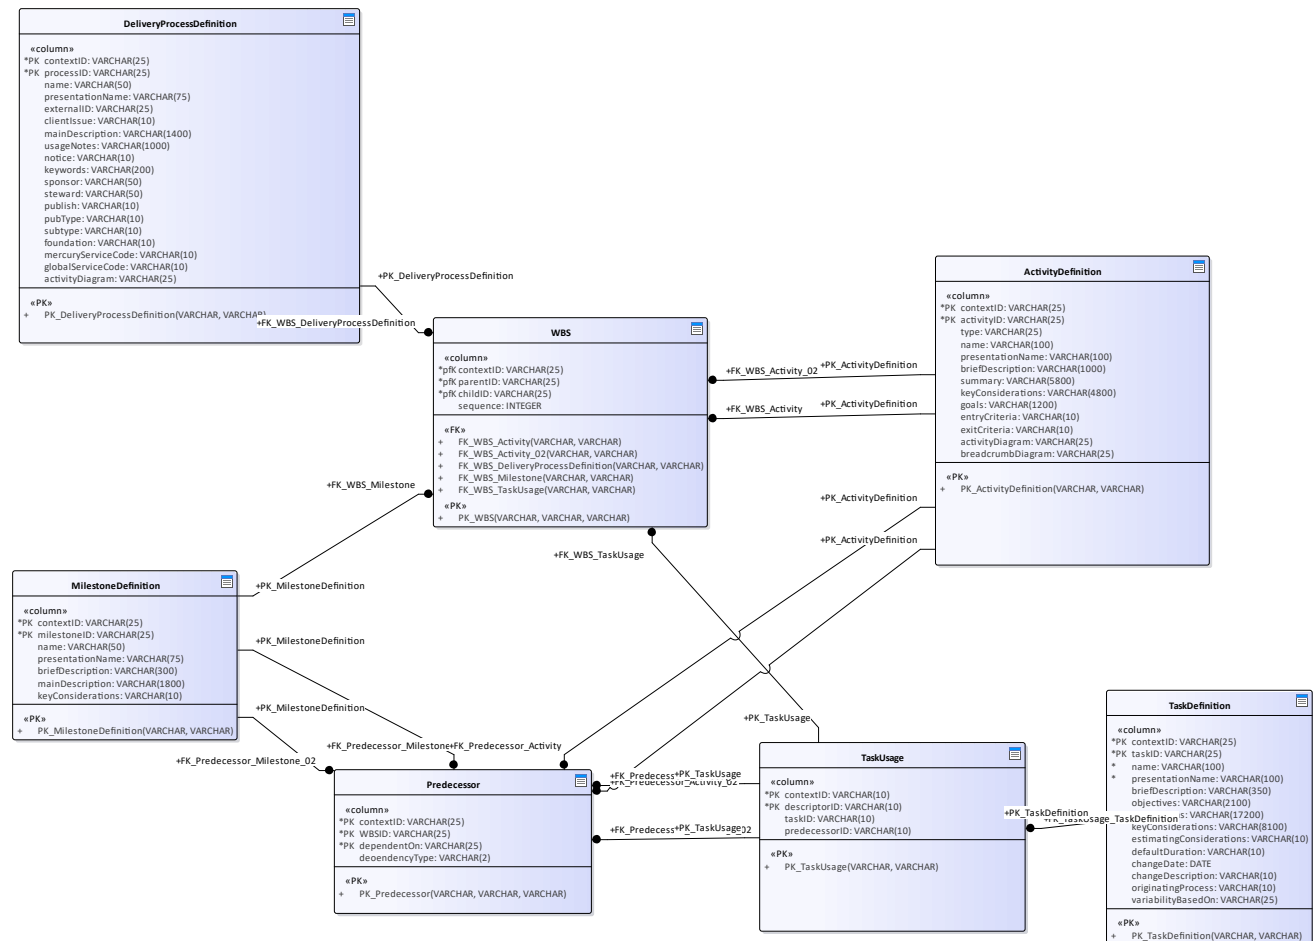


Figure 6: WBS

## WorkProducts diagram

Data Modeling diagram in package 'Interim Data Model'

WorkProducts  
Version 1.0  
fredrto created on 4/16/2026. Last modified 5/1/2026



*Database table in package 'Interim Data Model'*

ActivityDefinition  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/23/2026. Last modified 5/1/2026  
DBMS DB2

| COLUMN NAME                                                                                           | DATATYPE      | NOT NULL | COMMENTS                                                                                                       |
|-------------------------------------------------------------------------------------------------------|---------------|----------|----------------------------------------------------------------------------------------------------------------|
|  contextID           | VARCHAR(25)   | True     | based on published configuration                                                                               |
|  activityID          | VARCHAR(25)   | True     | simple XML: <process-item> id<br>Activity/Phase/Iteration XML attribute name="guid"                            |
|  type                | VARCHAR(25)   | False    | simple XML: <process-item> type<br>Activity/Phase/Iteration XML attribute name="TypeName"                      |
|  name                | VARCHAR(100)  | False    | not included in simplified XML<br>Activity/Phase/Iteration XML attribute name="name"                           |
|  presentationName    | VARCHAR(100)  | False    | simple XML: <process-item> name<br>Activity/Phase/Iteration XML attribute name="presentationName"              |
|  briefDescription    | VARCHAR(1000) | False    | simple XML: <process-item> brief-description<br>Activity/Phase/Iteration XML attribute name="briefDescription" |
|  summary           | VARCHAR(5800) | False    | not included in simplified XML<br>Activity/Phase/Iteration XML attribute name="mainDescription"                |
|  keyConsiderations | VARCHAR(4800) | False    | not included in simplified XML<br>Activity/Phase/Iteration XML attribute name="keyConsiderations"              |
|  goals             | VARCHAR(1200) | False    | not included in simplified XML<br>Activity/Phase/Iteration XML attribute name="purpose"                        |
|  entryCriteria     | VARCHAR(10)   | False    | not included in simplified XML<br>Phase/Iteration XML rte name="Entry Criteria"                                |
|  exitCriteria      | VARCHAR(10)   | False    | not included in simplified XML<br>Phase/Iteration XML rte name="Exit Criteria"                                 |
|  activityDiagram   | VARCHAR(25)   | False    | not included in simplified XML<br>Activity/Phase/Iteration XML userDiagram name="Activity"                     |
|  breadcrumbDiagram | VARCHAR(25)   | False    | not included in simplified XML<br>Activity/Phase/Iteration XML userDiagram name="ActivityDetail"               |

| COLUMN NAME | DATATYPE | NOT NULL | COMMENTS |
|-------------|----------|----------|----------|
|             |          |          |          |

| PRIMARY KEY NAME                                                                                        | COLUMNS               | COMMENTS |
|---------------------------------------------------------------------------------------------------------|-----------------------|----------|
|  PK_ActivityDefinition | activityID, contextID |          |

## Category

Database table in package 'Interim Data Model'

Category  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/27/2026. Last modified 4/27/2026  
DBMS DB2

| COLUMN NAME                                                                                           | DATATYPE      | NOT NULL | COMMENTS |
|-------------------------------------------------------------------------------------------------------|---------------|----------|----------|
|  contextID           | VARCHAR(25)   | True     |          |
|  categoryID          | VARCHAR(25)   | True     |          |
|  name              | VARCHAR(50)   | False    |          |
|  presentationName  | VARCHAR(75)   | False    |          |
|  label             | VARCHAR(10)   | False    |          |
|  briefDescription  | VARCHAR(400)  | False    |          |
|  mainDescription   | VARCHAR(7700) | False    |          |
|  keyConsiderations | VARCHAR(1100) | False    |          |

| PRIMARY KEY NAME                                                                                | COLUMNS               | COMMENTS |
|-------------------------------------------------------------------------------------------------|-----------------------|----------|
|  PK_Category | contextID, categoryID |          |

## CategoryContents

Database table in package 'Interim Data Model'

CategoryContents  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 5/20/2026. Last modified 5/20/2026

| COLUMN NAME                                                                                  | DATATYPE    | NOT NULL | COMMENTS |
|----------------------------------------------------------------------------------------------|-------------|----------|----------|
|  contextID  | VARCHAR(10) | True     |          |
|  categoryID | VARCHAR(10) | True     |          |
|  contentID  | VARCHAR(10) | True     |          |

| PRIMARY KEY NAME                                                                                      | COLUMNS                          | COMMENTS |
|-------------------------------------------------------------------------------------------------------|----------------------------------|----------|
|  PK_CategoryContents | contextID, categoryID, contentID |          |

| FOREIGN KEY NAME                                                                                               | COLUMNS               | REFERENCES                      |
|----------------------------------------------------------------------------------------------------------------|-----------------------|---------------------------------|
|  FK_CategoryContents_Category | contextID, categoryID | Category(contextID, categoryID) |

## Context

Database table in package 'Interim Data Model'

based off of configuration, represents a publication based on the specifications used to define how variants are resolved for that publication

Context  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/30/2026  
DBMS DB2

| COLUMN NAME                                                                                   | DATATYPE    | NOT NULL | COMMENTS |
|-----------------------------------------------------------------------------------------------|-------------|----------|----------|
|  contextID | VARCHAR(25) | True     |          |
|  processID | VARCHAR(25) | False    |          |

| PRIMARY KEY NAME                                                                               | COLUMNS   | COMMENTS |
|------------------------------------------------------------------------------------------------|-----------|----------|
|  PK_Context | contextID |          |

| FOREIGN KEY NAME                                                                                                         | COLUMNS              | REFERENCES                                      |
|--------------------------------------------------------------------------------------------------------------------------|----------------------|-------------------------------------------------|
|  FK_Context_DeliveryProcessDefinition | processID, contextID | DeliveryProcessDefinition(processID, contextID) |

## DeliverableDefinition

Database table in package 'Interim Data Model'

included under **work-product** in simple XML  
details from **Deliverable** XML files

DeliverableDefinition  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/30/2026  
DBMS DB2

| COLUMN NAME                                                                                             | DATATYPE           | NOT NULL | COMMENTS                                                                                             |
|---------------------------------------------------------------------------------------------------------|--------------------|----------|------------------------------------------------------------------------------------------------------|
|  contextID             | VARCHAR(10)        | True     | based on published configuration                                                                     |
|  workProductID         | VARCHAR(25)        | True     | simple XML: <work-product> id<br>Deliverable XML attribute name="guid"                               |
|  name                  | VARCHAR(50)        | True     | not included in simple XML<br>Deliverable XML attribute name="name"                                  |
|  presentationName      | VARCHAR(75)        | True     | simple XML: <work-product> name<br>Deliverable XML attribute<br>name="presentationName"              |
|  briefDescription    | VARCHAR(600)       | False    | simple XML: <work-product> brief-description<br>Deliverable XML attribute<br>name="briefDescription" |
|  clientValue         | VARCHAR(1000)      | False    | not included in simple XML<br>Deliverable XML attribute name="prupose"                               |
|  internalDescription | VARCHAR(13300<br>) | False    | not included in simple XML<br>Deliverable XML attribute<br>name="mainDescription"                    |
|  externalDescription | VARCHAR(2400)      | False    | not included in simple XML<br>Deliverable XML attribute<br>name="externalDescription"                |
|  packagingGuidance   | VARCHAR(1300)      | False    | not included in simple XML<br>Deliverable XML attribute<br>name="packagingGuidance"                  |
|  changeDate          | DATE               | False    | not included in simple XML<br>Deliverable XML attribute name="changeDate"                            |

| COLUMN NAME                                                                                           | DATATYPE    | NOT NULL | COMMENTS                                                                         |
|-------------------------------------------------------------------------------------------------------|-------------|----------|----------------------------------------------------------------------------------|
|  changeDescription   | VARCHAR(10) | False    | not included in simple XML<br>Deliverable XML attribute name="changeDescription" |
|  originating_process | VARCHAR(10) | False    | not included in simple XML<br>Deliverable XML attribute name="authors"           |

| PRIMARY KEY NAME                                                                                           | COLUMNS                     | COMMENTS |
|------------------------------------------------------------------------------------------------------------|-----------------------------|----------|
|  PK_DeliverableDefinition | workProductID,<br>contextID |          |

## DeliverableParts

Database table in package 'Interim Data Model'

DeliverableParts  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/16/2026  
DBMS DB2

| COLUMN NAME                                                                                       | DATATYPE    | NOT NULL | COMMENTS |
|---------------------------------------------------------------------------------------------------|-------------|----------|----------|
|  contextID     | VARCHAR(25) | True     |          |
|  deliverableID | VARCHAR(25) | True     |          |
|  workProductID | VARCHAR(25) | True     |          |

| PRIMARY KEY NAME                                                                                        | COLUMNS                                       | COMMENTS |
|---------------------------------------------------------------------------------------------------------|-----------------------------------------------|----------|
|  PK_DeliverableParts | contextID,<br>deliverableID,<br>workProductID |          |

| FOREIGN KEY NAME                                                                                                              | COLUMNS                     | REFERENCES                                          |
|-------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------------------------------|
|  FK_DeliverableParts_OutcomeDefinition     | workProductID,<br>contextID | OutcomeDefinition(workProductID<br>, contextID)     |
|  FK_DeliverableParts_WorkProductDefinition | workProductID,<br>contextID | WorkProductDefinition(workProdu<br>ctID, contextID) |
|  FK_DeliverableParts_DeliverableDefinition | deliverableID,<br>contextID | DeliverableDefinition(workProduct<br>ID, contextID) |

## DeliveryProcessDefinition

Database table in package 'Interim Data Model'

under **process-item** in simple XML file (additional attributes listed under **method**)  
details from **DeliveryProcess** XML file

DeliveryProcessDefinition  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/23/2026. Last modified 4/30/2026  
DBMS DB2

| COLUMN NAME                                                                                         | DATATYPE      | NOT NULL | COMMENTS                                                                                                                               |
|-----------------------------------------------------------------------------------------------------|---------------|----------|----------------------------------------------------------------------------------------------------------------------------------------|
|  contextID         | VARCHAR(25)   | True     | based on published configuration                                                                                                       |
|  processID         | VARCHAR(25)   | True     | simple XML: <process-item> id<br>DeliveryProcess XML attribute name="guid"                                                             |
|  name              | VARCHAR(50)   | False    | not included in simple XML<br>DeliveryProcess XML attribute name="name"                                                                |
|  presentationName | VARCHAR(75)   | False    | simple XML: <process-item> name<br>DeliveryProcess XML attribute name="presentationName"                                               |
|  externalID      | VARCHAR(25)   | False    | simple XML: <method> external-id<br>DeliveryProcess XML attribute name="externalID"<br><br>used for maintaining ID across replacements |
|  clientIssue     | VARCHAR(10)   | False    | not included in simple XML<br>DeliveryProcess XML attribute name="purpose"                                                             |
|  mainDescription | VARCHAR(1400) | False    | simple XML: <method> description<br>DeliveryProcess XML attribute name="mainDescription"                                               |
|  usageNotes      | VARCHAR(1000) | False    | not included in simple XML<br>DeliveryProcess XML attribute name="usageNotes"                                                          |
|  notice          | VARCHAR(10)   | False    | not included in simple XML<br>DeliveryProcess XML attribute name="keyConsiderations"                                                   |
|  keywords        | VARCHAR(200)  | False    | not included in simple XML<br>DeliveryProcess XML attribute name="projectCharacteristics"                                              |

| COLUMN NAME                                                                                            | DATATYPE    | NOT NULL | COMMENTS                                                                                                                       |
|--------------------------------------------------------------------------------------------------------|-------------|----------|--------------------------------------------------------------------------------------------------------------------------------|
|  sponsor              | VARCHAR(50) | False    | simple XML: <method> sponsor<br>DeliveryProcess XML attribute<br>name="projectMemberExpertise" (split out<br>before semicolon) |
|  steward              | VARCHAR(50) | False    | simple XML: <method> steward<br>DeliveryProcess XML attribute<br>name="projectMemberExpertise" (split out after<br>semicolon)  |
|  publish              | VARCHAR(10) | False    | simple XML: <method> publish<br>DeliveryProcess XML rte name="Publish"                                                         |
|  pubType              | VARCHAR(10) | False    | simple XML: <method> type<br>DeliveryProcess XML rte name="Type"                                                               |
|  subtype              | VARCHAR(10) | False    | simple XML: <method> management<br>DeliveryProcess XML rte name="Management"                                                   |
|  foundation           | VARCHAR(10) | False    | simple XML: <method> foundation<br>DeliveryProcess XML rte name="Foundation"                                                   |
|  mercuryServiceCode | VARCHAR(10) | False    | simple XML: <method> msc<br>DeliveryProcess XML rte name="Mercury<br>Service Code"                                             |
|  globalServiceCode  | VARCHAR(10) | False    | simple XML: <method> gsc<br>DeliveryProcess XML rte name="Global Service<br>Code"                                              |
|  activityDiagram    | VARCHAR(25) | False    | not included in simple XML<br>DeliveryProcess XML userDiagram="Activity"                                                       |

| PRIMARY KEY NAME                                                                                                 | COLUMNS              | COMMENTS |
|------------------------------------------------------------------------------------------------------------------|----------------------|----------|
|  PK_DeliveryProcessDefinition | processID, contextID |          |

## GettingStarted

Database table in package 'Interim Data Model'

not in simple XML

details from **udt** XML files where TypeName="Getting Started"

file name="udt.getting\_started\_278A8205.xml"

GettingStarted

Version 1.0 Phase 1.0 Proposed

fredrto created on 4/23/2026. Last modified 5/20/2026

| COLUMN NAME                                                                                        | DATATYPE            | NOT NULL | COMMENTS                                                                |
|----------------------------------------------------------------------------------------------------|---------------------|----------|-------------------------------------------------------------------------|
|  contextID        | VARCHAR(25)         | True     | based on published configuration                                        |
|  guidanceID       | VARCHAR(25)         | True     | not included in simple XML<br>UDT XML attribute name="guid"             |
|  name             | VARCHAR(50)         | False    | not included in simple XML<br>UDT XML attribute name="name"             |
|  presentationName | VARCHAR(50)         | False    | not included in simple XML<br>UDT XML attribute name="presentationName" |
|  background       | VARCHAR(18100)<br>) | False    | not included in simple XML<br>UDT XML attribute name="problem"          |
|  howToApply       | VARCHAR(24900)<br>) | False    | not included in simple XML<br>UDT XML attribute name="goals"            |
|  considerations | VARCHAR(3100)       | False    | not included in simple XML<br>UDT XML attribute name="background"       |
|  sizing         | VARCHAR(2000)       | False    | not included in simple XML<br>UDT XML attribute name="mainDescription"  |
|  staffing       | VARCHAR(3100)       | False    | not included in simple XML<br>UDT XML attribute name="application"      |
|  nextSteps      | VARCHAR(900)        | False    | not included in simple XML<br>UDT XML attribute name="levelsOfAdoption" |
|  purpose        | VARCHAR(650)        | False    | not included in simple XML<br>UDT XML attribute name="additionalInfo"   |

| PRIMARY KEY NAME                                                                                      | COLUMNS               | COMMENTS |
|-------------------------------------------------------------------------------------------------------|-----------------------|----------|
|  PK_GettingStarted | contextID, guidanceID |          |

## GuidanceDefinition

Database table in package 'Interim Data Model'

included under **guidance** in simple XML  
details from XML files based on type:

- **Checklist**
- **Concept**
- **Example**
- **Guideline**
- **ReusableAsset**
- **Roadmap**
- **SupportingMaterial**
- **Template**
- **TermDefinition**
- **ToolMentor** (*aka ProductGuide*)
- **udt** (Type="Alliance")
- **udt** (Type="Control")
- **udt** (Type="Delivery Toolkit")
- **udt** (Type="Metadata")
- **udt** (Type="Metric")
- **udt** (Type="Policy")
- **udt** (Type="Procedure")
- **udt** (Type="Product")
- **udt** (Type="Reference")
- **udt** (Type="Resource and Cost Model")
- **udt** (Type="Tool")

GuidanceDefinition

Version 1.0 Phase 1.0 Proposed

fredrto created on 4/16/2026. Last modified 5/20/2026

DBMS DB2

| COLUMN NAME                                                                                          | DATATYPE     | NOT NULL | COMMENTS                                                                                                  |
|------------------------------------------------------------------------------------------------------|--------------|----------|-----------------------------------------------------------------------------------------------------------|
|  contextID        | VARCHAR(25)  | True     | based on published configuration                                                                          |
|  guidanceID       | VARCHAR(25)  | True     | simple XML <guidance>: id<br>*type/UDT XML attribute name="guid"                                          |
|  type             | VARCHAR(10)  | False    | simple XML <guidance>: type<br>*type XML attribute name="Type"<br>OR<br>UDT XML attribute name="TypeName" |
|  name             | VARCHAR(50)  | True     | not included in simple XML<br>*type/UDT XML attribute name="name"                                         |
|  presentationName | VARCHAR(75)  | True     | simple XML <guidance>: name<br>*type/UDT XML attribute name="presentationName"                            |
|  externalID       | VARCHAR(25)  | False    | not included in simple XML<br>*type/UDT XML attribute name="externalID"                                   |
|  briefDescription | VARCHAR(500) | False    | simple XML <guidance>: brief-description<br>*type/UDT XML attribute name="briefDescription"               |
|  mainDescription  | LONG         | False    | not included in simple XML                                                                                |

| COLUMN NAME                                                                                            | DATATYPE      | NOT NULL | COMMENTS                                                                                                                                                                                         |
|--------------------------------------------------------------------------------------------------------|---------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                        | VARCHAR       |          | *type XML attribute name="mainDescription"<br>OR<br>UDT XML attribute name="problem"<br>(TypeName= Agent/BOT   , Product    Tool   <br>Control    Policy    Procedure    Metric   <br>Reference) |
|  sourceType           | VARCHAR(3)    | False    | simple XML <guidance>: source-type<br>*type/UDT XML attribute name="version" (split<br>our prior to =)                                                                                           |
|  sourcePath           | VARCHAR(10)   | False    | simple XML <guidance>: source-path<br>*type/UDT XML attribute name="version" (split<br>out after =)                                                                                              |
|  changeDate           | DATE          | False    | not included in simple XML<br>*type/UDT XML attribute name="changeDate"                                                                                                                          |
|  changeDescription    | VARCHAR(10)   | False    | not included in simple XML<br>*type/UDT XML attribute<br>name="changeDescription"                                                                                                                |
|  originatingProcess | VARCHAR(10)   | False    | not included in simple XML<br>*type/UDT XML attribute name="authors"                                                                                                                             |
|  exportFlag         | VARCHAR(10)   | False    | simple XML <guidance>: export-flag<br><i>derived from custom category assignment</i>                                                                                                             |
|  suppressed         | VARCHAR(10)   | False    | simple XML <guidance>: suppressed<br><i>derived from custom category assignment</i>                                                                                                              |
|  benefits           | VARCHAR(2000) | False    | not included in simple XML<br>UDT XML attribute name="background"<br>(TypeName=Agent/BOT)<br>OR<br>UDT XML attribute name="goals"<br>(TypeName=Product)                                          |
|  access             | VARCHAR(450)  | False    | not included in simple XML<br>UDT XML attribute name="background"<br>(TypeName=Product)                                                                                                          |
|  support            | VARCHAR(250)  | False    | not included in simple XML<br>UDT XML attribute name="mainDescription"<br>(TypeName=Product)                                                                                                     |
|  contacts           | VARCHAR(4500) | False    | not included in simple XML<br>UDT XML attribute name="application"<br>(TypeName=Product)                                                                                                         |

| COLUMN NAME                                                                                            | DATATYPE      | NOT NULL | COMMENTS                                                                                      |
|--------------------------------------------------------------------------------------------------------|---------------|----------|-----------------------------------------------------------------------------------------------|
|  productManager       | VARCHAR(350)  | False    | not included in simple XML<br>UDT XML attribute name="levelsOfAdoption"<br>(TypeName=Product) |
|  homePage             | VARCHAR(350)  | False    | not included in simple XML<br>UDT XML attribute name="additionalInfo"<br>(TypeName=Product)   |
|  purpose              | VARCHAR(600)  | False    | not included in simple XML<br>UDT XML attribute name="goals"<br>(TypeName=Control    Metric)  |
|  analysis             | VARCHAR(250)  | False    | not included in simple XML<br>UDT XML attribute name="background"<br>(TypeName=Metric)        |
|  frequency            | VARCHAR(100)  | False    | not included in simple XML<br>UDT XML attribute name="mainDescription"<br>(TypeName=Metric)   |
|  otherConsiderations | VARCHAR(1200) | False    | not included in simple XML<br>UDT XML attribute name="levelsOfAdoption"<br>(TypeName=Metric)  |

| PRIMARY KEY NAME                                                                                          | COLUMNS               | COMMENTS |
|-----------------------------------------------------------------------------------------------------------|-----------------------|----------|
|  PK_GuidanceDefinition | guidanceID, contextID |          |

## GuidanceToGuidance

Database table in package 'Interim Data Model'

GuidanceToGuidance  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/23/2026  
DBMS DB2

| COLUMN NAME                                                                                          | DATATYPE    | NOT NULL | COMMENTS |
|------------------------------------------------------------------------------------------------------|-------------|----------|----------|
|  contextID        | VARCHAR(25) | True     |          |
|  guidanceID       | VARCHAR(25) | True     |          |
|  relatedGuidance  | VARCHAR(25) | True     |          |
|  relationshipType | VARCHAR(10) | False    |          |

| PRIMARY KEY NAME                                                                                        | COLUMNS | COMMENTS |
|---------------------------------------------------------------------------------------------------------|---------|----------|
|  PK_GuidanceToGuidance |         |          |

| FOREIGN KEY NAME                                                                                                              | COLUMNS                       | REFERENCES                                   |
|-------------------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------------------------------------|
|  FK_GuidanceToGuidance_GuidanceDefinition    | guidanceID,<br>contextID      | GuidanceDefinition(guidanceID,<br>contextID) |
|  FK_GuidanceToGuidance_GuidanceDefinition_02 | relatedGuidance,<br>contextID | GuidanceDefinition(guidanceID,<br>contextID) |

## MilestoneDefinition

Database table in package 'Interim Data Model'

included under **process-item** in simple XML  
details from **Milestone** XML files

MilestoneDefinition  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/27/2026. Last modified 5/1/2026  
DBMS DB2

| COLUMN NAME                                                                                           | DATATYPE      | NOT NULL | COMMENTS                                                                                           |
|-------------------------------------------------------------------------------------------------------|---------------|----------|----------------------------------------------------------------------------------------------------|
|  contextID         | VARCHAR(25)   | True     | based on published configuration                                                                   |
|  milestoneID       | VARCHAR(25)   | True     | simple XML: <process-item> id<br>Milestone XML attribute name="guid"                               |
|  name              | VARCHAR(50)   | False    | not included in simple XML<br>Milestone XML attribute name="name"                                  |
|  presentationName  | VARCHAR(75)   | False    | simple XML: <process-item> name<br>Milestone XML attribute<br>name="presentationName"              |
|  briefDescription  | VARCHAR(300)  | False    | simple XML: <process-item> brief-description<br>Milestone XML attribute<br>name="briefDescription" |
|  mainDescription   | VARCHAR(1800) | False    | not included in simple XML<br>Milestone XML attribute<br>name="mainDescription"                    |
|  keyConsiderations | VARCHAR(10)   | False    | not included in simple XML<br>Milestone XML attribute                                              |

| COLUMN NAME | DATATYPE | NOT NULL | COMMENTS                 |
|-------------|----------|----------|--------------------------|
|             |          |          | name="keyConsiderations" |

| PRIMARY KEY NAME                                                                                         | COLUMNS                   | COMMENTS |
|----------------------------------------------------------------------------------------------------------|---------------------------|----------|
|  PK_MilestoneDefinition | milestoneID,<br>contextID |          |

## OutcomeDefinition

Database table in package 'Interim Data Model'

included under **work-product** in simple XML  
details from **Outcome** XML files

OutcomeDefinition  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/30/2026  
DBMS DB2

| COLUMN NAME                                                                                           | DATATYPE      | NOT NULL | COMMENTS                                                                                         |
|-------------------------------------------------------------------------------------------------------|---------------|----------|--------------------------------------------------------------------------------------------------|
|  contextID           | VARCHAR(25)   | True     | based on published configuration                                                                 |
|  workProductID     | VARCHAR(25)   | True     | simple XML: <work-product> id<br>Outcome XML attribute name="guid"                               |
|  name              | VARCHAR(50)   | False    | not included in simple XML<br>outcome XML attribute name="name"                                  |
|  presentationName  | VARCHAR(76)   | False    | simple XML: <work-product> name<br>Outcome XML attribute<br>name="presentationName"              |
|  briefDescription  | VARCHAR(350)  | False    | simple XML: <work-product> brief-description<br>Outcome XML attribute<br>name="briefDescription" |
|  purpose           | VARCHAR(400)  | False    | not included in simple XML<br>Outcome XML attribute name="purpose"                               |
|  mainDescription   | VARCHAR(3700) | False    | not included in simple XML<br>Outcome XML attribute<br>name="mainDescription"                    |
|  keyConsiderations | VARCHAR(1000) | False    | not included in simple XML<br>Outcome XML attribute<br>name="keyConsiderations"                  |
|  impactOfNotHaving | VARCHAR(250)  | False    | not included in simple XML                                                                       |

| COLUMN NAME                                                                                            | DATATYPE     | NOT NULL | COMMENTS                                                                        |
|--------------------------------------------------------------------------------------------------------|--------------|----------|---------------------------------------------------------------------------------|
|                                                                                                        |              |          | Outcome XML attribute name="impactOfNotHaving"                                  |
|  reasonsForNotNeeding | VARCHAR(150) | False    | not included in simple XML<br>Outcome XML attribute name="reasonsForNotNeeding" |
|  changeDate           | DATE         | False    | not included in simple XML<br>Outcome XML attribute name="changeDate"           |
|  changeDescription    | VARCHAR(10)  | False    | not included in simple XML<br>Outcome XML attribute name="changeDescription"    |
|  originatingProcess   | VARCHAR(10)  | False    | not included in simple XML<br>Outcome XML attribute name="authors"              |

| PRIMARY KEY NAME                                                                                       | COLUMNS                     | COMMENTS |
|--------------------------------------------------------------------------------------------------------|-----------------------------|----------|
|  PK_OutcomeDefinition | workProductID,<br>contextID |          |

## PlanAttachments

Database table in package 'Interim Data Model'

included under **guidance** in simple XML (also listed under **method**)  
details from **udt** XML files where TypeName="Project Plan"

PlanAttachments  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/23/2026. Last modified 5/20/2026  
DBMS DB2

| COLUMN NAME                                                                                     | DATATYPE    | NOT NULL | COMMENTS                                                            |
|-------------------------------------------------------------------------------------------------|-------------|----------|---------------------------------------------------------------------|
|  contextID   | VARCHAR(25) | False    | based on published configuration                                    |
|  guidanceID  | VARCHAR(25) | False    | simple XML <guidance>: id<br>UDT XML attribute name="guid"          |
|  excelPlan   | VARCHAR(10) | False    | simple XML <method>: plan-xlsx<br>UDT XML rte name="Attached Files" |
|  projectPlan | VARCHAR(10) | False    | simple XML <method>: plan-mpp<br>UDT XML rte name="Attached Files"  |

| FOREIGN KEY NAME | COLUMNS | REFERENCES |
|------------------|---------|------------|
|------------------|---------|------------|

|                                                                                                                  |                          |                                       |
|------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------------------------|
|  FK_PlanAttachments_ProjectPlan | contextID,<br>guidanceID | ProjectPlan(contextID,<br>guidanceID) |
|------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------------------------|

## Predecessor

Database table in package 'Interim Data Model'

under **process-item** in simple XML file

Predecessor  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/28/2026. Last modified 4/30/2026  
DBMS DB2

| COLUMN NAME                                                                                        | DATATYPE    | NOT NULL | COMMENTS |
|----------------------------------------------------------------------------------------------------|-------------|----------|----------|
|  contextID        | VARCHAR(25) | True     |          |
|  WBSID            | VARCHAR(25) | True     |          |
|  dependentOn     | VARCHAR(25) | True     |          |
|  deoendencyType | VARCHAR(2)  | False    |          |

| PRIMARY KEY NAME                                                                                   | COLUMNS                          | COMMENTS |
|----------------------------------------------------------------------------------------------------|----------------------------------|----------|
|  PK_Predecessor | dependentOn, WBSID,<br>contextID |          |

| FOREIGN KEY NAME                                                                                                | COLUMNS                   | REFERENCES                                   |
|-----------------------------------------------------------------------------------------------------------------|---------------------------|----------------------------------------------|
|  FK_Predecessor_Milestone    |                           | MilestoneDefinition()                        |
|  FK_Predecessor_Activity     | WBSID,<br>contextID       | ActivityDefinition(activityID,<br>contextID) |
|  FK_Predecessor_TaskUsage_02 | dependentOn,<br>contextID | TaskUsage(descriptorID,<br>contextID)        |
|  FK_Predecessor_Milestone_02 |                           | MilestoneDefinition()                        |
|  FK_Predecessor_Activity_02  |                           | ActivityDefinition()                         |
|  FK_Predecessor_TaskUsage    |                           | TaskUsage()                                  |

## ProcessToGuidance

Database table in package 'Interim Data Model'

ProcessToGuidance  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/28/2026. Last modified 4/28/2026  
DBMS DB2

| COLUMN NAME                                                                                        | DATATYPE    | NOT NULL | COMMENTS |
|----------------------------------------------------------------------------------------------------|-------------|----------|----------|
|  processID        | VARCHAR(25) | False    |          |
|  contextID        | VARCHAR(25) | False    |          |
|  guidanceID       | VARCHAR(25) | False    |          |
|  relationshipType | VARCHAR(10) | False    |          |

| FOREIGN KEY NAME                                                                                                                   | COLUMNS                  | REFERENCES                                         |
|------------------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------------------------------------------|
|  FK_ProcessToGuidance_PursuitSupport            | contextID,<br>guidanceID | PursuitSupport(contextID,<br>guidanceID)           |
|  FK_ProcessToGuidance_ProjectPlan               | contextID,<br>guidanceID | ProjectPlan(contextID,<br>guidanceID)              |
|  FK_ProcessToGuidance_GettingStarted            | contextID,<br>guidanceID | GettingStarted(contextID,<br>guidanceID)           |
|  FK_ProcessToGuidance_Activity                  |                          | ActivityDefinition()                               |
|  FK_ProcessToGuidance_DeliveryProcessDefinition | processID,<br>contextID  | DeliveryProcessDefinition(processID,<br>contextID) |
|  FK_ProcessToGuidance_GuidanceDefinition        | guidanceID,<br>contextID | GuidanceDefinition(guidanceID,<br>contextID)       |
|  FK_ProcessToGuidance_Milestone                 |                          | MilestoneDefinition()                              |

## ProjectPlan

Database table in package 'Interim Data Model'

included under **guidance** in simple XML (also listed under **method**)  
details from **udt** XML files where TypeName="Project Plan"

file name="udt.project\_plan\_DE44BE1A.xml"

ProjectPlan  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/23/2026. Last modified 5/20/2026  
DBMS DB2

| COLUMN NAME                                                                                                 | DATATYPE      | NOT NULL | COMMENTS                                                                 |
|-------------------------------------------------------------------------------------------------------------|---------------|----------|--------------------------------------------------------------------------|
|  contextID                 | VARCHAR(25)   | True     | based on published configuration                                         |
|  guidanceID                | VARCHAR(25)   | True     | simple XML <guidance>: id<br>UDT XML attribute name="guid"               |
|  name                      | VARCHAR(50)   | False    | not included in simple XML<br>UDT XML attribute name="name"              |
|  presentationName          | VARCHAR(50)   | False    | simple XML <guidance>: name<br>UDT XML attribute name="presentationName" |
|  mainDescription           | VARCHAR(1500) | False    | not included in simple XML<br>UDT XML attribute name="problem"           |
|  howToUse                | VARCHAR(2000) | False    | not included in simple XML<br>UDT XML attribute name="goals"             |
|  technicalConsiderations | VARCHAR(600)  | False    | not included in simple XML<br>UDT XML attribute name="background"        |

| PRIMARY KEY NAME                                                                                   | COLUMNS               | COMMENTS |
|----------------------------------------------------------------------------------------------------|-----------------------|----------|
|  PK_ProjectPlan | contextID, guidanceID |          |

## PursuitSupport

Database table in package 'Interim Data Model'

not in simple XML  
details from **udt** XML files where TypeName="Pursuit Support"  
file name="udt.pursuit\_support\_71577FBA.xml"

PursuitSupport  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/23/2026. Last modified 5/20/2026  
DBMS DB2

| COLUMN NAME                                                                                   | DATATYPE    | NOT NULL | COMMENTS                         |
|-----------------------------------------------------------------------------------------------|-------------|----------|----------------------------------|
|  contextID | VARCHAR(25) | True     | based on published configuration |

| COLUMN NAME                                                                                        | DATATYPE            | NOT NULL | COMMENTS                                                                |
|----------------------------------------------------------------------------------------------------|---------------------|----------|-------------------------------------------------------------------------|
|  guidanceID       | VARCHAR(25)         | True     | not included in simple XML<br>UDT XML attribute name="guid"             |
|  name             | VARCHAR(50)         | False    | not included in simple XML<br>UDT XML attribute name="name"             |
|  presentationName | VARCHAR(50)         | False    | not included in simple XML<br>UDT XML attribute name="presentationName" |
|  solutionOverview | VARCHAR(4300)       | False    | not included in simple XML<br>UDT XML attribute name="problem"          |
|  elevatorPitch    | VARCHAR(8800)       | False    | not included in simple XML<br>UDT XML attribute name="goals"            |
|  valueProp        | VARCHAR(11200)<br>) | False    | not included in simple XML<br>UDT XML attribute name="background"       |
|  positioning    | VARCHAR(5800)       | False    | not included in simple XML<br>UDT XML attribute name="mainDescription"  |
|  scoping        | VARCHAR(10700)<br>) | False    | not included in simple XML<br>UDT XML attribute name="application"      |
|  estimating     | VARCHAR(800)        | False    | not included in simple XML<br>UDT XML attribute name="levelsOfAdoption" |
|  additionalInfo | VARCHAR(3200)       | False    | not included in simple XML<br>UDT XML attribute name="additionalInfo"   |

| PRIMARY KEY NAME                                                                                      | COLUMNS               | COMMENTS |
|-------------------------------------------------------------------------------------------------------|-----------------------|----------|
|  PK_PursuitSupport | contextID, guidanceID |          |

## ReleaseInformation

Database table in package 'Interim Data Model'

not included in simple XML  
details from **udt** XML files where TypeName="Release Information"

ReleaseInformation  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/23/2026. Last modified 4/30/2026

| COLUMN NAME                                                                                            | DATATYPE            | NOT NULL | COMMENTS                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------|---------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  contextID            | VARCHAR(25)         | True     | based on published configuration                                                                                                                               |
|  guidanceID           | VARCHAR(25)         | True     | not included in simple XML<br>UDT XML attribute name="guid"                                                                                                    |
|  name                 | VARCHAR(50)         | False    | not included in simple XML<br>UDT XML attribute name="name"                                                                                                    |
|  presentationName     | VARCHAR(75)         | False    | not included in simple XML<br>UDT XML attribute name="presentationName"                                                                                        |
|  whatsNew             | VARCHAR(3500)       | False    | not included in simple XML<br>UDT XML attribute name="problem"                                                                                                 |
|  revisionHistory      | VARCHAR(16700)<br>) | False    | not included in simple XML<br>UDT XML attribute name="goals"                                                                                                   |
|  acknowledgements    | VARCHAR(2100)       | False    | not included in simple XML<br>UDT XML attribute name="background"                                                                                              |
|  internalHistory    | VARCHAR(8300)       | False    | not included in simple XML<br>UDT XML attribute name="mainDescription"                                                                                         |
|  designerCommentary | VARCHAR(300)        | False    | not included in simple XML<br>UDT XML attribute name="application"                                                                                             |
|  lastReviewed       | DATE                | False    | not included in simple XML<br>UDT XML attribute name="levelsOfAdoption"                                                                                        |
|  processID          | VARCHAR(25)         | False    | not included in simple XML<br>UDT XML referenceList<br>ExtendedReference=DeliveryProcess<br>OR<br>UDT XML referenceList<br>ExtendedReference=CaapbilityPattern |

| PRIMARY KEY NAME                                                                                          | COLUMNS               | COMMENTS |
|-----------------------------------------------------------------------------------------------------------|-----------------------|----------|
|  PK_ReleaseInformation | contextID, guidanceID |          |

| FOREIGN KEY NAME                                                                                                                    | COLUMNS    | REFERENCES                         |
|-------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------------------|
|  FK_ReleaseInformation_DeliveryProcessDefinition | processID, | DeliveryProcessDefinition(processI |

|     |           |               |
|-----|-----------|---------------|
| _02 | contextID | D, contextID) |
|-----|-----------|---------------|

## RoleDefinition

Database table in package 'Interim Data Model'

included under **method-roles** in simple XML  
 details from **Role** XML files  
 approx 199 unique roles

RoleDefinition  
 Version 1.0 Phase 1.0 Proposed  
 fredrto created on 4/16/2026. Last modified 4/30/2026  
 DBMS DB2

| COLUMN NAME                                                                                           | DATATYPE      | NOT NULL | COMMENTS                                                                                  |
|-------------------------------------------------------------------------------------------------------|---------------|----------|-------------------------------------------------------------------------------------------|
|  contextID           | VARCHAR(10)   | True     | based on published configuration                                                          |
|  roleID              | VARCHAR(25)   | True     | simple XML: <method-role> id<br>Role XML attribute name="guid"                            |
|  name              | VARCHAR(50)   | True     | not included in simple XML<br>Role XML attribute name="name"                              |
|  presentationName  | VARCHAR(75)   | True     | simple XML: <method-role> name<br>Role XML attribute name="presentationName"              |
|  briefDescription  | VARCHAR(350)  | False    | simple XML: <method-role> brief-description<br>Role XML attribute name="briefDescription" |
|  responsibilities  | VARCHAR(3200) | False    | not included in simple XML<br>Role XML attribute name="mainDescription"                   |
|  keyConsiderations | VARCHAR(1500) | False    | not included in simple XML<br>Role XML attribute name="name"                              |
|  skills            | VARCHAR(3800) | False    | not included in simple XML<br>Role XML attribute name="name"                              |
|  staffing          | VARCHAR(3200) | False    | not included in simple XML<br>Role XML attribute<br>name="assignmentApproaches"           |
|  synonyms          | VARCHAR(50)   | False    | not included in simple XML<br>Role XML attribute name="synonyms"                          |
|  changeDate        | DATE          | False    | not included in simple XML                                                                |

| COLUMN NAME                                                                                          | DATATYPE    | NOT NULL | COMMENTS                                                                                                                                                      |
|------------------------------------------------------------------------------------------------------|-------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                      |             |          | Role XML attribute name="changeDate"                                                                                                                          |
|  changeDescription  | VARCHAR(10) | False    | not included in simple XML<br>Role XML attribute name="changeDescription"                                                                                     |
|  originatingProcess | VARCHAR(10) | False    | not included in simple XML<br>Role XML attribute name="aauthors"                                                                                              |
|  variabilityBasedOn | VARCHAR(25) | False    | not included in simple XML<br>Role XML <attribute<br>name="variabilityType">extends</attribute><br><reference name="variabilityBasedOnElement"<br><Element Id |

| PRIMARY KEY NAME                                                                                    | COLUMNS           | COMMENTS |
|-----------------------------------------------------------------------------------------------------|-------------------|----------|
|  PK_RoleDefinition | roleID, contextID |          |

## RoleToGuidance

Database table in package 'Interim Data Model'

RoleToGuidance  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/16/2026  
DBMS DB2

| COLUMN NAME                                                                                    | DATATYPE    | NOT NULL | COMMENTS |
|------------------------------------------------------------------------------------------------|-------------|----------|----------|
|  ContextID  | VARCHAR(25) | True     |          |
|  RoleID     | VARCHAR(25) | True     |          |
|  GuidanceID | VARCHAR(25) | True     |          |

| PRIMARY KEY NAME                                                                                      | COLUMNS                       | COMMENTS |
|-------------------------------------------------------------------------------------------------------|-------------------------------|----------|
|  PK_RoleToGuidance | ContextID, RoleID, GuidanceID |          |

| FOREIGN KEY NAME                                                                                                         | COLUMNS           | REFERENCES                        |
|--------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------------------|
|  FK_RoleToGuidance_RoleDefinition     | RoleID, ContextID | RoleDefinition(roleID, contextID) |
|  FK_RoleToGuidance_GuidanceDefinition | GuidanceID,       | GuidanceDefinition(guidanceID,    |

|  |           |            |
|--|-----------|------------|
|  | ContextID | contextID) |
|--|-----------|------------|

## StepDefinition

Database table in package 'Interim Data Model'

not included in simple XML  
part of **Task** XML files  
approx 6241 unique steps

StepDefinition  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/21/2026. Last modified 4/30/2026  
DBMS DB2

| COLUMN NAME                                                                                        | DATATYPE            | NOT NULL | COMMENTS    |
|----------------------------------------------------------------------------------------------------|---------------------|----------|-------------|
|  stepID           | VARCHAR(25)         | True     | legacy GUID |
|  stepName         | VARCHAR(150)        | False    |             |
|  stepDescription | VARCHAR(23000)<br>) | False    |             |

| PRIMARY KEY NAME                                                                                      | COLUMNS | COMMENTS |
|-------------------------------------------------------------------------------------------------------|---------|----------|
|  PK_StepDefinition | stepID  |          |

## TaskDefinition

Database table in package 'Interim Data Model'

included under **tasks** in simple XML  
details from **Task** XML files  
approx 6383 unique tasks

TaskDefinition  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/30/2026  
DBMS DB2

| COLUMN NAME                                                                                   | DATATYPE    | NOT NULL | COMMENTS                                                               |
|-----------------------------------------------------------------------------------------------|-------------|----------|------------------------------------------------------------------------|
|  contextID | VARCHAR(25) | True     | based on published configuration                                       |
|  taskID    | VARCHAR(25) | True     | legacy GUID<br>simple XML: <task> id<br>Task XML attribute name="guid" |
|                                                                                               |             |          |                                                                        |

| COLUMN NAME                                                                                                | DATATYPE            | NOT NULL | COMMENTS                                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------|---------------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  name                     | VARCHAR(100)        | True     | not included in simple XML<br>Task XML attribute name="name"                                                                                                |
|  presentationName         | VARCHAR(100)        | True     | simple XML: <task> name<br>Task XML attribute name="presentationName"                                                                                       |
|  briefDescription         | VARCHAR(350)        | False    | simple XML: <task> brief-description<br>Task XML attribute name="briefDescription"                                                                          |
|  objectives               | VARCHAR(2100)       | False    | not included in simple XML<br>Task XML attribute name="purpose"                                                                                             |
|  instructions             | VARCHAR(17200)<br>) | False    | not included in simple XML<br>Task XML attribute name="mainDescription"                                                                                     |
|  keyConsiderations        | VARCHAR(8100)       | False    | not included in simple XML<br>Task XML attribute name="keyConsiderations"                                                                                   |
|  estimatingConsiderations | VARCHAR(10)         | False    | not included in simple XML<br>Task XML rte name="Estimating Considerations"                                                                                 |
|  defaultDuration        | VARCHAR(10)         | False    | not included in simple XML<br>Task XML rte name="Default Duration (Hours)"                                                                                  |
|  changeDate             | DATE                | False    | not included in simple XML<br>Task XML attribute name="changeDate"                                                                                          |
|  changeDescription      | VARCHAR(10)         | False    | not included in simple XML<br>Task XML attribute name="changeDescription"                                                                                   |
|  originatingProcess     | VARCHAR(10)         | False    | not included in simple XML<br>Task XML attribute name="authors"                                                                                             |
|  variabilityBasedOn     | VARCHAR(25)         | False    | not included in simple XML<br>Task XML <attribute name="variabilityType">extends</attribute><br><reference name="variabilityBasedOnElement"><br><Element Id |

| PRIMARY KEY NAME                                                                                      | COLUMNS           | COMMENTS |
|-------------------------------------------------------------------------------------------------------|-------------------|----------|
|  PK_TaskDefinition | taskID, contextID |          |

## TaskToGuidance

Database table in package 'Interim Data Model'

TaskToGuidance  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/16/2026  
DBMS DB2

| COLUMN NAME                                                                                  | DATATYPE    | NOT NULL | COMMENTS |
|----------------------------------------------------------------------------------------------|-------------|----------|----------|
|  contextID  | VARCHAR(25) | True     |          |
|  taskID     | VARCHAR(25) | True     |          |
|  guidanceID | VARCHAR(25) | True     |          |

| PRIMARY KEY NAME                                                                                    | COLUMNS                       | COMMENTS |
|-----------------------------------------------------------------------------------------------------|-------------------------------|----------|
|  PK_TaskToGuidance | contextID, taskID, guidanceID |          |

| FOREIGN KEY NAME                                                                                                         | COLUMNS               | REFERENCES                                |
|--------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------------------|
|  FK_TaskToGuidance_GuidanceDefinition | guidanceID, contextID | GuidanceDefinition(guidanceID, contextID) |
|  FK_TaskToGuidance_TaskDefinition     | taskID, contextID     | TaskDefinition(taskID, contextID)         |

## TaskToRole

Database table in package 'Interim Data Model'

TaskToRole  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/16/2026  
DBMS DB2

| COLUMN NAME                                                                                          | DATATYPE    | NOT NULL | COMMENTS              |
|------------------------------------------------------------------------------------------------------|-------------|----------|-----------------------|
|  contextID        | VARCHAR(25) | True     |                       |
|  taskID           | VARCHAR(25) | True     |                       |
|  roleID           | VARCHAR(25) | True     |                       |
|  relationshipType | VARCHAR(10) | True     | Primary or Additional |

| PRIMARY KEY NAME                                                                                | COLUMNS                                           | COMMENTS |
|-------------------------------------------------------------------------------------------------|---------------------------------------------------|----------|
|  PK_TaskToRole | contextID, taskID,<br>roleID,<br>relationshipType |          |

| FOREIGN KEY NAME                                                                                               | COLUMNS              | REFERENCES                        |
|----------------------------------------------------------------------------------------------------------------|----------------------|-----------------------------------|
|  FK_TaskToRole_TaskDefinition | taskID,<br>contextID | TaskDefinition(taskID, contextID) |
|  FK_TaskToRole_RoleDefinition | roleID,<br>contextID | RoleDefinition(roleID, contextID) |

## TaskToStep

Database table in package 'Interim Data Model'

TaskToStep  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/21/2026. Last modified 4/21/2026  
DBMS DB2

| COLUMN NAME                                                                                   | DATATYPE    | NOT NULL | COMMENTS |
|-----------------------------------------------------------------------------------------------|-------------|----------|----------|
|  contextID | VARCHAR(25) | False    |          |
|  taskID    | VARCHAR(25) | False    |          |
|  stepID    | VARCHAR(25) | False    |          |
|  order     | INTEGER     | False    |          |

| FOREIGN KEY NAME                                                                                                 | COLUMNS              | REFERENCES                        |
|------------------------------------------------------------------------------------------------------------------|----------------------|-----------------------------------|
|  FK_TaskToStep_StepDefinition | stepID               | StepDefinition(stepID)            |
|  FK_TaskToStep_TaskDefinition | taskID,<br>contextID | TaskDefinition(taskID, contextID) |

## TaskToWorkProduct

Database table in package 'Interim Data Model'

TaskToWorkProduct  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/16/2026

| COLUMN NAME                                                                                        | DATATYPE    | NOT NULL | COMMENTS        |
|----------------------------------------------------------------------------------------------------|-------------|----------|-----------------|
|  contextID        | VARCHAR(25) | True     |                 |
|  taskID           | VARCHAR(25) | True     |                 |
|  workProductID    | VARCHAR(25) | True     |                 |
|  relationshipType | VARCHAR(10) | True     | Input or Output |

| PRIMARY KEY NAME                                                                                       | COLUMNS                                            | COMMENTS |
|--------------------------------------------------------------------------------------------------------|----------------------------------------------------|----------|
|  PK_TaskToWorkProduct | contextID, taskID, workProductID, relationshipType |          |

| FOREIGN KEY NAME                                                                                                               | COLUMNS                  | REFERENCES                                      |
|--------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------------------------------------------|
|  FK_TaskToWorkProduct_DeliverableDefinition   | workProductID, contextID | DeliverableDefinition(workProductID, contextID) |
|  FK_TaskToWorkProduct_OutcomeDefinition     | workProductID, contextID | OutcomeDefinition(workProductID, contextID)     |
|  FK_TaskToWorkProduct_TaskDefinition        | taskID, contextID        | TaskDefinition(taskID, contextID)               |
|  FK_TaskToWorkProduct_WorkProductDefinition | workProductID, contextID | WorkProductDefinition(workProductID, contextID) |

## TaskUsage

Database table in package 'Interim Data Model'

under **process-item** in simple XML file as Task Descriptor

TaskUsage  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/28/2026. Last modified 4/30/2026  
DBMS DB2

| COLUMN NAME                                                                                      | DATATYPE    | NOT NULL | COMMENTS |
|--------------------------------------------------------------------------------------------------|-------------|----------|----------|
|  contextID    | VARCHAR(10) | True     |          |
|  descriptorID | VARCHAR(10) | True     |          |

| COLUMN NAME                                                                                     | DATATYPE    | NOT NULL | COMMENTS |
|-------------------------------------------------------------------------------------------------|-------------|----------|----------|
|  taskID        | VARCHAR(10) | False    |          |
|  predecessorID | VARCHAR(10) | False    |          |

| PRIMARY KEY NAME                                                                               | COLUMNS                    | COMMENTS |
|------------------------------------------------------------------------------------------------|----------------------------|----------|
|  PK_TaskUsage | descriptorID,<br>contextID |          |

| FOREIGN KEY NAME                                                                                              | COLUMNS              | REFERENCES                        |
|---------------------------------------------------------------------------------------------------------------|----------------------|-----------------------------------|
|  FK_TaskUsage_TaskDefinition | taskID,<br>contextID | TaskDefinition(taskID, contextID) |

## TeamDefinition

Database table in package 'Interim Data Model'

included under **teams** in simple XML  
details from **udt** XML files where TypeName="Team"

TeamDefinition  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/30/2026  
DBMS DB2

| COLUMN NAME                                                                                          | DATATYPE    | NOT NULL | COMMENTS                                                                                             |
|------------------------------------------------------------------------------------------------------|-------------|----------|------------------------------------------------------------------------------------------------------|
|  contextID        | VARCHAR(25) | True     | based on published configuration                                                                     |
|  teamID           | VARCHAR(25) | True     | legacy GUID<br>simple XML: <team> id<br>udt XML TypeName="Team" attribute<br>name="guid"             |
|  name             | VARCHAR(10) | True     | not included in simple XML<br>udt XML TypeName="Team" attribute<br>name="name"                       |
|  presentationname | VARCHAR(10) | True     | simple XML: <team> name<br>udt XML TypeName="Team" attribute<br>name="presentationName"              |
|  briefDescription | VARCHAR(10) | False    | simple XML: <team> brief-description<br>udt XML TypeName="Team" attribute<br>name="briefDescription" |
|  mainDescription  | VARCHAR(10) | False    | not included in simple XML                                                                           |

| COLUMN NAME                                                                                          | DATATYPE    | NOT NULL | COMMENTS                                                                                 |
|------------------------------------------------------------------------------------------------------|-------------|----------|------------------------------------------------------------------------------------------|
|                                                                                                      |             |          | udt XML TypeName="Team" attribute name="problem"                                         |
|  location           | VARCHAR(10) | False    | not included in simple XML<br>udt XML TypeName="Team" attribute name="goals"             |
|  changeDate         | DATE        | False    | not included in simple XML<br>udt XML TypeName="Team" attribute name="changeDate"        |
|  changeDescription  | VARCHAR(10) | False    | not included in simple XML<br>udt XML TypeName="Team" attribute name="changeDescription" |
|  originatingProcess | VARCHAR(10) | False    | not included in simple XML<br>udt XML TypeName="Team" attribute name="authors"           |

| PRIMARY KEY NAME                                                                                      | COLUMNS           | COMMENTS |
|-------------------------------------------------------------------------------------------------------|-------------------|----------|
|  PK_TeamDefinition | teamID, contextID |          |

## TeamToTask

Database table in package 'Interim Data Model'

TeamToTask  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/30/2026  
DBMS DB2

| COLUMN NAME                                                                                          | DATATYPE    | NOT NULL | COMMENTS                         |
|------------------------------------------------------------------------------------------------------|-------------|----------|----------------------------------|
|  contextID        | VARCHAR(25) | True     | based on published configuration |
|  teamID           | VARCHAR(25) | True     |                                  |
|  taskID           | VARCHAR(25) | True     |                                  |
|  relationshipType | VARCHAR(10) | False    | primary, assisting, or alternate |

| PRIMARY KEY NAME                                                                                  | COLUMNS                   | COMMENTS |
|---------------------------------------------------------------------------------------------------|---------------------------|----------|
|  PK_TeamToTask | contextID, teamID, taskID |          |

| FOREIGN KEY NAME                                                                                               | COLUMNS              | REFERENCES                           |
|----------------------------------------------------------------------------------------------------------------|----------------------|--------------------------------------|
|  FK_TeamToTask_TaskDefinition | taskID,<br>contextID | TaskDefinition(taskID, contextID)    |
|  FK_TeamToTask_TeamDefinition | teamID,<br>contextID | TeamDefinition(teamID,<br>contextID) |

## WBS

Database table in package 'Interim Data Model'

WBS  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/30/2026. Last modified 4/30/2026  
DBMS DB2

| COLUMN NAME                                                                                  | DATATYPE    | NOT NULL | COMMENTS                                         |
|----------------------------------------------------------------------------------------------|-------------|----------|--------------------------------------------------|
|  contextID  | VARCHAR(25) | True     |                                                  |
|  parentID  | VARCHAR(25) | True     |                                                  |
|  childID  | VARCHAR(25) | True     |                                                  |
|  sequence | INTEGER     | False    | for child ID<br>simple XML: <process-item> index |

| PRIMARY KEY NAME                                                                           | COLUMNS                         | COMMENTS |
|--------------------------------------------------------------------------------------------|---------------------------------|----------|
|  PK_WBS | contextID, parentID,<br>childID |          |

| FOREIGN KEY NAME                                                                                                     | COLUMNS                | REFERENCES                                         |
|----------------------------------------------------------------------------------------------------------------------|------------------------|----------------------------------------------------|
|  FK_WBS_Milestone                 | childID,<br>contextID  | MilestoneDefinition(milestoneID,<br>contextID)     |
|  FK_WBS_DeliveryProcessDefinition | parentID,<br>contextID | DeliveryProcessDefinition(processID,<br>contextID) |
|  FK_WBS_TaskUsage                 | childID,<br>contextID  | TaskUsage(descriptorID,<br>contextID)              |
|  FK_WBS_Activity_02               | childID,<br>contextID  | ActivityDefinition(activityID,<br>contextID)       |
|                                                                                                                      | parentID,              | ActivityDefinition(activityID,                     |

|                                                                                                   |           |            |
|---------------------------------------------------------------------------------------------------|-----------|------------|
|  FK_WBS_Activity | contextID | contextID) |
|---------------------------------------------------------------------------------------------------|-----------|------------|

## WorkProductDefinition

Database table in package 'Interim Data Model'

included under **work-product** in simple XML  
details from **Artifact** XML files

WorkProductDefinition  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/30/2026  
DBMS DB2

| COLUMN NAME                                                                                           | DATATYPE            | NOT NULL | COMMENTS                                                                                      |
|-------------------------------------------------------------------------------------------------------|---------------------|----------|-----------------------------------------------------------------------------------------------|
|  contextID           | VARCHAR(10)         | True     | based on published configuration                                                              |
|  workProductID       | VARCHAR(25)         | True     | legacy GUID<br>simple XML: <work-product> id<br>Artifact XML attribute name="guid"            |
|  name              | VARCHAR(50)         | True     | not included in simple XML<br>Artifact XML attribute name="name"                              |
|  presentationName  | VARCHAR(75)         | True     | simple XML <work-product> name<br>Artifact XML attribute<br>name="presentationName"           |
|  externalID        | VARCHAR(25)         | False    | not included in simple XML<br>Artifact XML attribute name="externalID"                        |
|  briefDescription  | VARCHAR(350)        | False    | simple XML <work-product> brief-description<br>Artifact XML attribute name="briefDescription" |
|  purpose           | VARCHAR(1600)       | False    | not included in simple XML<br>Artifact XML attribute name="purpose"                           |
|  mainDescription   | VARCHAR(17200)<br>) | False    | not included in simple XML<br>Artifact XML attribute name="mainDescription"                   |
|  keyConsiderations | VARCHAR(2200)       | False    | not included in simple XML<br>Artifact XML attribute<br>name="keyConsiderations"              |
|  briefOutline      | VARCHAR(9700)       | False    | not included in simple XML<br>Artifact XML attribute name="briefOutline"                      |
|                    |                     |          |                                                                                               |

| COLUMN NAME                                                                                                 | DATATYPE      | NOT NULL | COMMENTS                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------|---------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| selectedRepresentation                                                                                      | VARCHAR(1600) | False    | not included in simple XML<br>Artifact XML attribute name="representation"                                                                                       |
|  impactOfNotHaving         | VARCHAR(700)  | False    | not included in simple XML<br>Artifact XML attribute name="impactOfNothaving"                                                                                    |
|  reasonsForNotNeeding      | VARCHAR(400)  | False    | not included in simple XML<br>Artifact XML attribute name="reasonsForNotNeeding"                                                                                 |
|  representationOptions     | VARCHAR(3000) | False    | not included in simple XML<br>Artifact XML attribute name="representationOptions"                                                                                |
|  methodSpecificInformation | VARCHAR(10)   | False    | not included in simple XML<br>Artifact XML rte name="Method Specific Information"                                                                                |
|  synonym                   | VARCHAR(10)   | False    | not included in simple XML<br>Artifact XML rte name="Synonym"                                                                                                    |
|  changeDate              | DATE          | False    | not included in simple XML<br>Artifact XML attribute name="changeDate"                                                                                           |
|  changeDescription       | VARCHAR(10)   | False    | not included in simple XML<br>Artifact XML attribute name="changeDescription"                                                                                    |
|  originatingProcess      | VARCHAR(10)   | False    | not included in simple XML<br>Artifact XML attribute name="authors"                                                                                              |
|  variabilityBasedOn      | VARCHAR(25)   | False    | not included in simple XML<br>Artifact XML <attribute name="variabilityType">extends</attribute><br><reference name="variabilityBasedOnElement"><br><Element Id= |

| PRIMARY KEY NAME                                                                                             | COLUMNS                     | COMMENTS |
|--------------------------------------------------------------------------------------------------------------|-----------------------------|----------|
|  PK_WorkProductDefinition | workProductID,<br>contextID |          |

## WorkProductToGuidance

Database table in package 'Interim Data Model'

WorkProductToGuidance

Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/16/2026  
DBMS DB2

| COLUMN NAME                                                                                     | DATATYPE    | NOT NULL | COMMENTS |
|-------------------------------------------------------------------------------------------------|-------------|----------|----------|
|  contextID     | VARCHAR(25) | True     |          |
|  guidanceID    | VARCHAR(25) | True     |          |
|  workProductID | VARCHAR(25) | True     |          |

| PRIMARY KEY NAME                                                                                           | COLUMNS                                    | COMMENTS |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|----------|
|  PK_WorkProductToGuidance | contextID,<br>guidanceID,<br>workProductID |          |

| FOREIGN KEY NAME                                                                                                                   | COLUMNS                     | REFERENCES                                      |
|------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------------------------------------------|
|  FK_WorkProductToGuidance_DeliverableDefinition   | workProductID,<br>contextID | DeliverableDefinition(workProductID, contextID) |
|  FK_WorkProductToGuidance_OutcomeDefinition     | workProductID,<br>contextID | OutcomeDefinition(workProductID, contextID)     |
|  FK_WorkProductToGuidance_GuidanceDefinition    | guidanceID,<br>contextID    | GuidanceDefinition(guidanceID, contextID)       |
|  FK_WorkProductToGuidance_WorkProductDefinition | workProductID,<br>contextID | WorkProductDefinition(workProductID, contextID) |

## WorkProductToWorkProduct

Database table in package 'Interim Data Model'

WorkProductToWorkProduct  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/16/2026  
DBMS DB2

| COLUMN NAME                                                                                       | DATATYPE    | NOT NULL | COMMENTS |
|---------------------------------------------------------------------------------------------------|-------------|----------|----------|
|  contextID     | VARCHAR(25) | True     |          |
|  workProductID | VARCHAR(25) | True     |          |
|  subArtifactID | VARCHAR(25) | True     |          |

| PRIMARY KEY NAME                                                                                              | COLUMNS                                       | COMMENTS |
|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------|----------|
|  PK_WorkProductToWorkProduct | contextID,<br>workProductID,<br>subArtifactID |          |

| FOREIGN KEY NAME                                                                                                                       | COLUMNS                     | REFERENCES                                      |
|----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------------------------------------------|
|  FK_WorkProductToWorkProduct_WorkProductDefinition    | workProductID,<br>contextID | WorkProductDefinition(workProductID, contextID) |
|  FK_WorkProductToWorkProduct_WorkProductDefinition... | subArtifactID,<br>contextID | WorkProductDefinition(workProductID, contextID) |

## Workstream

Database table in package 'Interim Data Model'

Workstream  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/16/2026  
DBMS DB2

| COLUMN NAME                                                                                      | DATATYPE    | NOT NULL | COMMENTS |
|--------------------------------------------------------------------------------------------------|-------------|----------|----------|
|  WorkstreamID | VARCHAR(10) | True     |          |

| PRIMARY KEY NAME                                                                              | COLUMNS      | COMMENTS |
|-----------------------------------------------------------------------------------------------|--------------|----------|
|  PK_Table1 | WorkstreamID |          |

## WorkstreamDefinition

Database table in package 'Interim Data Model'

included under **workstreams** in simple XML  
details from **CapabilityPattern** XML files where prefix="workstream"

WorkstreamDefinition  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/30/2026  
DBMS DB2

| COLUMN NAME                                                                                      | DATATYPE    | NOT NULL | COMMENTS                                                                                          |
|--------------------------------------------------------------------------------------------------|-------------|----------|---------------------------------------------------------------------------------------------------|
|  contextID    | VARCHAR(25) | True     | based on published configuration                                                                  |
|  workstreamID | VARCHAR(25) | True     | simple XML: <workstream> id<br>capabilityPattern XML prefix="workstream"<br>attribute name="guid" |

| COLUMN NAME                                                                                        | DATATYPE    | NOT NULL | COMMENTS                                                                                                              |
|----------------------------------------------------------------------------------------------------|-------------|----------|-----------------------------------------------------------------------------------------------------------------------|
|  name             | VARCHAR(10) | True     | not included in simple XML<br>capabilityPattern XML prefix="workstream"<br>attribute name="name"                      |
|  presentationName | VARCHAR(10) | True     | simple XML: <workstream> name<br>capabilityPattern XML prefix="workstream"<br>attribute name="presentationName"       |
|  mainDescription  | VARCHAR(10) | False    | simple XML: <workstream> description<br>capabilityPattern XML prefix="workstream"<br>attribute name="mainDescription" |
|  interactions     | VARCHAR(10) | False    | not included in simple XML<br>capabilityPattern XML prefix="workstream"<br>attribute name="usageNotes"                |
|  staffing         | VARCHAR(10) | False    | not included in simple XML<br>capabilityPattern XML prefix="workstream"<br>attribute name="howToStaff"                |

| PRIMARY KEY NAME                                                                                            | COLUMNS                    | COMMENTS |
|-------------------------------------------------------------------------------------------------------------|----------------------------|----------|
|  PK_WorkstreamDefinition | workstreamID,<br>contextID |          |

## WorkstreamToTask

Database table in package 'Interim Data Model'

WorkstreamToTask  
Version 1.0 Phase 1.0 Proposed  
fredrto created on 4/16/2026. Last modified 4/16/2026  
DBMS DB2

| COLUMN NAME                                                                                      | DATATYPE    | NOT NULL | COMMENTS |
|--------------------------------------------------------------------------------------------------|-------------|----------|----------|
|  contextID    | VARCHAR(25) | True     |          |
|  workstreamID | VARCHAR(25) | True     |          |
|  taskID       | VARCHAR(25) | True     |          |

| PRIMARY KEY NAME                                                                                        | COLUMNS                            | COMMENTS |
|---------------------------------------------------------------------------------------------------------|------------------------------------|----------|
|  PK_WorkstreamToTask | contextID,<br>workstreamID, taskID |          |

| FOREIGN KEY NAME                                                                                                           | COLUMNS                    | REFERENCES                                        |
|----------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------------------------|
|  FK_WorkstreamToTask_WorkstreamDefinition | workstreamID,<br>contextID | WorkstreamDefinition(workstream<br>ID, contextID) |
|  FK_WorkstreamToTask_TaskDefinition       | taskID,<br>contextID       | TaskDefinition(taskID, contextID)                 |