Create Agentic Workflow in N8N framework:

Step1: Download docker desktop
https://docs.docker.com/desktop/setup/install/windows-install/

Step2: Open application, and pull N8N image

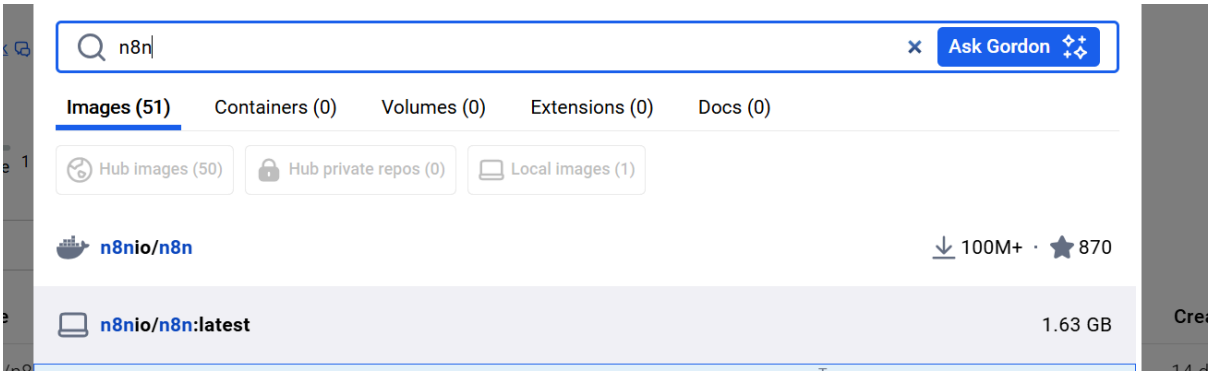

Step3: run below command to run the container or instance of image:

- docker run -it --rm -p 5678:5678 --name n8n n8nio/n8n

Step4: open in browser localhost:5678
Enter details and next:

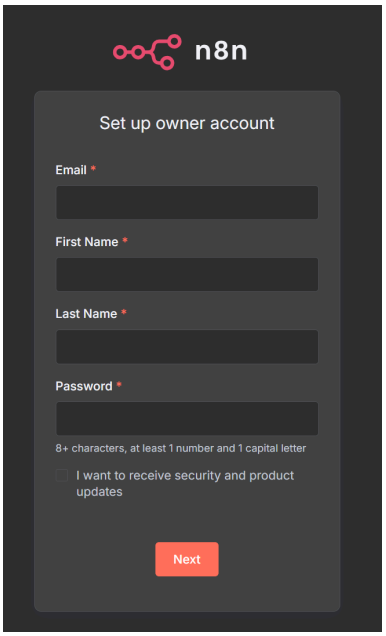

Step 5: Click create workflow and start the process

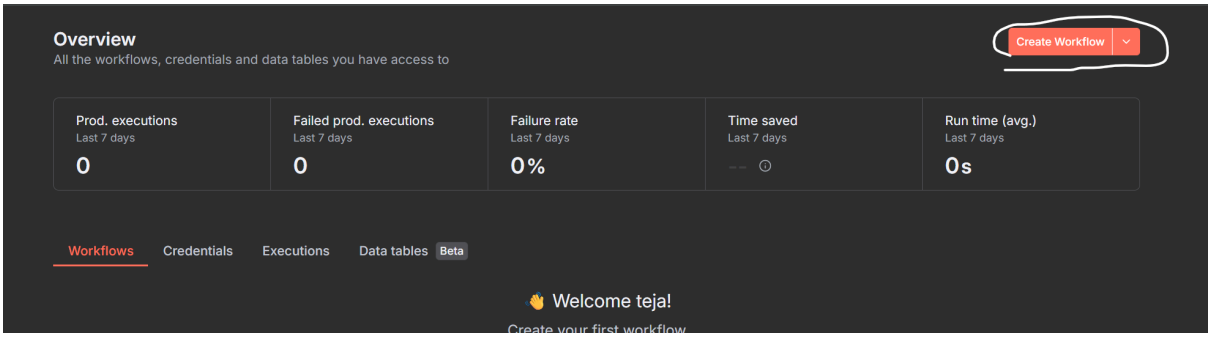

Step 6: or you can import the existing json/workflow

mail-read-workflow.j
son

Step7: Integration with Google API's

7.1: open website - console.cloud.google.com

Create and select project

API & Services > Enable APIs & Services > select your app > Enable

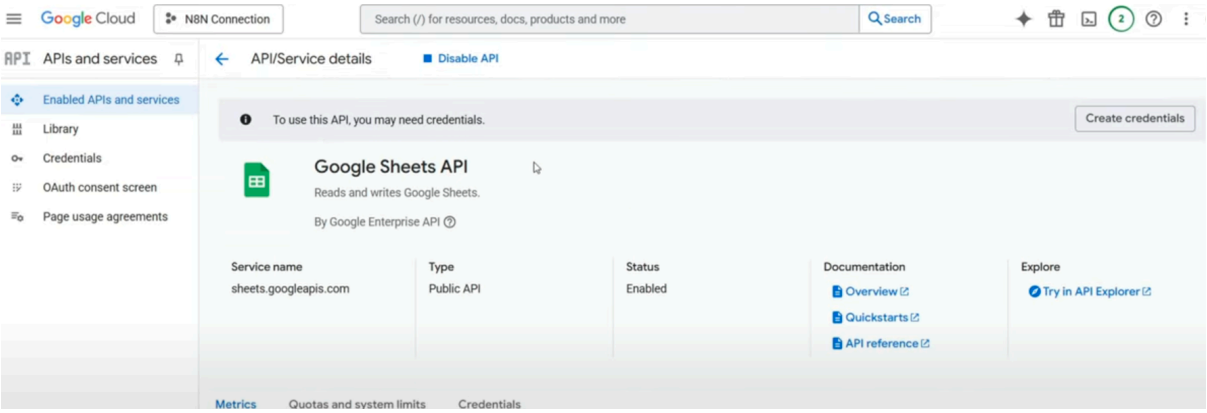

7.2: Now generate client and secret:

OAuth consent screen > Enter details and save > Audience (if gmail internal else external) > enter your email and continue > create

it takes to branding screen, just enter values and save

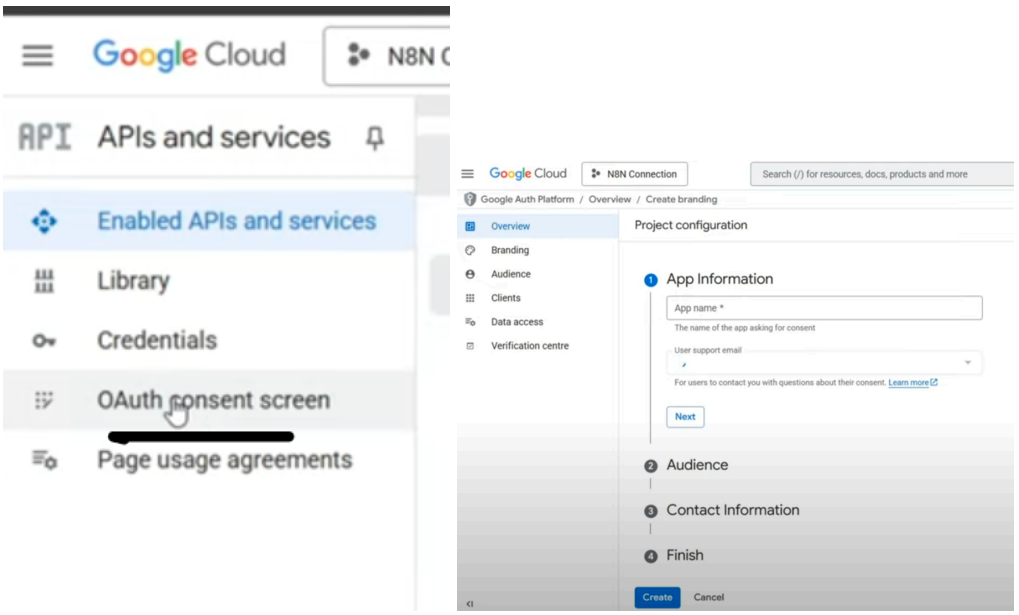

now go to your google sheet and click on create credentials:

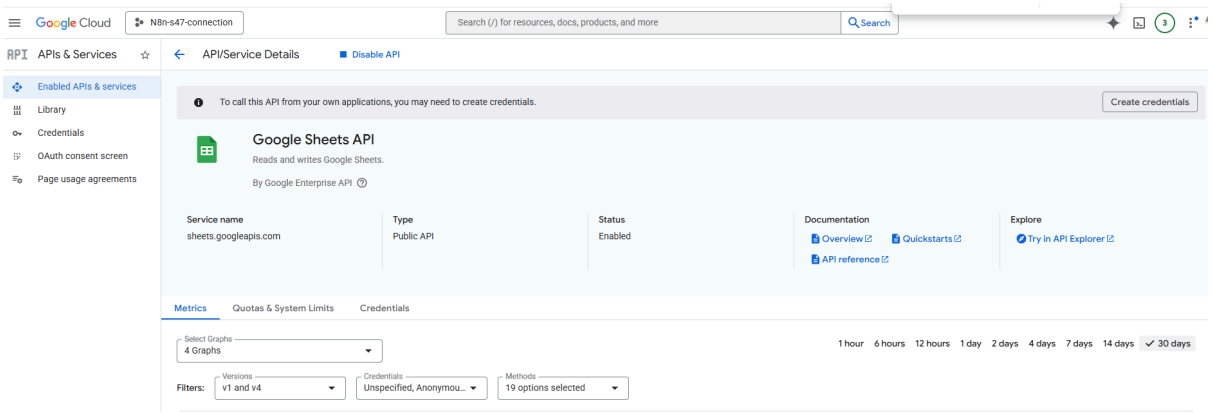

select user data

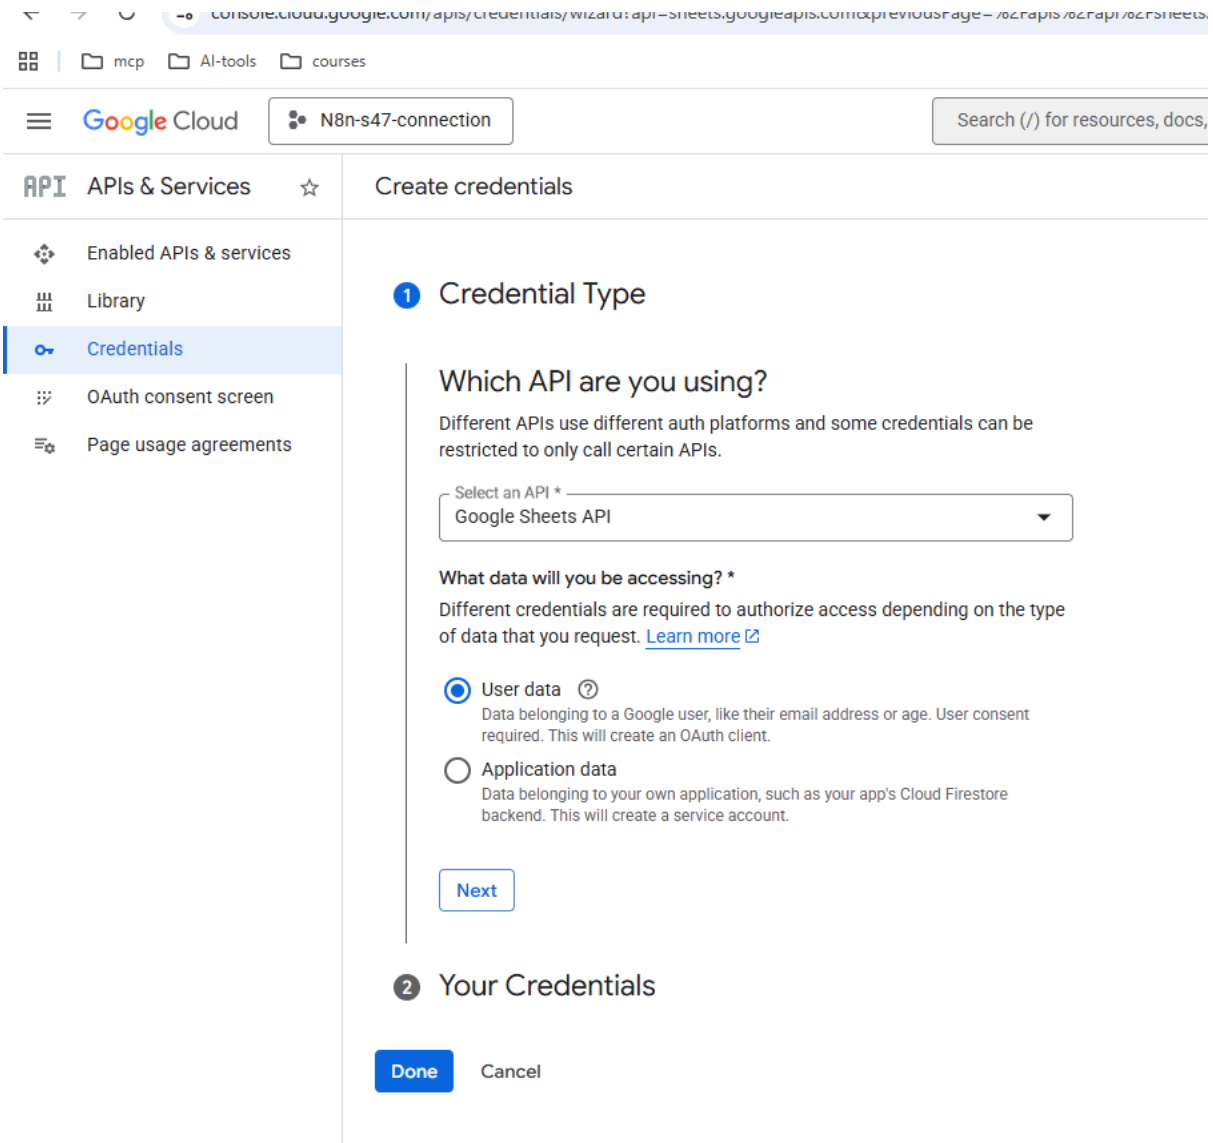

save and continue

application type = web application

to add redirect url's, select credential add for google sheet in n8n

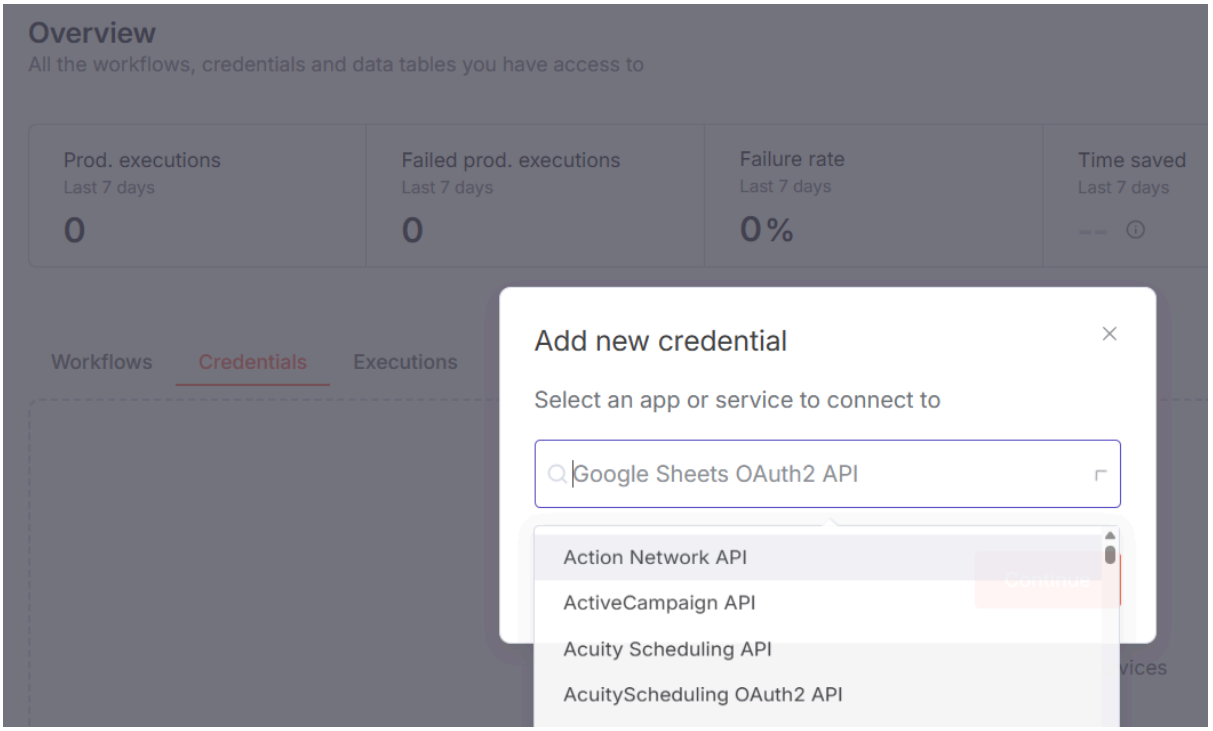

copy the redirect url and paste it in above form

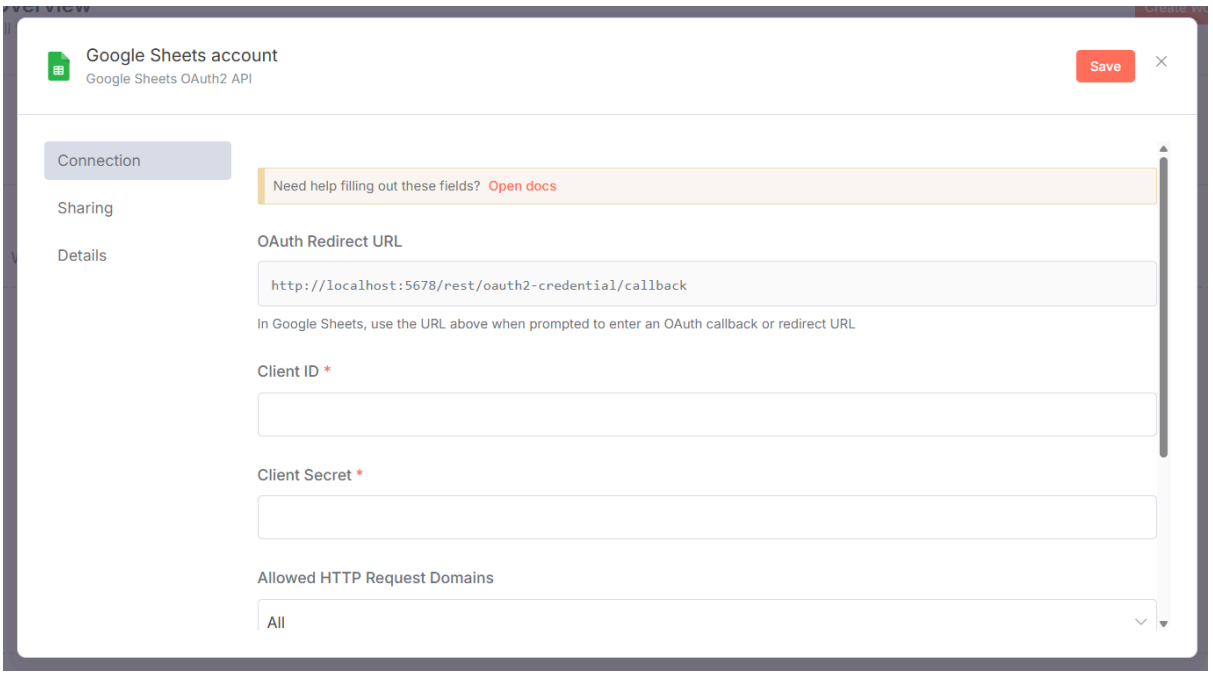

authorized redirect url:

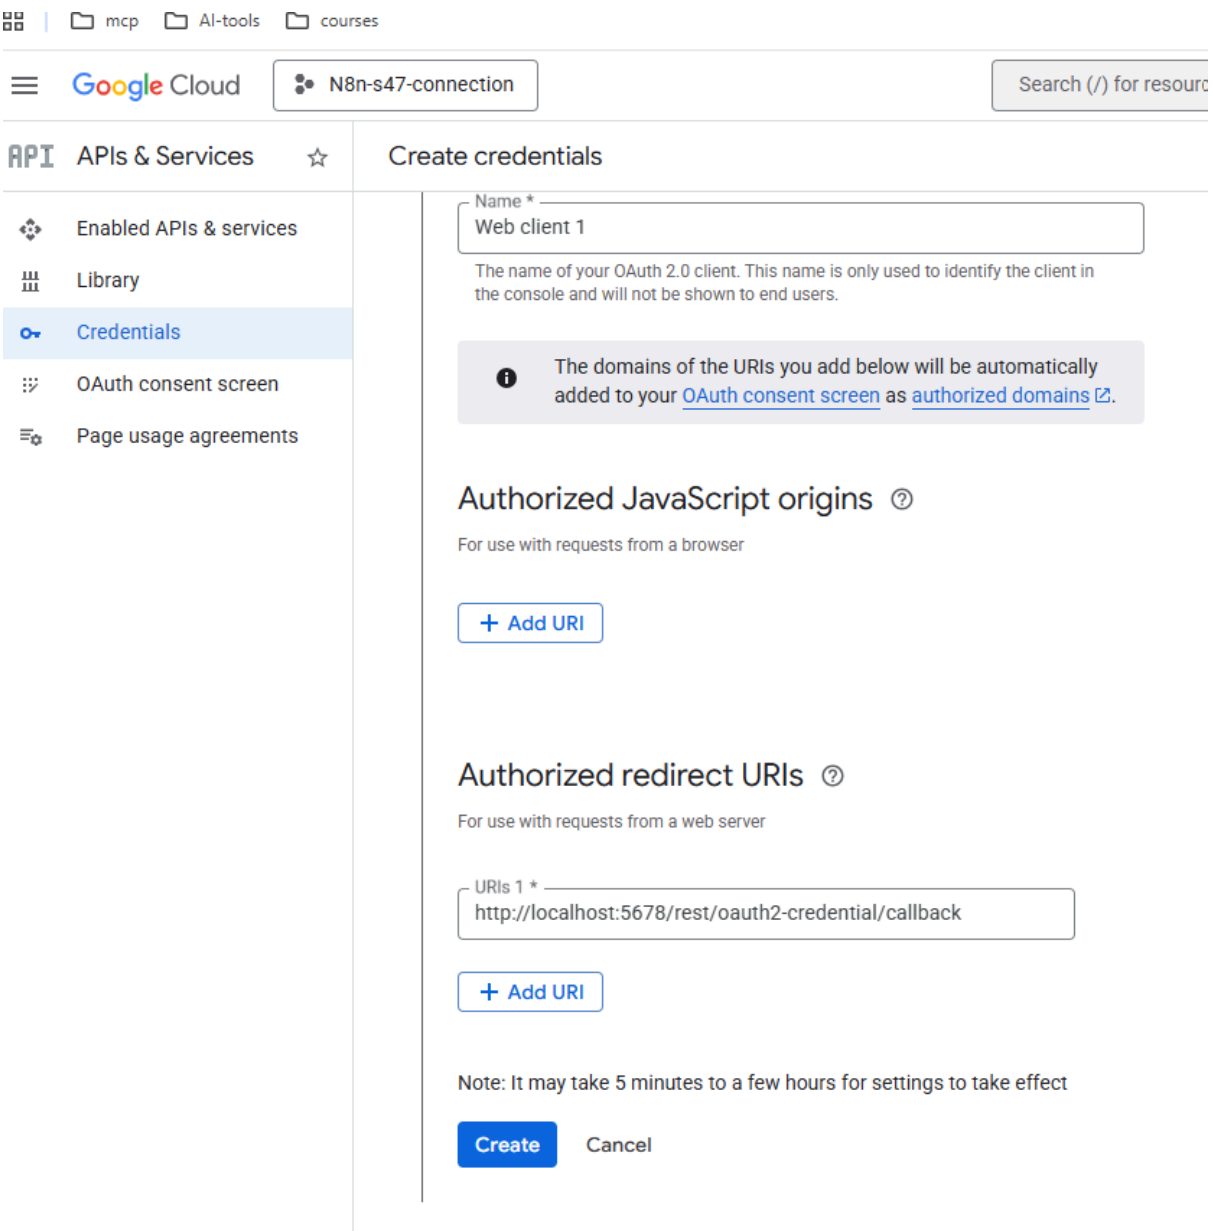

once created click on client id and paste it in n8n

and open this client to get client secret

then try sign in with google but u might get this error:

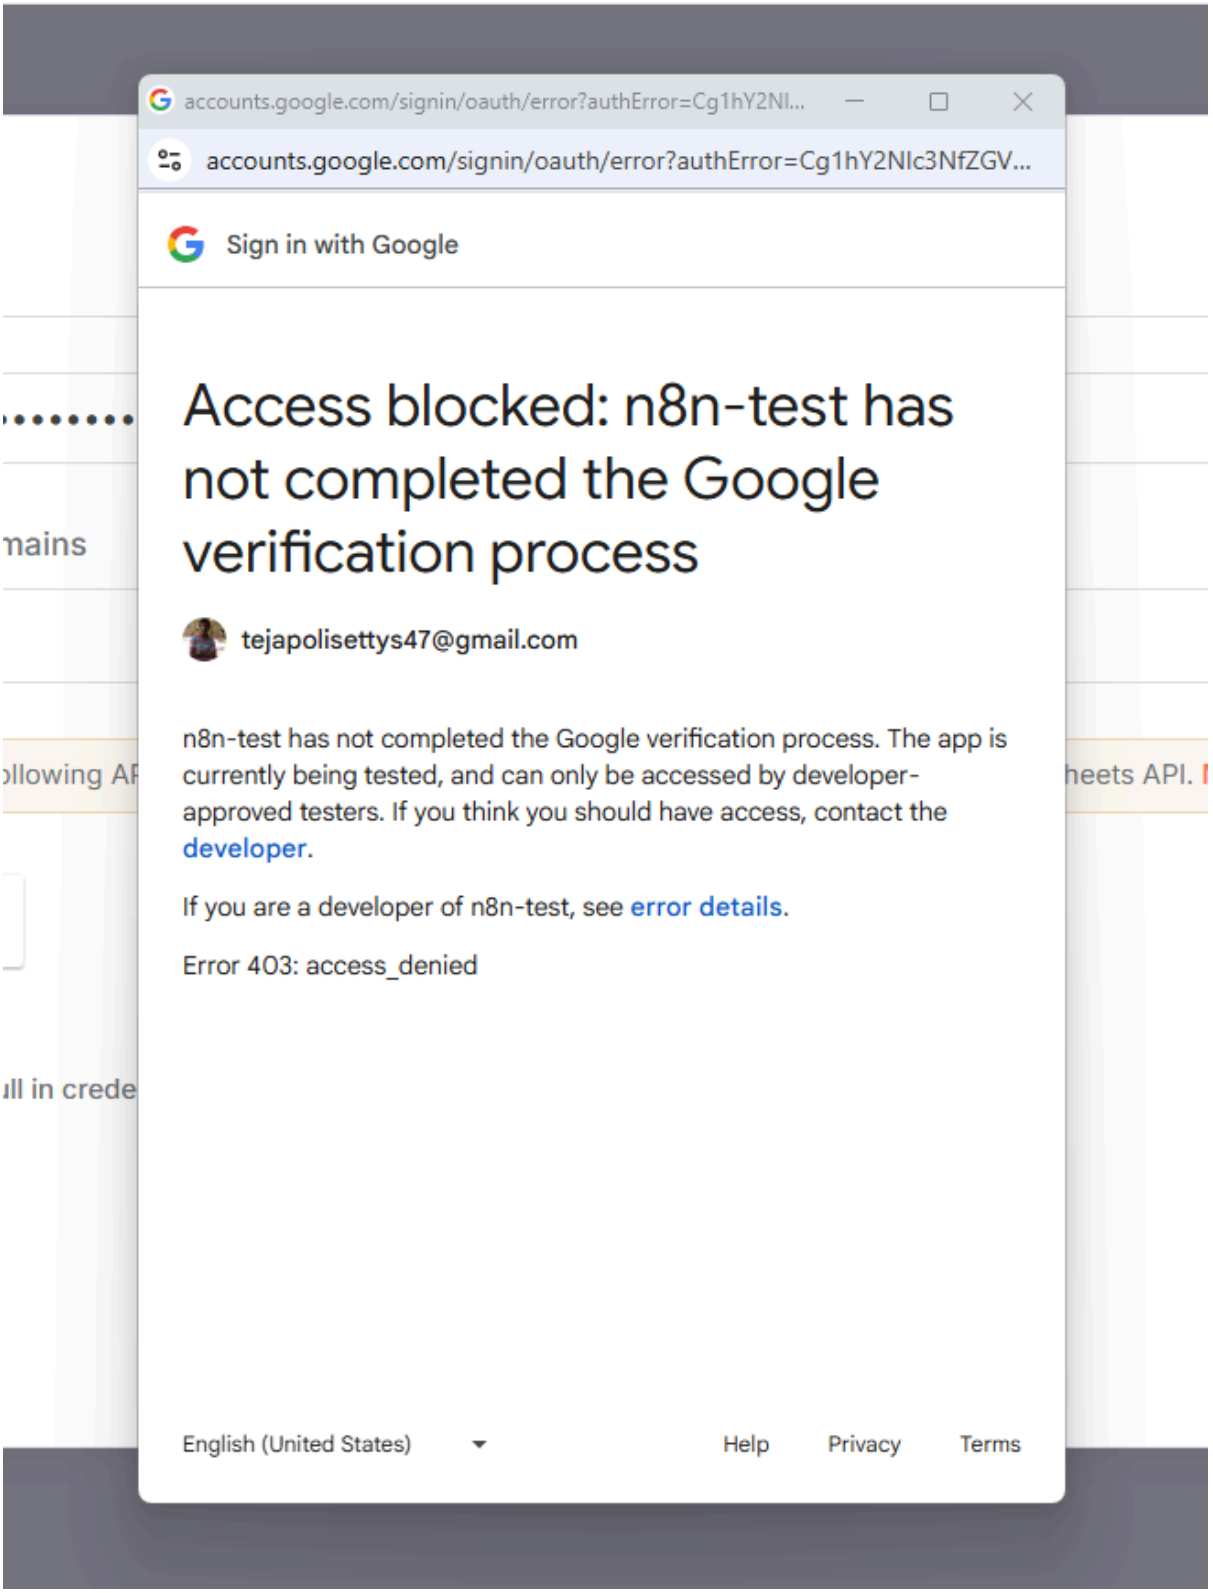

this is because we have to add, email in audience

once added, access is not blocked anymore.

but because you are running on http, call back wont work.

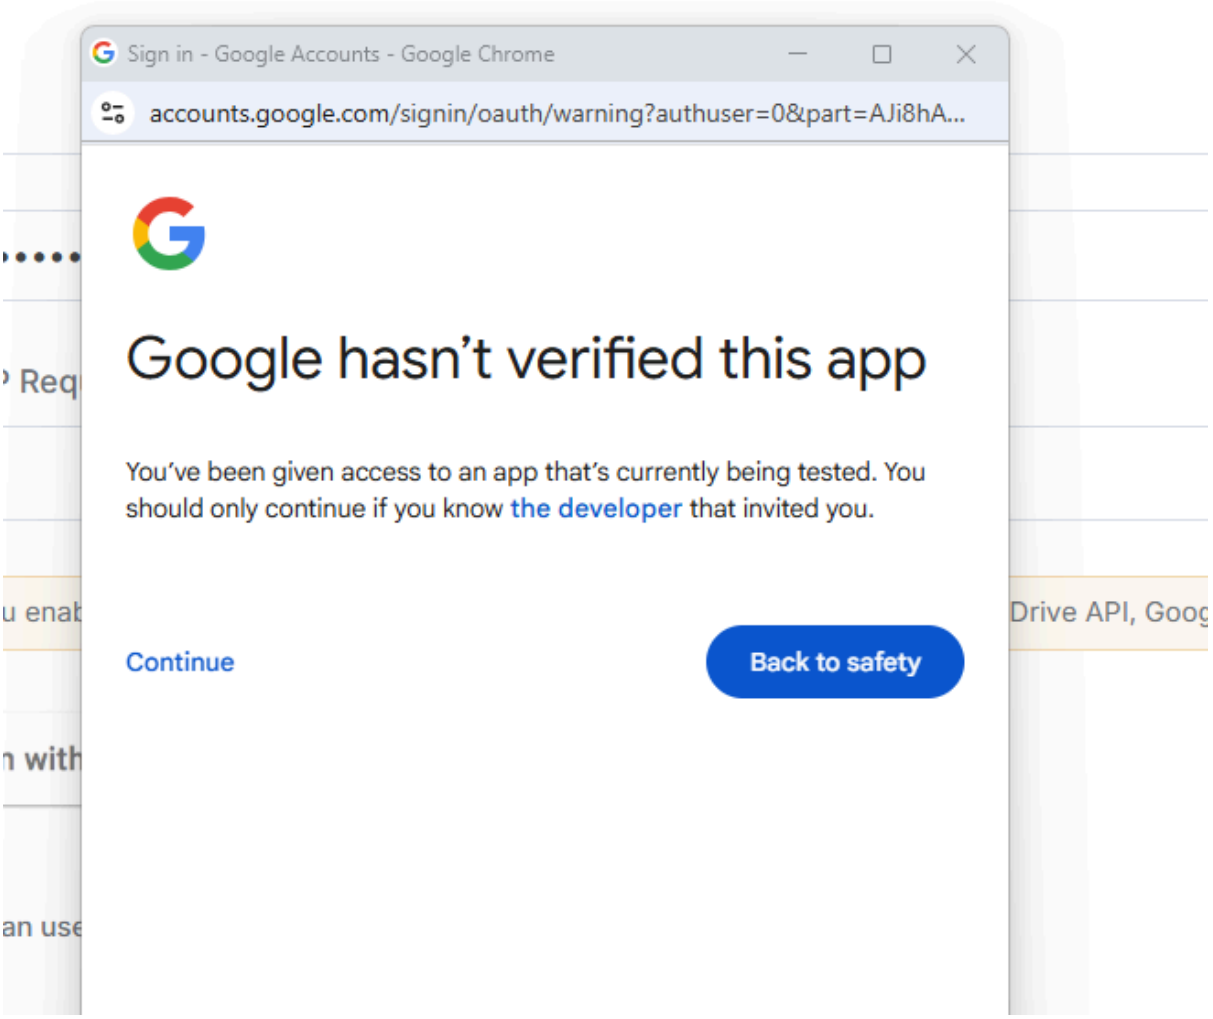

but now we see one more error:

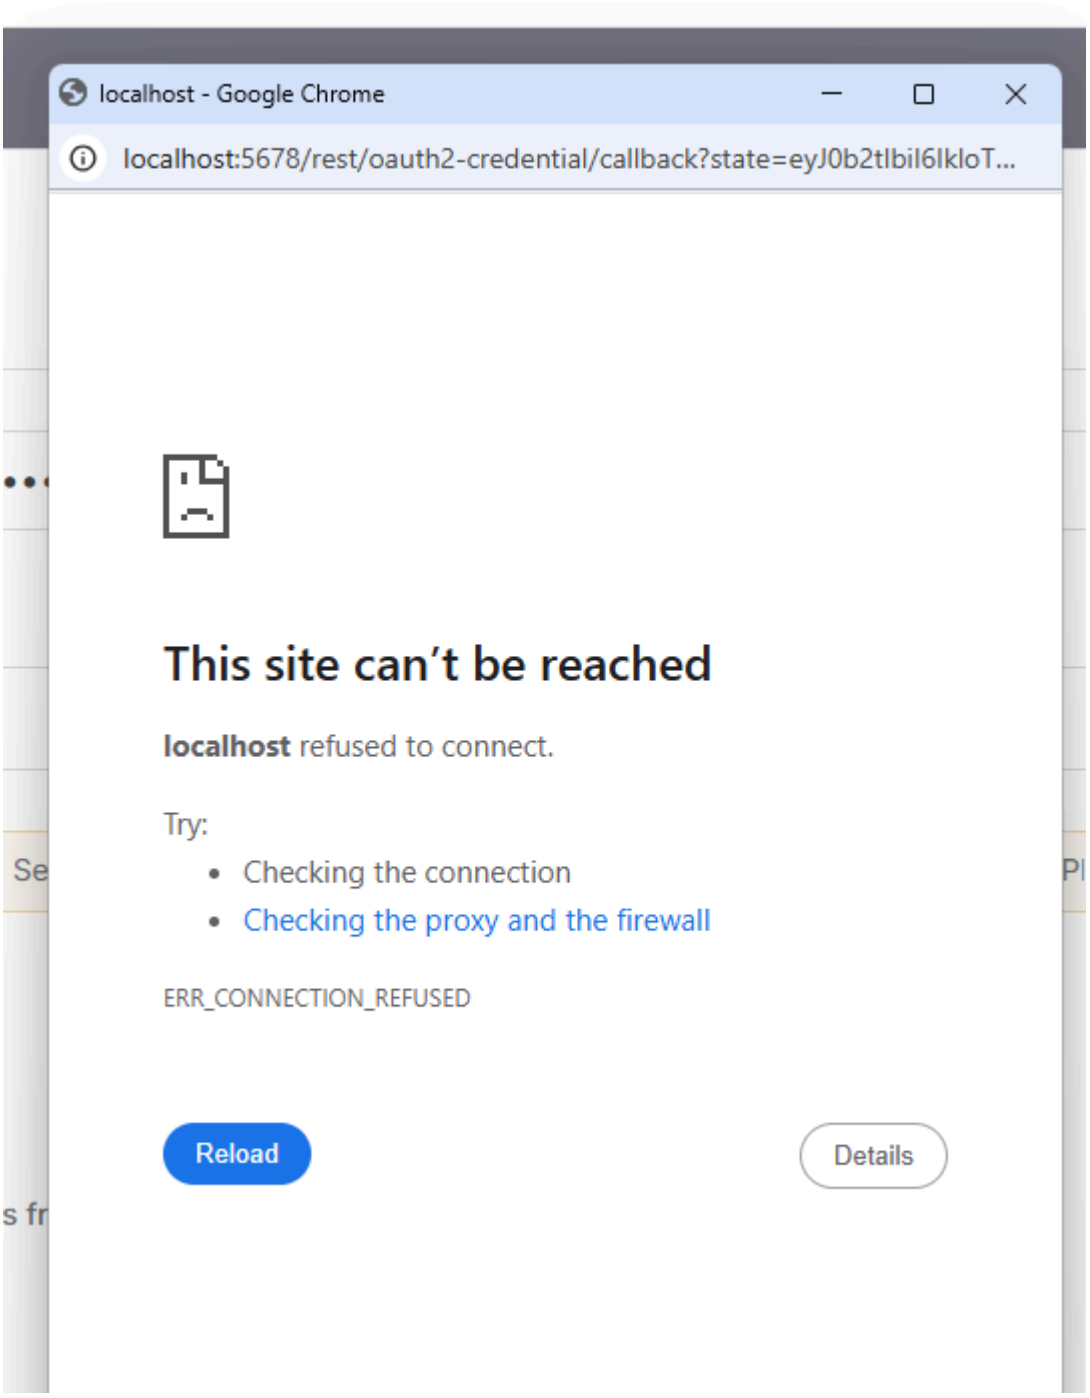

because redirect url was 3000, but this seems to be 5678

http://localhost:5678/rest/oauth2-credential/callback?state=eyJ0b2tlbiI6IkdVTHNhRmRsLVZOaEZvd3VDelhCa1lfRXpDRDR1bHRqWTd6TSIsImNpZCI6IjhwZEI0VWtzaWlIN2hDYVUiLCJjcmVhdGVkQXQiOjE3NzA5MTUxNTk1NzF9&code=4/0ASc3gC1Bh6BXe_6NHOybzgXZgLSz2aaoBqFRkh6Td6XJIUQ7XHrAsB1afshhDmTk-F2IJQ&scope=https://www.googleapis.com/auth/drive.metadata%20https://www.googleapis.com/auth/drive.file%20https://www.googleapis.com/auth/spreadsheets

after ngrok, add its url to the redirect list and now try login again,

it is successful

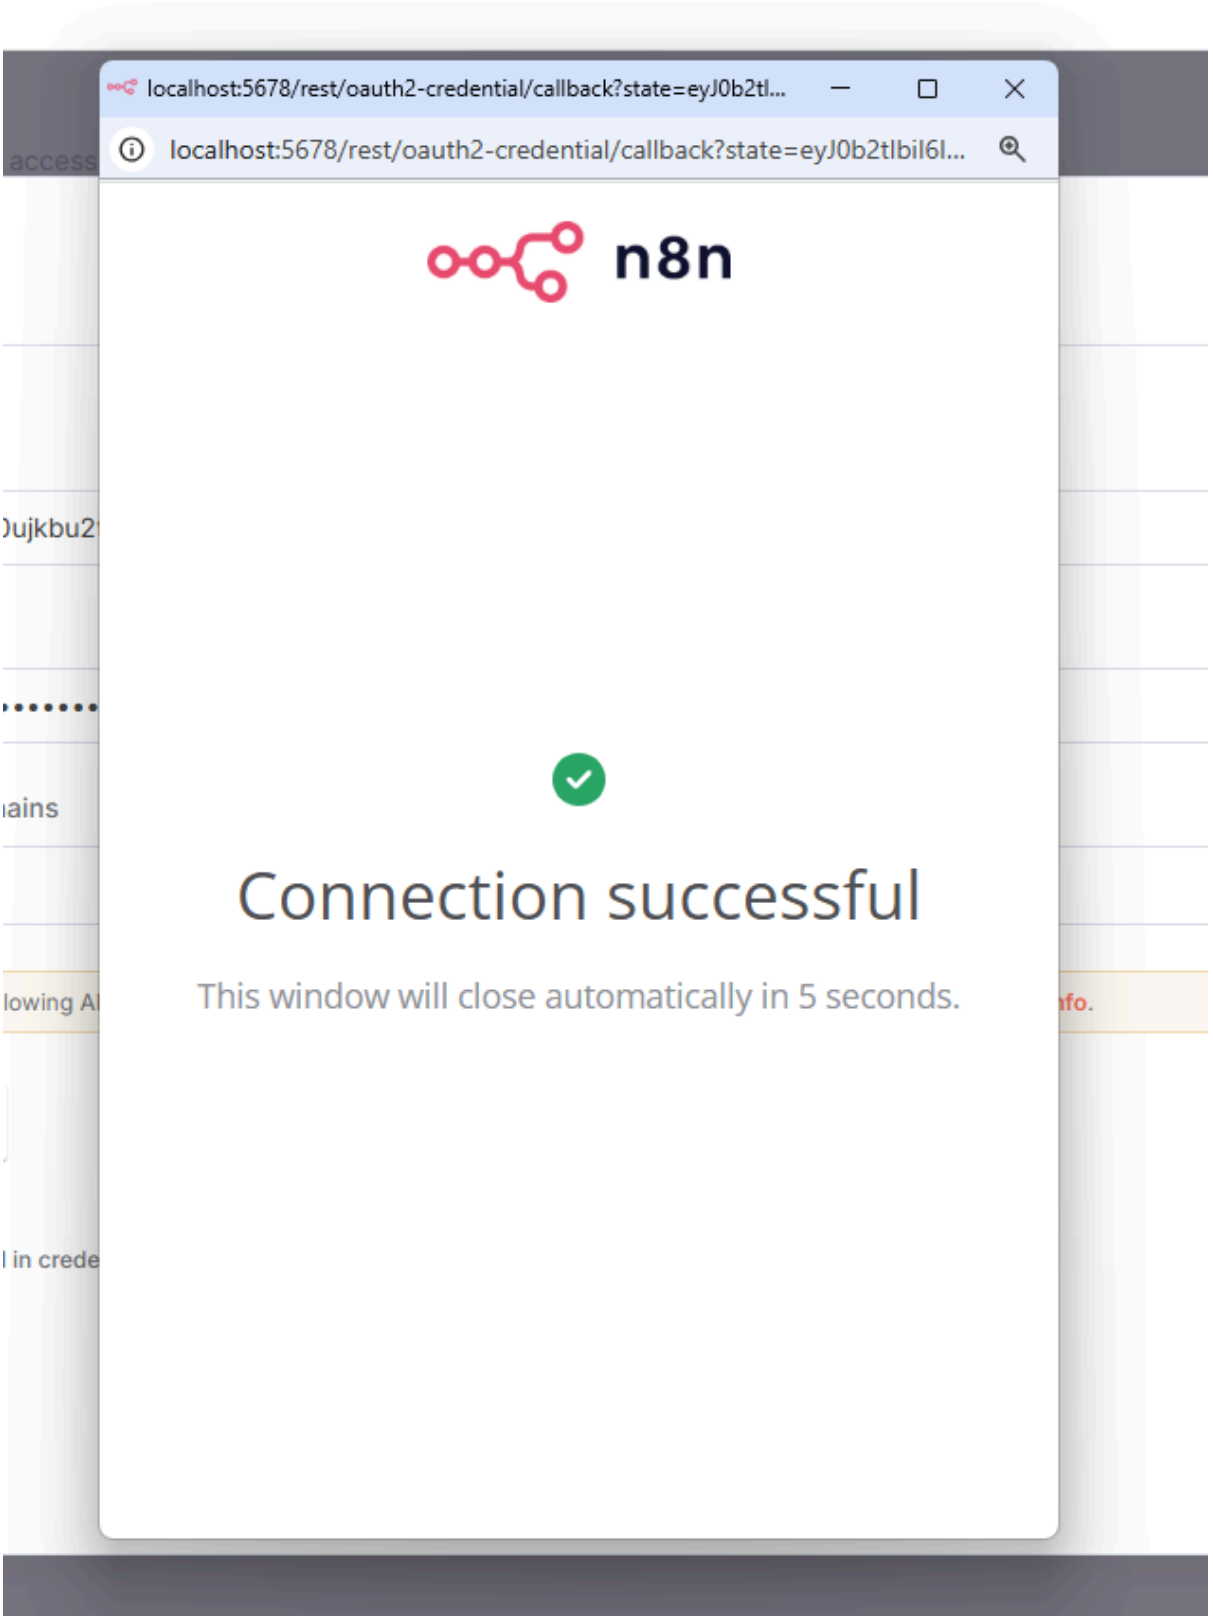

and we should see account connected:

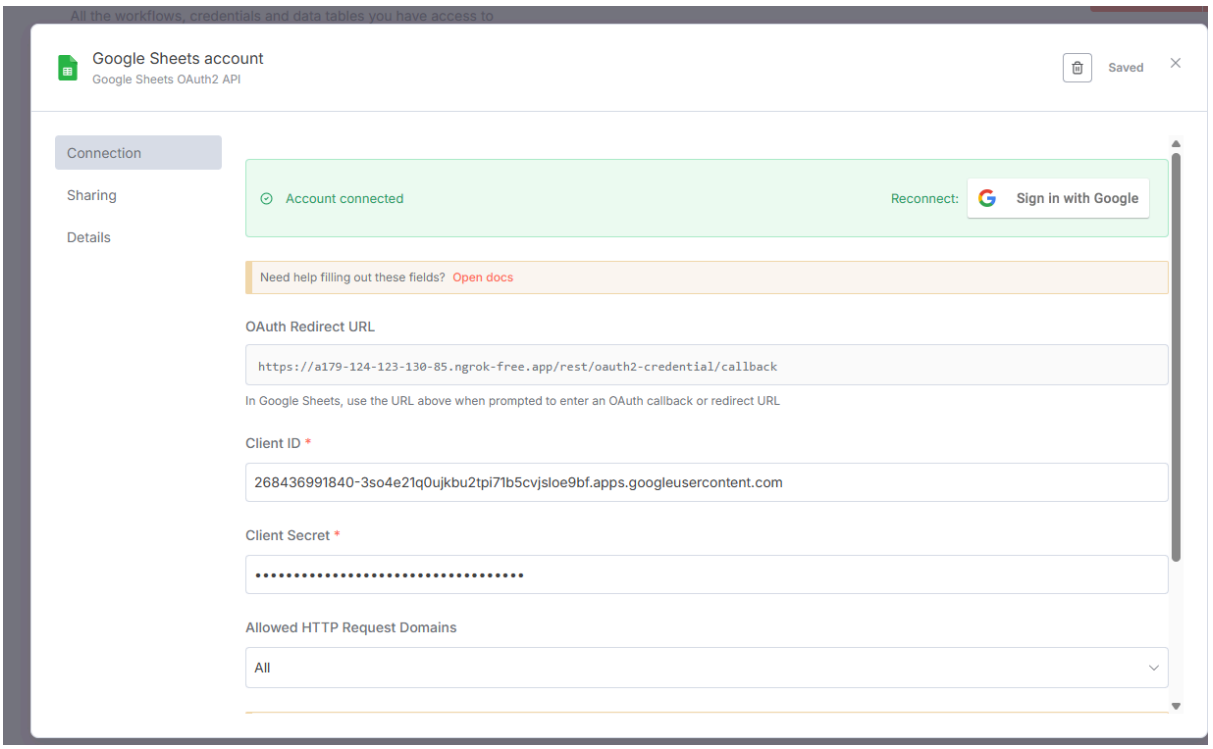
All the workflows, credentials and data tables you have access to
Google Sheets account
Google Sheets OAuth2 API
Saved
Connection
Sharing
Details
Account connected
Reconnect:
Sign in with Google
Need help filling out these fields? Open docs
OAuth Redirect URL
https://a179-124-123-130-85.ngrok-free.app/rest/oauth2-credential/callback
In Google Sheets, use the URL above when prompted to enter an OAuth callback or redirect URL
Client ID *
268436991840-3so4e21q0ujkbu2tpi71b5cvjsloe9bf.apps.googleusercontent.com
Client Secret *
Allowed HTTP Request Domains
All

Step8: Integrate with telegram

Open bot father

/start

/newbot

<provide username>

And we get our token and bot link.

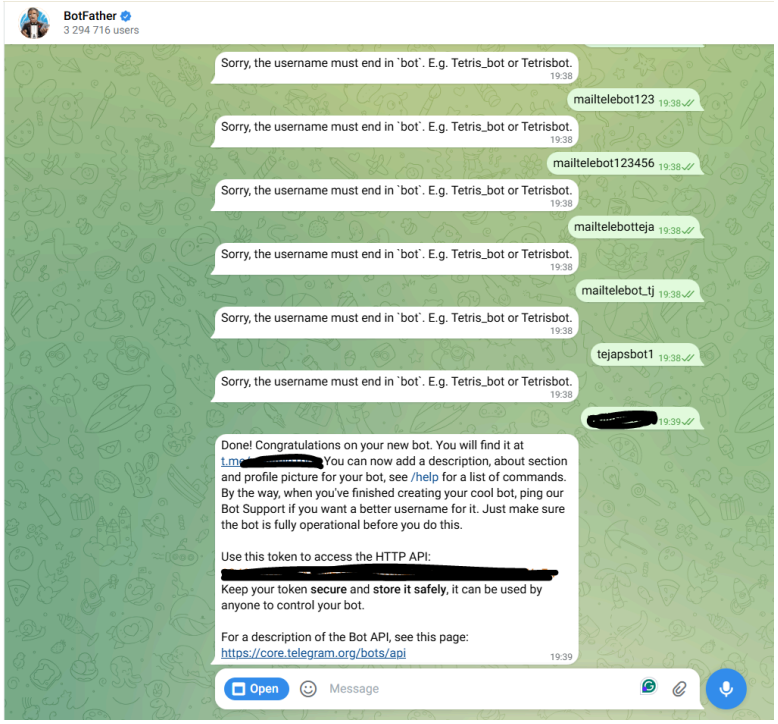

Cmd to delete webhook:

- iwr -Method Post https://api.telegram.org/bot<YOUR_BOT_TOKEN>/deleteWebhook"

Cmd to get webhook: iwr

- iwr https://api.telegram.org/bot<YOUR_BOT_TOKEN>/getWebhookInfo

Script to setup webhook manually:

```
1. $token = "<YOUR_BOT_TOKEN>"
2. $whUrl = "https://75f1507ee3de.ngrok-free.app/webhook/<YOUR-N8N-WORKFLOW-ID>/webhook"
3. $body = @{
4.   url = $whUrl
5.   allowed_updates = '["message","callback_query"]'
6. }
7. iwr -Method Post -Body $body -ContentType "application/x-www-form-urlencoded"
https://api.telegram.org/bot$token/setWebhook
```

To see webhook status:

```
1. $resp = Invoke-RestMethod "https://api.telegram.org/bot$token/getWebhookInfo"
2. $resp | ConvertTo-Json -Depth 6

3. OR

4. (Invoke-WebRequest "https://api.telegram.org/bot$token/getWebhookInfo").Content
```

Step 8: Integrate with Redis:

8.1: Go to https://console.upstash.com/

Create redis database

Get tcp connection url

And enter it in our redis node with SSL enabled

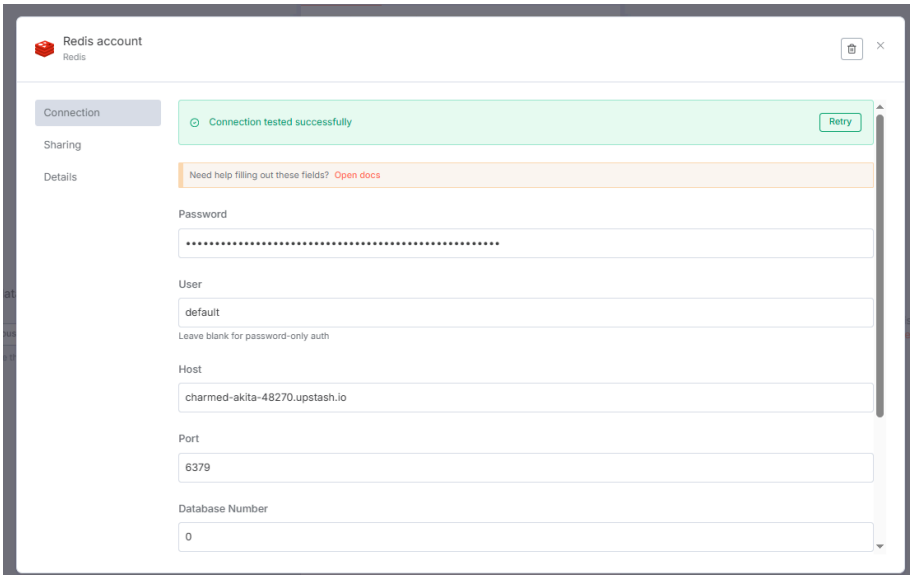

Step 9: Tunneling: using ngrok

As webhooks only work with https site and not http

So we have to run our localhost on https or host it on some cloud platform

With tunneling, we are running our localhost on https using ngrok

Site: https://dashboard.ngrok.com/

Sign in and Get your token:

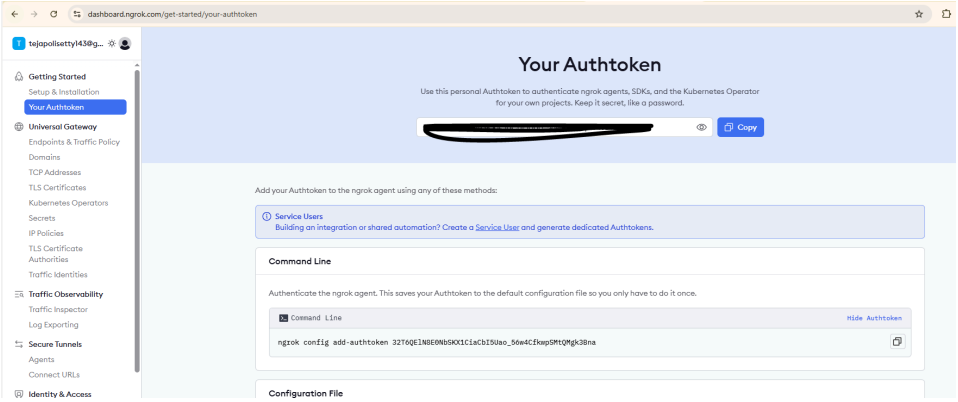

install ngrok:

> choco install ngrok

or

> winget install ngrok.ngrok

Cmd for setting auth token:

- ngrok config add-authtoken <YOUR_AUTHTOKEN>

Cmd to get https: ngrok http 5678

lets say it gave - https://a179-124-123-130-85.ngrok-free.app

Cmd for tunneling:

- ngrok http 5678 --log=stdout

  But instead we need to stop our docker , and run it with below command to run it on expected port and expected https ngrok url

- docker run -d --name n8n -e

  N8N_HOST="a179-124-123-130-85.ngrok-free.app" -e N8N_PORT=5678 -e N8N_PROTOCOL="http" -e

WEBHOOK_URL="https://a179-124-123-130-85.ngrok-free.app/" -e N8N_EDITOR_BASE_URL="https://a179-124-123-130-85.ngrok-free.app/" -p 5678:5678 n8nio/n8n:latest

now app is running on : https://a179-124-123-130-85.ngrok-free.app

Step 9: Integrate with google gemini:

Site: aistudio.google.com

Signup And click get API key

In node add agent :

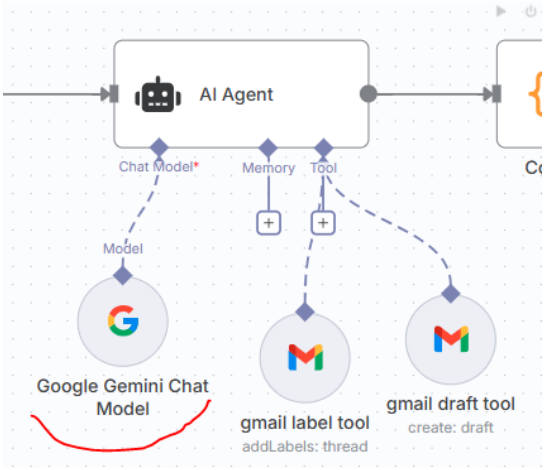

and set account:

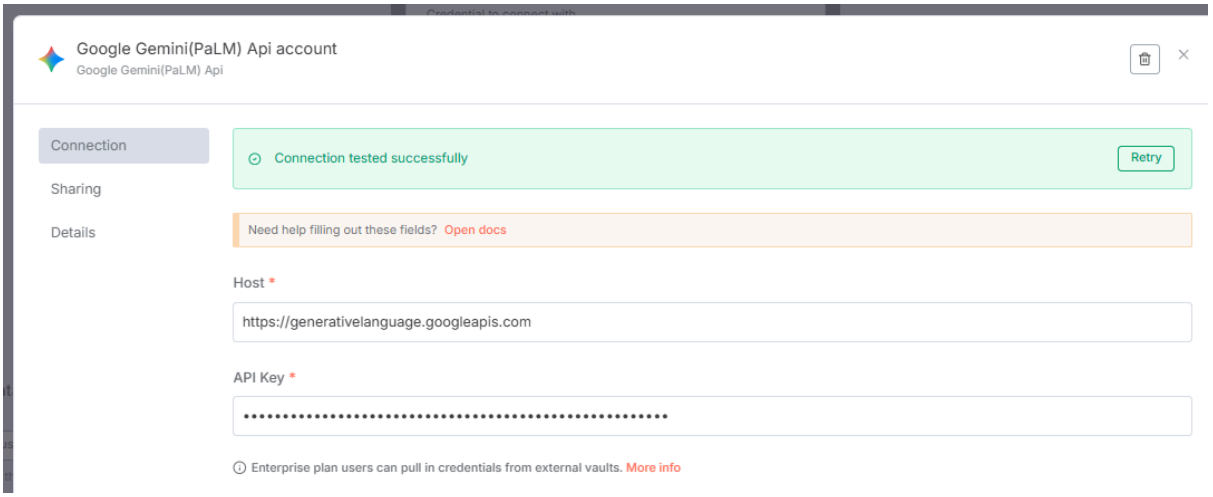

Step10: Similar to other steps we can get chatgpt openai keys as well.

All integrations:

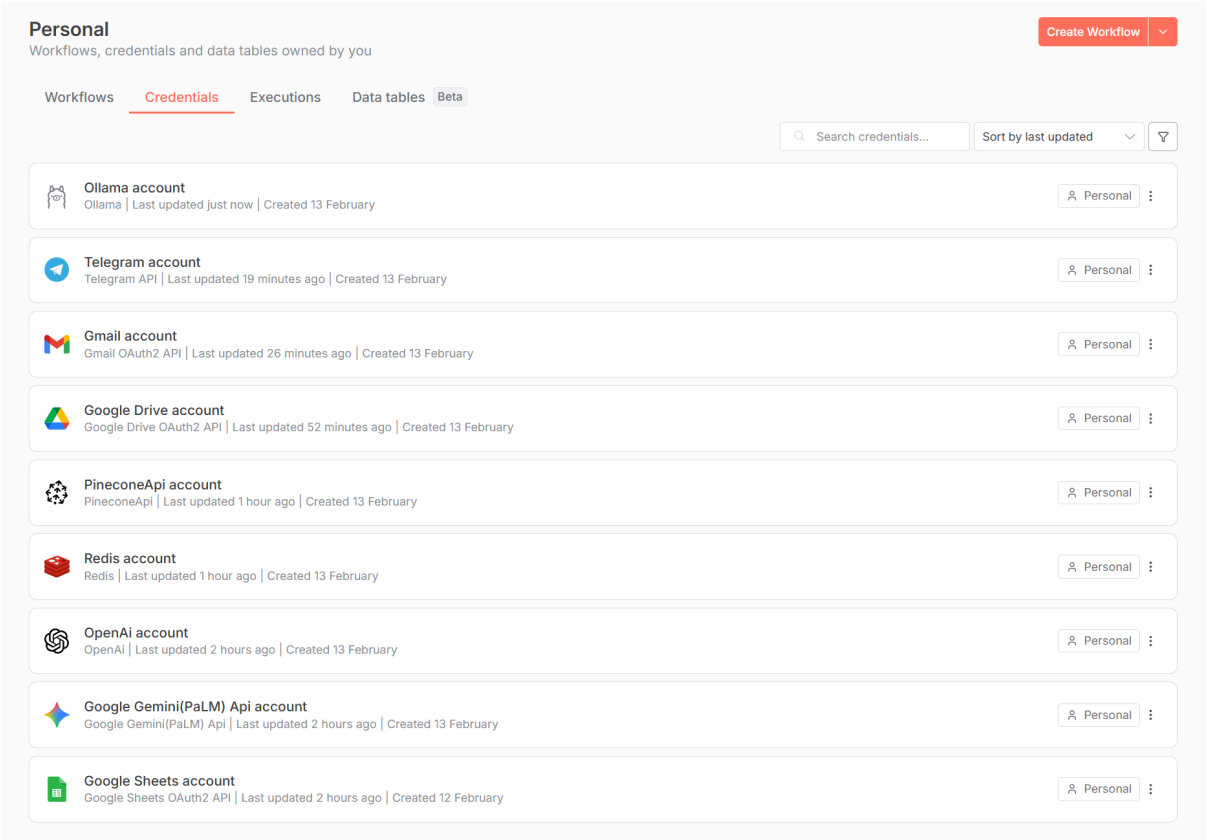

and workflows

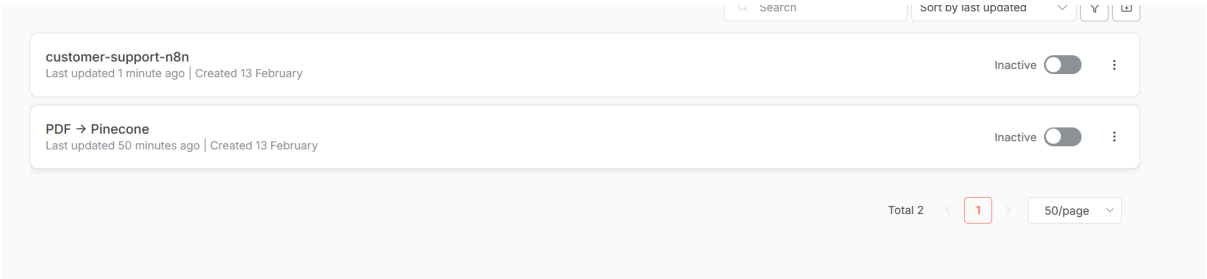

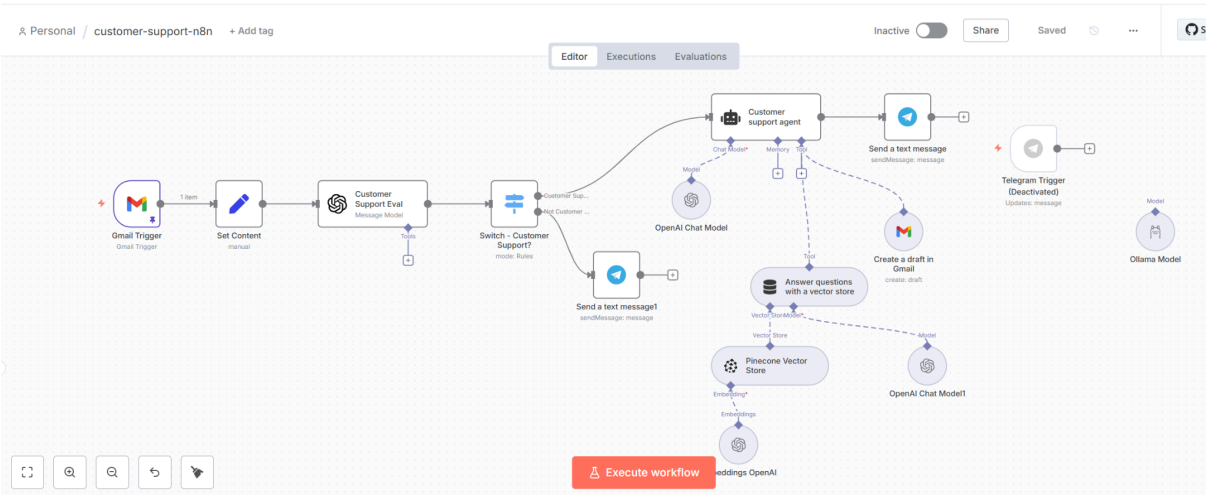

and

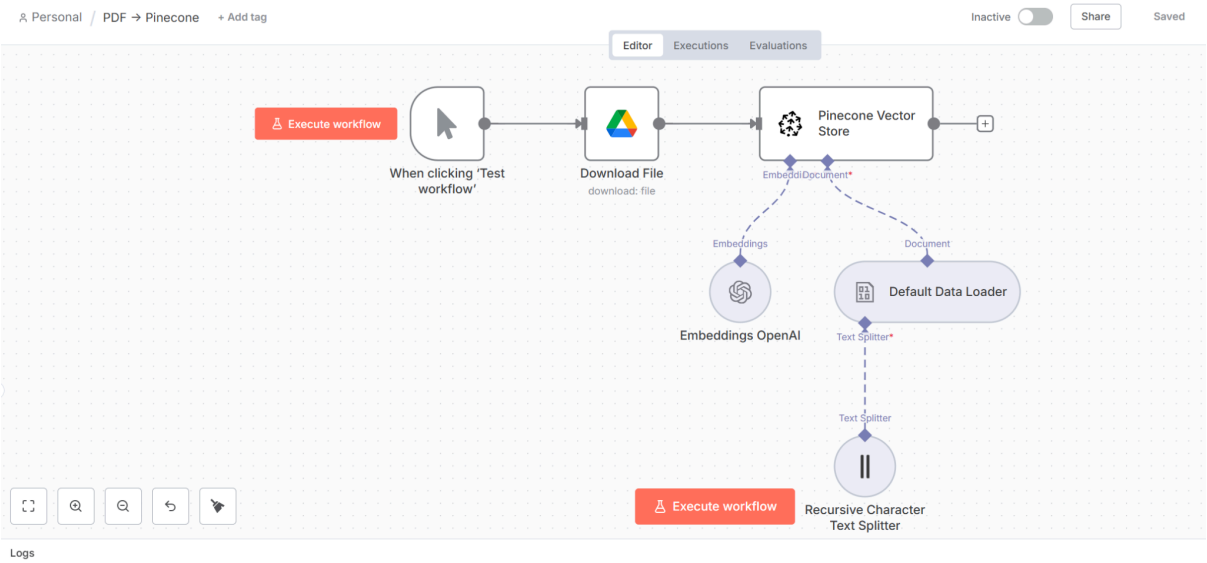
Personal / PDF → Pinecone
+ Add tag
Inactive
Share
Saved
Editor
Executions
Evaluations
Execute workflow
When clicking 'Test workflow'
Download File
download: file
Pinecone Vector Store
Embeddings
Document
Embeddings OpenAI
Default Data Loader
Text Splitter
Recursive Character Text Splitter
Execute workflow
Logs