

NAME:-SAKET PAWAR

CLASS:- SYBTECH-C

BATCH:- C-2

ROLL NO:- 223043

GR NO:- 17U021

ASSIGNMENT NO.7.

Aim :- Insert the keys into a hash table of length m using open addressing using double hashing with $h(k)=1+(k \bmod (m-1))$.

Objective:- to study the hashing concept and its techniques.

Theory:-

Open Addressing—

Like separate chaining, open addressing is a method for handling collisions. In Open Addressing, all elements are stored in the hash table itself. So at any point, size of the table must be greater than or equal to the total number of keys (Note that we can increase table size by copying old data if needed).

Insert(k): Keep probing until an empty slot is found. Once an empty slot is found, insert k .

Search(k): Keep probing until slot's key doesn't become equal to k or an empty slot is reached.

Delete(k): **Delete operation is interesting**. If we simply delete a key, then search may fail. So slots of deleted keys are marked specially as "deleted".

Insert can insert an item in a deleted slot, but the search doesn't stop at a deleted slot.

Open Addressing is done following ways:

a) Linear Probing: In linear probing, we linearly probe for next slot. For example, typical gap between two probes is 1 as taken in below example also.

let **hash(x)** be the slot index computed using hash function and **S** be the table size

If slot $\text{hash}(x) \% S$ is full, then we try $(\text{hash}(x) + 1) \% S$

If $(\text{hash}(x) + 1) \% S$ is also full, then we try $(\text{hash}(x) + 2) \% S$

If $(\text{hash}(x) + 2) \% S$ is also full, then we try $(\text{hash}(x) + 3) \% S$

NAME:-SAKET PAWAR

CLASS:- SYBTECH-C

BATCH:- C-2

ROLL NO:- 223043

GR NO:- 17U021

Double Hashing:-

Double hashing is a collision resolving technique in **Open Addressed** Hash tables. Double hashing uses the idea of applying a second hash function to key when a collision occurs.

Double hashing can be done using :

$(hash1(key) + i * hash2(key)) \% TABLE_SIZE$

Here hash1() and hash2() are hash functions and TABLE_SIZE is size of hash table.

(We repeat by increasing i when collision occurs)

First hash function is typically $hash1(key) = key \% TABLE_SIZE$

A popular second hash function is : **$hash2(key) = PRIME - (key \% PRIME)$** where PRIME is a prime smaller than the TABLE_SIZE.

A good second Hash function is:

- It must never evaluate to zero
- Must make sure that all cells can be probed

NAME:-SAKET PAWAR

CLASS:- SYBTECH-C


BATCH:- C-2

ROLL NO:- 223043

GR NO:- 17U021

Lets say, $\text{Hash1}(\text{key}) = \text{key} \% 13$

$\text{Hash2}(\text{key}) = 7 - (\text{key} \% 7)$

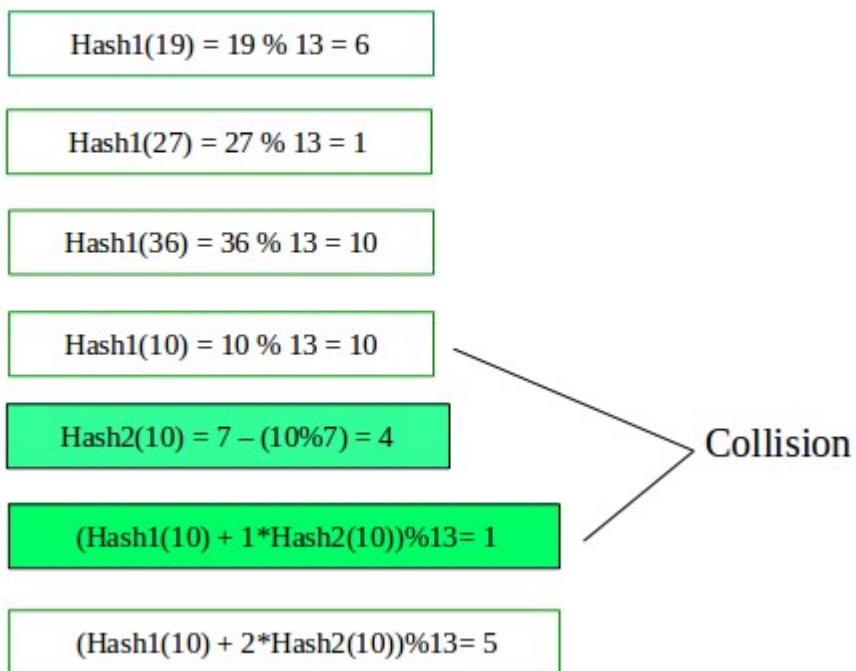

Algorithm:-

Program Code:-

NAME:-SAKET PAWAR
CLASS:- SYBTECH-C
BATCH:- C-2
ROLL NO:- 223043
GR NO:- 17U021

```
#include <bits/stdc++.h>
```

```
using namespace std;
```

```
#define TABLE_SIZE 13
```

```
#define PRIME 7
```

```
class DoubleHash
```

```
{
```

```
    int *hashTable;
```

```
    int curr_size;
```

```
public:
```

```
    bool isFull()
```

```
{
```

```
        return (curr_size == TABLE_SIZE);
```

```
}
```

```
    int hash1(int key)
```

NAME:-SAKET PAWAR

CLASS:- SYBTECH-C

BATCH:- C-2

ROLL NO:- 223043

GR NO:- 17U021

```
{  
    return (key % TABLE_SIZE);  
}
```

```
int hash2(int key)  
{  
    return (PRIME - (key % PRIME));  
}
```

```
DoubleHash()  
{  
    hashTable = new int[TABLE_SIZE];  
    curr_size = 0;  
    for (int i=0; i<TABLE_SIZE; i++)  
        hashTable[i] = -1;  
}
```

```
void insertHash(int key)  
{  
    if (isFull())
```

NAME:-SAKET PAWAR

CLASS:- SYBTECH-C

BATCH:- C-2

ROLL NO:- 223043

GR NO:- 17U021

```
return;
```

```
int index = hash1(key);
```

```
if (hashTable[index] != -1)
```

```
{
```

```
    int index2 = hash2(key);
```

```
    int i = 1;
```

```
    while (1)
```

```
    {
```

```
        int newIndex = (index + i * index2) %
```

```
            TABLE_SIZE;
```

```
        if (hashTable[newIndex] == -1)
```

```
        {
```

```
            hashTable[newIndex] = key;
```

```
            break;
```

```
        }
```

```
        i++;
```

```
    }
```

NAME:-SAKET PAWAR

CLASS:- SYBTECH-C

BATCH:- C-2

ROLL NO:- 223043

GR NO:- 17U021

```
    }

    else

        hashTable[index] = key;

        curr_size++;

    }

// function to display the hash table
void displayHash()
{
    for (int i = 0; i < TABLE_SIZE; i++)
    {
        if (hashTable[i] != -1)
            cout << i << " --> "

                << hashTable[i] << endl;

        else

            cout << i << endl;

    }

}

};
```

NAME:-SAKET PAWAR
CLASS:- SYBTECH-C
BATCH:- C-2
ROLL NO:- 223043
GR NO:- 17U021

```
// Driver's code

int main()
{

    int a[] = {19, 27, 36, 10, 64};
    int n = sizeof(a)/sizeof(a[0]);
    cout<<"inserted elements in hash table are as follows:";

    // inserting keys into hash table

    DoubleHash h;
    for (int i = 0; i < n; i++)
        h.insertHash(a[i]);


    // display the hash Table

    h.displayHash();

    return 0;
}
```

Output Screenshots:-

NAME:-SAKET PAWAR
CLASS:- SYBTECH-C
BATCH:- C-2
ROLL NO:- 223043
GR NO:- 17U021

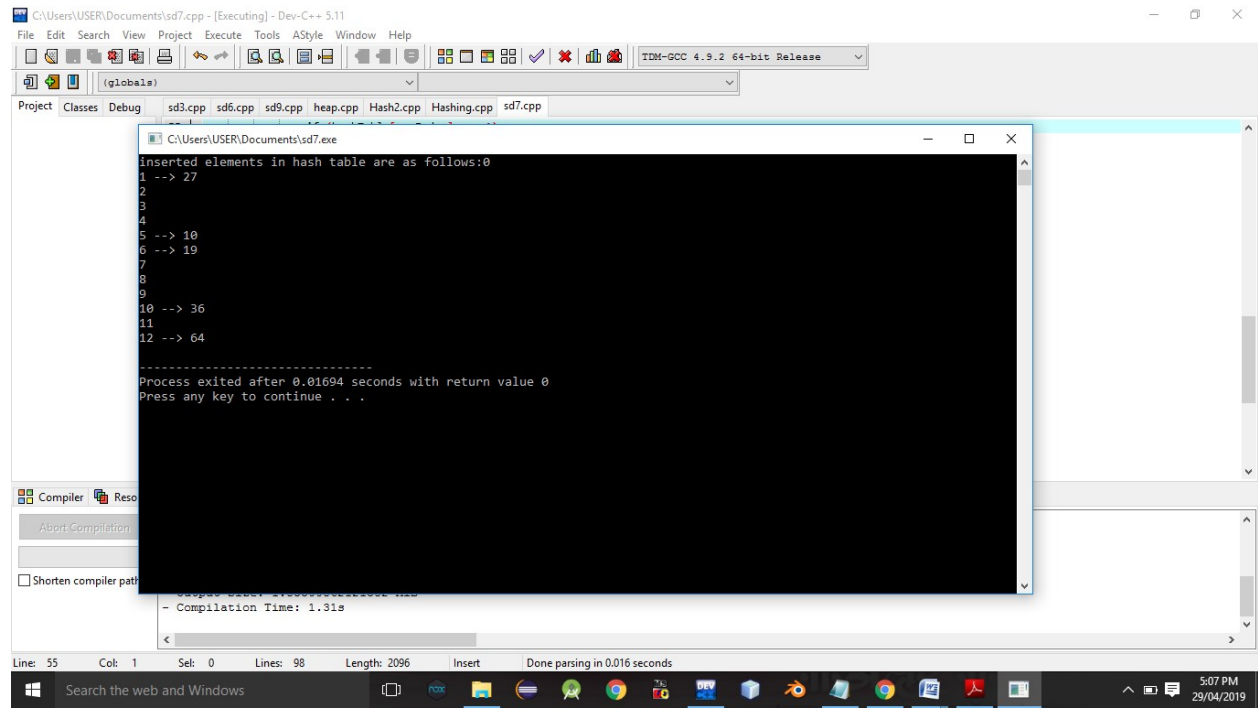

```
CA\Users\USER\Documents\sd7.cpp - [Executing] - Dev-C++ 5.11
File Edit Search View Project Execute Tools AStyle Window Help
((globals))
Project Classes Debug sd3.cpp sd6.cpp sd9.cpp heap.cpp Hash2.cpp Hashing.cpp sd7.cpp
CA\Users\USER\Documents\sd7.exe
Inserted elements in hash table are as follows:0
1 --> 27
2
3
4
5 --> 10
6 --> 19
7
8
9
10 --> 36
11
12 --> 64
.....
Process exited after 0.01694 seconds with return value 0
Press any key to continue . . .
Compiler Reso
Abort Completion
Shorten compiler path
- Compilation Time: 1.31s
Line: 55 Col: 1 Sel: 0 Lines: 98 Length: 2096 Insert Done parsing in 0.016 seconds
Search the web and Windows 5:07 PM 29/04/2019
```

Conclusion:- Thus,we have studied double hashing and hashing technique.