




ຄະນະວິທະຍາສາດທຳມະຊາດ
ພາກວິຊາ ວິທະຍາສາດຄອມພິວເຕີ

ເວບເຊີເວີ ແລະ ເຕັກໂນໂລຢີ (Web Server and Technology)

ສອນໂດຍ: [REDACTED]


ມີຖື: [REDACTED]


ອີເມວ: [REDACTED]

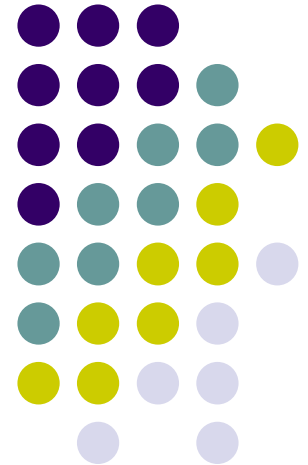

ບົດທີ6

ການບໍລິການ Web hosting (Web hosting Configuration)

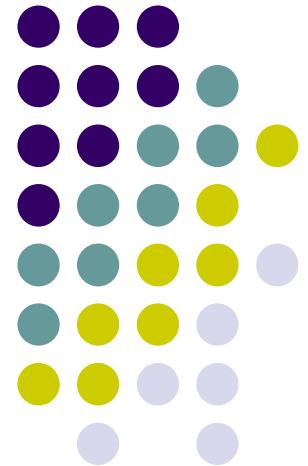




ເນື້ອໃນໂດຍລວມ

- ຄວາມໝາຍຂອງ Virtualhost
- ການຕັ້ງຄ່າໝາຍເລກ IP
- ຕິດຕັ້ງ DNS Server
- ຕັ້ງຄ່າ DNS Server
- ສ້າງ Virtual Host
- ທົດສອບ
- ການຕັ້ງຄ່າ DNS ສໍາລັບ Windows
- ການສ້າງ Virtual host ສໍາລັບ Windows




ຄວາມໝາຍຂອງ Virtualhost

- Virtual host ໝາຍເຖິງການຕັ້ງຄ່າ Web server ໃຫ້ເຂົ້າເຖິງເວບໄຊຕາມຊື່ດູເມນ(DNS) ຫຼື ຕາມໝາຍເລກ IP ທີ່ໄດ້ກຳນົດໄວ້, ເພື່ອຈຳລອງການອ້າງເຖິງຊື່ເວບໄຊຢູ່ໃນເຄື່ອງ Server ຫຼື ເອີ້ນວ່າ Web Hosting.
- ການຕັ້ງຄ່າ Virtual host ຢູ່ໃນ Apache ຈະມີ 2 ແບບຄື:
 - ຈຳລອງດ້ວຍໝາຍເລກ IP(IP-Based Virtual Host)
 - ຈຳລອງດ້ວຍຊື່ (Name-based Virtual Host)



ຄວາມໝາຍຂອງ Virtualhost

■ ຕົວຢ່າງ

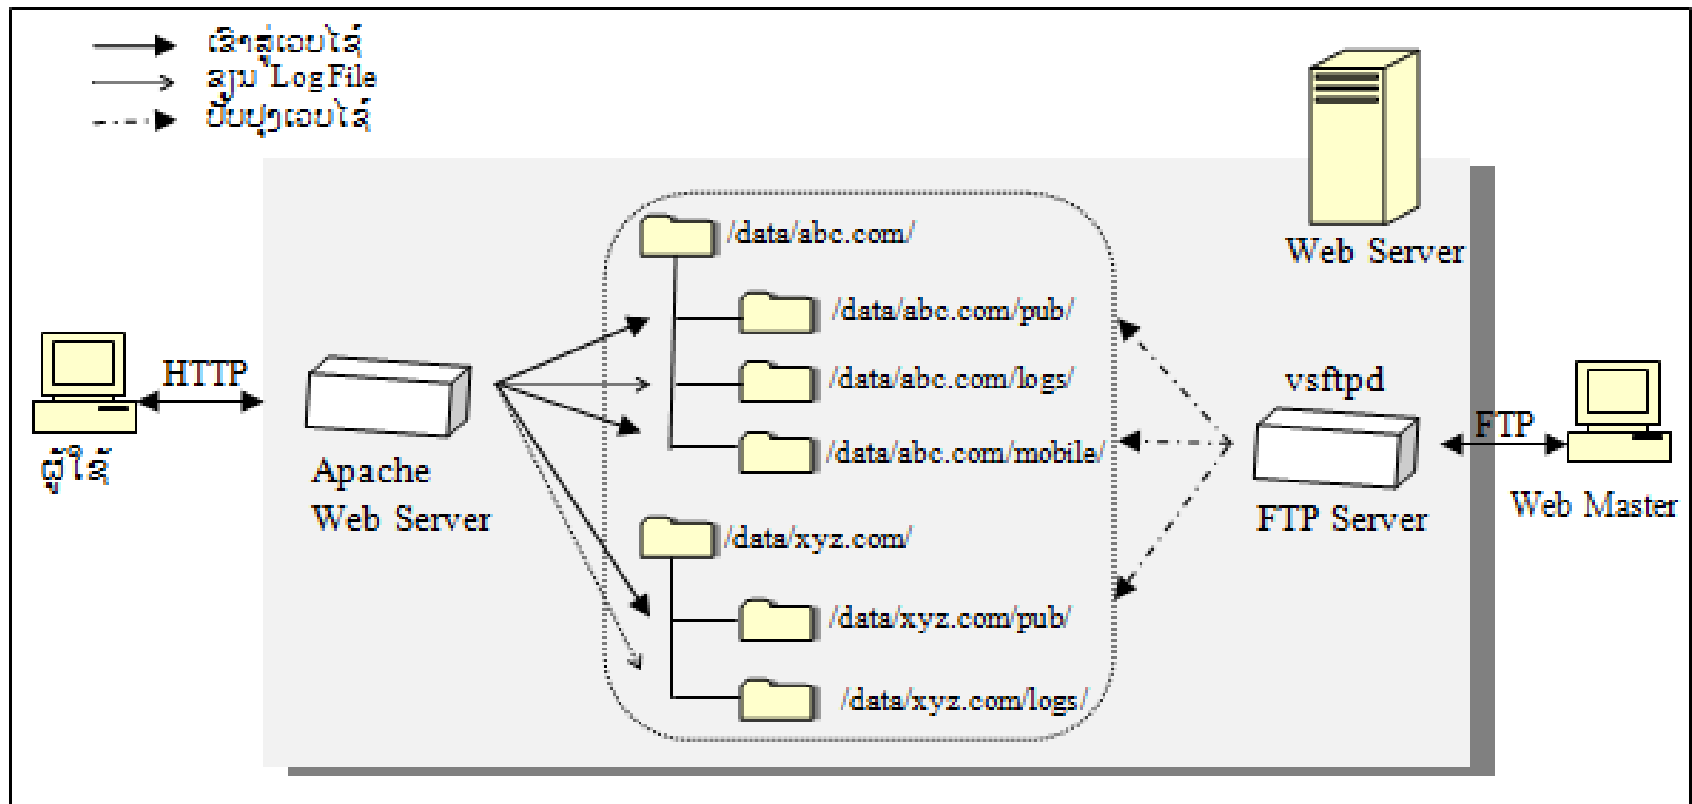



ການຕັ້ງຄ່າໝາຍເລກ IP

- ການຕັ້ງຄ່າໝາຍເລກ IP ໃຫ້ກັບເຄື່ອງເຊິ່ງເປັນສິ່ງຈຳເປັນເພື່ອລະບົບຕົວຕົນໃນການເຊື່ອມຕໍ່ເຂົ້າກັບເຄື່ອຄ່າຍ ຫຼື ອິນເຕີເນັດ. ການຕັ້ງຄ່າ IP ອາດຈະນຳໃຊ້ DHCP ທີ່ກຳນົດໃຫ້ ຫຼື ກຳນົດແບບ Static IP ກໍໄດ້. ແຕ່ຖ້າກຳນົດແບບ Static IP ໃຫ້ໄປແກ້ໄຂຢູ່ໄຟລ໌ `/etc/sysconfig/network-scripts/ifcfg-eth0` ດັ່ງນີ້:
- `root@localhost# vi /etc/sysconfig/network-scripts/ifcfg-eth0`


ການຕັ້ງຄ່າໝາຍເລກ IP



- ການກຳນົດແບບ Static IP

```
root@localhost:~  
File Edit View Terminal Tabs Help  
# Advanced Micro Devices [AMD] 79c970 [PCnet32 LANCE]  
#DEVICE=eth0  
#BOOTPROTO=dhcp  
#HWADDR=08:00:27:46:9C:EA  
#ONBOOT=yes  
#TYPE=Ethernet  
  
DEVICE=eth0  
BOOTPROTO=none  
HWADDR=08:00:27:46:9c:EA  
  
IPADDR=192.168.0.1  
NETMASK=255.255.255.0  
BROADCAST=192.168.0.255  
NETWORK=192.168.0.0  
GATEWAY=192.168.0.1  
  
TYPE=Ethernet
```

ຕິດຕັ້ງ DNS Server



- **DNS(Domain Name System)**, ແປຊີເຄື່ອງ(hostnames ຫຼື URL) ໄປເປັນໝາຍເລກ IP(IP addresses). ຕົວຢ່າງ: ຖ້າພົ້ມ `www.abc.com` ຢູ່ໃນ browser, DNS server ຈະແປ domain name ໄປຍັງໝາຍເລກ IP (ip address) ທີ່ກ່ຽວຄ່ອງນັ້ນ ເຊັ່ນວ່າ: `192.xxx.xxx.xxx`
- ຕິດຕັ້ງໂປຣແກຣມ `bind9.x` ທີ່ຕິດມາກັບແຜ່ນ CentOS CD/DVD ນຳໃຊ້ຄຳສັ່ງ `rpm`
- ຫຼື ຕິດຕັ້ງໂປຣແກຣມ `bind9.x` ຈາກອິນເຕີເນັດ ນຳໃຊ້ຄຳສັ່ງ `yum` ຫຼື `apt-get`

ການຕັ້ງຄ່າ DNS




- ແກ້ໄຂໄຟລ /etc/named.conf ແລ້ວກຳນົດ zone ໃຫ້ກັບ DNS ດັ່ງລຸ່ມນີ້:
#vi /etc/named.conf

```
zone "." IN {  
    type hint;  
    file "named.ca";  
};  
include "/etc/named.rfc1912.zones";
```

```
zone "abc.com" IN {  
    type master;  
    file "db.abc.com";  
    allow-update {none;};  
    allow-transfer {none;};  
};  
// Define forward DNS domain "abc.com"  
// Define DNS type "master"  
// Define zone file "db.abc.com"  
// Add DNS security  
// Add DNS security
```


```
zone "0.168.192.in-addr.arpa" IN {  
    type master;  
    file "db.0.168.192.reverse";  
    allow-update {none;};  
    allow-transfer {none;};  
};  
// Define reverse DNS zone  
// Define zone file "db.0.168.192.reverse"
```



ການຕັ້ງຄ່າໂປຣແກຣມ Bind

- ການສ້າງ Zone File

```
$TTL 8h           ; TTL ຂອງດູເມນນີ້ກຳນົດໄວ້ 8 ຊົ່ວໂມງ
@      IN      SOA  abc.com. root.abc.com. ( ; SOA Record ຂອງດູເມນນີ້
                2015092501 ; Serial ; Serial ຂອງດູເມນນີ້ຕ້ອງມີຄ່າເພີ່ມຂຶ້ນສະເໝີ
                28800      ; Refresh
                14400      ; Retry
                3600000     ; Expire
                28800 )     ; Minimum
      IN      NS    ns      ; ຊື່ເຄື່ອງທີ່ຮັບຜິດຊອບຂອງດູເມນ ຫຼື NS Record
      IN      MX    10 mail  ; ຊື່ເຄື່ອງທີ່ຮັບຜິດຊອບ E-mail ຂອງດູເມນນີ້
ns     IN      A     192.168.0.1 ; IP Address ຂອງເຄື່ອງທີ່ຊື່ NS
www    IN      A     192.168.0.1
mail   IN      A     192.168.0.2
Server1 IN      CNAME www
```




ການຕັ້ງຄ່າໂປຣແກຣມ Bind

- ການສ້າງ Reverse Zone File

```
$TTL 8h
@      IN      SOA  abc.com. root.abc.com. (
                                2015092501 ; Serial
                                28800      ; Refresh
                                14400      ; Retry
                                3600000    ; Expire
                                86400 )    ; Minimum
      IN      NS   ns.abc.com.
1      IN      PTR  ns.abc.com. ; ຊື່ເຄື່ອງແມ່ຄ່າຍເມື່ອຖາມແບບ Reverse DNS
2      IN      PTR  mail.abc.com.
```

ຕັ້ງຄ່າ DNS Server



- ພາຍຫຼັງສຳເລັດແລ້ວ ໃຫ້ Restart ໂດຍນຳໃຊ້ຄຳສັ່ງດັ່ງນີ້:
#service named restart
- ແລ້ວທົດສອບດ້ວຍຄຳສັ່ງ nslookup ຫຼື ping

```
[root@localhost ~]# service named start
```

```
Starting named:
```

[OK]

```
[root@localhost ~]# nslookup abc.com
```

```
Server:          127.0.0.1
```


```
Address:         127.0.0.1#53
```

```
Name:   abc.com
```

```
Address: 192.168.0.1
```

```
[root@localhost ~]#
```


ຕັ້ງຄ່າ DNS Server



- ຖ້າເປັນດູເມນຍ່ອຍ(Subdomain)

```
File Edit View Search Terminal Help
$TTL      8h
@          IN      SOA  abc.com. root.abc.com. (
                        2015092501      ; Serial
                        28800            ; Refresh
                        14400            ; Retry
                        3600000          ; Expire
                        28800            ); Minimum
                        IN      NS       ns
                        IN      MX       10 mail
ns          IN      A       192.168.0.1
www         IN      A       192.168.0.1
mail        IN      A       192.168.0.1

;subdomain
al          IN      CNAME   www.abc.com. → ສໍາລັບ Subdomain
```



ສ້າງ Virtual Host

- ສ້າງໄດແຮັກທໍຣີ ໃນ
/var/www/abc.com/public_html ແລະ ສ້າງໄຟລ
html ຊື່ index.html

```
<html>
```

```
<head>
```

```
<title>this is test</title>
```


```
</head>
```

```
<body>
```

```
this is test virtualhost
```

```
</body>
```

```
</html>
```




ສ້າງ Virtual Host

- ໃຫ້ໄປແກ້ໄຂໄຟລ /etc/httpd/conf/httpd.conf

```
root@localhost:~  
File Edit View Terminal Tabs Help  
# VirtualHost example:  
# Almost any Apache directive may go into a VirtualHost container.  
# The first VirtualHost section is used for requests without a known  
# server name.  
#  
<VirtualHost *:80>  
    ServerAdmin webmaster@abc.com  
    DocumentRoot /var/www/abc.com/public_html  
    ServerName abc.com  
    ServerAlias www.abc.com  
    ErrorLog logs/abc.com-error_log  
    CustomLog logs/abc.com-access_log common  
</VirtualHost>  
~
```

ສຳລັບ CentOS6




ສ້າງ Virtual Host

- ໃຫ້ໄປສ້າງໄຟລ໌ vhost.conf ຢູ່ໃນ /etc/httpd/conf.d/

```
root@localhost:~  
File Edit View Search Terminal Help  
<VirtualHost *:80>  
    DocumentRoot    /var/www/html  
    ServerName      localhost  
</VirtualHost>  
  
<VirtualHost *:80>  
    DocumentRoot    /var/www/abc.com/public_html  
    ServerName      www.abc.com  
</VirtualHost>  
  
<VirtualHost *:80>  
    DocumentRoot    /var/www/xyz.com/public_html  
    ServerName      www.xyz.com  
</VirtualHost>
```

ສໍາລັບ CentOS 7



ສ້າງ Virtual Host


- ສໍາເລັດແລ້ວ ໃຫ້ Restart ດ້ວຍຄໍາສັ່ງ `#service httpd restart`

```
[root@localhost ~]# vi /etc/httpd/conf/httpd.conf
[root@localhost ~]# service httpd restart
Stopping httpd:
Starting httpd:
[root@localhost ~]#
```


[OK]

[OK]


ສ້າງ Virtual Host




- ທົດສອບ ແລະ ສັງເກດຜົນໄດ້ຮັບ

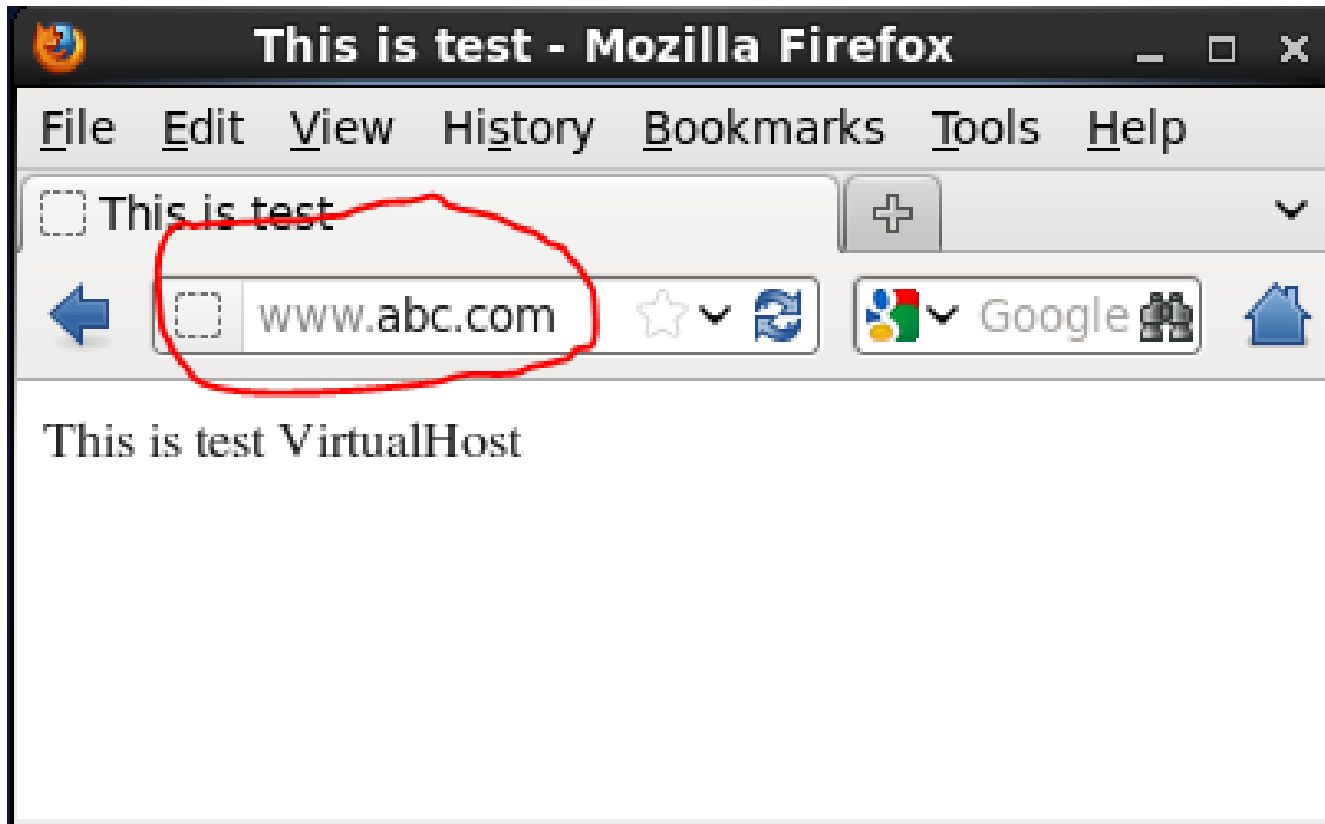


ການຕັ້ງຄ່າ DNS ສໍາລັບ Windows




- ເຂົ້າສູ່ Server Manager > ເລືອກ Add roles and features

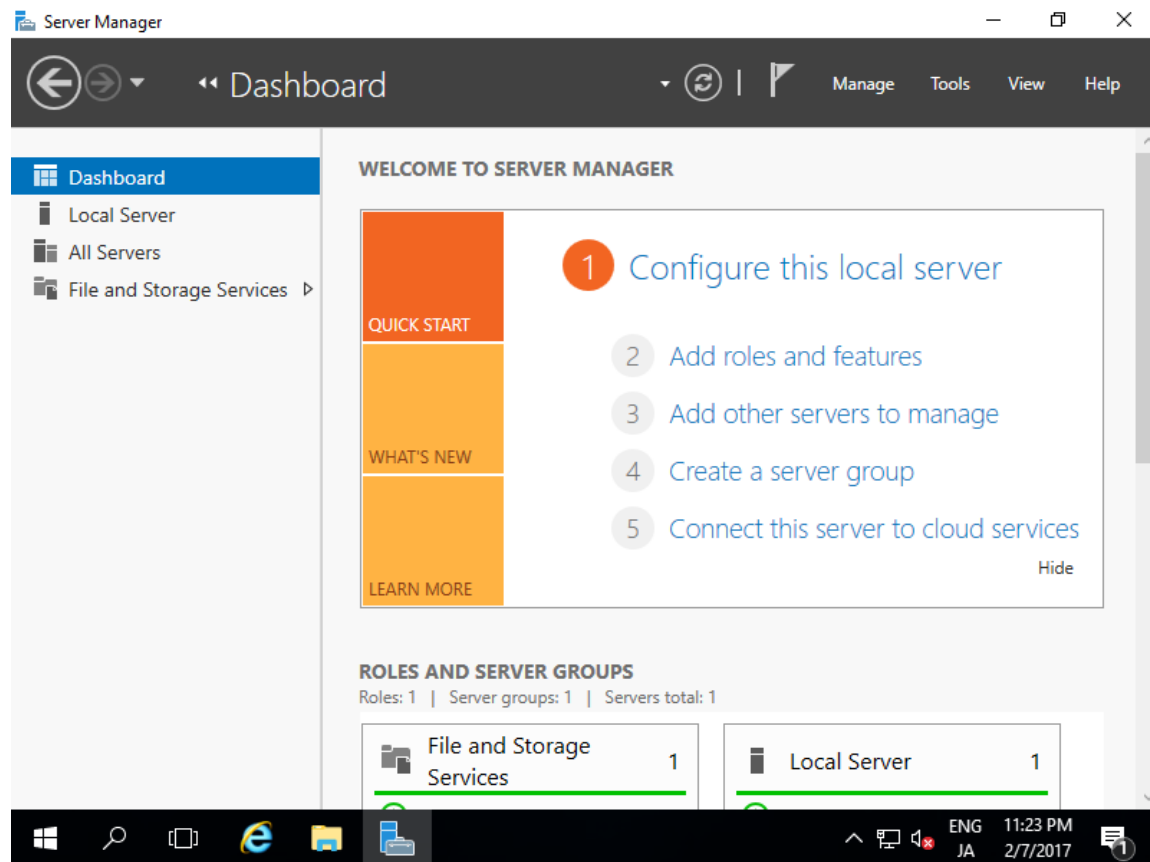

ການຕັ້ງຄ່າ DNS ສໍາລັບ Windows




■ ເລືອກ Next

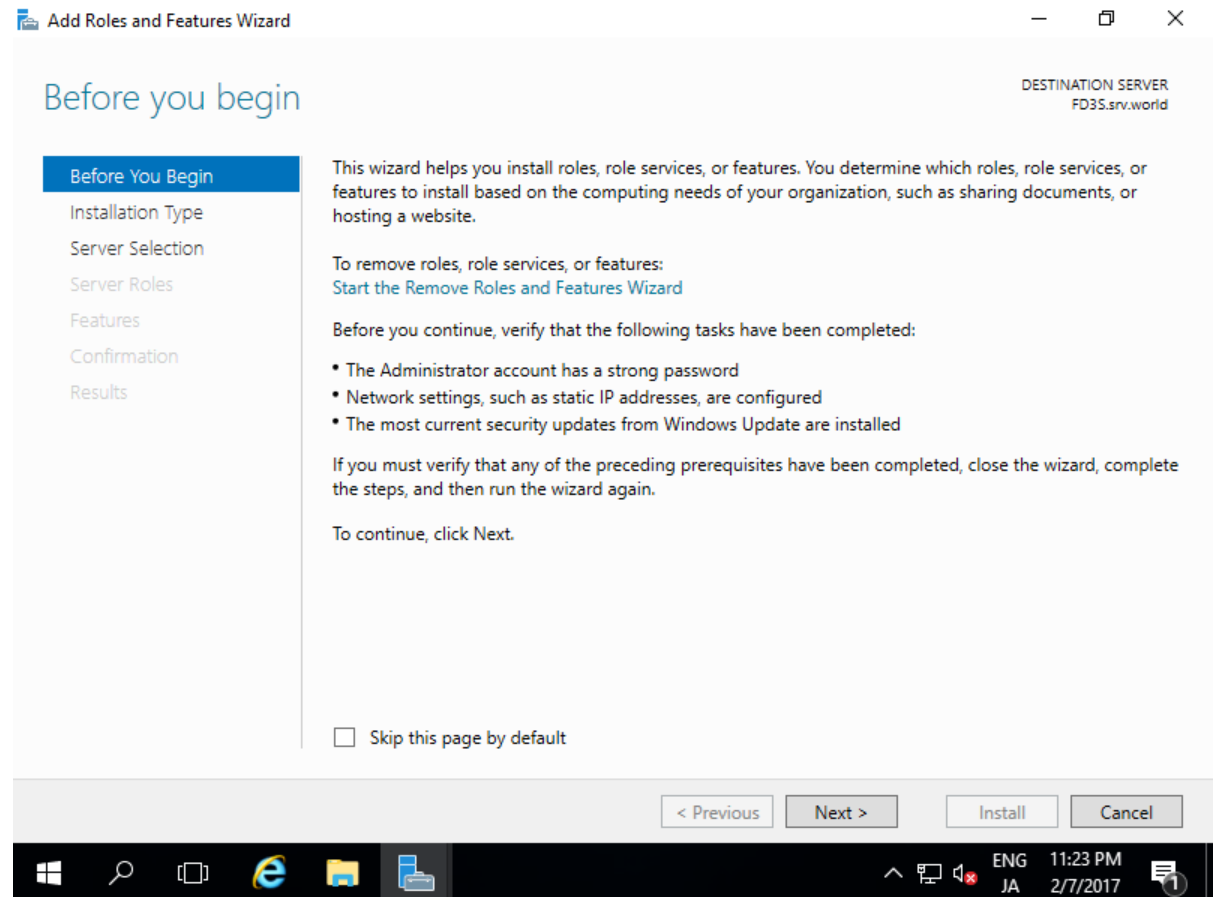


ການຕັ້ງຄ່າ DNS ສໍາລັບ Windows

- ເລືອກ Next

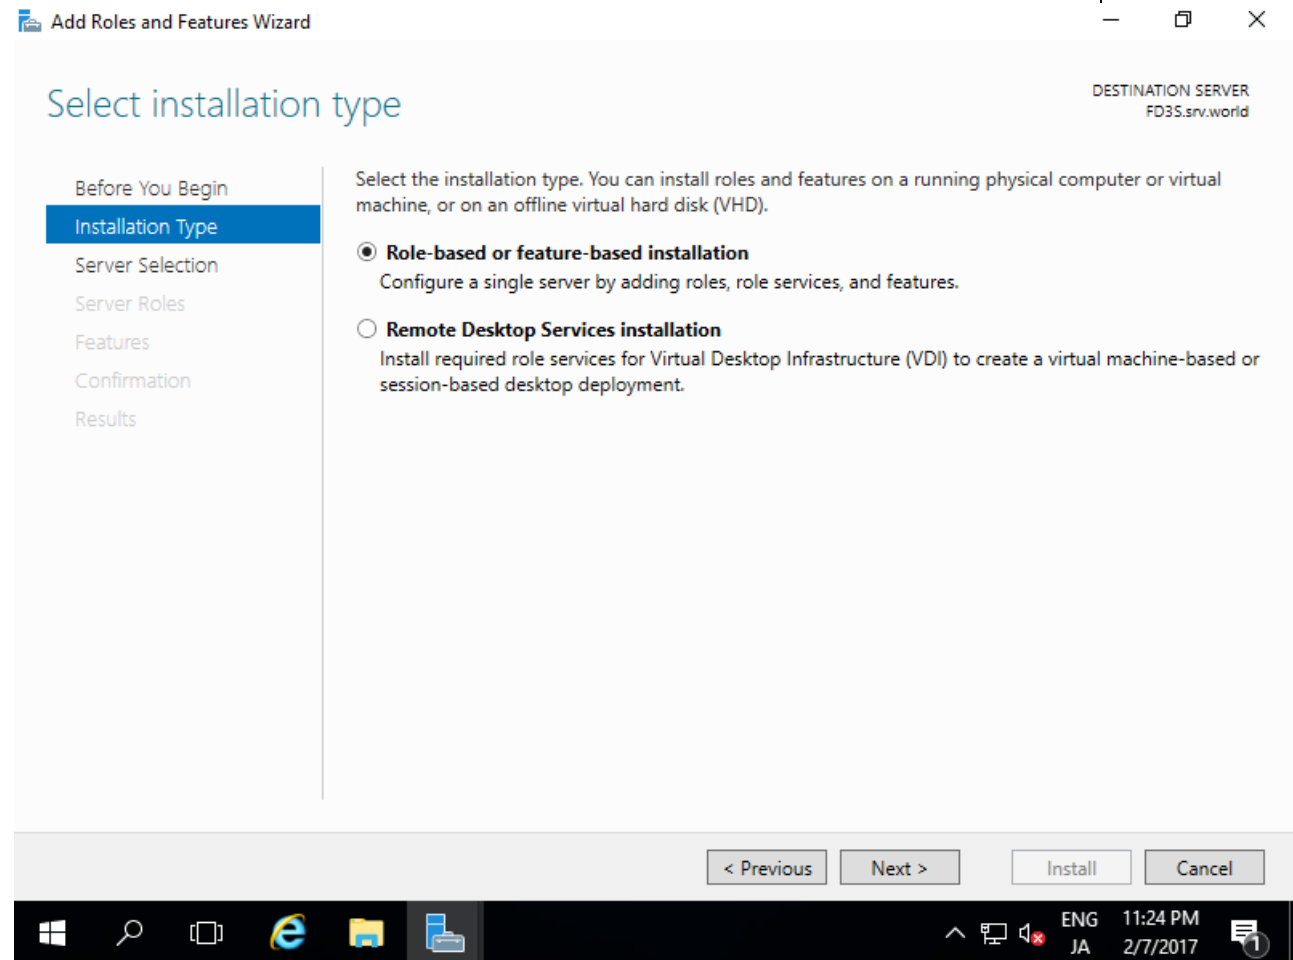

ການຕັ້ງຄ່າ DNS ສໍາລັບ Windows



- ເລືອກ Next

Add Roles and Features Wizard

Select destination server

DESTINATION SERVER
FD3S.srv.world

Before You Begin
Installation Type
Server Selection
Server Roles
Features
Confirmation
Results

Select a server or a virtual hard disk on which to install roles and features.

☒ Select a server from the server pool
☐ Select a virtual hard disk

Server Pool

Filter:


Name	IP Address	Operating System
FD3S.srv.world	10.0.0.100	Microsoft Windows Server 2016 Datacenter Evaluation

1 Computer(s) found


This page shows servers that are running Windows Server 2012 or a newer release of Windows Server, and that have been added by using the Add Servers command in Server Manager. Offline servers and newly-added servers from which data collection is still incomplete are not shown.

< Previous Next > Install Cancel

ການຕັ້ງຄ່າ DNS ສໍາລັບ Windows




■ ເລືອກ DNS Server

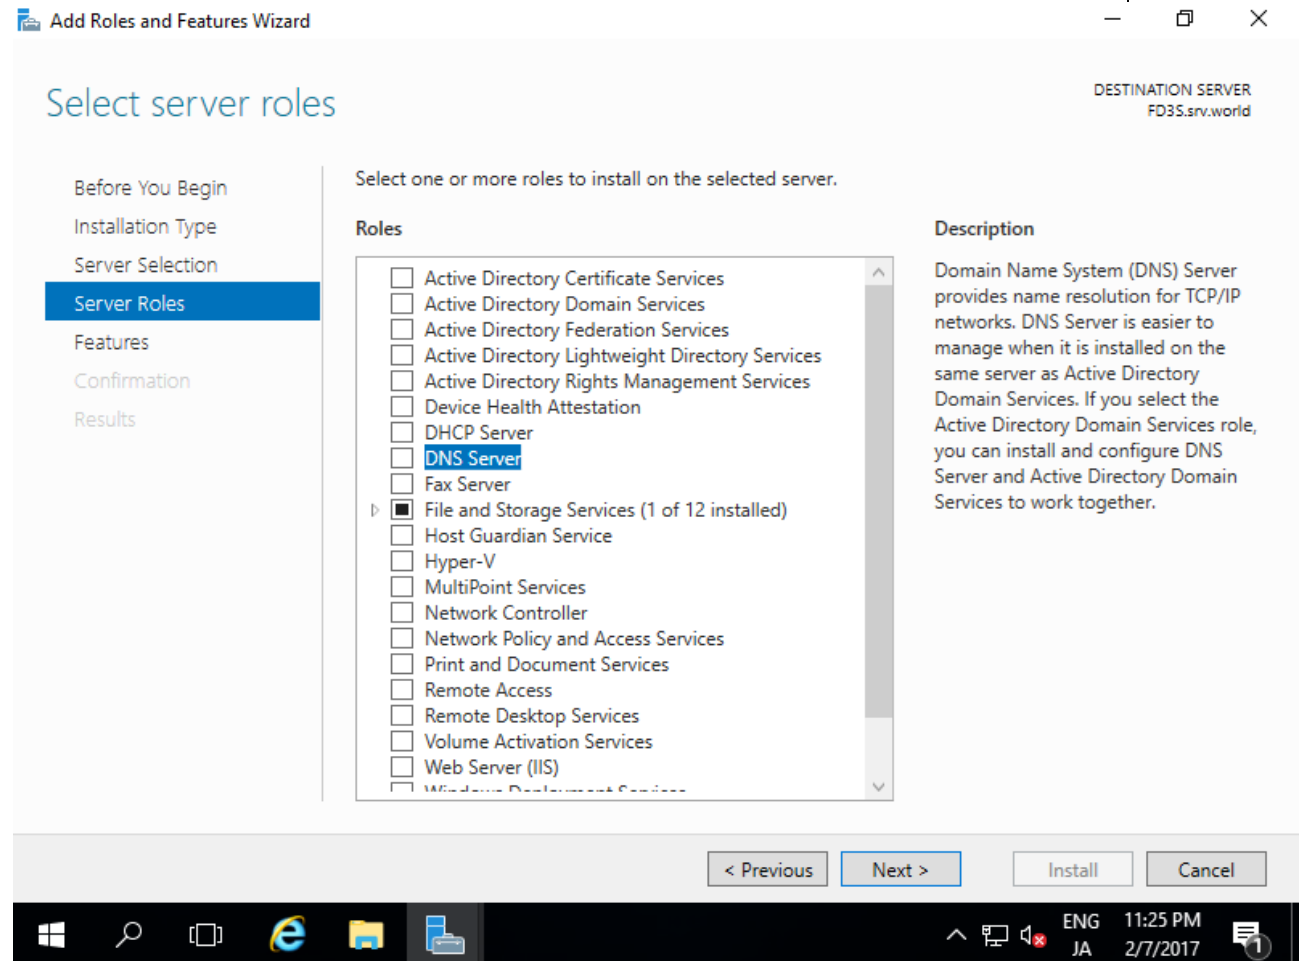


ການຕັ້ງຄ່າ DNS ສໍາລັບ Windows




- Click ໃສ່
Add Features

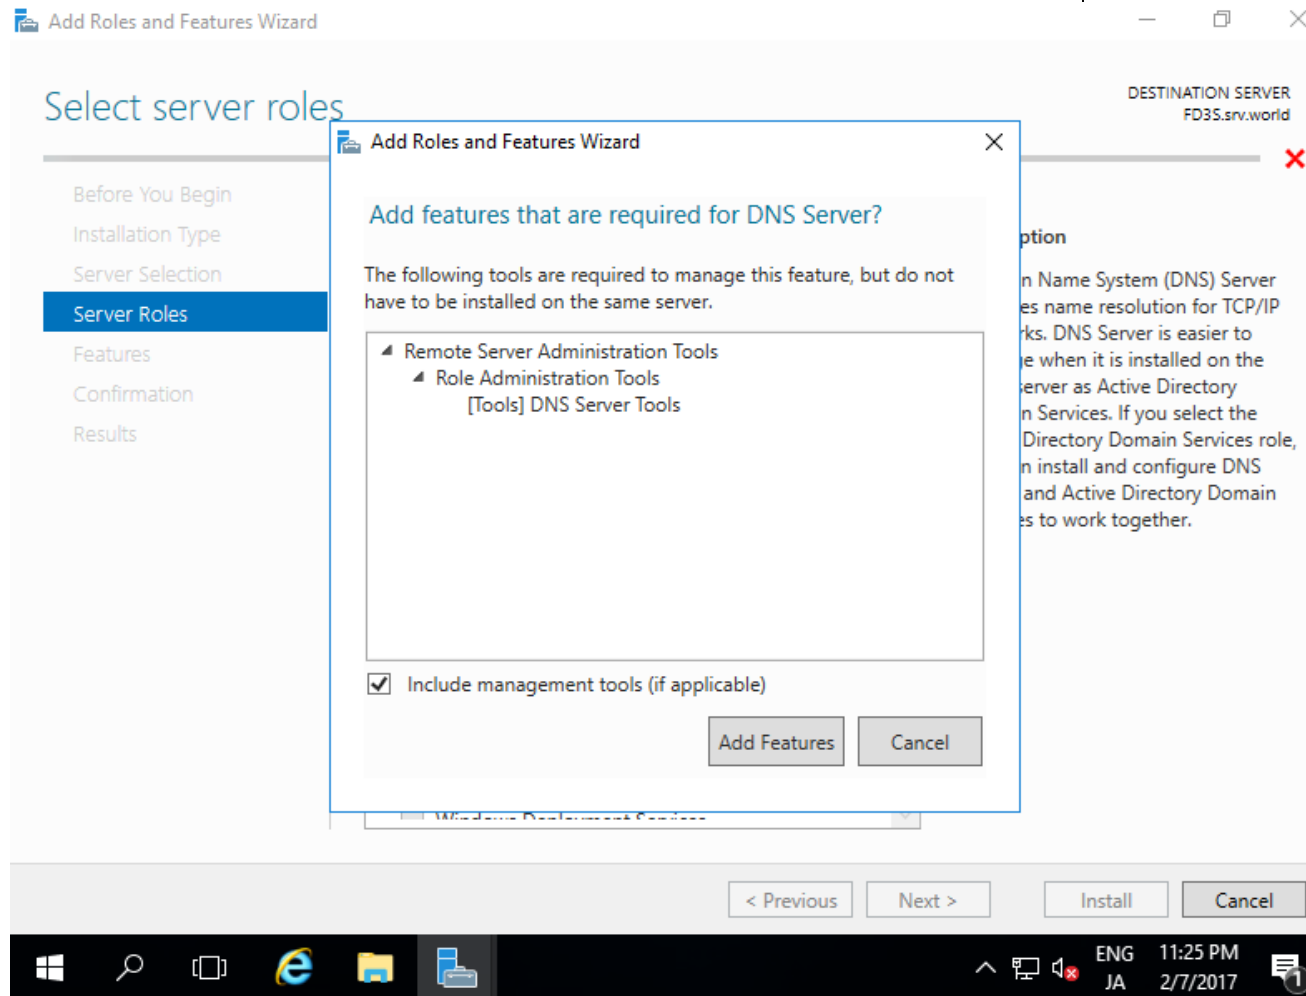

ການຕັ້ງຄ່າ DNS ສໍາລັບ Windows




- Click ໃສ່
Next

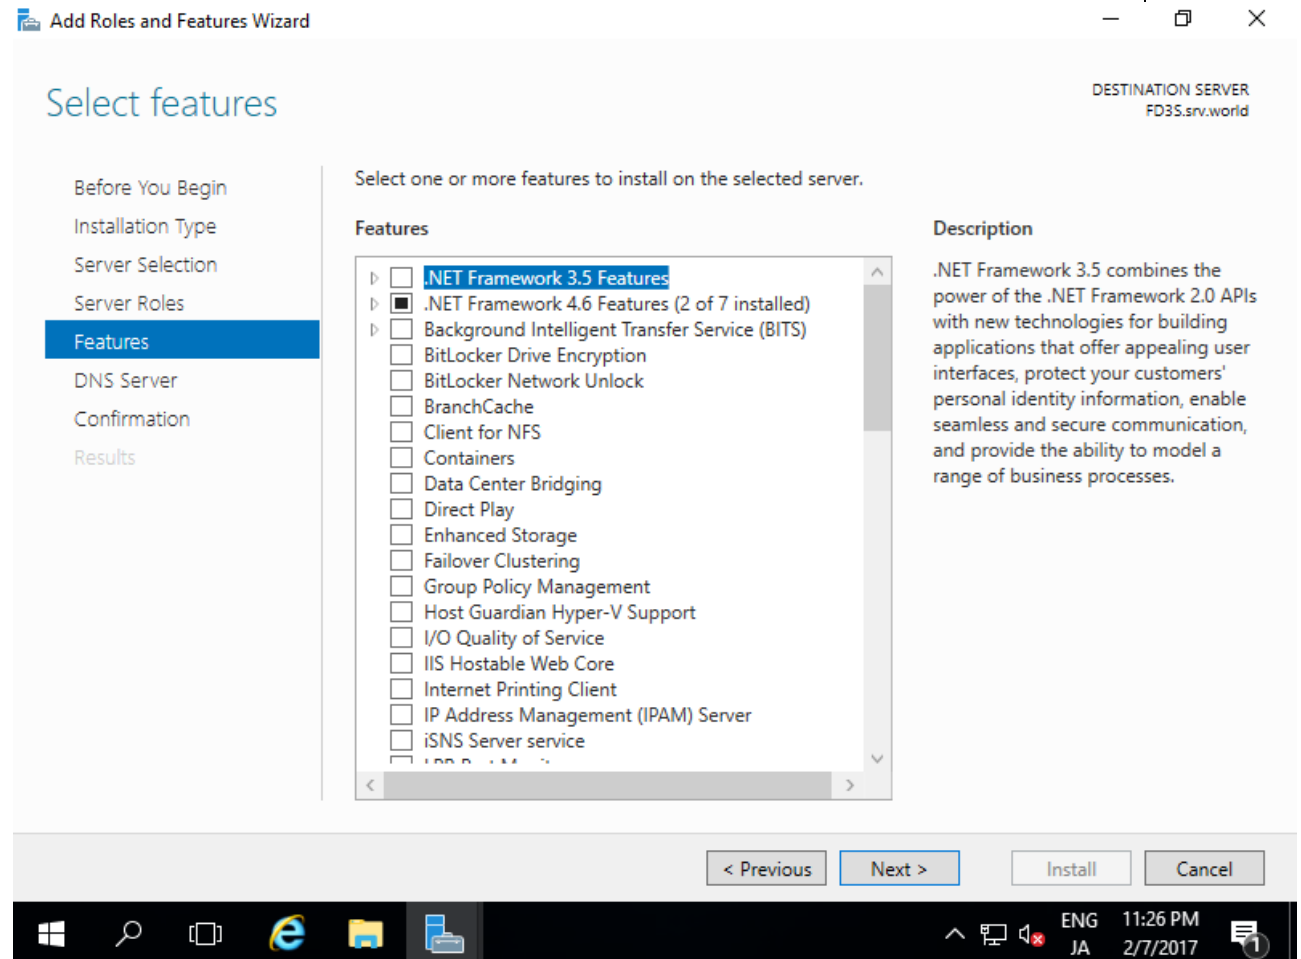

ການຕັ້ງຄ່າ DNS ສໍາລັບ Windows

- Click ໃສ່
Next

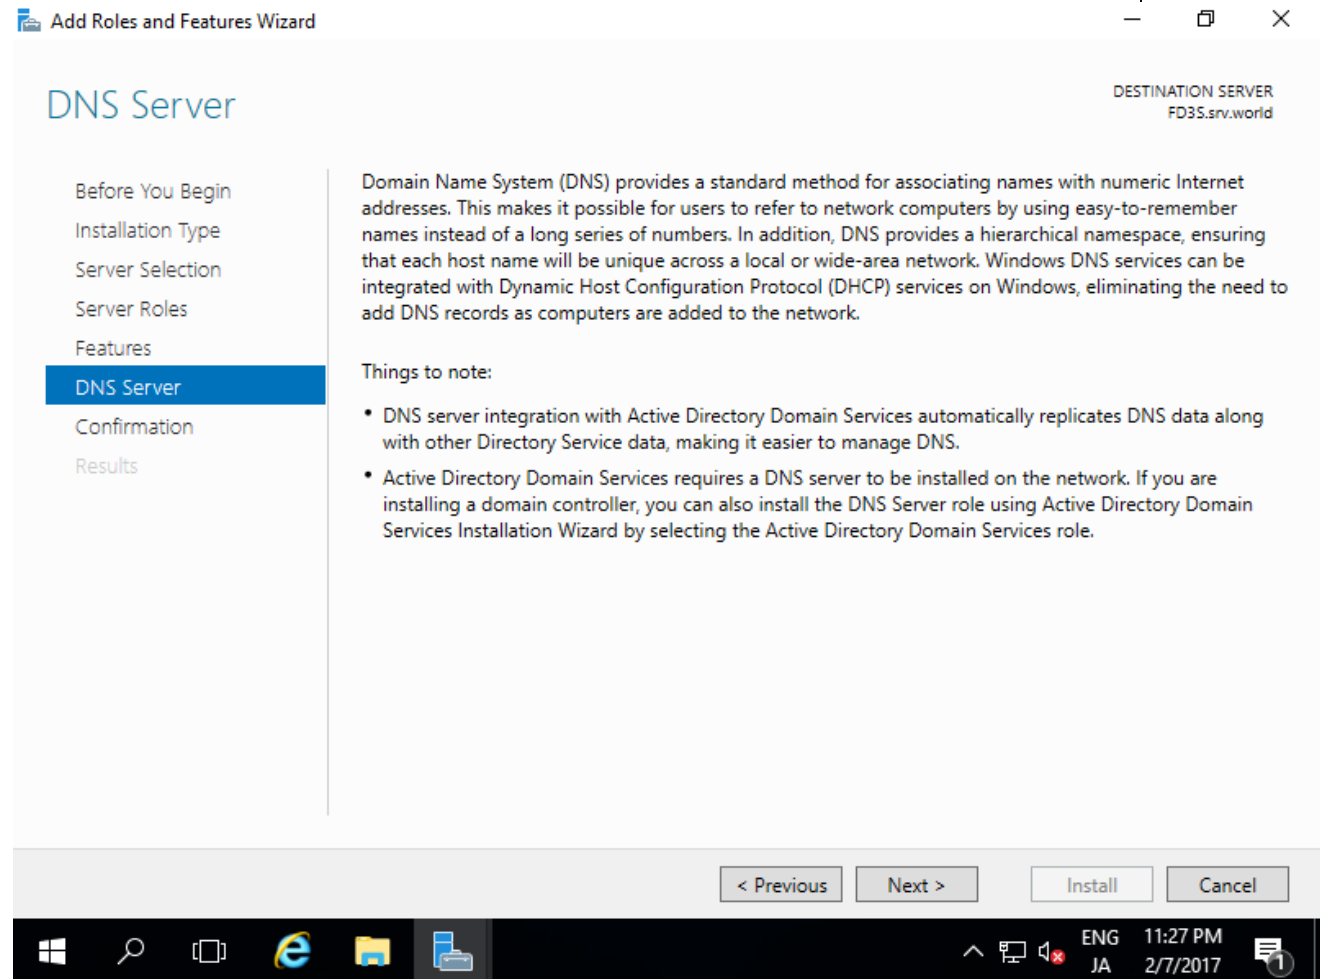

ການຕັ້ງຄ່າ DNS ສໍາລັບ Windows



- Click ໃສ່
Install

Add Roles and Features Wizard

Confirm installation selections

DESTINATION SERVER
FD3S.srv.world

Before You Begin
Installation Type
Server Selection
Server Roles
Features
DNS Server
Confirmation
Results

To install the following roles, role services, or features on selected server, click Install.

☐ Restart the destination server automatically if required

Optional features (such as administration tools) might be displayed on this page because they have been selected automatically. If you do not want to install these optional features, click Previous to clear their check boxes.

DNS Server

Remote Server Administration Tools


Role Administration Tools

DNS Server Tools


Export configuration settings
Specify an alternate source path

< Previous Next > Install Cancel


ການຕັ້ງຄ່າ DNS ສໍາລັບ Windows




- Click ໃສ່
Close

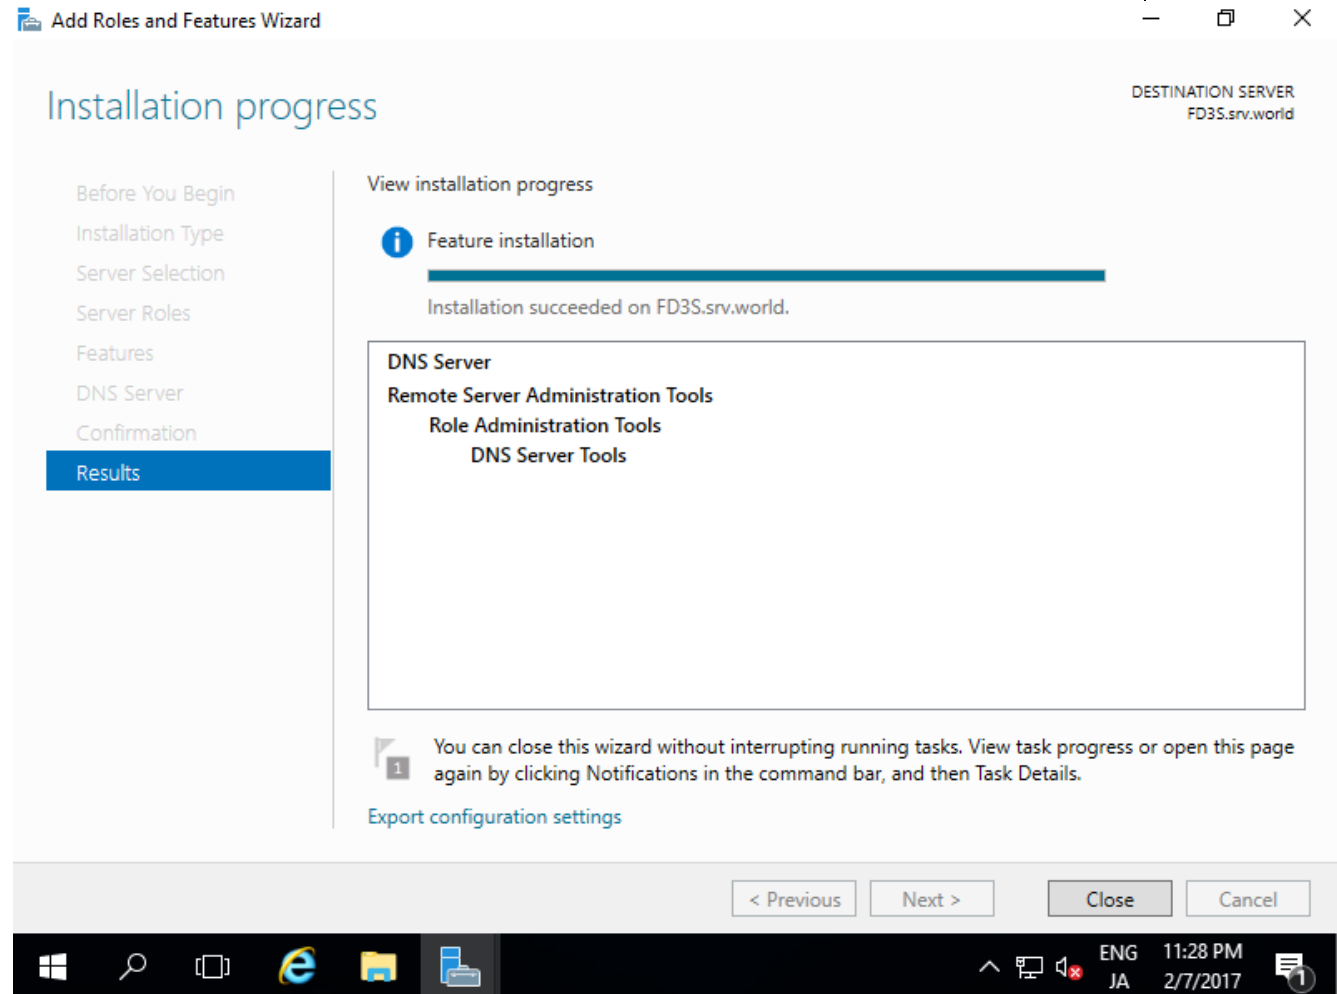


ການສ້າງ Virtual host ສຳລັບ Windows




- Click ໃສ່ Tool> Internet Information Service(IIS)

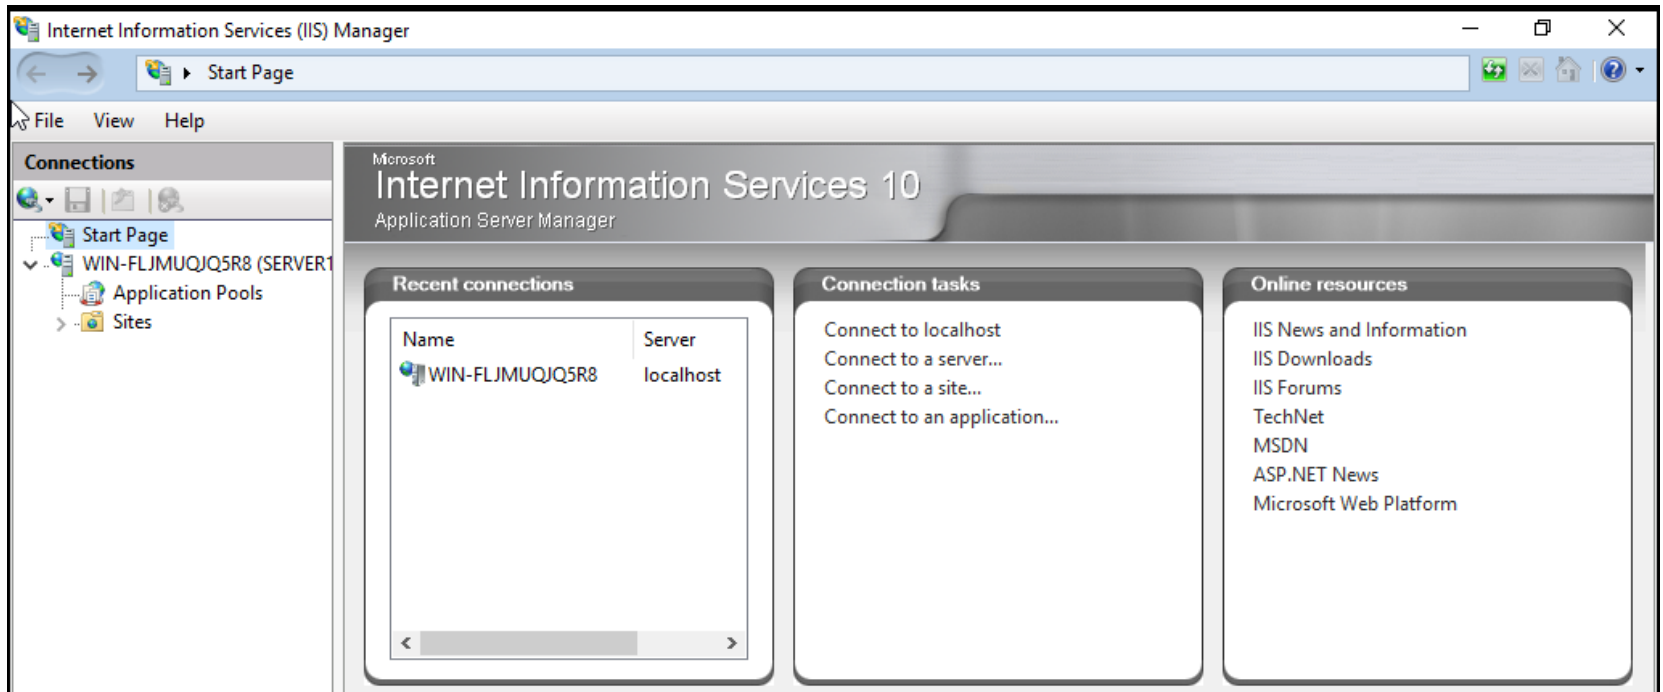

ການສ້າງ Virtual host ສຳລັບ Windows



- Click ຂວາໃສ່ Site> Add Website

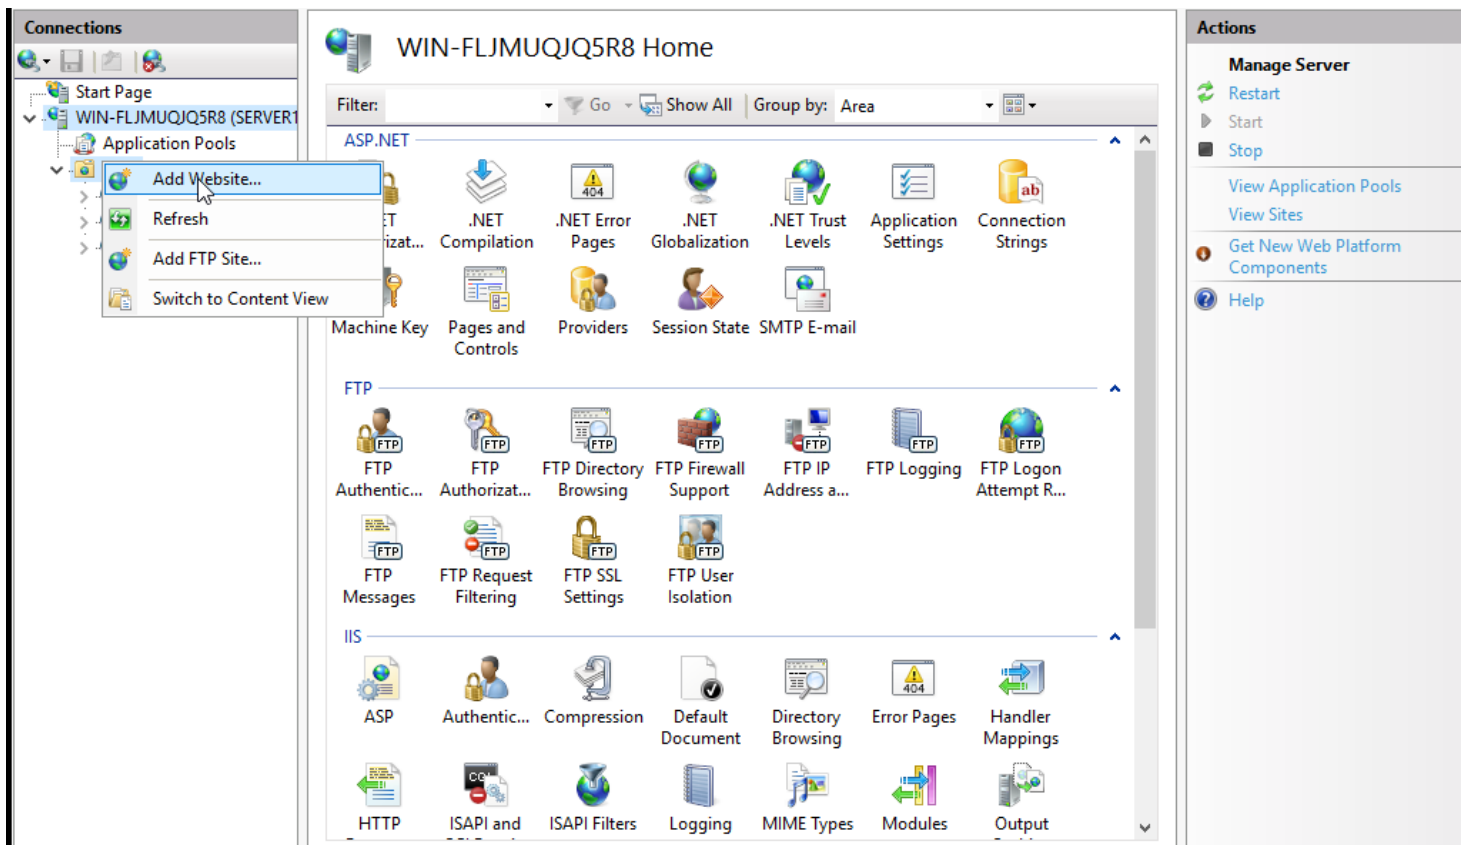

ການສ້າງ Virtual host ສຳລັບ Windows

- ຕັ້ງຊື່ເວບໄຊ້, ກຳນົດລາຍລະອຽດຂໍ້ມູນ ແລະ Click ໃສ່ OK


The screenshot shows the 'Add Website' dialog box in Windows IIS Manager. The fields are filled as follows:

- Site name: abc.com
- Application pool: abc.com
- Content Directory: Physical path: C:\abc.com
- Binding: Type: http, IP address: All Unassigned, Port: 80
- Host name: www.abc.com
- Start Website immediately: ☒


The OK button is highlighted with a blue border.

ການສ້າງ Virtual host ສໍາລັບ Windows


- ສໍາເລັດ
ການສ້າງ
VirtualHost

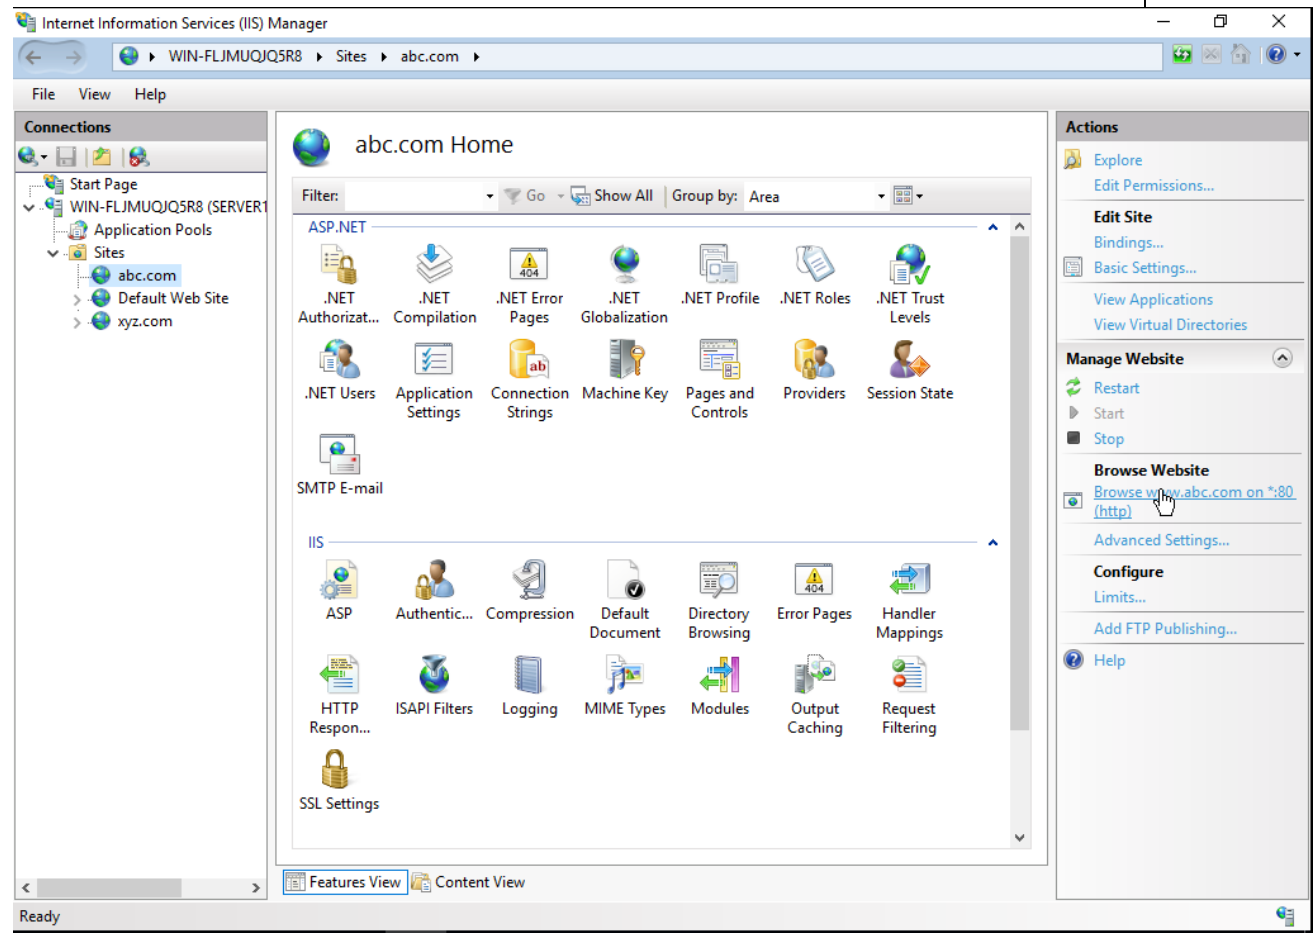


ການສ້າງ Virtual host ສໍາລັບ Windows




- ສ້າງໄຟລ html ຫຼື ASP ເກັບໄວ້ໃນ Folder ທີ່ Web server ກຳນົດໃຫ້

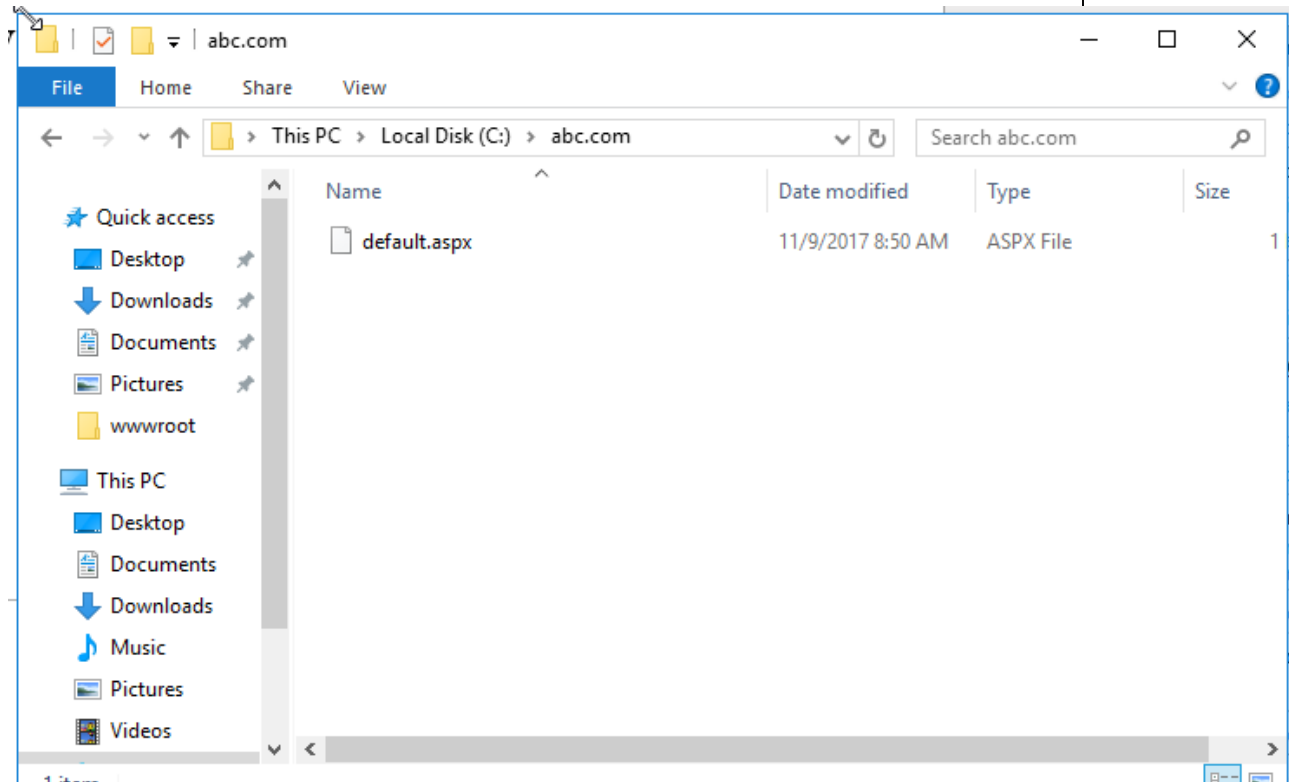


ການສ້າງ Virtual host ສໍາລັບ Windows




- ທົດສອບ

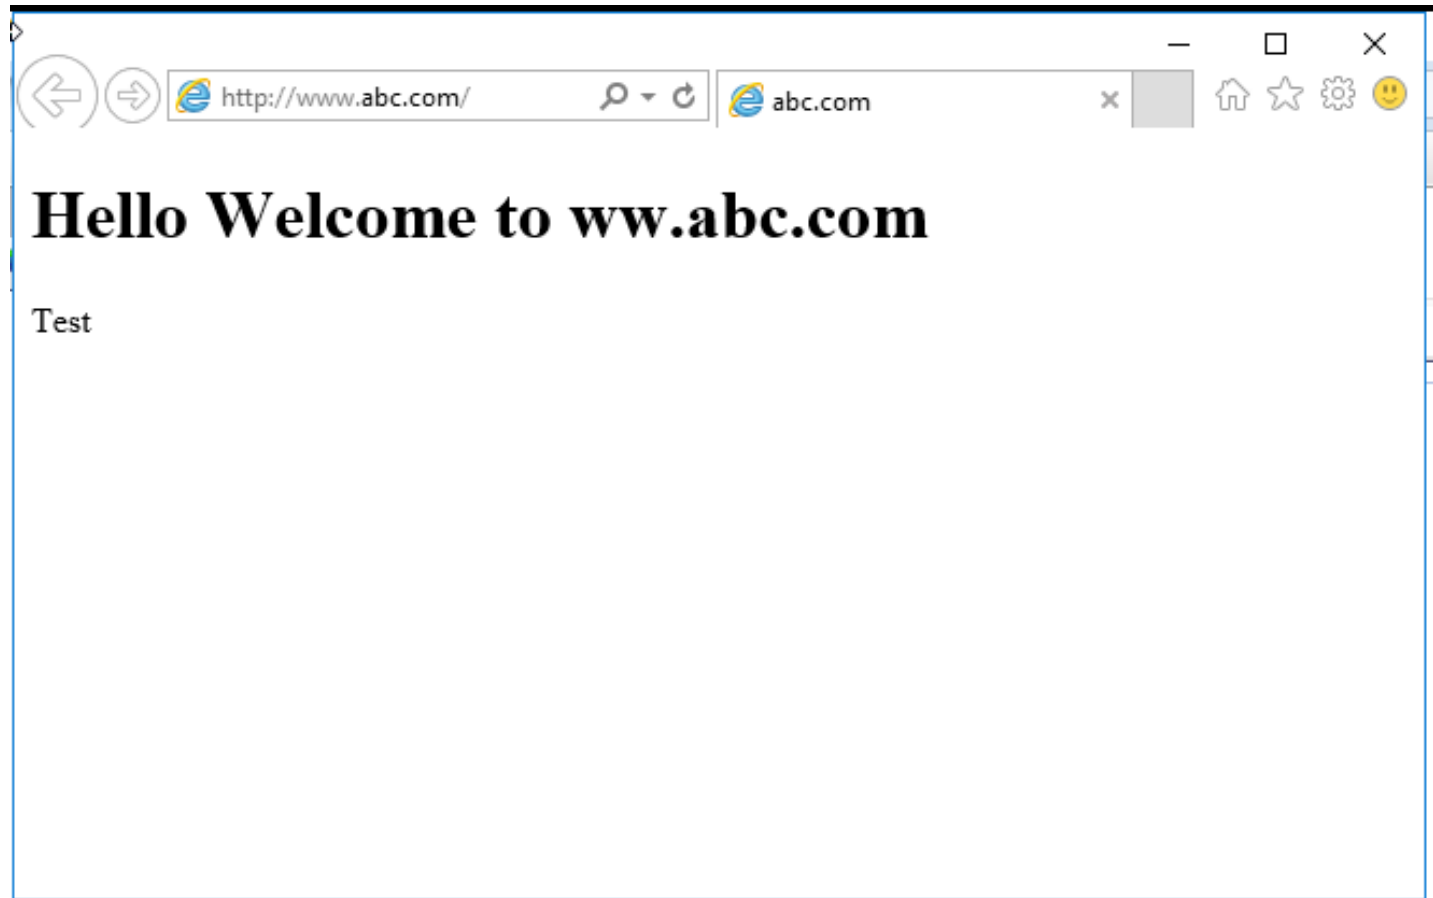

ຂໍ້ມູນອ້າງອີງ



- [1] Jeffrey C. Jackson. Web Technologies: A Computer Science Perspective. Pearson. 2007
- [2] Ramesh Bangia. Web Technology (including HTML,CSS,XML,ASP,JAVA). Firewall Media, 2008
- [3] Wale Soyinka. Linux Administration: A Beginner's Guide, Fifth Edition, 2009



ព្យាបាល និង ព្យាបាល

ឧបករណ៍