Servicenow

Session Agenda

- ITSM(Guided setup)
- Incidents(create record, Assign To, Emails)
- Script types

- # ITSM(Guided setup)

ITSM (IT Service Management) refers to the process of designing, delivering, managing, and improving IT services to meet business needs.

Guided Setup in ITSM is a step-by-step, structured approach (usually provided inside platforms like ServiceNow) that helps you configure and implement ITSM features easily.
It breaks down complex configurations into clear tasks, making it easier for admins to set up things like Incident Management, Change Management, and Service Catalog without missing important steps.

- # ITSM(Guided setup)

Why is it important?

Simplifies implementation

Instead of manually configuring everything, Guided Setup walks you through each step clearly.

Reduces errors

Ensures you don’t skip critical configurations or misconfigure modules.

Saves time

Faster setup compared to starting from scratch.

Best practice alignment

Follows standard frameworks like ITIL, so your system is built correctly from the start.

Better onboarding for beginners

Great for new admins or teams who are still learning ITSM.

- # ITSM(Guided setup)

Simple Example:

If you're setting up **Incident Management**, Guided Setup will:

Ask you to define priorities

Configure assignment rules

Set up notifications

Enable SLAs

All in a guided, ordered flow instead of random manual setup.

• Incidents(create record, Assign To, Emails)

- User creates an Incident (Email issue)
- Incident status = **New**
- System assigns Incident to **IT Support Group**
- Agent is assigned → status = **Assigned**
- Agent opens the Incident
- Agent changes status → **In Progress**
- Agent sends email to customer (Issue received)
- Customer replies with more details
- System updates Incident with customer reply

- **Incidents(create record, Assign To, Emails)**

  - Agent reviews and identifies issue (e.g., password expired)
  - Agent fixes the issue
  - Agent updates status → **Resolved**
  - Agent sends resolution email to customer
  - Customer confirms issue is fixed
  - Agent updates status → **Closed**
  - Add closure notes & resolution code

- # Script types

1. Client Script
Definition:
Runs on the **client side (browser)** and executes when the user interacts with the form.
Types:
onLoad
onChange
onSubmit
onCellEdit
Use cases:
Validate form before submit
Show/hide fields
Auto-fill values
Example:
If user selects “High Priority” → make a field mandatory

- # Script types

2. Business Rule

Definition:

Runs on the **server side** when a record is inserted, updated, deleted, or queried.

When it runs:

Before

After

Async

Display

Use cases:

Update other records

Enforce business logic

Trigger actions automatically

- # Script types

3. UI Policy

Definition:

Controls **form behavior without scripting (or minimal scripting)** on the client side.

Use cases:

Make fields mandatory

Hide/show fields

Make fields read-only

👉 Prefer UI Policy over Client Script when possible (cleaner & easier)

- # Script types

4. Script Include

Definition:

Reusable **server-side functions/classes** that can be called from other scripts.

Use cases:

Shared logic across multiple scripts

Complex calculations

API-like reusable functions

- # Script types

5. GlideAjax

Definition:

A way to call **server-side code from client-side scripts** asynchronously.

Use cases:

Get data from server without reloading the form

- # Script types

6. UI Action

Definition:

Custom buttons/links on forms that execute scripts.

Use cases:

“Approve”, “Reject”, “Close Incident” buttons

Perform actions on click

- # Script types

7. Scheduled Script Execution

Definition:

Runs scripts automatically at a **specific time or interval**.

Use cases:

Daily cleanup

Auto-close incidents

Send scheduled reports

- **Script types**

Type	Runs Where	Triggered By	Use Case
Client Script	Client (Browser)	User actions	Form validation, UI changes
Business Rule	Server	DB operations	Data processing, automation
UI Policy	Client	Form conditions	UI changes (no code preferred)
Script Include	Server	Called by scripts	Reusable logic
GlideAjax	Client → Server	Client request	Fetch server data dynamically
UI Action	Client/Server	Button click	Trigger manual actions
Scheduled Script	Server	Time-based	Background automation

- # Script types

Simple Comparison

Client Script vs Business Rule

- Client Script → UI (before sending data)
- Business Rule → Database (after/before save)

•**UI Policy vs Client Script**

- UI Policy → No code / simple
- Client Script → More flexible / complex logic

•**Script Include vs Business Rule**

- Script Include → reusable
- Business Rule → tied to table events

- Asset Management System

1. Quantity Validation Based on Stock

Scenario:

When a user enters quantity, ensure it does not exceed available stock and stays within allowed limits.

2. Auto-Set Asset Category

Scenario:

When an asset is selected, automatically assign a category based on predefined mapping (Laptop, Printer, etc.).

- Asset Management System

Dynamic Field Visibility

Scenario:

Show or hide the serial number field depending on the selected asset type.

4. Prevent Form Submission with Invalid Quantity

Scenario:

Block submission if quantity is empty, zero, or exceeds allowed maximum.

- Asset Management System

5. Auto Calculate Total Price

Scenario:

Calculate total price dynamically based on quantity and fixed unit price.

6. Prevent Duplicate Asset Selection in Same Form

Scenario:

Ensure the same asset cannot be selected more than once in a multi-select or repeated field structure.

- Asset Management System

7. Set Default Values on Form Load

Scenario:

When form opens, automatically set default values for quantity, request type, and visibility of optional fields.

Practice

- # Restaurant Management System

1. Quantity vs Available Dishes

A customer selects a dish and enters a quantity.

👉 How would you ensure (onChange) that the quantity does not exceed the available number of dishes in stock?

2. Auto-Set Cuisine Type

When a customer selects a restaurant (e.g., Italian, Japanese, Fast Food).

👉 How would you automatically set the cuisine field based on the selected restaurant using client-side logic?

- Restaurant Management System

3. Show/Hide “Spice Level”

Some dishes (like Indian or Thai) require spice level selection.

👉 How would you show the “spice level” field only for specific cuisines and hide it for others?

4. Prevent Invalid Order Submission

A user tries to place an order with:

empty quantity

or quantity = 0

👉 How would you prevent form submission (onSubmit) in such cases?

- # Restaurant Management System

5. Auto Calculate Total Price

Each dish has a fixed price, and the user selects quantity.

👉 How would you dynamically calculate and update the total price on the form without calling the server?

6. Prevent Ordering Same Dish Twice

A customer tries to add the same dish multiple times in the same order.

👉 How would you detect and prevent duplicate dish selection using only client-side logic?

- # Restaurant Management System

5. Auto Calculate Total Price

Each dish has a fixed price, and the user selects quantity.

👉 How would you dynamically calculate and update the total price on the form without calling the server?

6. Prevent Ordering Same Dish Twice

A customer tries to add the same dish multiple times in the same order.

👉 How would you detect and prevent duplicate dish selection using only client-side logic?

- # Restaurant Management System

7. Limit Maximum Items per Order

Restaurant policy: a single order cannot exceed 10 total items.

👉 How would you enforce this rule while the user is entering quantities?

8. Delivery Type Controls Fields
If the user selects:
“Delivery” → show address field
“Pickup” → hide address field
👉 How would you dynamically control field visibility based on delivery type?

- Restaurant Management System

7. Default Order Values on Load

When the order form opens:

quantity should default to 1

delivery type should default to “standard”

optional fields should be hidden

👉 How would you implement this behavior when the form loads?

10. Special Requests Validation

If the user selects “Custom Order”, they must fill “Special Instructions”.

👉 How would you make this field mandatory only in that case?

Homework

When the form loads, if **Category = Network**, show a message: *“Network team will handle this”*.

Client Script
Load Network Cat

Update

Name	Load Network Cat	Application	Global
Table	Incident [incident]	Active	☑
UI Type	All	Inherited	☐
Type	onLoad	Global	☑

tion

1. When the form loads, if Category = Network, show a message: “Network team will handle this”.

ages

ot

```
function onLoad() {
    var category = g_form.getValue('category');

    if (category == 'network') {
        g_form.addInfoMessage('Network team will handle this');
    }
}
```

Incident
INC0000003

Network team will handle this

Number	INC0000003
* Caller	Joe Employee
Department	
Category	Network
Subcategory	-- None --

When **Priority = High**, make the **Description** field mandatory.

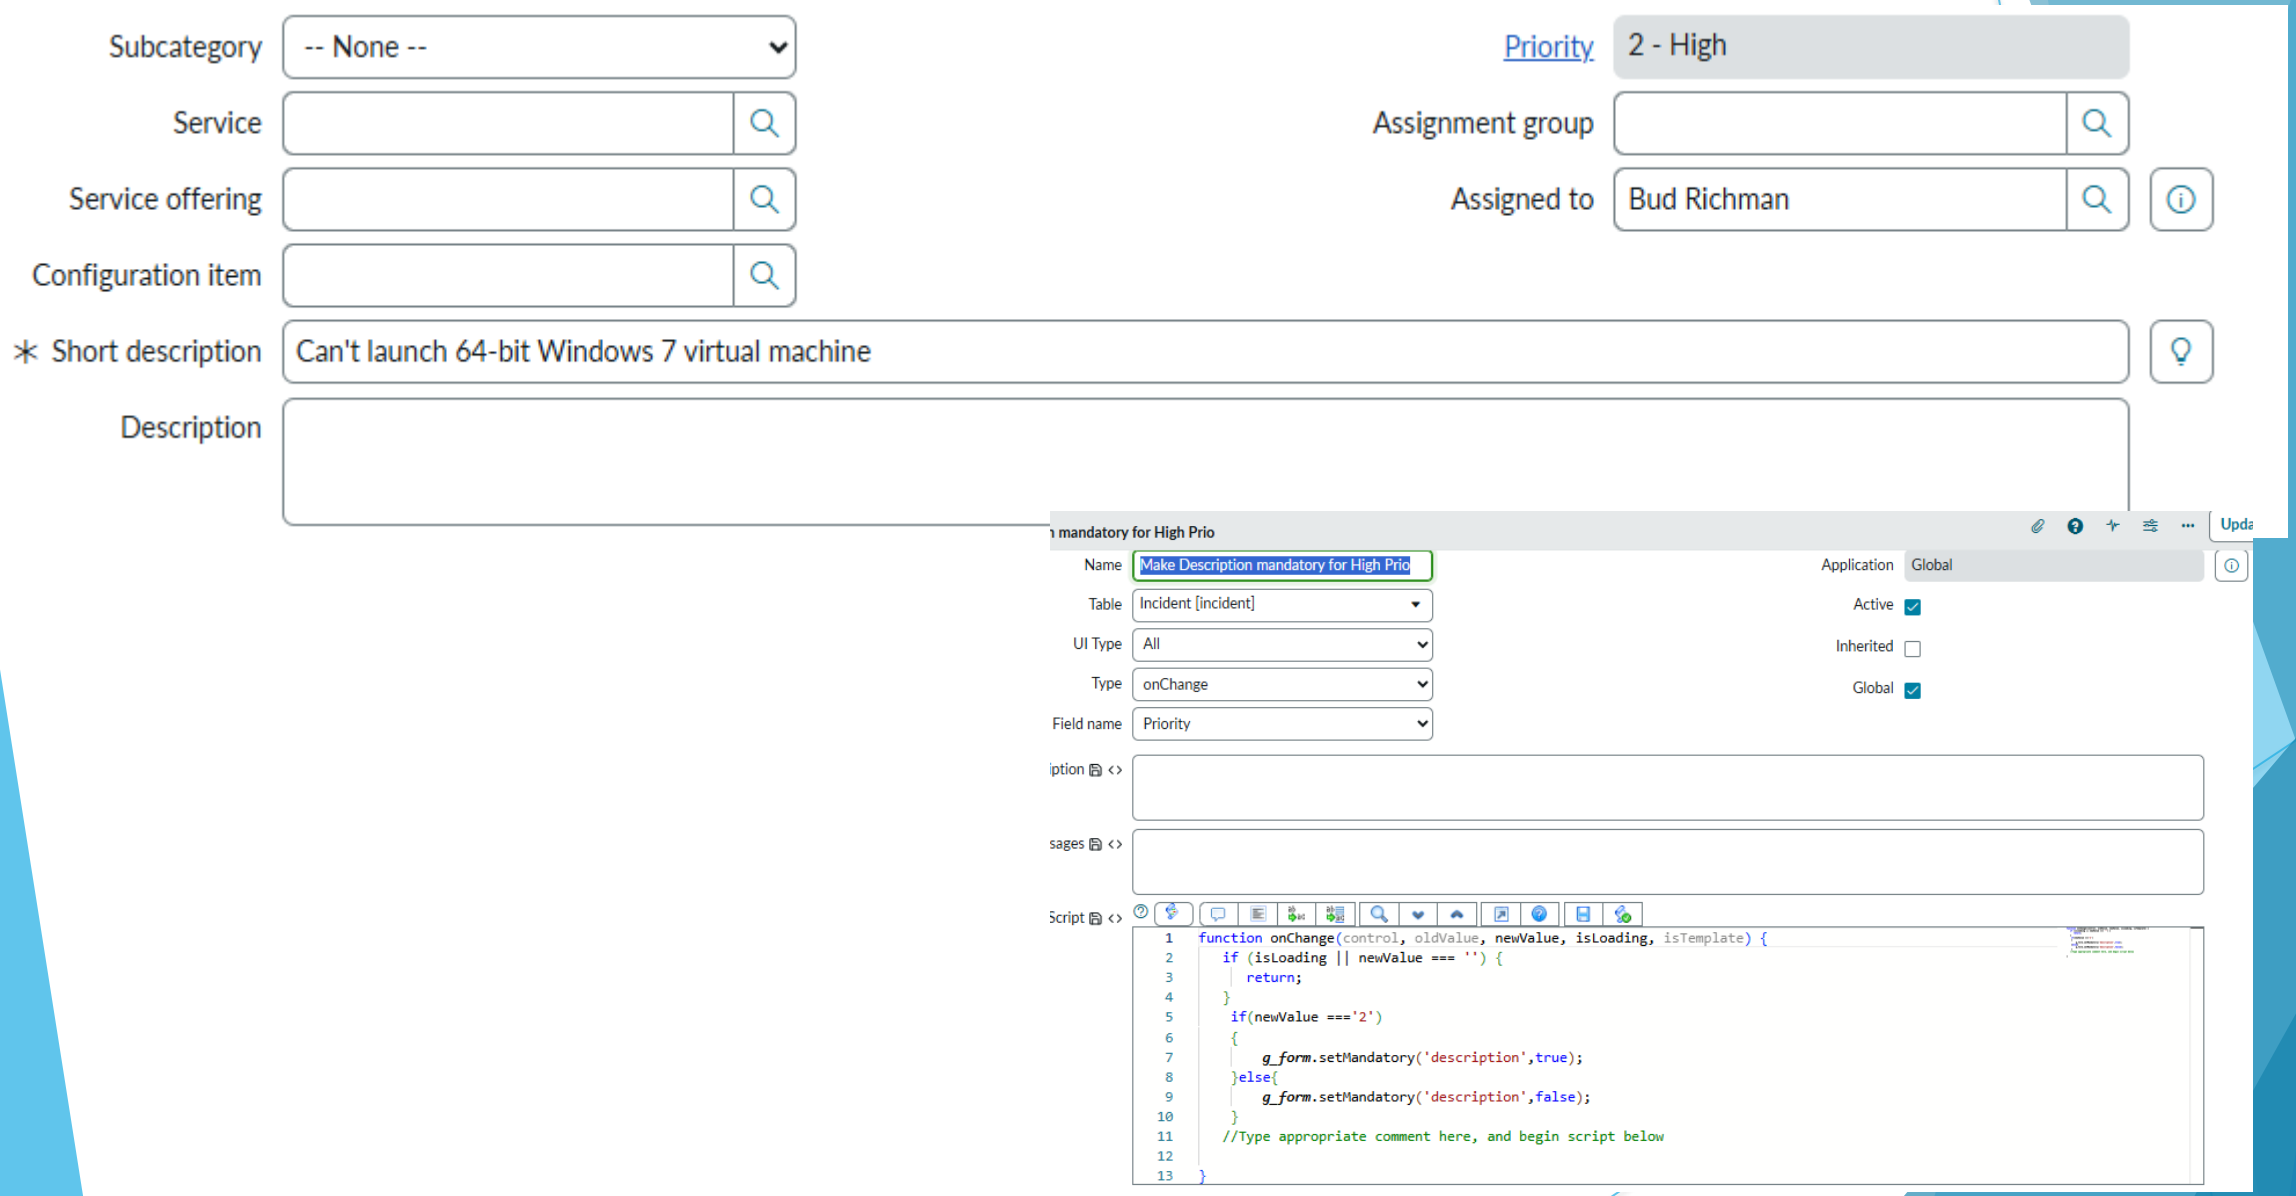

When **Urgency = Low**, hide the **Impact** field.

```
function onChange(control, oldValue, newValue, isLoading) {
    if (isLoading) return;

    if (newValue == '3') { // Low
        g_form.setDisplay('impact', false);
    } else {
        g_form.setDisplay('impact', true);
    }
}
```

When **Urgency = Low**, hide the **Impact** field.

```
function onChange(control, oldValue, newValue, isLoading) {
    if (isLoading) return;

    if (newValue == '3') { // Low
        g_form.setDisplay('impact', false);
    } else {
        g_form.setDisplay('impact', true);
    }
}
```

Questions

1. Which of the following is the best recommendation for validating form data before submission?

A. onSubmit() Client Script

B. onLoad() Client Script

C. Business Rule

D. UI Policy

Anwer: A

Why: `onSubmit()` triggers exactly when the user clicks save/submit, allowing you to stop the process if data is invalid

2. Where do Client Scripts execute?

A. On the ServiceNow Server

B. In the user's Web Browser

C. In the MID Server

D. In the Database

Anwer: B

Why: Client scripts run on the "client-side" (the browser) to provide immediate feedback.

3. What are the four standard types of Client Scripts? (Select all that apply)

A. onLoad

B. onChange

C. onSubmit

D. onCellEdit

E. onUpdate

Anwer: A,B,C,D

Why: These are the four specific "Types" available in the Client Script configuration form.

Which object is used to access and manipulate form fields in a Client Script?

A. gs

B. g_form

C. g_user

D. current

Anwer: B

Why: g_form (GlideForm) is the primary API for interacting with the UI, while gs (GlideSystem) and current are server-side only.

1. A developer needs to make a field hidden only when the "Priority" of an incident is "5 - Planning." What is the ServiceNow recommended way to do this?

A. onLoad() Client Script

B. onChange() Client Script

C. UI Policy

D. Data Policy

Anwer: C

Why: For simple "Mandatory, Read-Only, or Visible" (MRV) logic based on conditions, a **UI Policy** is preferred because it requires no coding and is easier to maintain

2. Which object can be used in a Client Script to find out if the currently logged-in user has the "itil" role?

A. current

B. gs

C. g_form

D. g_user

Anwer: D

Why: The g_user (GlideUser) object provides methods like hasRole() to check permissions on the client side

3. In an onChange() Client Script, which parameter is used to prevent the script from running when the form is first loaded?

A. control

B. oldValue

C. newValue

D. isLoading

Anwer: D

Why: By default, onChange scripts run during initial load. Checking if (isLoading) and returning early prevents unnecessary execution.

4. When a user changes a field value on a list view (not on a form), which type of Client Script is triggered?

A. onChange

B. onCellEdit

C. onListEdit

D. onSubmit

Anwer: B

Why: onCellEdit is the specific script type designed for list-view interactions.

Thank you