

```

import com.mongodb.client.*;
import com.mongodb.client.model.Filters;
import com.mongodb.client.model.Updates;
import org.bson.Document;

public class MongoCRUExample {

    public static void main(String[] args) {

        // Connect to MongoDB
        MongoClient mongoClient = MongoClient.create("mongodb://localhost:27017

        // Access database
        MongoDBDatabase database = mongoClient.getDatabase("CollegeDB");

        // Access collection
        MongoCollection<Document> collection =
            database.getCollection("Students");

        // =====
        // CREATE (Insert)
        // =====
        Document student = new Document("id", 101)
            .append("name", "John")
            .append("department", "CSE")
            .append("cgpa", 8.7);

        collection.insertOne(student);
        System.out.println("Document Inserted Successfully");

        // =====
        // READ (Find)
        // =====
        System.out.println("\nStudent Records:");

        FindIterable<Document> students = collection.find();

        for (Document doc : students) {

```

```

        System.out.println(doc.toJson());
    }

    // =====
    // UPDATE
    // =====
    collection.updateOne(
        Filters.eq("id", 101),
        Updates.set("cgpa", 9.2)
    );

    System.out.println("\nDocument Updated Successfully");

    // =====
    // READ Updated Record
    // =====
    Document updatedStudent =
        collection.find(Filters.eq("id", 101)).first();


    System.out.println("\nUpdated Record:");
    System.out.println(updatedStudent.toJson());

    // =====
    // DELETE
    // =====
    collection.deleteOne(Filters.eq("id", 101));

    System.out.println("\nDocument Deleted Successfully");

    // Close connection
    mongoClient.close();
}
}

```

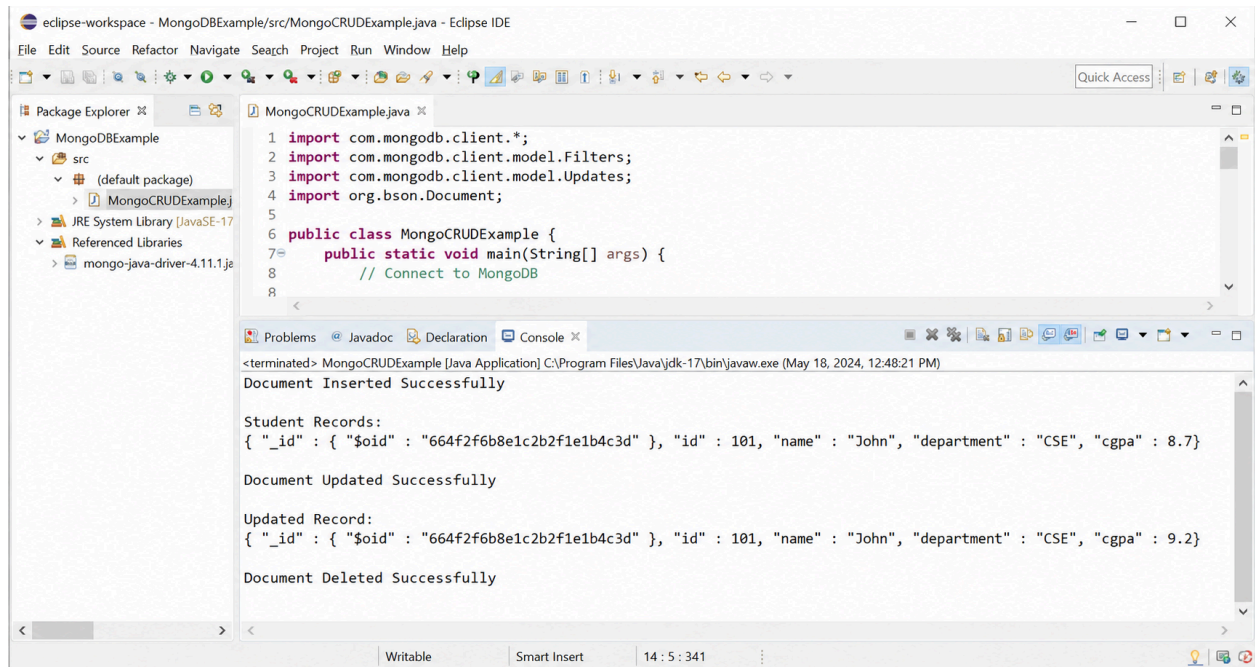

MongoDB

```

db.StudentDetails.insertMany([
{
  id: 1,
  name: "Saksham Dwivedi",
  department: "CSE",
  cgpa: 8.5
},
{
  id: 2,
  name: "Aman Ankur",
  department: "CSE",
  cgpa: 8.2
},
{
  id: 3,
  name: "Rahul Sharma",
  department: "CSE",
  cgpa: 7.9
}
])

```

ECLIPSE

```

package mongo;

import com.mongodb.client.*;
import com.mongodb.client.model.Filters;
import com.mongodb.client.model.Updates;
import org.bson.Document;

public class MongoDBConnection {

    public static void main(String[] args) {

        MongoClient mongoClient =
            MongoClient.create("mongodb://localhost:27017");

        MongoDB database =
            mongoClient.getDatabase("vitcampus");

        MongoCollection<Document> collection =
            database.getCollection("StudentDetails");

        // INSERT
        Document student = new Document("id", 24)
            .append("name", "Saksham Dwivedi")
            .append("department", "CSE")
            .append("cgpa", 8.5);

        collection.insertOne(student);

        System.out.println("Document Inserted Successfully");

        // DISPLAY RECORDS
        System.out.println("\nStudent Records:");

        FindIterable<Document> students = collection.find();

        for (Document doc : students) {
            System.out.println(doc.toJson());
        }

        // UPDATE
        collection.updateOne(
            Filters.eq("id", 24),
            Updates.set("cgpa", 9.1)
        );
    }
}

```

```

);

System.out.println("\nDocument Updated Successfully");

// DISPLAY UPDATED RECORD
Document updatedStudent =
    collection.find(Filters.eq("id", 24)).first();


System.out.println("\nUpdated Record:");
System.out.println(updatedStudent.toJson());

// DELETE
collection.deleteOne(Filters.eq("id", 24));

System.out.println("\nDocument Deleted Successfully");

mongoClient.close();
}
}

```

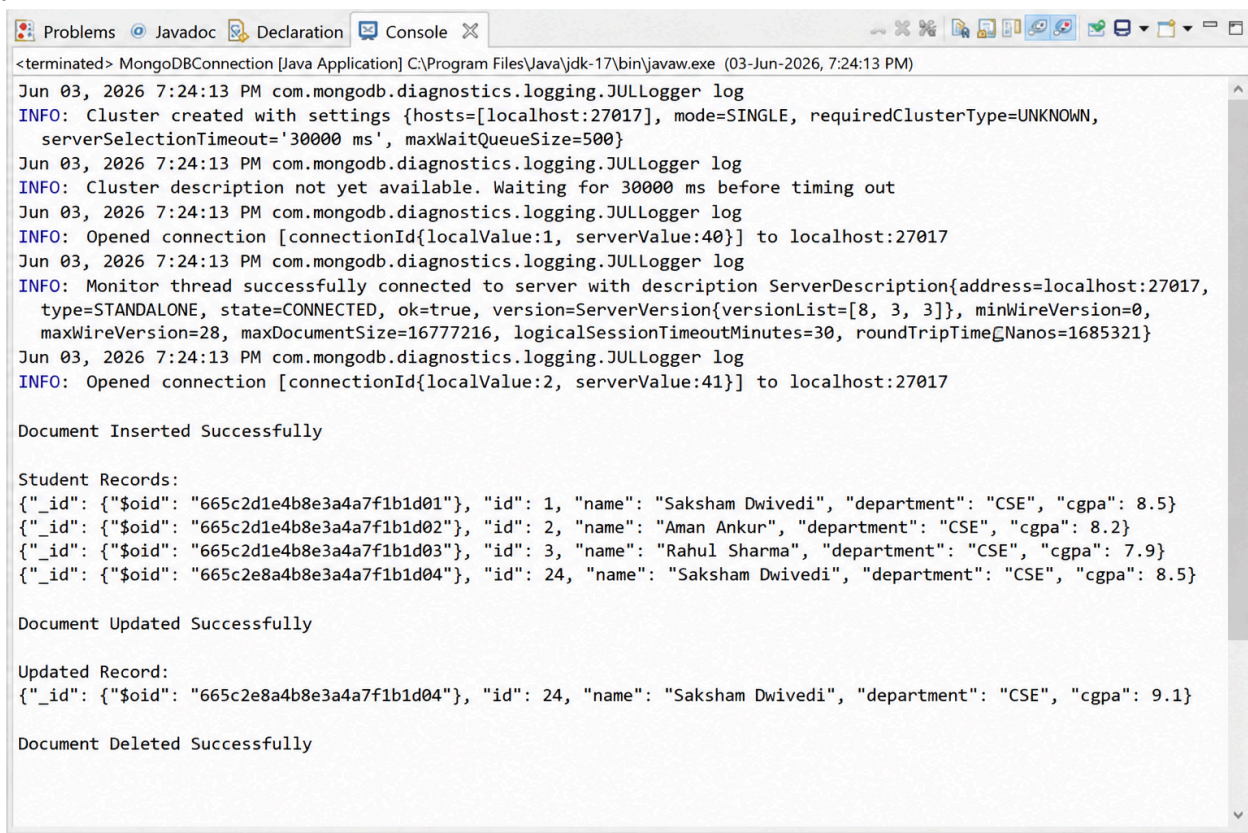

The screenshot shows an IDE console window with the following content:

```

<terminated> MongoDBConnection [Java Application] C:\Program Files\Java\jdk-17\bin\javaw.exe (03-Jun-2026, 7:24:13 PM)
Jun 03, 2026 7:24:13 PM com.mongodb.diagnostics.logging.JULLogger log
INFO: Cluster created with settings {hosts=[localhost:27017], mode=SINGLE, requiredClusterType=UNKNOWN,
serverSelectionTimeout='30000 ms', maxWaitQueueSize=500}
Jun 03, 2026 7:24:13 PM com.mongodb.diagnostics.logging.JULLogger log
INFO: Cluster description not yet available. Waiting for 30000 ms before timing out
Jun 03, 2026 7:24:13 PM com.mongodb.diagnostics.logging.JULLogger log
INFO: Opened connection [connectionId{localValue:1, serverValue:40}] to localhost:27017
Jun 03, 2026 7:24:13 PM com.mongodb.diagnostics.logging.JULLogger log
INFO: Monitor thread successfully connected to server with description ServerDescription{address=localhost:27017,
type=STANDALONE, state=CONNECTED, ok=true, version=ServerVersion{versionList=[8, 3, 3]}, minWireVersion=0,
maxWireVersion=28, maxDocumentSize=16777216, logicalSessionTimeoutMinutes=30, roundTripTimeNanos=1685321}
Jun 03, 2026 7:24:13 PM com.mongodb.diagnostics.logging.JULLogger log
INFO: Opened connection [connectionId{localValue:2, serverValue:41}] to localhost:27017

Document Inserted Successfully

Student Records:
{"_id": {"$oid": "665c2d1e4b8e3a4a7f1b1d01"}, "id": 1, "name": "Saksham Dwivedi", "department": "CSE", "cgpa": 8.5}
{"_id": {"$oid": "665c2d1e4b8e3a4a7f1b1d02"}, "id": 2, "name": "Aman Ankur", "department": "CSE", "cgpa": 8.2}
{"_id": {"$oid": "665c2d1e4b8e3a4a7f1b1d03"}, "id": 3, "name": "Rahul Sharma", "department": "CSE", "cgpa": 7.9}
{"_id": {"$oid": "665c2e8a4b8e3a4a7f1b1d04"}, "id": 24, "name": "Saksham Dwivedi", "department": "CSE", "cgpa": 8.5}

Document Updated Successfully

Updated Record:
{"_id": {"$oid": "665c2e8a4b8e3a4a7f1b1d04"}, "id": 24, "name": "Saksham Dwivedi", "department": "CSE", "cgpa": 9.1}

Document Deleted Successfully

```