


D2 · D3


DRESSING AND BATHROOM · 2 FT 6 · AS AST-DR-009

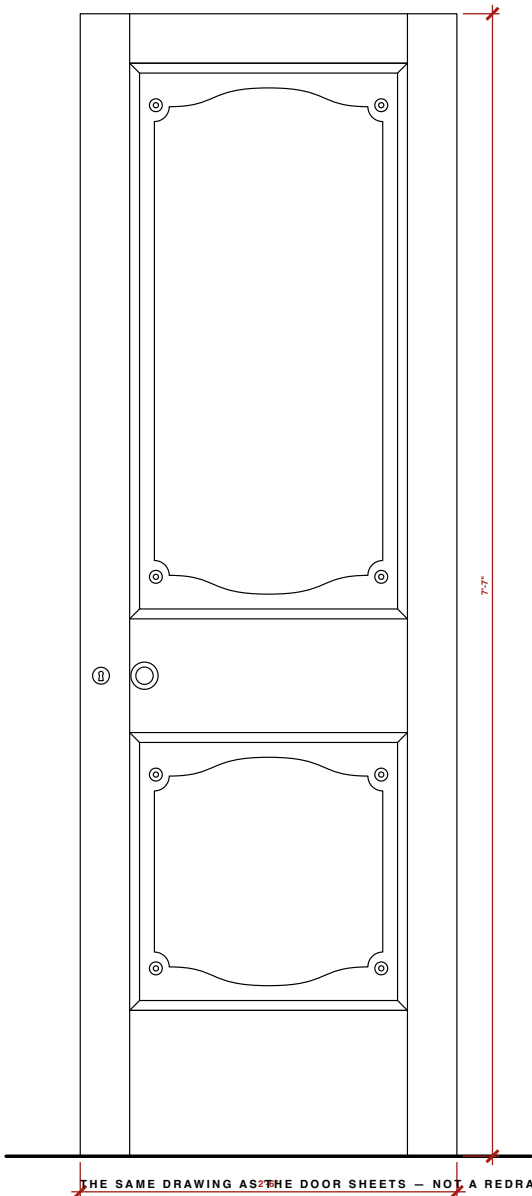

Both elevations are generated from the door sheets' own code, so the design cannot drift. Nothing on this sheet changes how the door LOOKS — only how it is made.


D1

MAIN DOOR · 3 FT · AS AST-DR-001

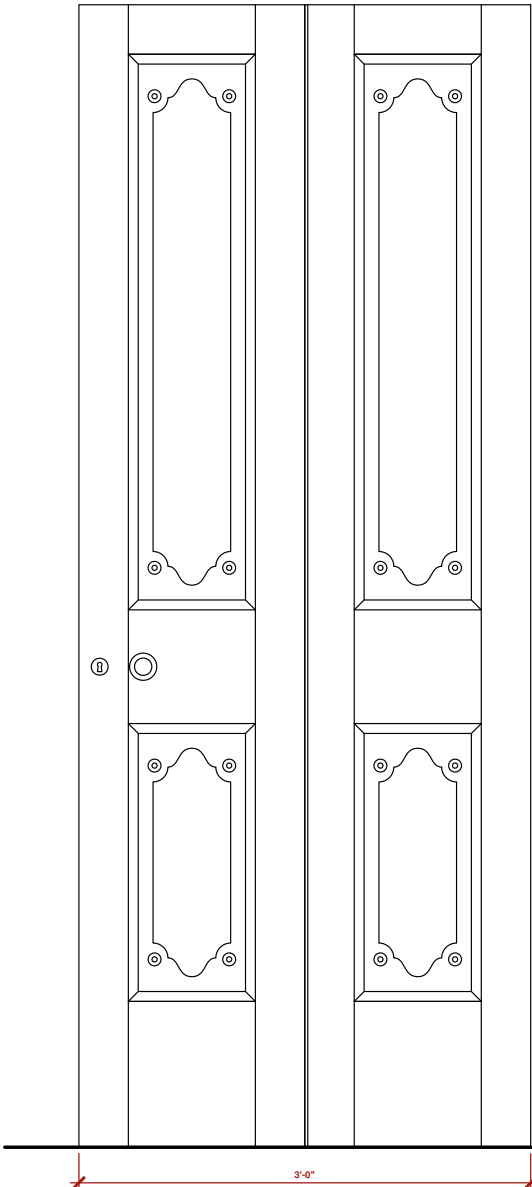

1 · THROUGH THE LEAF

SECTION ACROSS A PANEL · EVERY MEMBER PLANTED ON

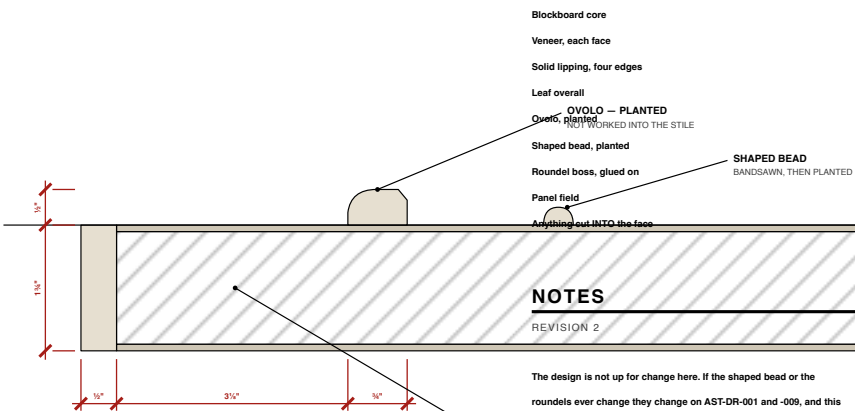

2 · WHAT CHANGES

THE SAME MEMBERS, MADE SEPARATELY AND GLUED ON

Panel field
was: sunk 1/4" into the solid
now: stays FLAT — the ovolo round it does the work
Ovolo sticking
was: worked on the stile edge
now: run as a separate 1/4" x 1/4" moulding, mitred on
Shaped bead
was: carved into the panel face
now: bandsawn to the curve in 1/4" x 1/4", planted on
Corner roundels
was: carved bosses
now: turned discs Ø1" x 1/4", glued on
The leaf
was: solid teak, 1 1/4"
now: 1 1/4" blockboard, 1/4" lipping, veneer both sides

RELIEF

FACE OF THE VENEER = DATUM 0

Blockboard core 1 1/4"
Veneer, each face 0.6
Solid lipping, four edges 1/2" WIDE
Leaf overall 1 1/4"
Ovolo — PLANTED 1/4" W · 1/4" OUT
Shaped bead, planted 1/4" W · 1/4" OUT
Roundel boss, glued on Ø1" · 1/4" OUT
Panel field FLAT · 0
Anything out INTO the face NONE

NOTES

REVISION 2

The design is not up for change here. If the shaped bead or the roundels ever change they change on AST-DR-001 and -009, and this sheet follows — it draws from the same code.

BLOCKBOARD CORE
Lipping is solid teak on all four edges so the leaf can be trimmed on site and the hinges and lock screw into wood, not into board.

Veneer both faces of the core and balance it: same thickness back and front, or the leaf will bow.

Ovolo, bead and bosses in solid teak, polished to match. They are small enough to take solid without moving, and they give a crisper arris than a cut face would.

Set the bead out from the panel opening, not from the leaf edge, so the four roundels land exactly on the corners of the curve.

OPEN — glue and pin, or glue only? Pins need filling and the filler shows through polish. Glue and cramp if the shop can.

A STUDY IN TEAK

Particulars of the room

DOORS — MADE IN VENEER

Same design · Planted mouldings · Construction only

SCALE AS NOTED @ A3	DATE 23.09.2026
REV 2 — the design unchanged; only the construction differs	DWG AST-DR-015

PROJECT

A Study in Teak — Doors — Made in Veneer

SHEET

General arrangement — the whole sheet

each view follows at its own scale, pages 2 to 5

SCALE

NTS

DATE

23.09.2026

REV



2

DRAWING

AST-DR-015 · 1 of 5

1 · THROUGH THE LEAF

SCALE 1:1 (FULL SIZE) @ A3 · SECTION ACROSS A PANEL · EVERY MEMBER PLANTED ON

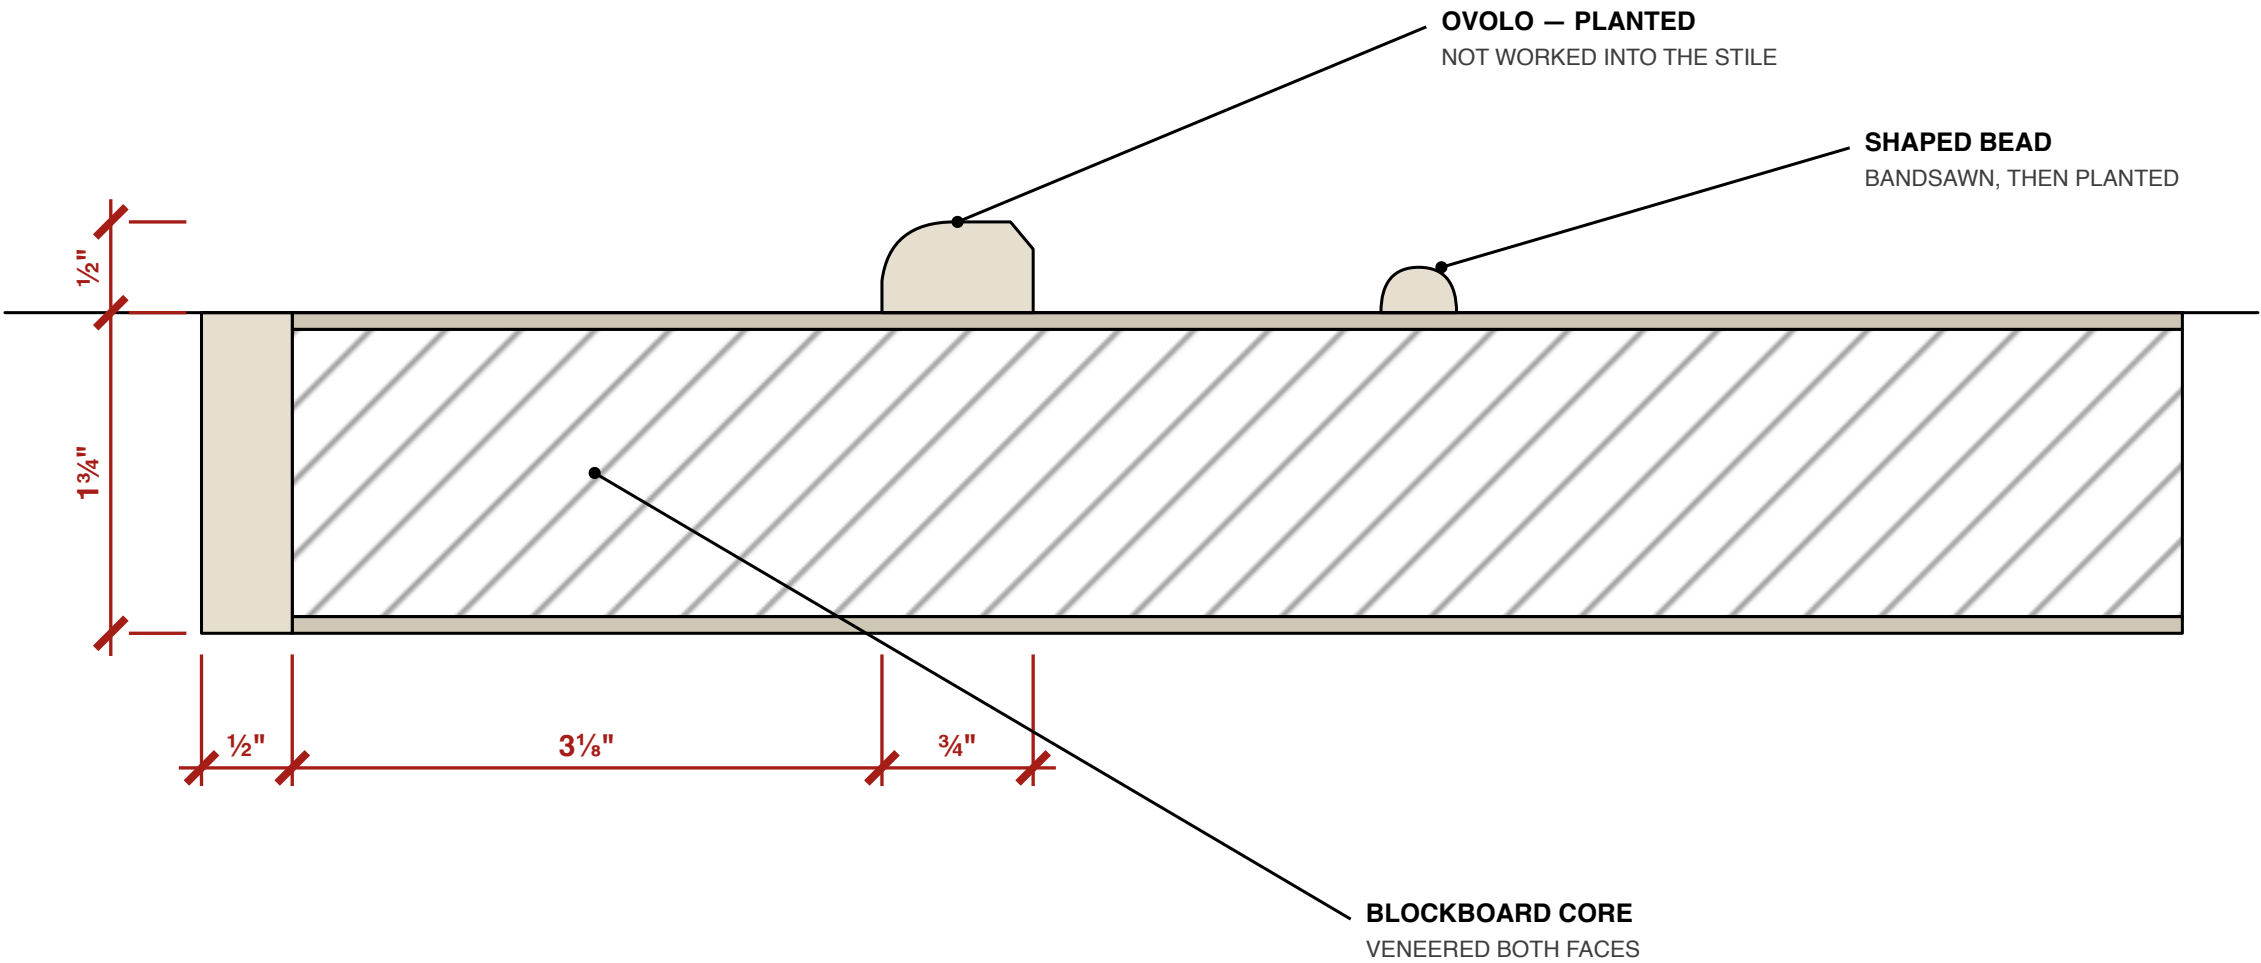

PROJECT
A Study in Teak — Doors — Made in Veneer

SHEET
1 · through the leaf
Same design · Planted mouldings · Construction only

SCALE
1:1 @ A3

DATE
23.09.2026

REV
2

DRAWING
AST-DR-015 · 2 of 5

RELIEF

FACE OF THE VENEER = DATUM 0

Blockboard core	1½"
Veneer, each face	0.6
Solid lipping, four edges	½" WIDE
Leaf overall	1¾"
Ovolo, planted	¾" W · ½" OUT
Shaped bead, planted	⅜" W · ¼" OUT
Roundel boss, glued on	Ø1" · ¼" OUT
Panel field	FLAT · 0
Anything cut INTO the face	NONE

NOTES

REVISION 2

The design is not up for change here. If the shaped bead or the roundels ever change they change on AST-DR-001 and -009, and this sheet follows — it draws from the same code.

Lipping is solid teak on all four edges so the leaf can be trimmed

Veneer both faces of the core and balance it: same thickness back and front, or the leaf will bow.

Ovolo, bead and bosses in solid teak, polished to match. They are small enough to take solid without moving, and they give a crisper arris than a cut face would.

Set the bead out from the panel opening, not from the leaf edge, so the four roundels land exactly on the corners of the curve.

OPEN — glue and pin, or glue only? Pins need filling and the filler shows through polish. Glue and cramp if the shop can.

PROJECT

A Study in Teak — Doors — Made in Veneer

SHEET

Notes

Same design · Planted mouldings · Construction only

SCALE

NTS

DATE

23.09.2026

REV

2

DRAWING

AST-DR-015 · 4 of 5

2 · WHAT CHANGES

on site and the hinges and lock screw into wood, not into board

THE SAME MEMBERS, MADE SEPARATELY AND GLUED ON

Panel field

was: sunk ½" into the solid

now: stays FLAT — the ovolo round it does the work
Ovolo sticking

was: worked on the stile edge

now: run as a separate ¾" × ½" moulding, mitred on
Shaped bead

was: carved into the panel face

now: bandsawn to the curve in ⅜" × ¼", planted on
Corner roundels

was: carved bosses

now: turned discs Ø1" × ¼", glued on
The leaf

was: solid teak, 1¾"

now: 1½" blockboard, ½" lipping, veneer both sides