

CloudFront

Amazon CloudFront is a **Content Delivery Network (CDN)** service that delivers your website content **faster** to users worldwide.

What can you deliver using CloudFront?

Static content → images, CSS, JS

Dynamic content

Videos / media streaming

Entire websites

API responses

Software downloads

1. Create EC2 Instance

The screenshot shows the AWS Management Console 'Launch an instance' wizard. The 'Network' section is expanded, showing options for VPC, Subnet, Auto-assign public IP, and Firewall (security groups). The 'Summary' section on the right shows the configuration: 1 instance, Amazon Linux 2023 AMI, t3.micro instance type, and 1 8 GiB volume. The 'Launch instance' button is highlighted.

Network | Info

vpc-09b6bfff8ffa12c928

Subnet | Info

No preference (Default subnet in any availability zone)

Auto-assign public IP | Info

Enable

Firewall (security groups) | Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☒ Create security group ☐ Select existing security group

We'll create a new security group called 'launch-wizard-4' with the following rules:

☒ Allow SSH traffic from

☐ Allow HTTPS traffic from the internet
To set up an endpoint, for example when creating a web server

☒ Allow HTTP traffic from the internet
To set up an endpoint, for example when creating a web server

Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Summary

Number of instances | Info

1

Software Image (AMI)
Amazon Linux 2023 AMI 2023.9.2...read more
ami-0b46816ffa1234887

Virtual server type (instance type)
t3.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

Allow tags in metadata | Info

Select

User data - optional | Info

Upload a file with your user data or enter it in the field.

```
#!/bin/bash
yum install httpd -y
systemctl start httpd
systemctl enable httpd
echo<ch1> This Testing Sit for CloudFront</h1>> /var/www/html/index.html
```

☐ User data has already been base64 encoded

Copy DNS of Instance

Instances (1/1) Info								Last updated 4 minutes ago	Connect	Instance state	Actions	Launch instances
Find Instance by attribute or tag (case-sensitive)								Running	< 1 >			
☒	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IPv4 DNS				
☒	cloudfront-ins...	i-05643703fe110b2e5	Running	t3.micro	Initializing	View alarms +	eu-north-1a	ec2-16-170-237-0.eu-n				


i-05643703fe110b2e5 (cloudfront-instance)

Details | Status and alarms | Monitoring | Security | Networking | Storage | Tags

▼ Instance summary Info

Instance ID i-05643703fe110b2e5	Public IPv4 address 16.170.237.0 open address	Private IPv4 addresses 172.31.24.150
IPv6 address -	Instance state Running	Public DNS ec2-16-170-237-0.eu-north-1.compute.amazonaws.com open address
Hostname type ID name is 172.31.24.150.eu-north-1.compute.internal	Private IP DNS name (IPv4 only) 16.170.237.0.eu-north-1.compute.internal	

Here it is showing Not secure

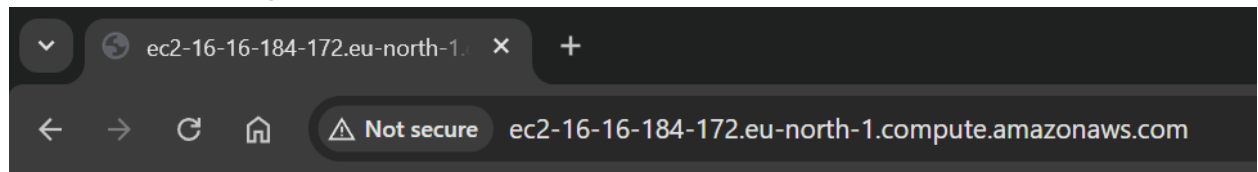

This is testing of cloudfront

2. CloudFront -> Distributions -> Create Distribution

aws Search [Alt+S]

CloudFront > Distributions > Create distribution

Step 1: Get started (selected)
Step 2: Specify origin
Step 3: Enable security
Step 4: Get TLS certificate
Step 5: Review and create

Get started
Connect your websites, apps, files, video streams, and other content to CloudFront. We optimize the performance, reliability, and security for your web traffic.

Distribution options Info

Distribution name
Name will be stored as a tag on the resource. You can change the name, or more tags, later.
Cloudfront

Description - optional

Distribution type

☒ Single website or app
Choose if each website or application will have a unique configuration.

☐ Multi-tenant architecture - New
Choose when you have multiple domains that need to share configurations. This is a common architecture for SaaS providers.

Domain Info

Route 53 managed domain - optional
Enter a domain that's already registered with Route 53 in your AWS account. CloudFront will provision a TLS certificate for you. If you have a domain from a different DNS provider, skip this step and configure your domain later.

Check domain

CloudFront > Distributions > Create distribution

Step 1
Get started

**Step 2
Specify origin**

Step 3
Enable security

Step 4
Review and create

Specify origin

Origin type

Your origin is where your content (such as a website or app) lives. CloudFront works with AWS-based origins and origins hosted on other cloud providers.

Origin type

☐ Amazon S3
Deliver static assets like files and images, statically generated websites or single page applications (SPA).

☐ Elastic Load Balancer
Deliver applications hosted behind ELB such as dynamic websites, web services, and APIs.

☐ API Gateway
Deliver API endpoints for REST APIs hosted on API Gateway.

☐ Elemental MediaPackage
Deliver end-to-end live events or video on demand (VOD).

☐ VPC origin
Deliver applications and content hosted within private VPCs, such as EC2 instances and Application Load Balancers.

☒ Other
Refer to any AWS or non-AWS origin through its publicly resolvable URL.

Origin

Custom origin
Choose an AWS origin, or enter your origin's domain name. [Learn more](#)

ec2-16-170-237-0.eu-north-1.compute.amazonaws.com

Origin path - optional
The directory path within your origin where your content is stored. [Learn more](#)

/path

aws

Search

[Alt+S] Ask Amazon Q

Global Account ID: 0950-7410-7161 Sakshi Jain

CloudFront > Distributions > Create distribution

Settings

CloudFront provides default origin and cache settings based on what origin you selected. [View default settings for Custom origin](#)

Origin settings
Origin settings control how CloudFront connects to the specified origin.

☐ Use recommended origin settings

☒ Customize origin settings

Add custom header - optional
CloudFront includes this header in all requests that it sends to your origin.

Add header

Enable Origin Shield
Origin shield is an additional caching layer that can help reduce the load on your origin and help protect its availability.

☒ No

☐ Yes

Protocol [Info](#)

☒ HTTP only

☐ HTTPS only

☐ Match viewer

HTTP port
Enter your origin's HTTP port. The default is port 80.

80

Connection attempts
The number of times that CloudFront attempts to connect to the origin, from 1 to 3. The default is 3.

3

Click on Create Policy

CloudFront > Distributions > Create distribution

Cache settings

Cache settings determine when CloudFront serves cached content and when it fetches new content from the origin.

☐ Use recommended cache settings tailored to serving Custom origin content

☒ Customize cache settings

Viewer protocol policy

☐ HTTP and HTTPS

☒ Redirect HTTP to HTTPS

☐ HTTPS only

Allowed HTTP methods

☐ GET, HEAD

☐ GET, HEAD, OPTIONS

☒ GET, HEAD, OPTIONS, PUT, POST, PATCH, DELETE

Cache HTTP methods
GET and HEAD methods are cached by default.

☐ OPTIONS

Allow gRPC requests over HTTP/2 [Info](#)

☐ Enable

Cache policy
Choose an existing cache policy or create a new one.

UseOriginCacheControlHeaders
Policy for origins that return Cache-Control headers. Query strings are not included in the cache key.

Recommended for EC2

Create cache policy View policy

Origin request policy - optional
Choose an existing origin request policy or create a new one.

aws

Search

[Alt+S]

Global

Account ID: 0950-7410-7161

Sakshi Jain

CloudFront

Policies

Cache

Create cache policy

Create cache policy

Details

Name
Enter a name for the cache policy.

Description - optional
Enter a description for the cache policy.

TTL settings info

Minimum TTL
Minimum time to live in seconds.

Maximum TTL
Maximum time to live in seconds.

Default TTL
Default time to live in seconds.

Cache key settings info

Headers
Choose which headers to include in the cache key.

Query strings
Choose which query strings to include in the cache key.

Select your created policy

aws

Search

[Alt+S]

Ask Amazon Q

Global

Account ID: 0950-7410-7161

Sakshi Jain

CloudFront

Distributions

Create distribution

Amplify-DefaultNoCookies
Default Amplify cache policy without cookies

Amplify-Default
Default Amplify cache policy

Amplify-StaticContent
Amplify cache policy for static content

Amplify-ImageOptimization
Amplify cache policy for image optimization

UseOriginCacheControlHeaders
Policy for origins that return Cache-Control headers. Query strings are not included in the cache key. Recommended for EC2

UseOriginCacheControlHeaders-QueryStrings
Policy for origins that return Cache-Control headers and serve different content based on values present in the query string.

Custom

UseOriginCacheControlHeaders
Policy for origins that return Cache-Control headers. Query strings are not included in the cache key. Recommended for EC2

[Create cache policy](#) [View policy](#)

Origin request policy - optional
Choose an existing origin request policy or create a new one.
AllViewer
Policy to forward all parameters in viewer requests. Recommended for EC2

[Create origin request policy](#) [View policy](#)

? **If your application serves different content based on query string values**

Select the UseOriginCacheHeaders-QueryStrings managed cache policy. This includes the query strings in your cache key.
An example use case is an ID parameter in the query string that your application uses to decide which content to display (/articles?id=10).

[Update my cache policy](#)

Response headers policy - optional
Choose an existing response headers policy or create a new one.

aws

Search

[Alt+S]

Ask Amazon Q

Global

Account ID: 0950-7410-7161

Sakshi Jain

CloudFront

Distributions

Create distribution

Step 1

Get started

Step 2

Specify origin

Step 3

Enable security

Step 4

Review and create

Enable security

Web Application Firewall (WAF) info


☐ **Enable security protections**
Keep your application secure from the most common web threats and security vulnerabilities using AWS WAF. Blocked requests are stopped before they reach your web servers.

☒ **Do not enable security protections**
Select this option if your application does not need security protections from AWS WAF.

Cancel


Previous

Next

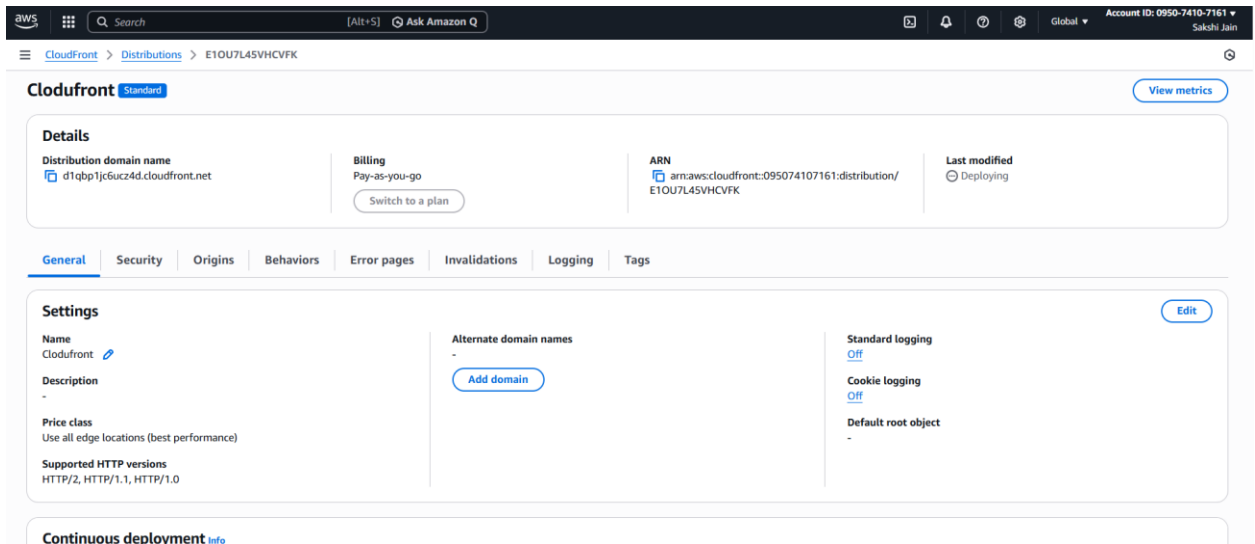

3. Copy Distribution domain Name and paste it into browser

Now your website is secure



This is testing of cloudfront