


VPC-Peering Connection

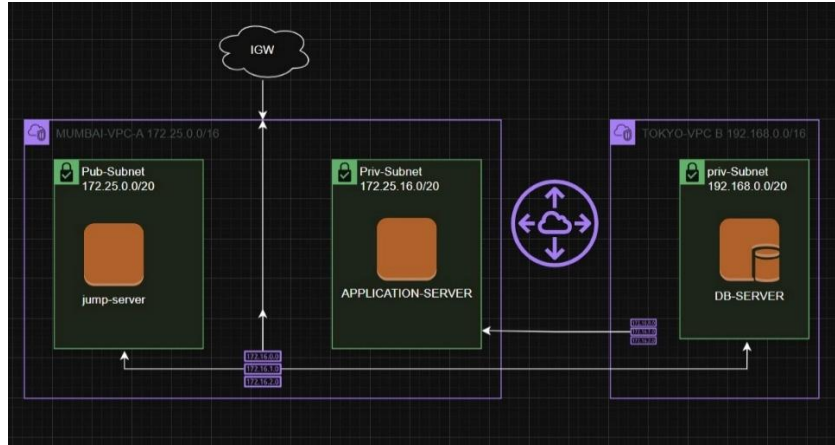

1. Create VPC in Europe Region

aws [Search] [Alt+S] Europe (Stockholm) Account ID: 0950-7410-7161 Sakshi Jain

VPC > Your VPCs > Create VPC

Create VPC Info

A VPC is an isolated portion of the AWS Cloud populated by AWS objects, such as Amazon EC2 instances.

VPC settings

Resources to create Info
Create only the VPC resource or the VPC and other networking resources.

☒ VPC only ☐ VPC and more

Name tag - optional
Creates a tag with a key of 'Name' and a value that you specify.

VPC-A

IPv4 CIDR block Info
☒ IPv4 CIDR manual input
☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR
172.25.0.0/16
CIDR block size must be between /16 and /28.

IPv6 CIDR block Info
☒ No IPv6 CIDR block
☐ IPAM-allocated IPv6 CIDR block
☐ Amazon-provided IPv6 CIDR block
☐ IPv6 CIDR owned by me

2. Create Subnet

aws [Search] [Alt+S] Europe (Stockholm) Account ID: 0950-7410-7161 Sakshi Jain

VPC > Subnets > Create subnet

Subnet settings

Specify the CIDR blocks and Availability Zone for the subnet.

Subnet 1 of 1

Subnet name
Create a tag with a key of 'Name' and a value that you specify.

pub-subnet
The name can be up to 256 characters long.

Availability Zone Info
Choose the zone in which your subnet will reside, or let Amazon choose one for you.

No preference

IPv4 VPC CIDR block Info
Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.

172.25.0.0/16

IPv4 subnet CIDR block
172.25.0.0/20 4,096 IPs

Tags - optional

Key	Value - optional
Q Name	Q pub-subnet

Remove

Subnet 2 of 2

Subnet name
Create a tag with a key of 'Name' and a value that you specify.
priv-subne
The name can be up to 256 characters long.

Availability Zone [Info](#)
Choose the zone in which your subnet will reside, or let Amazon choose one for you.
No preference

IPv4 VPC CIDR block [Info](#)
Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.
172.25.0.0/16

IPv4 subnet CIDR block
172.25.16.0/20 4,096 IPs

▼ **Tags - optional**

Key Value - optional
Q Name X Q priv-subne X Remove
Add new tag
You can add 49 more tags.
Remove

✓ You have successfully created 2 subnets: subnet-043b0111381419f66, subnet-032dddea2f2d774a4

Subnets (1/2) [Info](#)
Find subnets by attribute or tag
Subnet ID : subnet-043b0111381419f66 X Subnet ID : subnet-032dddea2f2d774a4 X Clear filters

	Name	Subnet ID	State	VPC
☐	priv-subne	subnet-032dddea2f2d774a4	Available	vpc-027b6da3630641104 V
☒	pub-subnet	subnet-043b0111381419f66	Available	vpc-027b6da3630641104 V

subnets: subnet-043b0111381419f66 / pub-subnet

Details | Flow logs | Route table | Network ACL | CIDR reservations | Sharing | Tags

Edit subnet settings [Info](#)

Subnet
Subnet ID: subnet-043b0111381419f66 Name: pub-subnet

Auto-assign IP settings [Info](#)
Enable AWS to automatically assign a public IPv4 or IPv6 address to a new primary network interface for an instance in this subnet.
☒ Enable auto-assign public IPv4 address [Info](#)
☐ Enable auto-assign customer-owned IPv4 address [Info](#)
Option disabled because no customer owned pools found.

Resource-based name (RBN) settings [Info](#)
Specify the hostname type for EC2 instances in this subnet and optional RBN DNS query settings.
☐ Enable resource name DNS A record on launch [Info](#)
☐ Enable resource name DNS AAAA record on launch [Info](#)

Hostname type [Info](#)
☐ Resource name
☒ IP name

3. Create & Attach Internet Gateway

An **Internet Gateway (IGW)** is a networking component in AWS that allows **your VPC** to **connect to the internet**.

aws

Search

[Alt+S]

Europe (Stockholm)

Account ID: 0950-7410-7161

Sakshi Jain

VPC > Internet gateways > Create internet gateway

Create internet gateway Info

An internet gateway is a virtual router that connects a VPC to the internet. To create a new internet gateway specify the name for the gateway below.

Internet gateway settings

Name tag
Creates a tag with a key of 'Name' and a value that you specify.

Tags - optional

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key	Value - optional
Q Name	Q IGW-1

[Add new tag](#)

You can add 49 more tags.

[Cancel](#) [Create internet gateway](#)

aws

Search

[Alt+S]

Europe (Stockholm)

Account ID: 0950-7410-7161

Sakshi Jain

VPC > Internet gateways > Attach to VPC (igw-01025daca8f434ddb)

Attach to VPC (igw-01025daca8f434ddb) Info

VPC
Attach an internet gateway to a VPC to enable the VPC to communicate with the internet. Specify the VPC to attach below.

Available VPCs
Attach the internet gateway to this VPC.

► AWS Command Line Interface command

[Cancel](#) [Attach internet gateway](#)

4. Route table

A **Route Table** is a set of rules that decide **where your network traffic should go** inside a VPC.

Edit Routes

Route tables (1/2) Info

Last updated 11 minutes ago

[Actions](#) [Create route table](#)

	Name	Route table ID	Explicit subnet associ...	Edge associations	Main	VPC	
☐	-	rtb-0a76891d23cfab0df	-	-	Yes	vpc-09b6bff8fa12c928	095
☒	VPC-A-route table	rtb-0e0ac9491c4a08813	-	-	Yes	vpc-027b6da3630641104 VPC-A	095


rtb-0e0ac9491c4a08813 / VPC-A-route table

[Details](#) [Routes](#) [Subnet associations](#) [Edge associations](#) [Route propagation](#) [Tags](#)

Routes (1)

[Both](#) [Edit routes](#)

Destination	Target	Status	Propagated	Route Origin
172.25.0.0/16	local	Active	No	Create Route Table

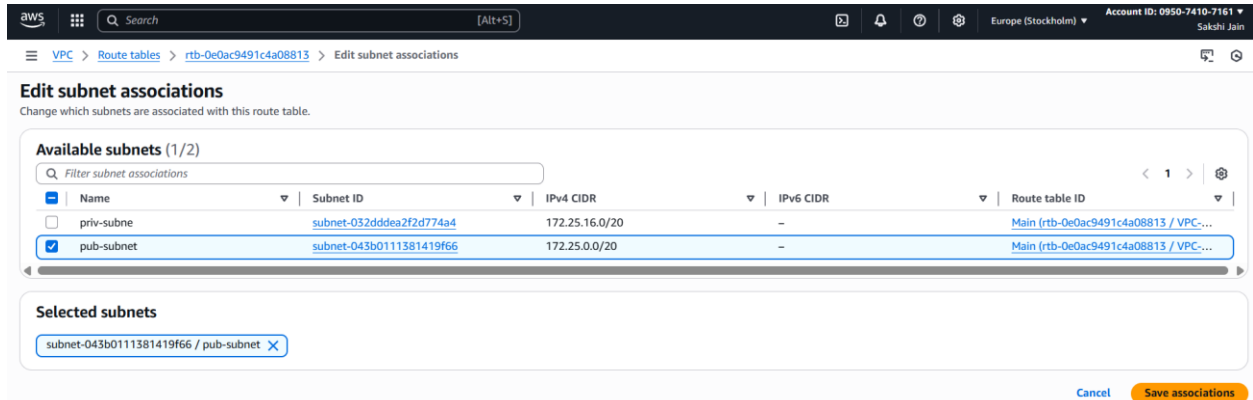

5. Create EC2 Instance

ICMP (Internet Control Message Protocol) is used for **network testing & diagnostics**

Application Server

ICMP (Internet Control Message Protocol) is used for **network testing & diagnostics**.

Launch an instance

Description - required [Info](#)

launch-wizard-1 created 2025-11-26T13:23:02.959Z

Inbound Security Group Rules

Security group rule 1 (TCP, 22, 0.0.0.0/0)

Type [Info](#) Protocol [Info](#) Port range [Info](#)

ssh TCP 22

Source type [Info](#) Source [Info](#) Description - optional [Info](#)

Anywhere 0.0.0.0/0 e.g. SSH for admin desktop

Security group rule 2 (ICMP, All, 0.0.0.0/0)

Type [Info](#) Protocol [Info](#) Port range [Info](#)

All ICMP - IPv4 ICMP All

Source type [Info](#) Source [Info](#) Description - optional [Info](#)

Custom 0.0.0.0/0 e.g. SSH for admin desktop

Summary

Number of instances [Info](#)

1

Software image (AMI) [Info](#)

Amazon Linux 2023 AMI 2023.9.2...[read more](#)

ami-03852a41f1e05c8e4

Virtual server type (instance type) [Info](#)

t3.micro

Firewall (security group) [Info](#)

New security group

Storage (volumes) [Info](#)

1 volume(s) - 8 GiB

Cancel Launch instance [Preview code](#)

6. Create VPC in Tokyo Region

Create VPC

A VPC is an isolated portion of the AWS Cloud populated by AWS objects, such as Amazon EC2 instances.

VPC settings

Resources to create [Info](#)

Create only the VPC resource or the VPC and other networking resources.

☒ VPC only ☐ VPC and more

Name tag - optional [Info](#)

Creates a tag with a key of 'Name' and a value that you specify.

VPC-B

IPv4 CIDR block [Info](#)

☒ IPv4 CIDR manual input ☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR

192.168.0.0/16

CIDR block size must be between /16 and /28.

IPv6 CIDR block [Info](#)

7. Create private Subnet

Create subnet

Subnet 1 of 1

Subnet name [Info](#)

Create a tag with a key of 'Name' and a value that you specify.

priv-subnet

The name can be up to 256 characters long.

Availability Zone [Info](#)

Choose the zone in which your subnet will reside, or let Amazon choose one for you.

No preference

IPv4 VPC CIDR block [Info](#)

Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.

192.168.0.0/16

IPv4 subnet CIDR block [Info](#)

192.168.0.0/20 4,096 IPs

Tags - optional [Info](#)

8. A VPC Peering Connection allows two VPCs to communicate with each other privately using their private IP addresses — without using the internet.

VPC peering is used to:

- Share resources between VPCs
- Communicate across environments
- Connect different applications/teams
- Connect production ↔ development networks
- Connect two AWS accounts privately

Create peering connection

A VPC peering connection is a networking connection between two VPCs that enables you to route traffic between them privately. [Info](#)

Peering connection settings

Name - optional
Create a tag with a key of 'Name' and a value that you specify.
connection01

Select a local VPC to peer with

VPC ID (Requester)
vpc-027b6da3630641104 (VPC-A)

VPC CIDRs for vpc-027b6da3630641104 (VPC-A)

CIDR	Status	Status reason
172.25.0.0/16	Associated	-

Select another VPC to peer with

Account
☒ My account
☐ Another account

Region
☒ This Region (eu-north-1)

From Tokyo region copy VPC ID

Your VPCs

VPCs | VPC encryption controls - new

Your VPCs (1/2) [Info](#)

Find VPCs by attribute or tag

Name	VPC ID	State	Encryption c...	Encryption control ...	Block Public...	IPv4 CIDR
-	vpc-0f9e15cfeed2c972d	Available	-	-	Off	172.31.0.0/16
☒ VPC-B	vpc-0e09975526cd80b5c	Available	-	-	Off	192.168.0.0/16

vpc-0e09975526cd80b5c / VPC-B

Details | Resource map | CIDRs | Flow logs | Tags | Integrations

State
Available

Block Public Access
Off

DNS hostnames
Disabled

DNS resolution
Enabled

Tenancy
default

DHCP option set
dept-0d130e91d5bc7e0f4

Main route table
rtb-0aa3c3bcf1bb8953

Main network ACL

IPv4 CIDR

IPv6 pool

AWS [Search] [Alt+S] Europe (Stockholm) Account ID: 0950-7410-7161 Sakshi Jain

VPC > Peering connections > Create peering connection

Select another VPC to peer with

Account
☒ My account
☐ Another account

Region
☐ This Region (eu-north-1)
☒ Another Region
 Asia Pacific (Tokyo) (ap-northeast-1)

VPC ID (Acceptor)
 vpc-0e09975526cd80b5c

Tags
 A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key
 Name: [X] Value - optional: connection01 [X] [Remove]

[Add new tag]
 You can add 49 more tags.

[Cancel] [Create peering connection]

You will get peering request in Tokyo region

AWS [Search] [Alt+S] Asia Pacific (Tokyo) Account ID: 0950-7410-7161 Sakshi Jain

VPC > Peering connections

VPC dashboard
 AWS Global View
 Filter by VPC
 Virtual private cloud
 Your VPCs
 Subnets
 Route tables
 Internet gateways
 Egress-only internet gateways
 Carrier gateways
 DHCP option sets
 Elastic IPs
 Managed prefix lists
 NAT gateways
 Peering connections
 Route servers

Peering connections (1/1) Info
 Find peering connections by attribute or tag

Name	Peering connection ID	Status	Requester VPC
-	pcx-083cb143339d0de2a	Pending acceptance	vpc-027b6da3630641104

pcx-083cb143339d0de2a
 Details | DNS | Route tables | Tags

Details
 Requester owner ID: 095074107161
 Acceptor owner ID: 095074107161
 VPC Peering connection ARN: arn:aws:ec2:ap-northeast-1:095074107161:vpc-peering-connection/pcx-083cb143339d0de2a

[Actions]
 View details
 Accept request
 Reject request
 Edit DNS settings
 Manage tags
 Delete peering connection

[Create peering connection]

9. In Tokyo region launch instance

AWS [Search] [Alt+S] Asia Pacific (Tokyo) Account ID: 0950-7410-7161 Sakshi Jain

EC2 > Instances > Launch an instance

Key pair (login) Info
 You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.
 Key pair name - required: vpc2 [Create new key pair]

Network settings Info
 VPC - required: vpc-0e09975526cd80b5c (VPC-B) 192.168.0.0/16
 Subnet: subnet-0a2385f1b6abda9f5 VPC: vpc-0e09975526cd80b5c Owner: 095074107161 Availability Zone: ap-northeast-1c (apne1-az1) Zone type: Availability Zone IP addresses available: 4091 CIDR: 192.168.0.0/20
 Auto-assign public IP: Disable
 Firewall (security groups): New security group

Summary
 Number of instances: 1
 Software image (AMI): Amazon Linux 2023 AMI 2023.9.2...read more ami-03852a41f1e05c8e4
 Virtual server type (instance type): t3.micro
 Firewall (security group): New security group
 Storage (volumes): 1 volume(s) - 8 GiB

[Cancel] [Launch instance] [Preview code]

ICMP (Internet Control Message Protocol) is used for **network testing & diagnostics**.

Description - required | Info
launch-wizard-1 created 2025-11-26T13:23:02.959Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 0.0.0.0/0) Remove

Type	Protocol	Port range	Source type	Source	Description - optional
ssh	TCP	22	Anywhere	Q. Add CIDR, prefix list or security group 0.0.0.0/0	e.g. SSH for admin desktop

▼ Security group rule 2 (ICMP, All, 0.0.0.0/0) Remove

Type	Protocol	Port range	Source type	Source	Description - optional
All ICMP - IPv4	ICMP	All	Custom	Q. Add CIDR, prefix list or security group 0.0.0.0/0	e.g. SSH for admin desktop

Summary

Number of instances | Info
1

Software Image (AMI)
Amazon Linux 2023 AMI 2023.9.2...read more
ami-03852a41f1e05c8e4

Virtual server type (instance type)
t3.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

Cancel Launch instance Preview code

10. In Tokyo Region edit Route Table- edits routes

VPC dashboard < **Route tables** (1/2) Info

Find route tables by attribute or tag

Name	Route table ID	Explicit subnet associ...	Edge associations	Main	VPC	OW
VPC-B Route table	rtb-0aaf3cbccf1bb8953	-	-	Yes	vpc-0e09975526cd80b5c VPC-B	09f
-	rtb-0ffd5d70edff3fe16	-	-	Yes	vpc-0f9e15cfeed2c972d	09f

rtb-0aaf3cbccf1bb8953 / VPC-B Route table

Routes (1)

Destination	Target	Status	Propagated	Route Origin
192.168.0.0/16	local	Active	No	Create Route Table

Edit routes

Destination	Target	Status	Propagated	Route Origin
192.168.0.0/16	local	Active	No	CreateRouteTable
Q. 0.0.0.0/0	Peering Connection	-	No	CreateRoute

Add route Cancel Preview Save changes

In Europe Region Edit Route table – Give your private subnet IP

Destination	Target	Status	Propagated	Route Origin
172.25.0.0/16	local	Active	No	CreateRouteTable
0.0.0.0/0	Internet Gateway	Active	No	CreateRoute
192.168.0.0/20	Peering Connection	Active	No	CreateRoute

11. Go into cmd

```
Microsoft Windows [Version 10.0.26100.7171]
(c) Microsoft Corporation. All rights reserved.

C:\Users\sjain403>cd downloads/

C:\Users\sjain403\Downloads>dir
Volume in drive C is OSDisk
Volume Serial Number is B29F-333D

Directory of C:\Users\sjain403\Downloads

26-Nov-25 03:29 PM <DIR> .
07-Nov-25 03:42 PM <DIR> ..
12-Nov-24 09:28 PM 3,073,800 (1).pdf
08-Apr-24 11:29 PM 228,754 (Prenana Badjate Resume).pdf
26-Jul-24 11:13 AM 60,304 0-1 Knapsack .pdf
06-Apr-24 02:13 PM 593,850 1027138186_WMHR25004961656_03042024.pdf
21-Jan-25 07:38 PM 680,591 1027138186_WMHR25008762668_02012025.pdf
06-Apr-25 12:05 PM 725,078 1027138186_WMHR26009924461_04042025.pdf
13-Oct-22 06:45 PM 1,281,502 10th Marksheet .pdf
13-Oct-22 06:51 PM 363,517 10th Marksheet _compressed.pdf
13-Mar-24 09:46 PM 291,040 11753806 (1).pdf
07-Jan-24 02:22 PM 260,458 11753806.pdf
17-Sep-25 08:03 AM 336,383 UTC APAC Server DAILY Backup Monitoring Logged 16th Sept 2025 1.xlsx
16-Sep-24 07:26 AM 824,649 UTC Exception 13th,14th,15th Sept 2024.xlsx
05-Jun-24 06:36 AM 6,146,044 UTC Monthly Report - May 2024.xlsx
17-Sep-25 08:01 AM 10,649,808 UTC- SUMMARY DBASE FOR 16th Sept 2026.xlsx
27-Jan-25 07:27 PM 9,547,087 VID-20231026-WA0007.mp4
16-Jan-24 07:26 PM 118,746 ViewResult1 (1).pdf
10-Jul-24 07:31 PM 119,512 ViewResult1 (11).pdf
10-Jul-24 08:01 PM 120,694 ViewResult1 (2).pdf
14-Jul-24 02:17 PM 119,174 ViewResult1 (3).pdf
01-Feb-25 12:27 PM 119,679 ViewResult1 (7) (1).pdf
24-Jan-25 07:42 PM 120,740 ViewResult1 (7).pdf
10-Jul-24 07:35 PM 120,689 ViewResult1.pdf
26-Nov-25 03:29 PM 1,674 vpc.pem
09-Feb-24 07:05 PM 98,950,632 VSCodeUserSetup-x64-1.86.1.exe
01-Apr-25 11:41 PM 34,655,352 WarpSetup.exe
14-Feb-25 08:06 PM 434,845 Web-Technologies.jpg
09-Aug-24 06:20 PM 33,843 WhatsApp Image 2024-08-09 at 6.20.36 PM.jpeg
15-Aug-24 04:07 PM 74,989 WhatsApp Image 2024-08-15 at 3.32.39 PM.jpeg
28-Mar-25 10:14 AM 981,048 WhatsApp Image 2025-03-28 at 10.14.40 AM.jpeg
28-Mar-25 10:17 AM 1,050,686 WhatsApp Image 2025-03-28 at 10.17.49 AM.jpeg
28-Mar-25 10:20 AM 992,606 WhatsApp Image 2025-03-28 at 10.20.04 AM.jpeg
29-Mar-25 05:34 PM 89,282 WhatsApp Image 2025-03-29 at 5.25.46 PM.jpeg
19-Apr-25 01:18 PM 1,413,753 WhatsApp Image 2025-04-16 at 8.32.25 PM.jpeg
```

A Private Key is used to securely login/authenticate to a remote system — especially without using a password.

Here I gave my Jump Server instance id



Here is I provided my DB-Server IP