Informatica Join Clean Tables Task Documentation

1. Objective

The objective of this task is to join two already cleaned sales tables using Informatica Cloud Data Integration. Both tables contain validated and cleaned transactional data. The joined output is loaded into an Oracle target table for further reporting and analysis.

2. Source Details

This task uses two clean source tables:

1. CLEAN TABLE 1 (HCL_SALES_CLEAN)
   - Contains cleaned transactional sales data
   - Includes Transaction ID, Customer ID, Product ID, Quantity, Unit Price, Discount, and Transaction Date

2. CLEAN TABLE 2 (HCL_SALES_CLEAN_1)
   - Contains additional cleaned sales records with the same structure
   - Used to merge and consolidate clean data into a single dataset

3. Mapping Architecture & Flow

The mapping is designed using a UNION transformation to combine data from both clean tables.

Flow:
Source (Clean Table 1) → Union Input 1
Source (Clean Table 2) → Expression → Union Input 2
Union → Oracle Target Table

This design ensures that data from both clean sources is merged row-wise into a single target.

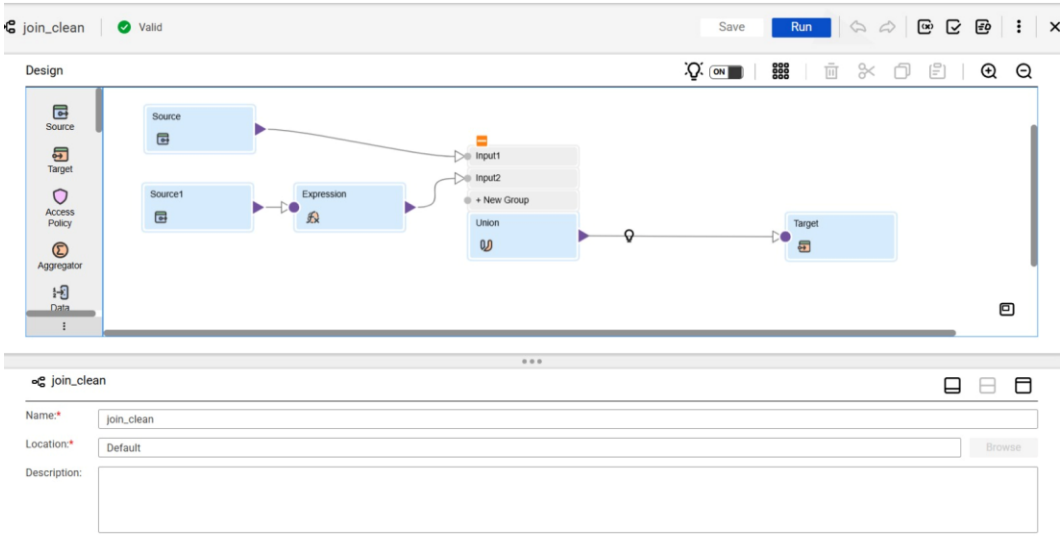

4. Transformations Used

4.1 Source Transformation

Two source transformations are used to read data from the Oracle clean tables. Both sources have identical metadata, which is mandatory for the Union transformation.

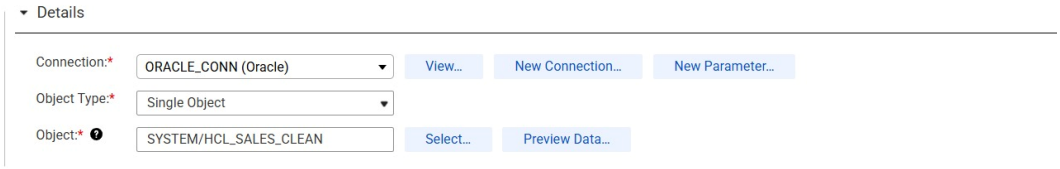

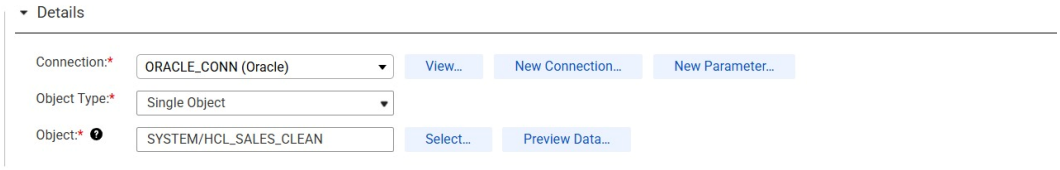

4.2 Expression Transformation

An Expression transformation is used on the second source to perform minor data standardization. In this task, the transaction date is validated and formatted using the IS_DATE function. Invalid dates raise transformation errors to maintain data consistency.

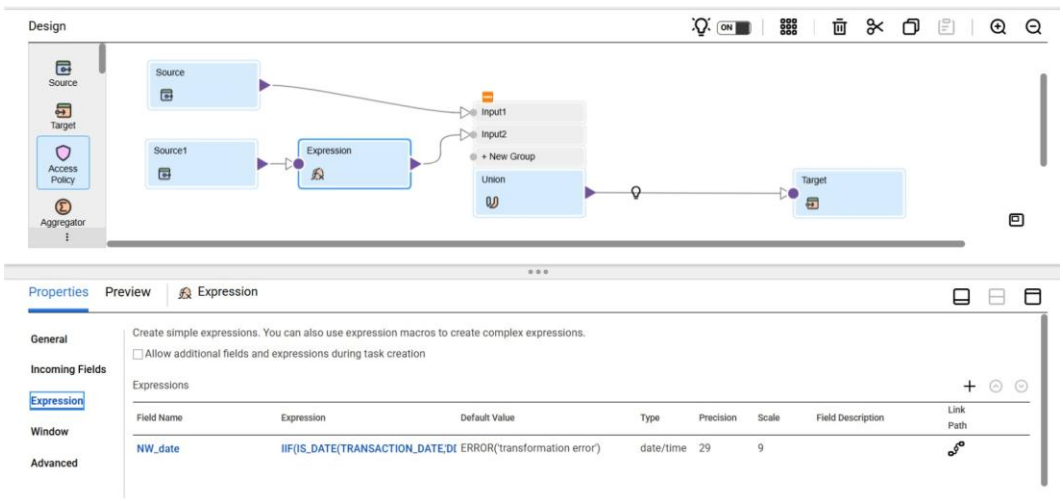

Expression logic used:
NW_DATE = IIF(IS_DATE(TRANSACTION_DATE,'YYYY-MM-DD'), TO_DATE(TRANSACTION_DATE,'YYYY-MM-DD'), ERROR('Transformation Error'))

4.3 Union Transformation

The Union transformation is used to combine rows from both clean tables. Both input groups (Input1 and Input2) have the same number of columns and compatible datatypes.

Key Points:

- Union appends rows vertically
- Column order and datatype must match
- No duplicate elimination is performed

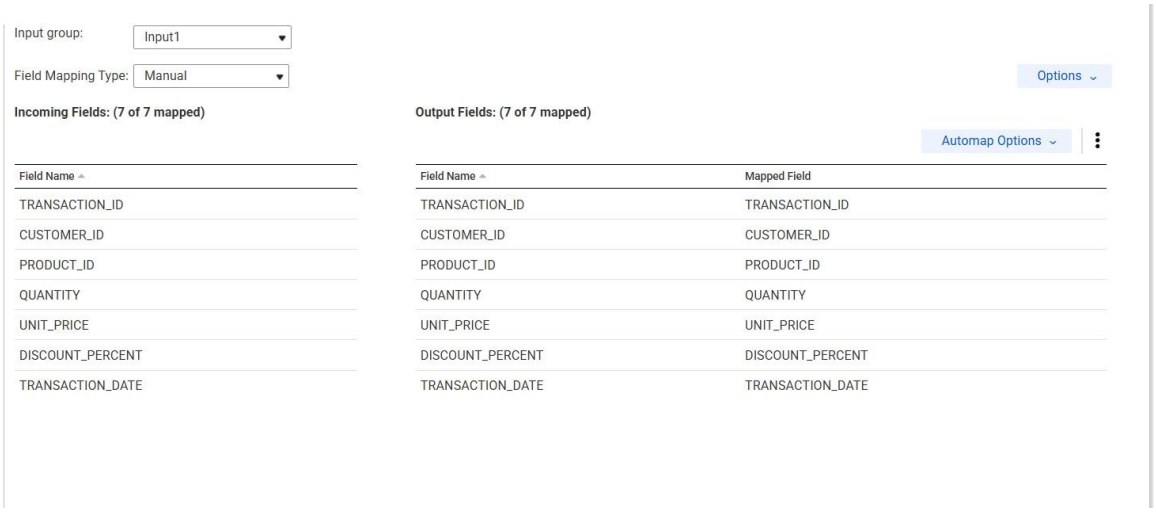

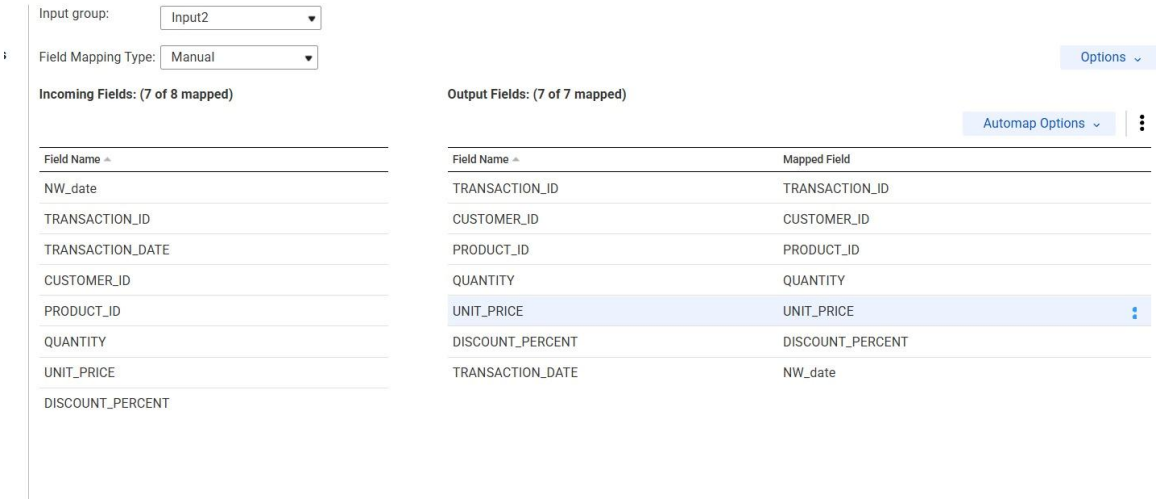

5. Target Details

The final output is loaded into an Oracle target table.

Target Table Name: SYSTEM.HCL_SALES_CLEAN_JOIN
Operation: Insert

The target table stores consolidated clean sales data from both input tables.

Details

Connection:* ORACLE_CONN (Oracle) View... New Connection... New Parameter...

Object Type:* Single Object

Object:* SYSTEM/HCL_SALES_CLEAN_1 Select... Preview Data...

Operation: Insert

Truncate target

Field Mapping Type: Manual Options

Incoming Fields: (7 of 7 mapped)

Find

Field Name
TRANSACTION_ID
CUSTOMER_ID
PRODUCT_ID
QUANTITY
UNIT_PRICE
DISCOUNT_PERCENT
TRANSACTION_DATE

Target Fields: (7 of 7 mapped)

Find Automap Options

Field Name	Mapped Field
TRANSACTION_ID	TRANSACTION_ID
CUSTOMER_ID	CUSTOMER_ID
PRODUCT_ID	PRODUCT_ID
QUANTITY	QUANTITY
UNIT_PRICE	UNIT_PRICE
DISCOUNT_PERCENT	DISCOUNT_PERCENT
TRANSACTION_DATE	TRANSACTION_DATE