AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

1.Create an EC2 Windows Instance in AWS

Sakthi Lakshmi L V,

CSE- Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

An EC2 Windows instance is a virtual machine running the Microsoft Windows operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, IIS, etc.) in the cloud without having to manage physical hardware.

Use Cases for EC2 Windows Instances:

- Web and Application Hosting: Run IIS web servers or other Windowsbased web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Windows instances, using RDS or EC2 for more control.
- Remote Desktop Applications: Set up RDS (Remote Desktop Services) for remote access to Windows desktops in the cloud.
- Development and Testing: Create development environments with Windows OS to test .NET or other Windows-based applications.

Used Services in AWS:

Amazon EC2

Topology

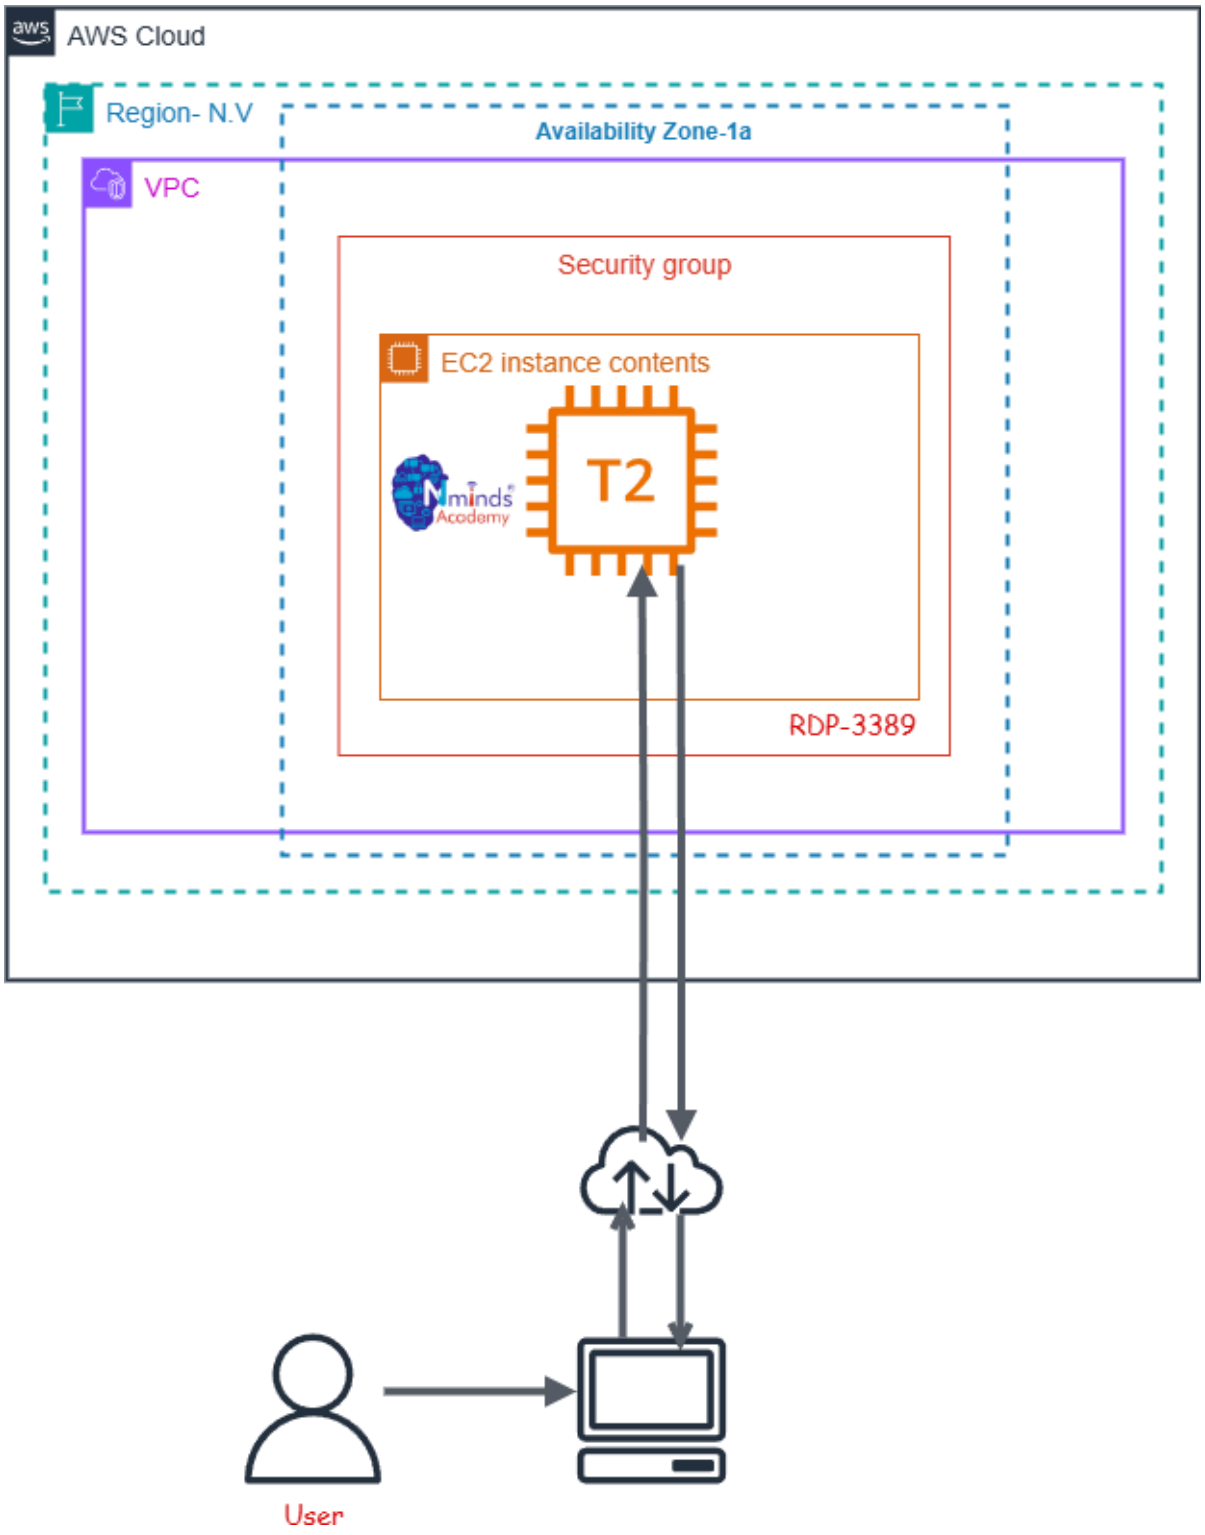
AWS Cloud
Region- N.V
Availability Zone-1a
VPC
Security group
EC2 instance contents
T2
RDP-3389
User

Execution Tasks:

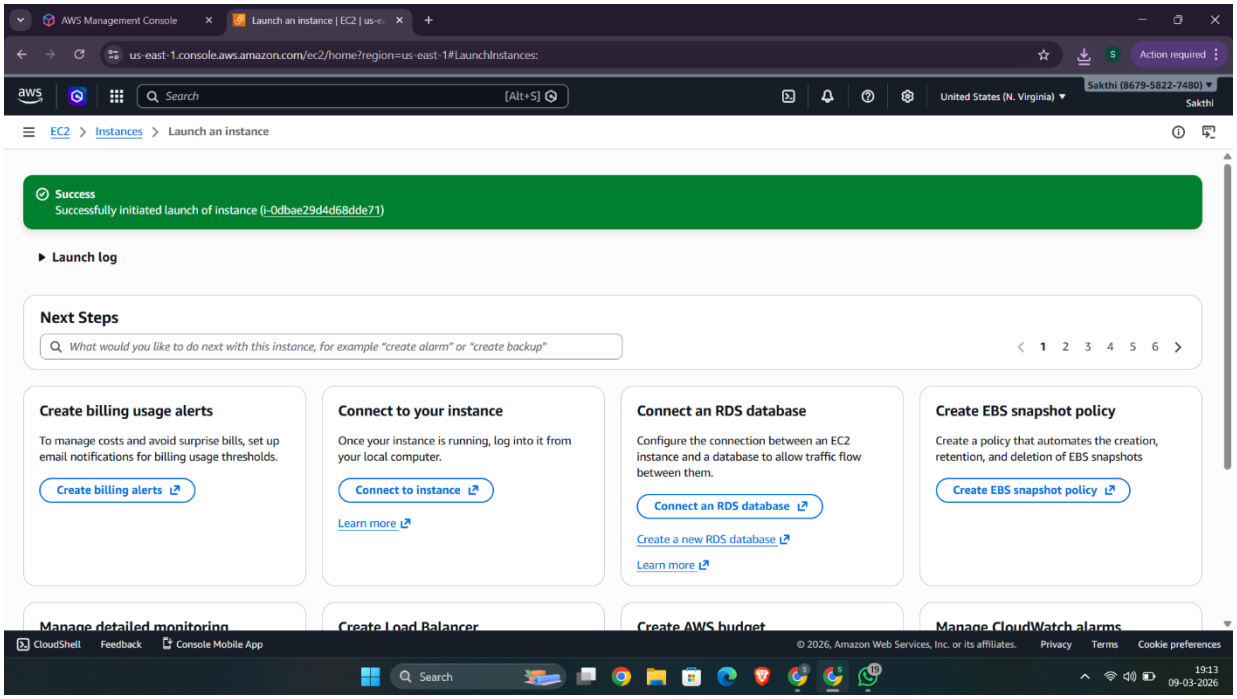

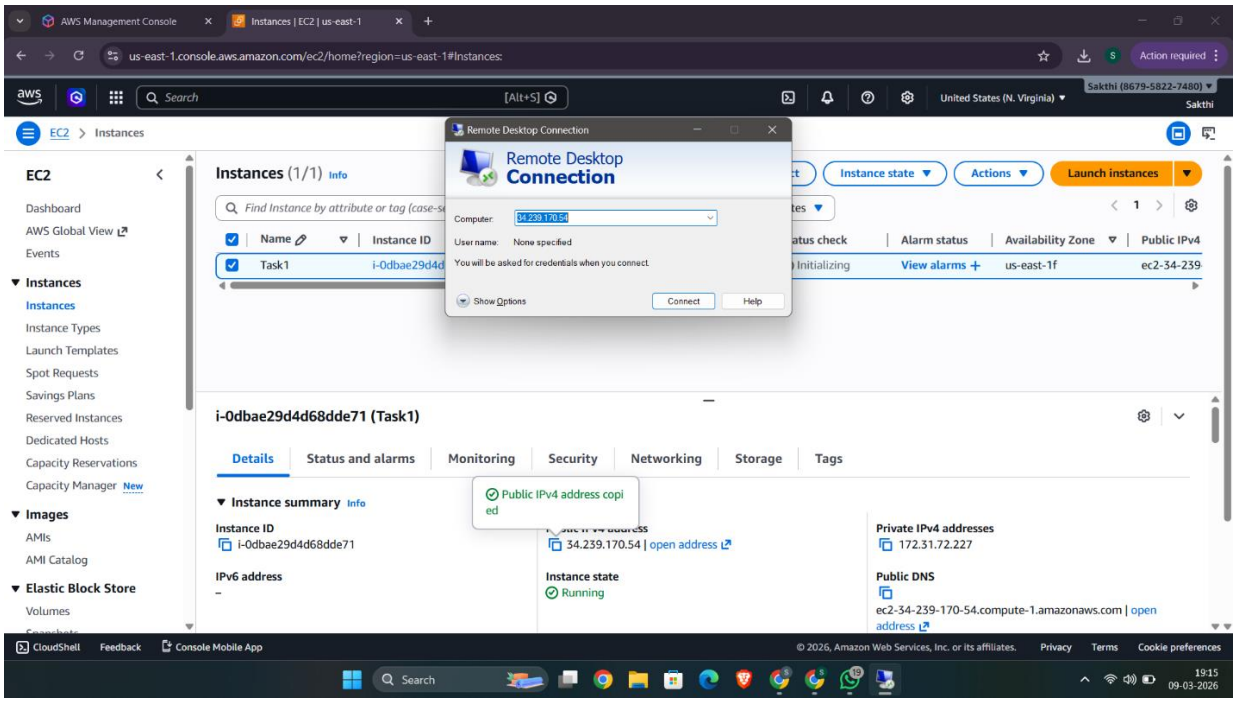

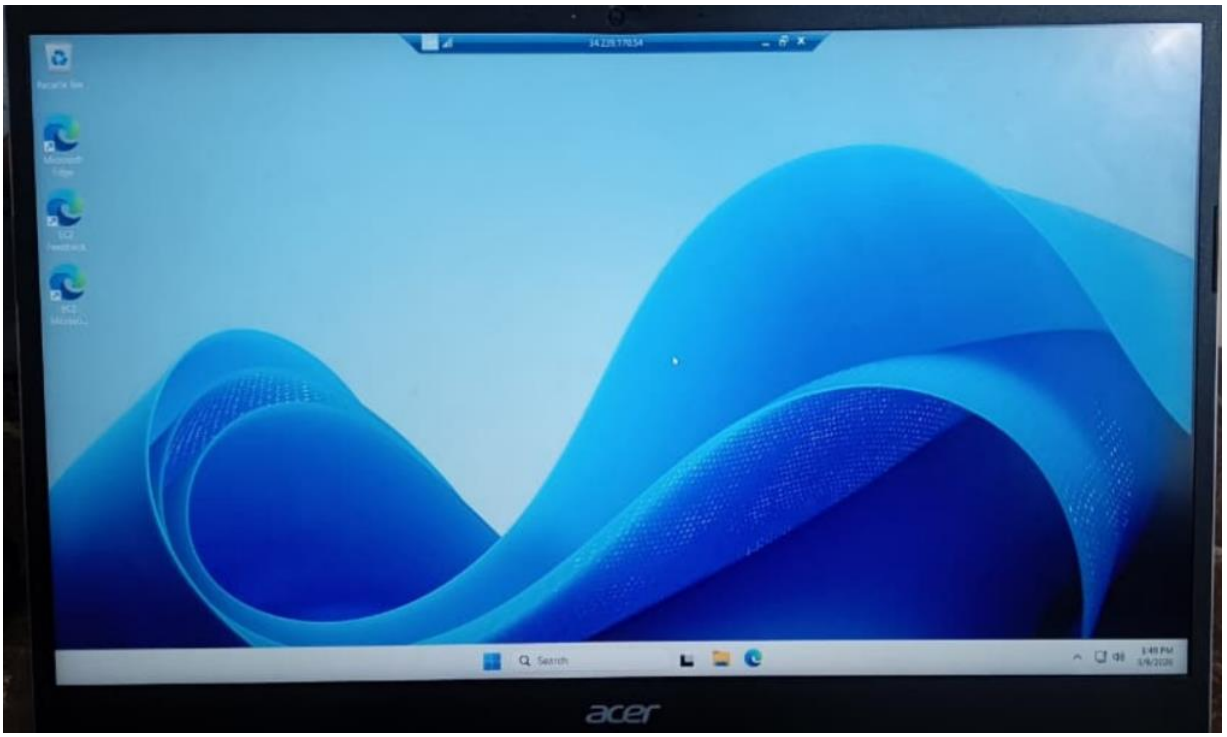
acer

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification Training

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

2. Configure IIS Webserver on Windows Server in AWS

Sakthi Lakshmi L V,

CSE- Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

An EC2 Windows instance is a virtual machine running the Microsoft Windows operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, IIS, etc.) in the cloud without having to manage physical hardware.

IIS (Internet Information Services) is a web server software created by Microsoft for hosting websites and web applications on Windows Server operating systems. It provides a platform for building, deploying, and managing web-based applications. IIS supports multiple protocols, including HTTP, HTTPS, FTP, and more, and is tightly integrated with the Windows OS.

Common Use Cases of IIS:

1. Hosting Websites: IIS is often used by businesses and developers to host websites and web applications, particularly those built with ASP.NET.
2. Web Applications: For applications that require robust back-end support, IIS provides features like application pooling and security for web services (e.g., SOAP or RESTful APIs).
3. Secure File Sharing: IIS can be configured as an FTP server to securely share files between different locations.
4. Application Hosting in Enterprises: Many enterprise applications built on Microsoft technologies rely on IIS for deployment, such as SharePoint, Exchange Server, or Dynamics CRM.
5. API Hosting: IIS is commonly used to host APIs (e.g., RESTful services) built with .NET or other technologies.

Used Services in AWS

Amazon EC2

Used Services in Windows Server

IIS- Internet Information Services

Topology

How to Configure the IIS web server in Windows Server with AWS EC2

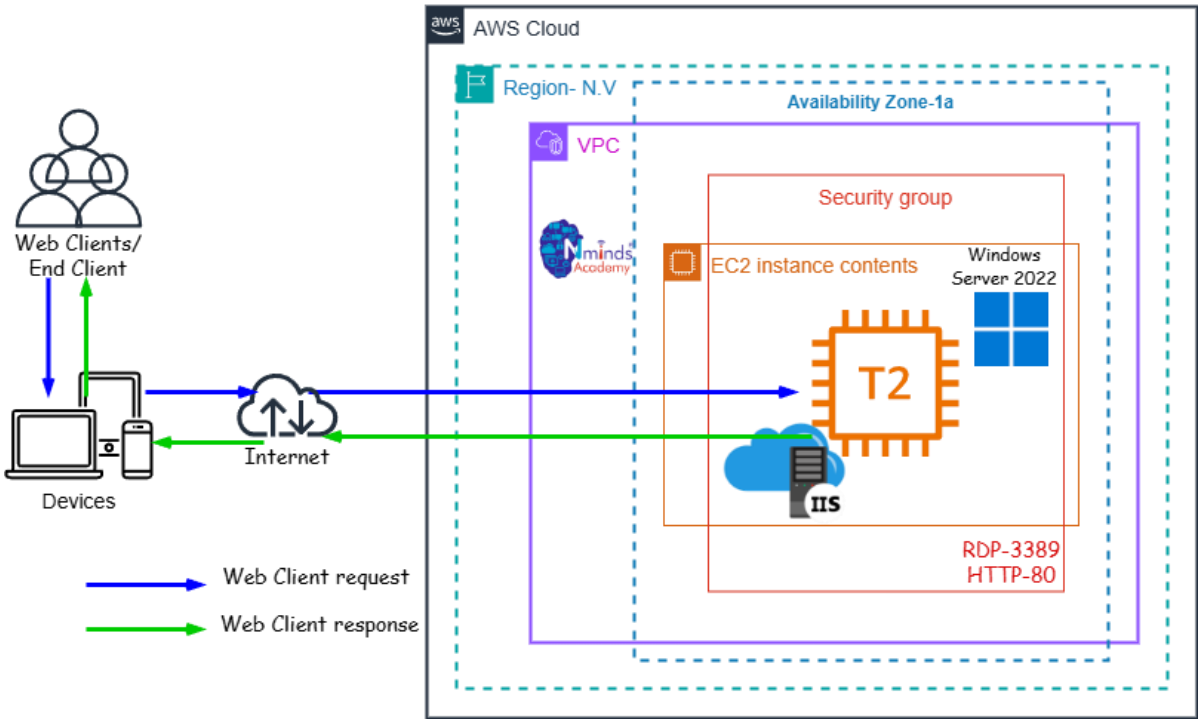

Execution Tasks:

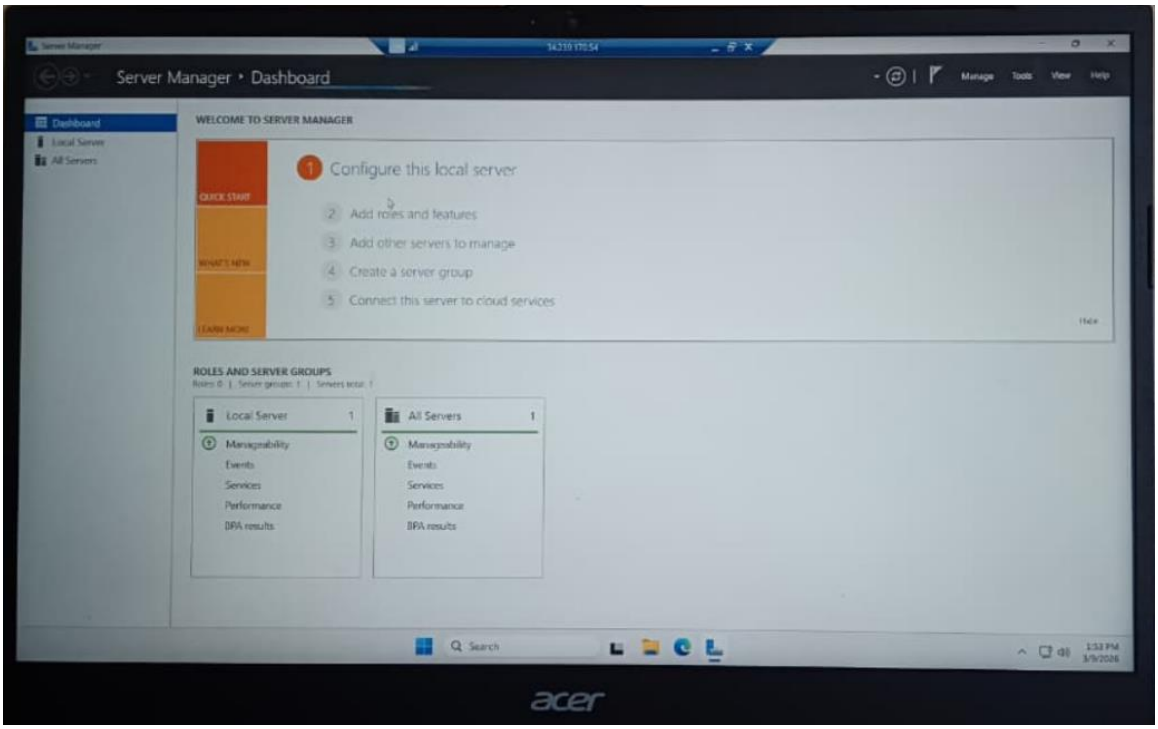

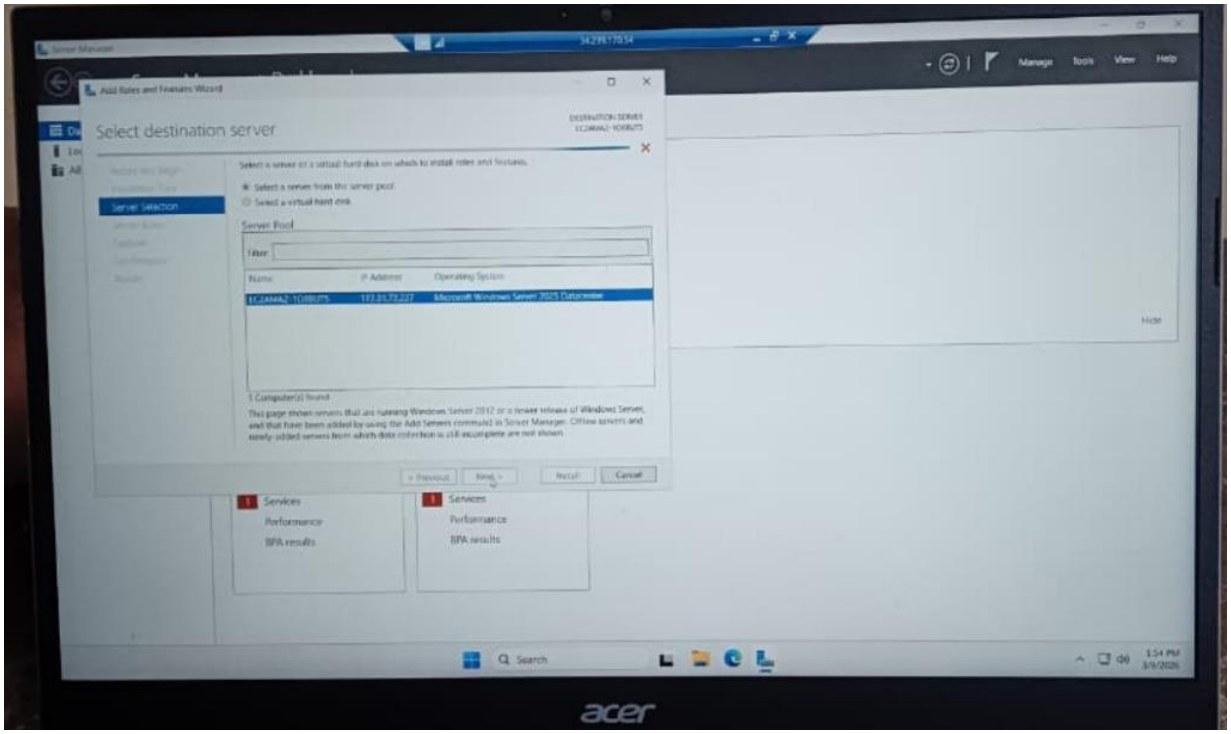

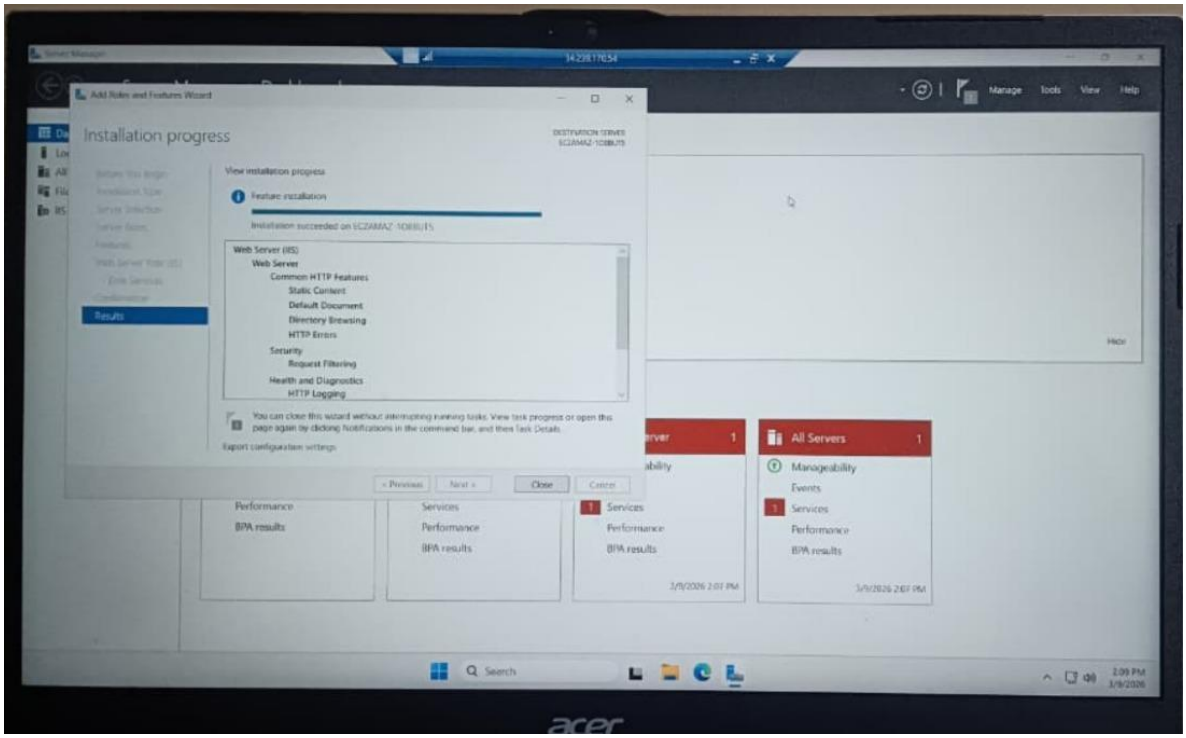
Installation progress
View installation progress
Feature installation
Web Server (IIS)
Web Server
Common HTTP Features
Static Content
Default Document
Directory Browsing
HTTP Errors
Security
Request Filtering
Health and Diagnostics
HTTP Logging
Results
Close
All Servers
Manageability
Events
Services
Performance
BPA results

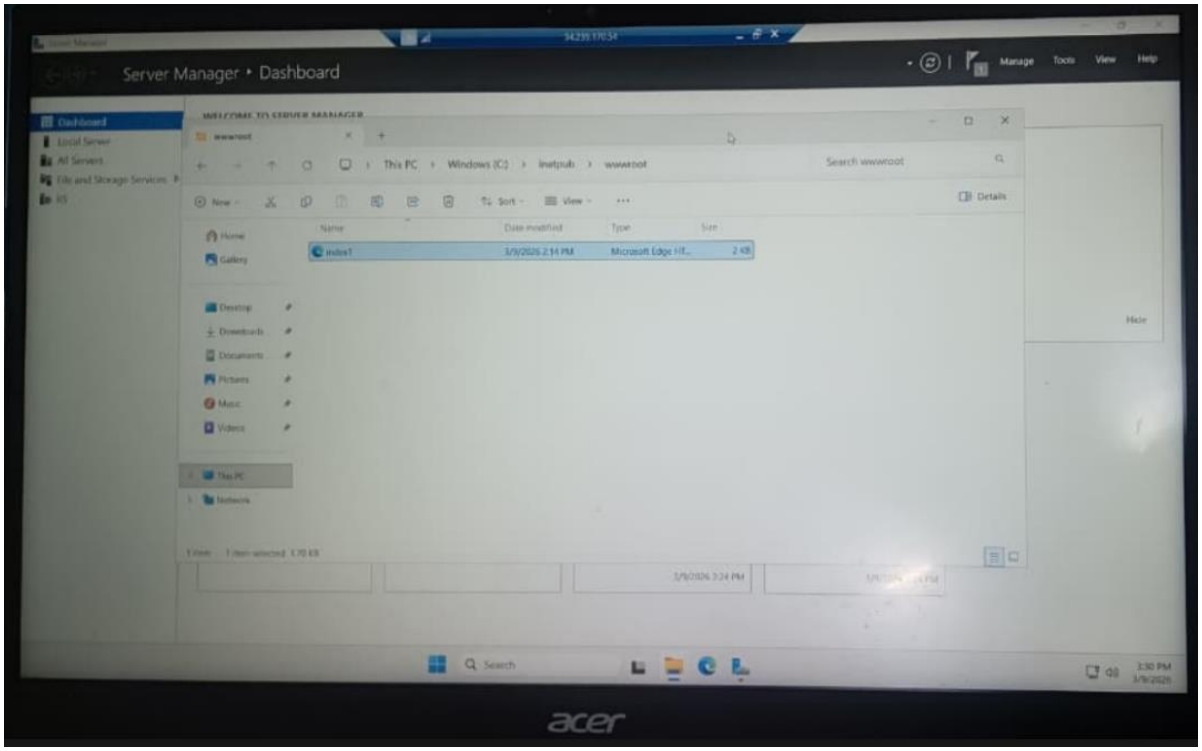
Server Manager • Dashboard
Manage
Tools
View
Help
This PC
Windows (C:)
inetpub
wwwroot
Search wwwroot
Details
index1

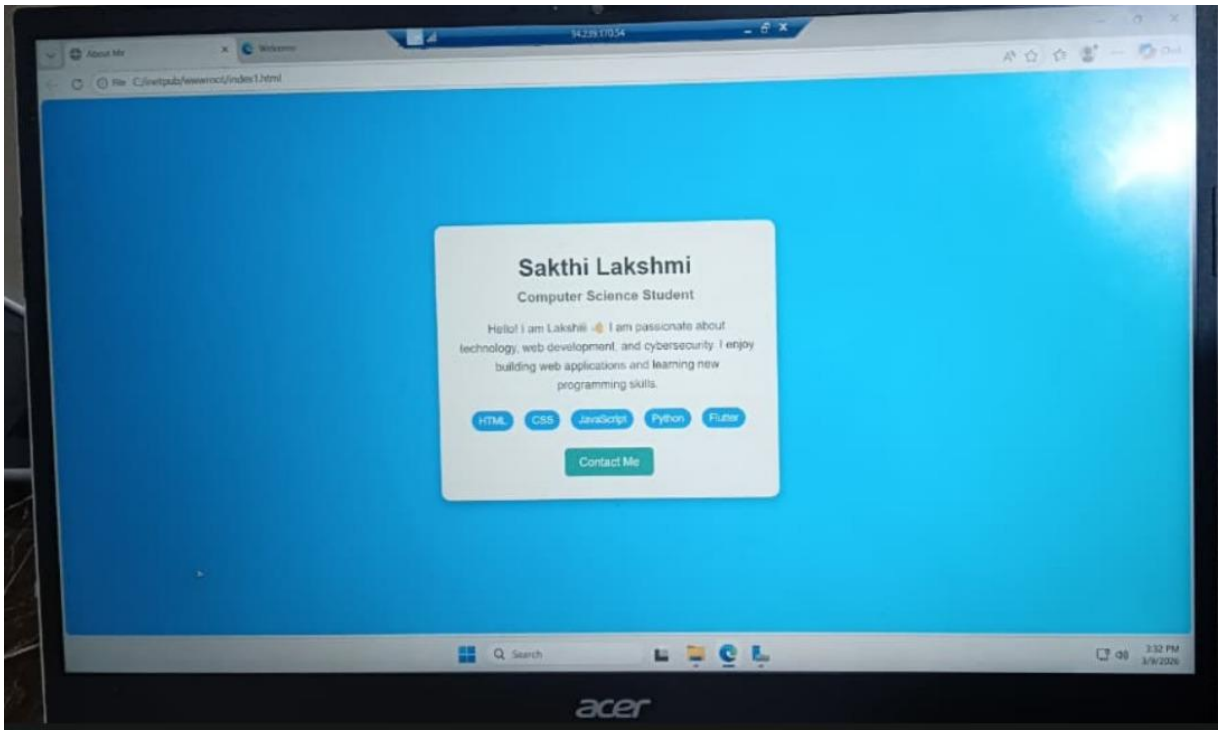
Sakthi Lakshmi
Computer Science Student
Hello! I am Lakshmi 👋 I am passionate about technology, web development, and cybersecurity. I enjoy building web applications and learning new programming skills.
HTML
CSS
JavaScript
Python
Flutter
Contact Me
acer

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

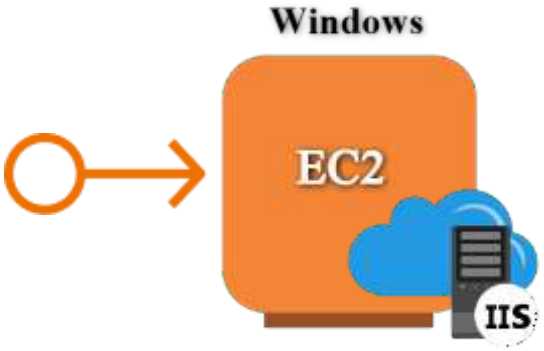

3. Configure Elastic IP Address to Windows Web Server in AWS

Sakthi Lakshmi L V,
CSE- Artificial Intelligence & Machine Learning,
Sri Eshwar College of Engineering,
Coimbatore.

Objective

An Elastic IP (EIP) in AWS is a static, public IP address designed for dynamic cloud computing. It is associated with your AWS account and can be quickly associated or disassociated with any EC2 instance in your account. This feature is particularly useful when you need to maintain a consistent IP address for your resources, even when you stop and start EC2 instances.

Common Use Cases for Elastic IP:

1. Highly Available Applications:
   - If you're running a service that requires high availability, you can use Elastic IPs to quickly reassign a static IP to a new instance if your primary instance fails, ensuring minimal downtime.
2. Web Servers:
   - If you host a website and need to ensure the IP address remains the same even if the underlying EC2 instance is restarted, an Elastic IP helps maintain this consistency.
3. Disaster Recovery:
   - Elastic IPs are useful for disaster recovery scenarios. If one instance goes down, you can quickly associate the EIP with a backup instance to ensure services are still accessible.

Best Practices:

- Use Elastic IPs only when necessary: Since they come with associated costs when unused, it's a good practice to release EIPs that are no longer required. ○ Move IPs during instance failure: Instead of keeping an EIP permanently attached, use it as a failover method, reassociating it to a new instance when needed. ○ Monitor EIP Usage: Periodically review your usage to ensure you're not paying for unnecessary Elastic IP addresses.

Topology

How to Configure the Elastic IP Address to Windows Web Server with AWS EC2

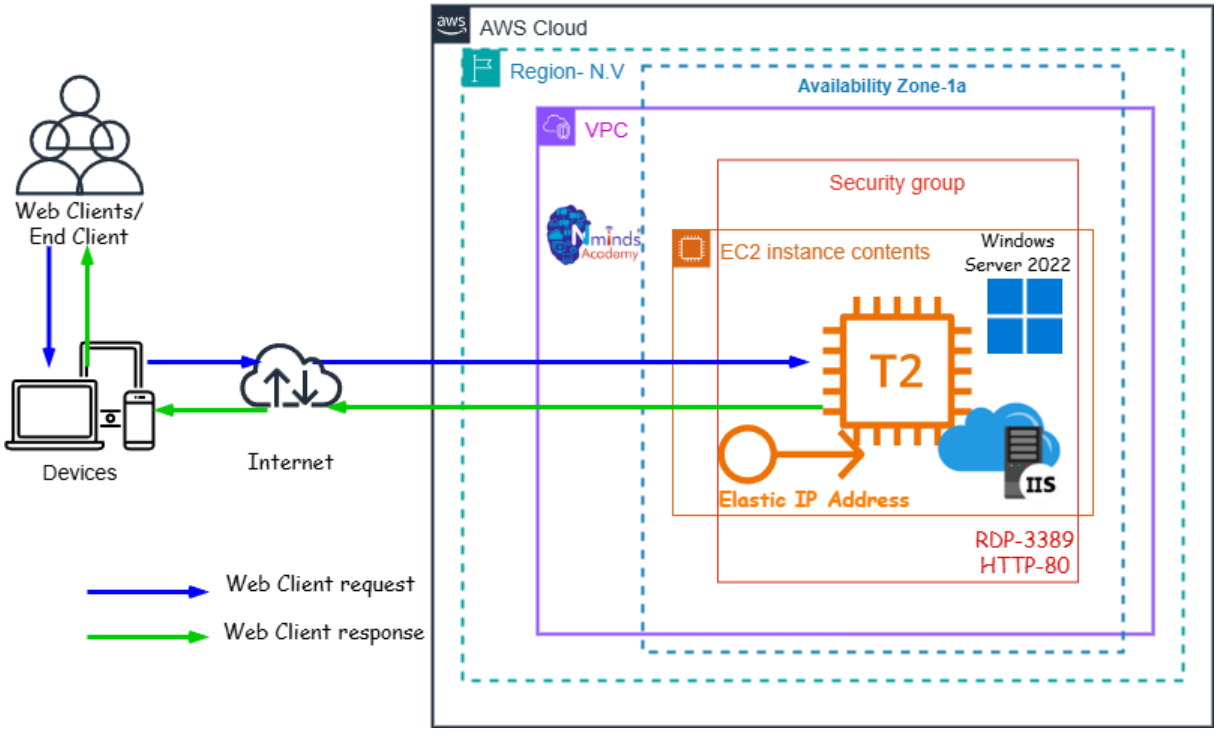

Used Services in AWS

Amazon EC2

Amazon Elastic IP Address

Used Services in Windows Server

IIS- Internet Information Services

Execution Tasks:

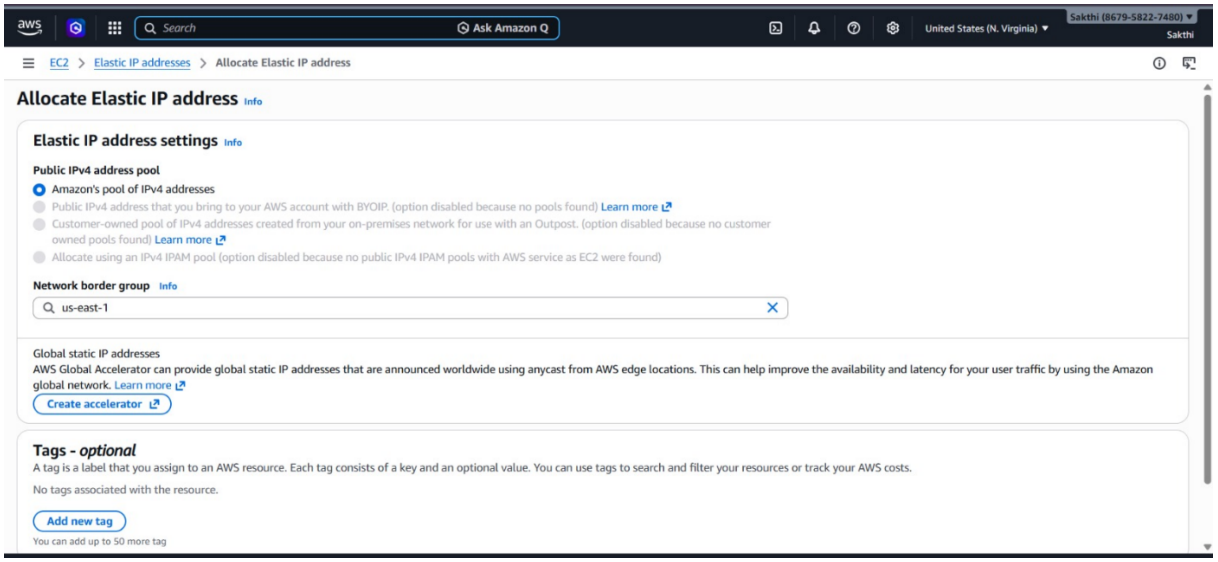

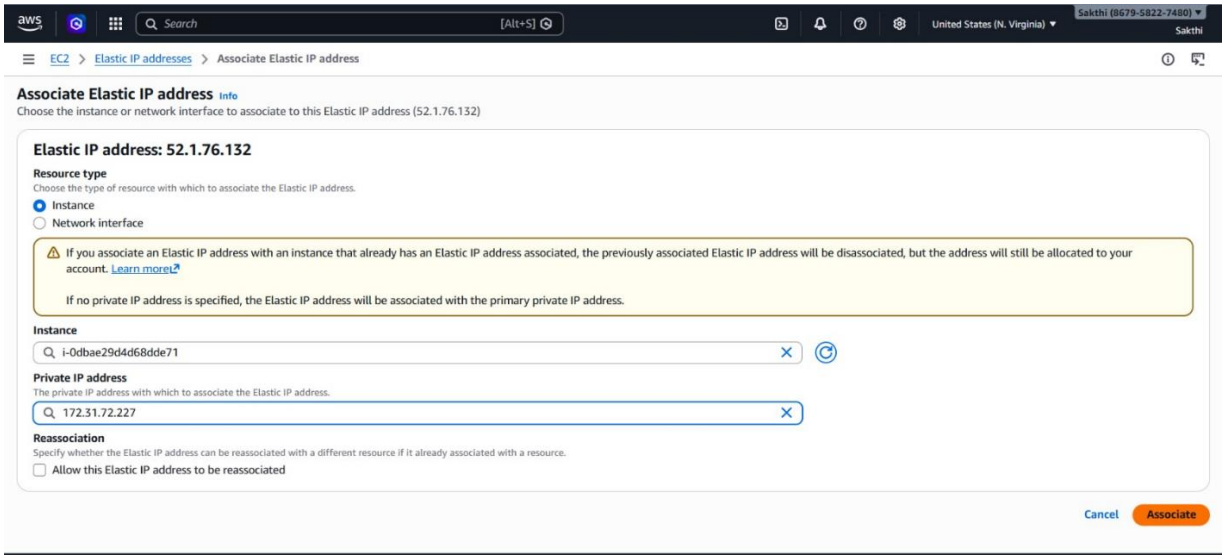

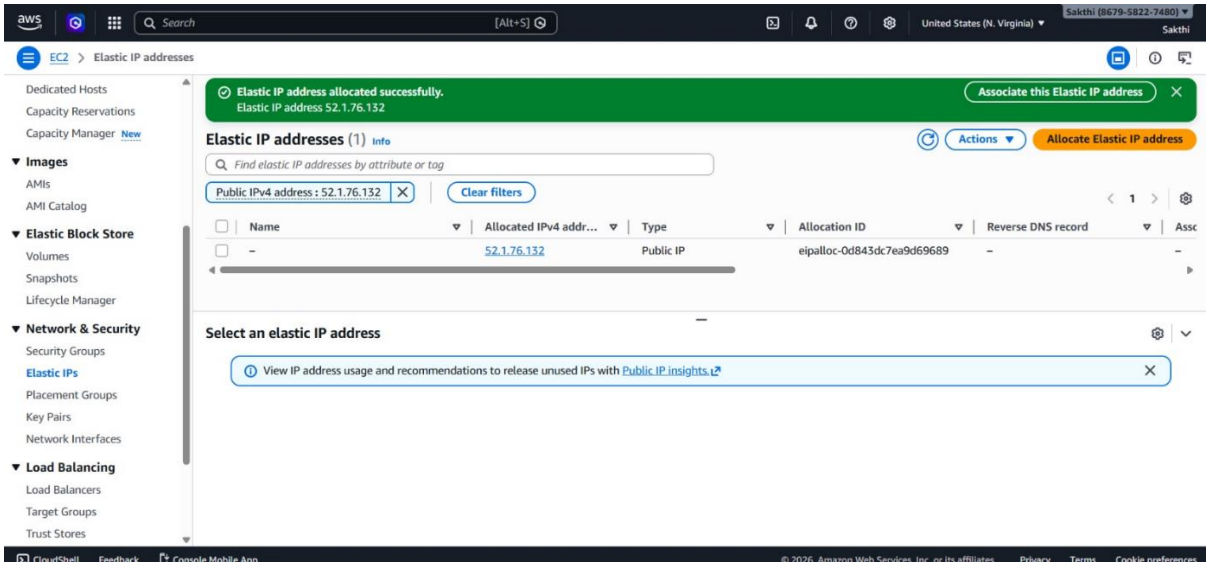
aws
Search
[Alt+S]
United States (N. Virginia)
Sakthi (8679-5822-7480)
Sakthi
EC2 > Elastic IP addresses
Dedicated Hosts
Capacity Reservations
Capacity Manager New
Images
AMIs
AMI Catalog
Elastic Block Store
Volumes
Snapshots
Lifecycle Manager
Network & Security
Security Groups
Elastic IPs
Placement Groups
Key Pairs
Network Interfaces
Load Balancing
Load Balancers
Target Groups
Trust Stores
Elastic IP address allocated successfully.
Elastic IP address 52.1.76.132
Associate this Elastic IP address
Elastic IP addresses (1) Info
Actions
Allocate Elastic IP address
Find elastic IP addresses by attribute or tag
Public IPv4 address : 52.1.76.132
Clear filters
Name
Allocated IPv4 addr...
Type
Allocation ID
Reverse DNS record
52.1.76.132
Public IP
eipalloc-0d843dc7ea9d69689
Select an elastic IP address
View IP address usage and recommendations to release unused IPs with Public IP insights.

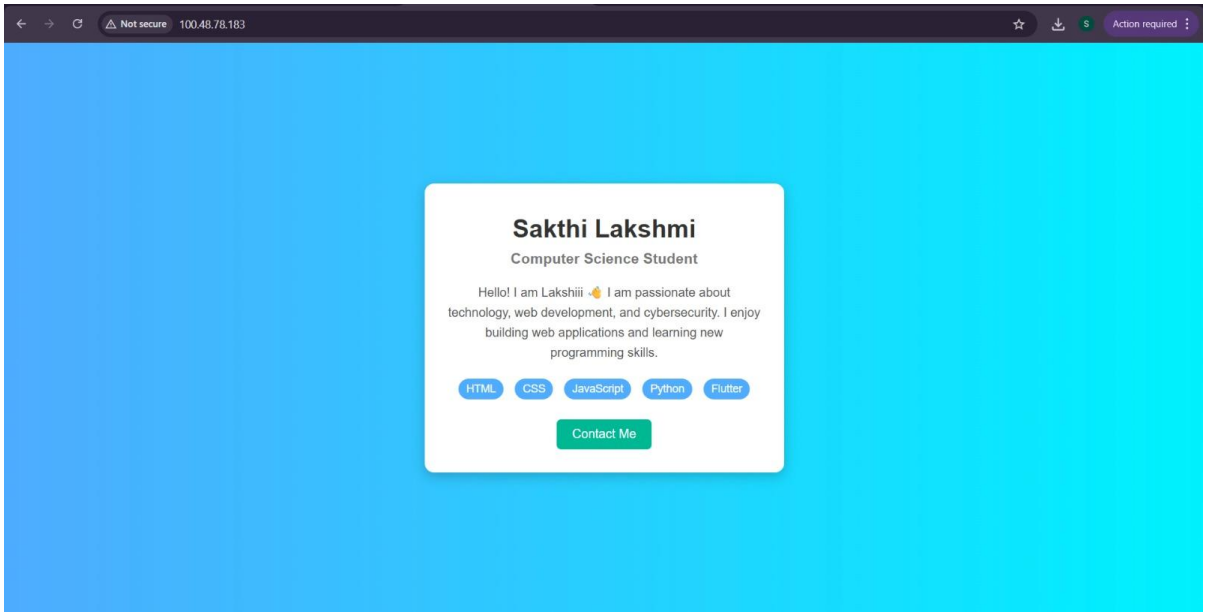
Not secure
100.48.78.183
Action required
Sakthi Lakshmi
Computer Science Student
Hello! I am Lakshiii 👋 I am passionate about technology, web development, and cybersecurity. I enjoy building web applications and learning new programming skills.
HTML
CSS
JavaScript
Python
Flutter
Contact Me

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

4. Create an EC2 Linux Instance in AWS

Sakthi Lakshmi L V,

CSE- Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

An EC2 Linux instance is a virtual machine running the Linux operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, Apache,FileServer etc.) in the cloud without having to manage physical hardware.

Use Cases for EC2 Linux Instances:

- Web and Application Hosting: Run Apache web servers or other Linuxbased web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Linux instances, using SSH or EC2 for more control.
- Remote Desktop Applications: Set up SSH (Remote Desktop Services) for remote access to Linux desktops in the cloud.
- Development and Testing: Create development environments with linux OS to test php,MySql or other Linux-based applications.

Used Services in AWS

Amazon EC2

Topology

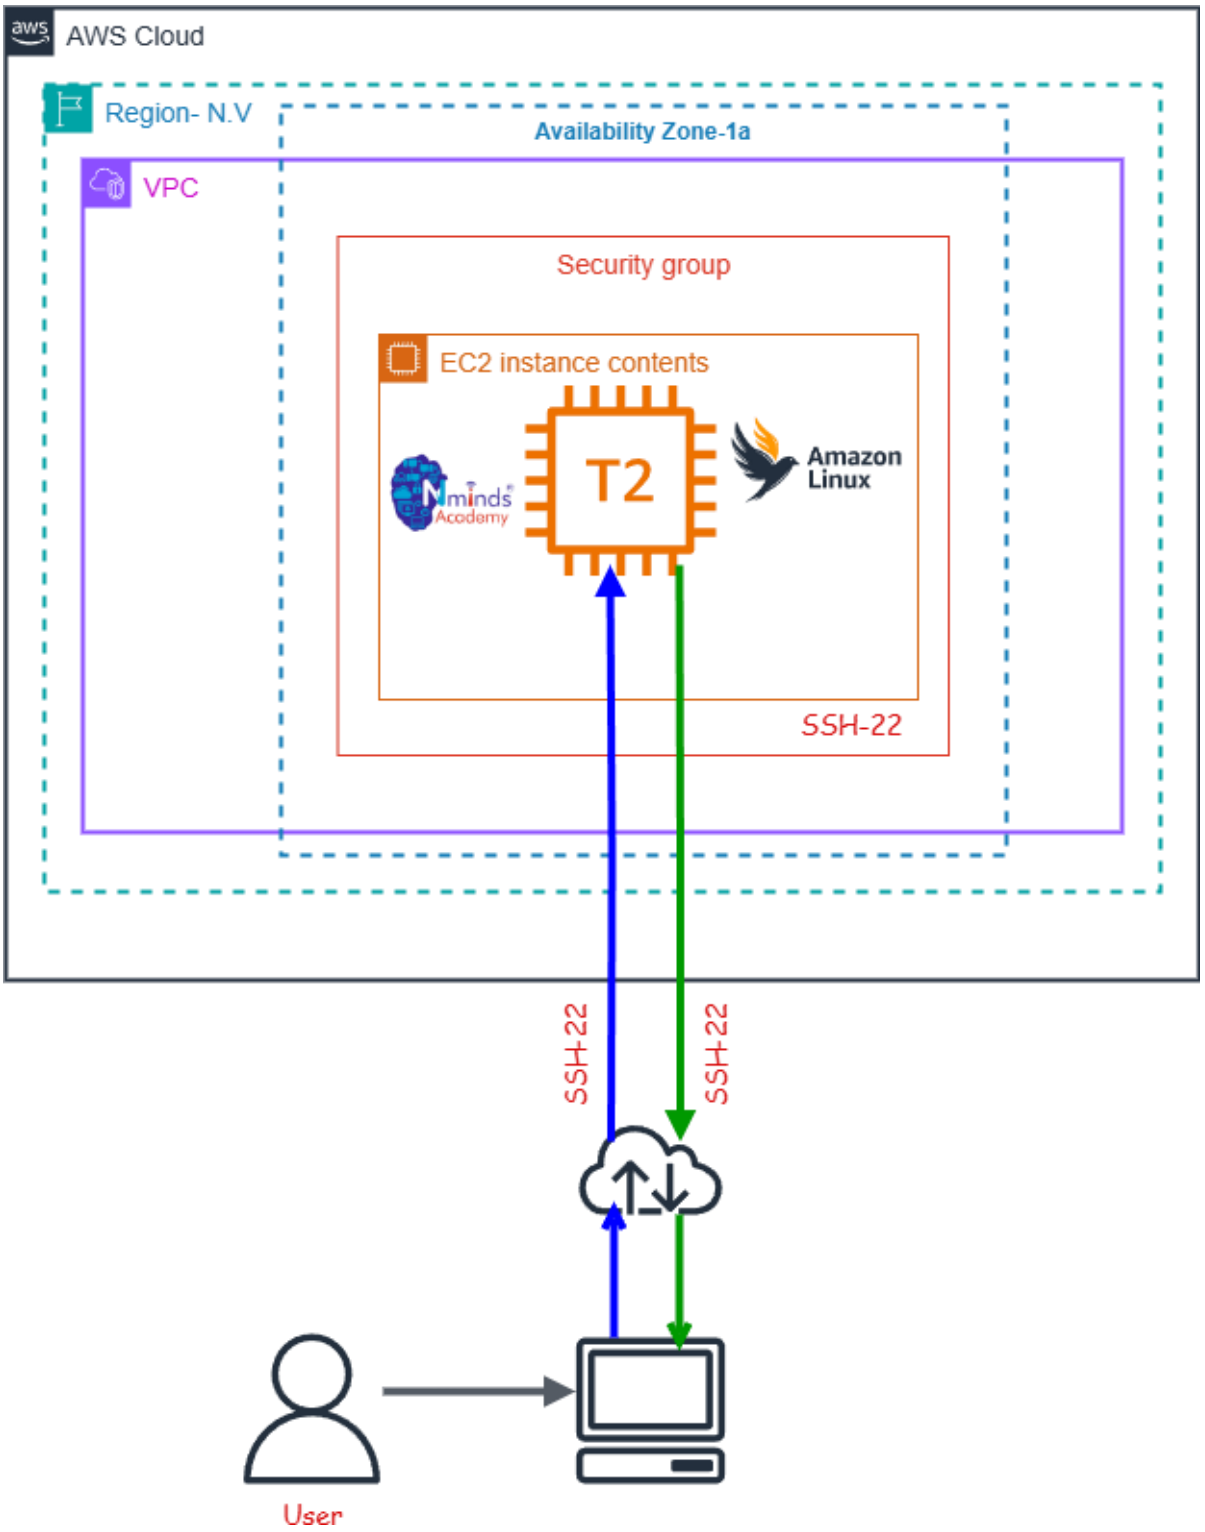
AWS Cloud
Region- N.V
Availability Zone-1a
VPC
Security group
EC2 instance contents
T2
Amazon Linux
SSH-22
SSH-22
SSH-22
User

Execution Tasks:

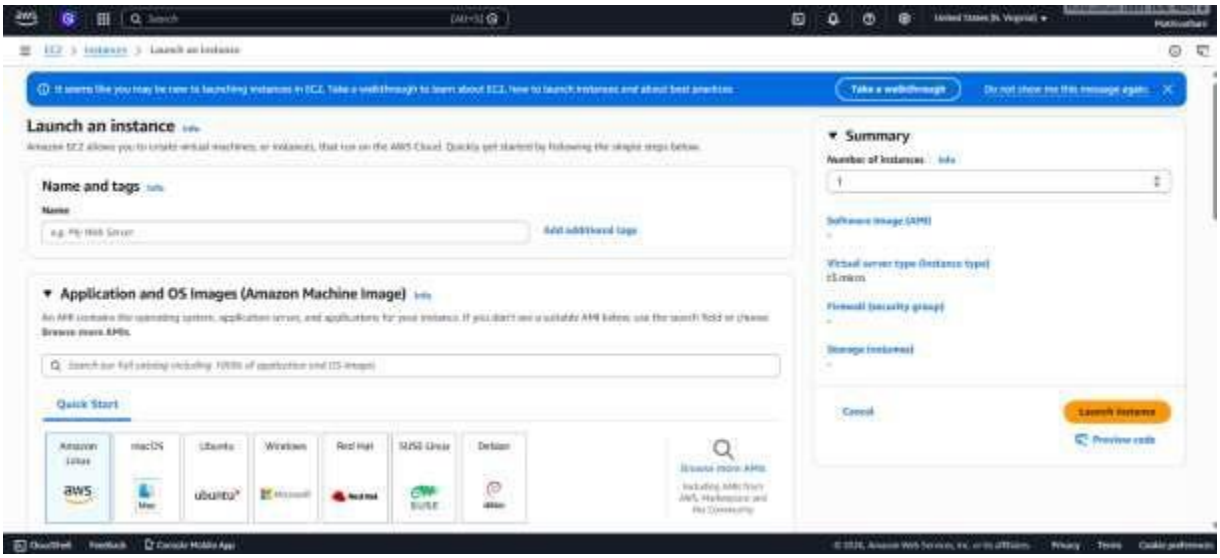

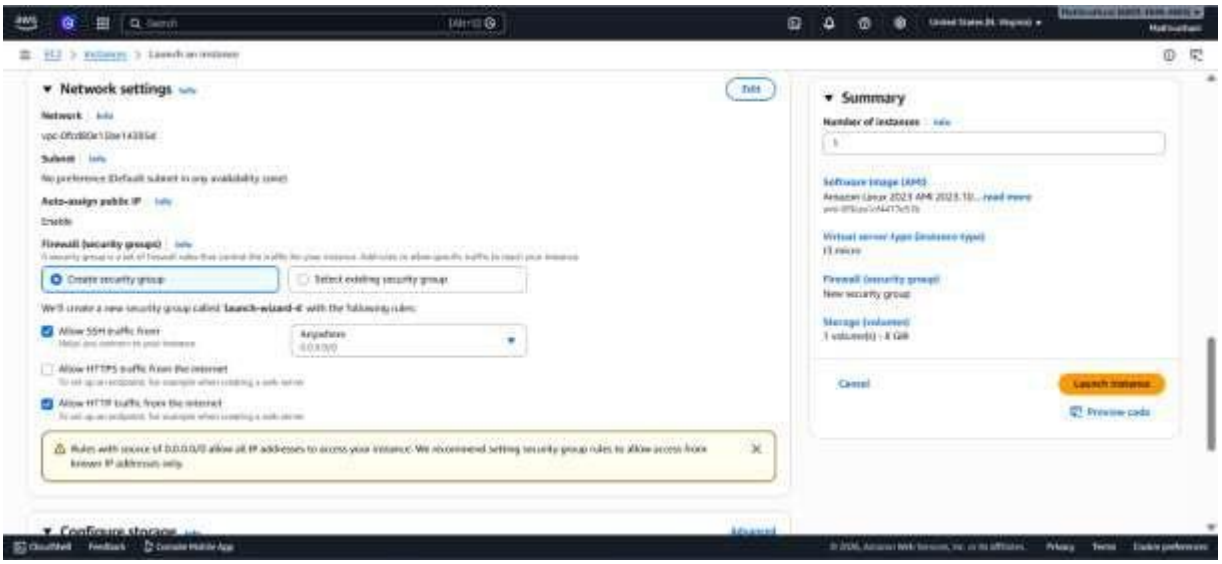

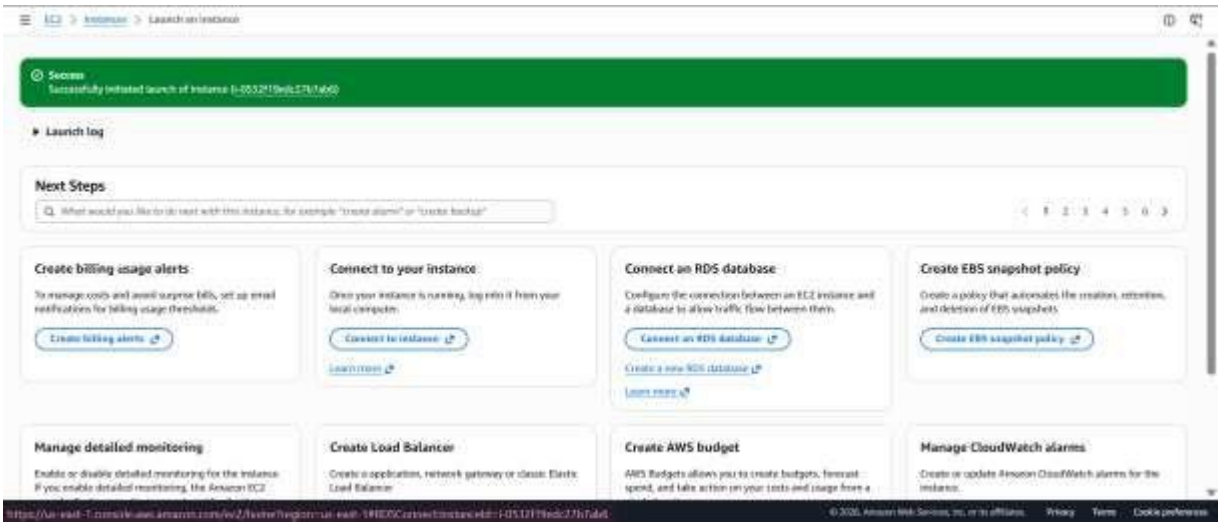
Success
Launch log
Next Steps
Create billing usage alerts
Connect to your instance
Connect an RDS database
Create EBS snapshot policy
Manage detailed monitoring
Create Load Balancer
Create AWS budget
Manage CloudWatch alarms

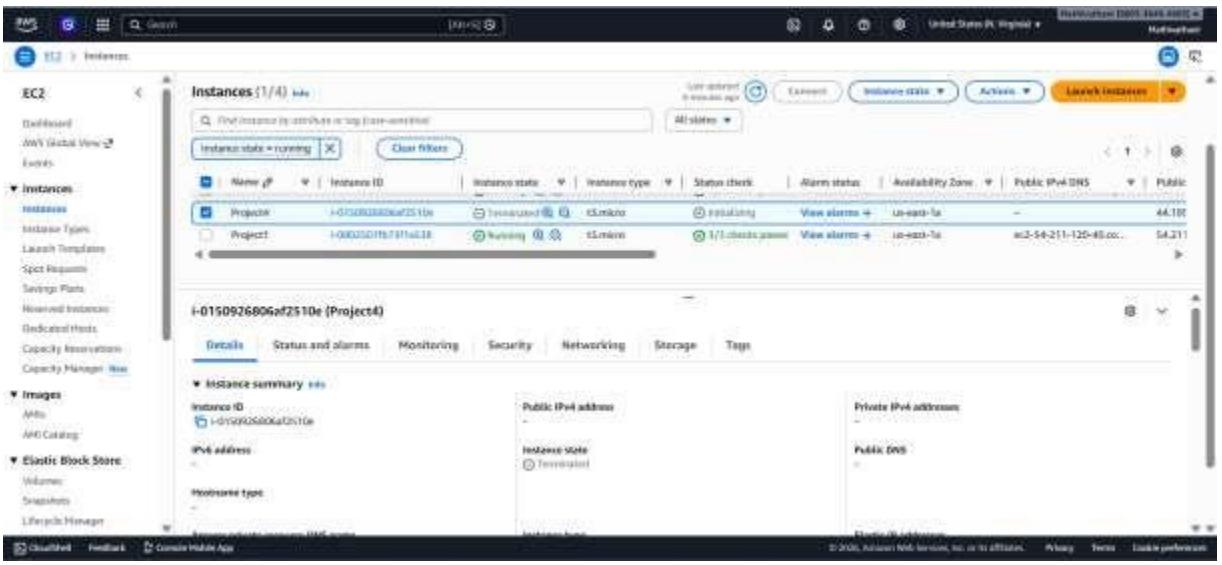
EC2
Instances (1/4)
Instance state = running
Clear filters
Project4
Project1
i-0150926806af2510e (Project4)
Details
Status and alarms
Monitoring
Security
Networking
Storage
Tags
Instance summary

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

5. Configure Apache Web Server on Linux Instance in AWS

Sakthi Lakshmi L V,

CSE- Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

An EC2 Linux instance is a virtual machine running the Linux operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, Apache,FileServer etc.) in the cloud without having to manage physical hardware.

Use Cases for EC2 Linux Instances:

- Web and Application Hosting: Run Apache web servers or other Linuxbased web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Linux instances, using SSH or EC2 for more control.
- Remote Desktop Applications: Set up SSH (Remote Desktop Services) for remote access to Linux desktops in the cloud.
- Development and Testing: Create development environments with linux OS to test php,MySql or other Linux-based applications.

Used Services in AWS

Amazon EC2

Used Services in Linux Server

Apache Webserver

Topology

How to Configure the Apache web server in Linux Server with AWS EC2

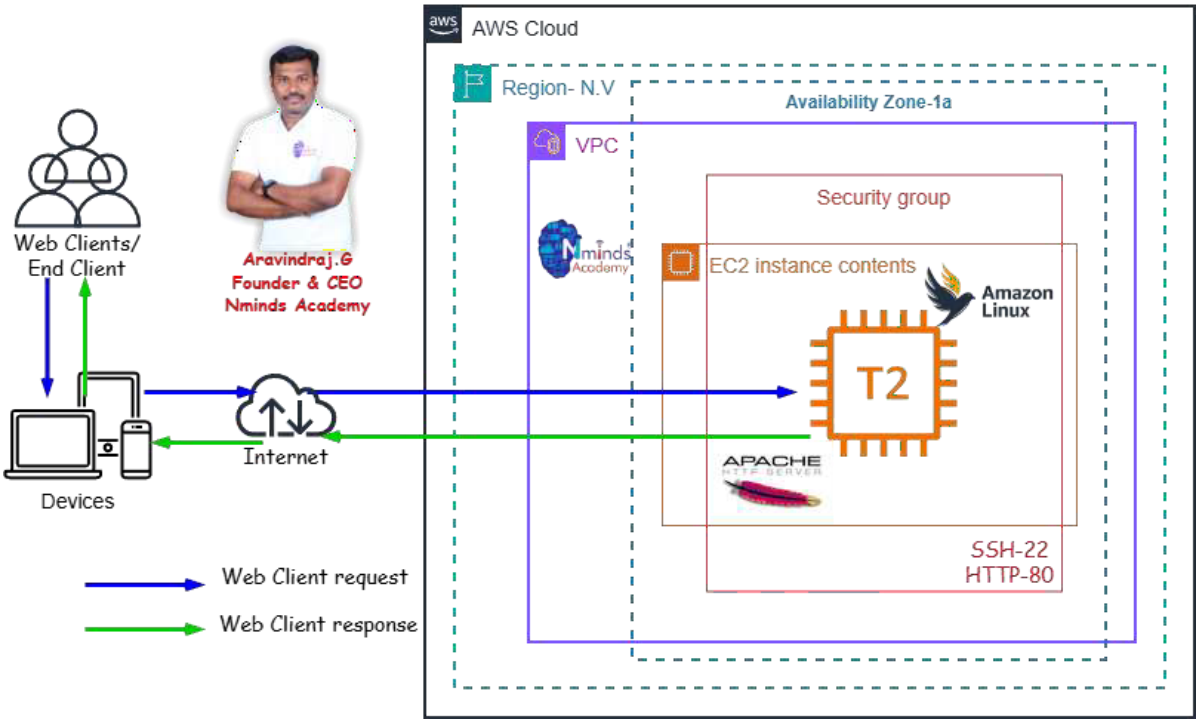

Execution Tasks:

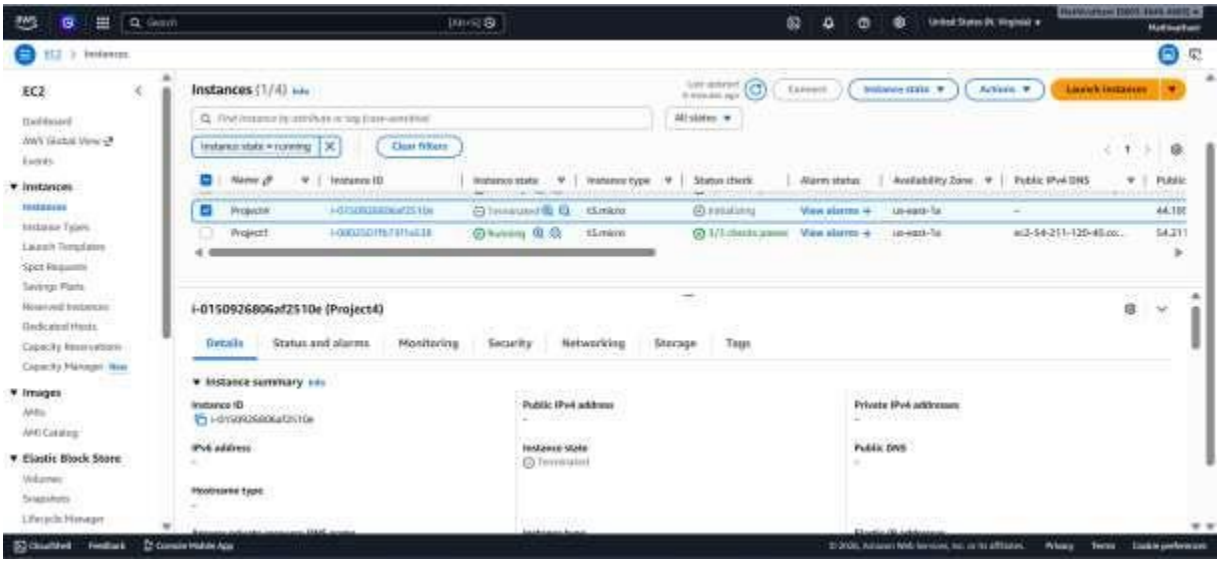

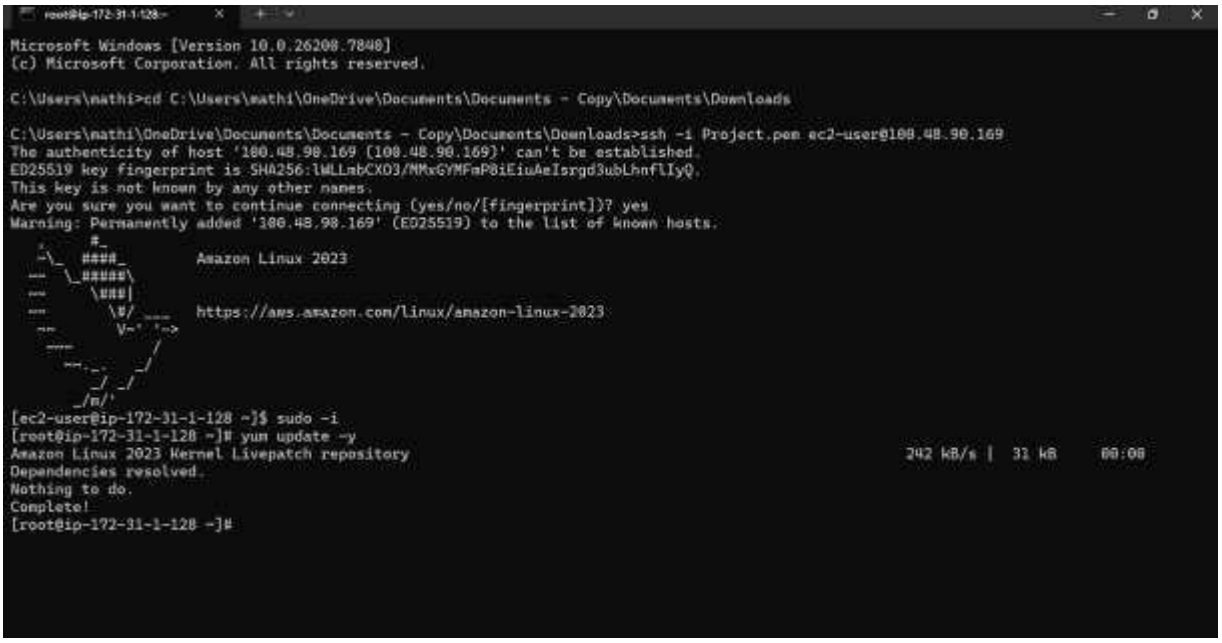

```
  Installing       : generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch                12/13
  Installing       : httpd-2.4.66-1.amzn2023.0.1.x86_64                               13/13
  Running scriptlet: httpd-2.4.66-1.amzn2023.0.1.x86_64                               13/13
  Verifying        : apr-1.7.5-1.amzn2023.0.4.x86_64                                   1/13
  Verifying        : apr-util-1.6.3-1.amzn2023.0.2.x86_64                              2/13
  Verifying        : apr-util-lmdb-1.6.3-1.amzn2023.0.2.x86_64                         3/13
  Verifying        : apr-util-openssl-1.6.3-1.amzn2023.0.2.x86_64                      4/13
  Verifying        : generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch                 5/13
  Verifying        : httpd-2.4.66-1.amzn2023.0.1.x86_64                                6/13
  Verifying        : httpd-core-2.4.66-1.amzn2023.0.1.x86_64                           7/13
  Verifying        : httpd-filesystem-2.4.66-1.amzn2023.0.1.noarch                     8/13
  Verifying        : httpd-tools-2.4.66-1.amzn2023.0.1.x86_64                          9/13
  Verifying        : libbrotli-1.0.9-4.amzn2023.0.2.x86_64                            10/13
  Verifying        : mailcap-2.1.49-3.amzn2023.0.3.noarch                             11/13
  Verifying        : mod_http2-2.0.27-1.amzn2023.0.3.x86_64                           12/13
  Verifying        : mod_lua-2.4.66-1.amzn2023.0.1.x86_64                             13/13

Installed:
  apr-1.7.5-1.amzn2023.0.4.x86_64                       apr-util-1.6.3-1.amzn2023.0.2.x86_64
  apr-util-lmdb-1.6.3-1.amzn2023.0.2.x86_64             apr-util-openssl-1.6.3-1.amzn2023.0.2.x86_64
  generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch     httpd-2.4.66-1.amzn2023.0.1.x86_64
  httpd-core-2.4.66-1.amzn2023.0.1.x86_64               httpd-filesystem-2.4.66-1.amzn2023.0.1.noarch
  httpd-tools-2.4.66-1.amzn2023.0.1.x86_64              libbrotli-1.0.9-4.amzn2023.0.2.x86_64
  mailcap-2.1.49-3.amzn2023.0.3.noarch                  mod_http2-2.0.27-1.amzn2023.0.3.x86_64
  mod_lua-2.4.66-1.amzn2023.0.1.x86_64

Complete!
[root@ip-172-31-1-128 ~]# systemctl status httpd
○ httpd.service - The Apache HTTP Server
     Loaded: loaded (/usr/lib/systemd/system/httpd.service; disabled; preset: disabled)
     Active: inactive (dead)
       Docs: man:httpd.service(8)
[root@ip-172-31-1-128 ~]#
```

Not secure 100.48.78.183

It works!

```
root@ip-172-31-78-120:/var/w
  mailcap-2.1.49-3.amzn2023.0.3.noarch                    mod_http2-2.0.27-1.amzn2023.0.3.x86_64
  mod_lua-2.4.66-1.amzn2023.0.1.x86_64

Complete!
[root@ip-172-31-78-120 ~]# systemctl status httpd
○ httpd.service - The Apache HTTP Server
     Loaded: loaded (/usr/lib/systemd/system/httpd.service; disabled; preset: disabled)
     Active: inactive (dead)
       Docs: man:httpd.service(8)
[root@ip-172-31-78-120 ~]# systemctl start httpd
[root@ip-172-31-78-120 ~]# systemctl status httpd
● httpd.service - The Apache HTTP Server
     Loaded: loaded (/usr/lib/systemd/system/httpd.service; disabled; preset: disabled)
     Active: active (running) since Mon 2026-03-09 15:51:46 UTC; 23s ago
       Docs: man:httpd.service(8)
   Main PID: 25532 (httpd)
     Status: "Total requests: 0; Idle/Busy workers 100/0;Requests/sec: 0; Bytes served/sec:   0 B/sec"
      Tasks: 177 (limit: 1067)
     Memory: 13.3M
        CPU: 106ms
     CGroup: /system.slice/httpd.service
             ├─25532 /usr/sbin/httpd -DFOREGROUND
             ├─25557 /usr/sbin/httpd -DFOREGROUND
             ├─25558 /usr/sbin/httpd -DFOREGROUND
             ├─25559 /usr/sbin/httpd -DFOREGROUND
             └─25563 /usr/sbin/httpd -DFOREGROUND

Mar 09 15:51:46 ip-172-31-78-120.ec2.internal systemd[1]: Starting httpd.service - The Apache HTTP Server...
Mar 09 15:51:46 ip-172-31-78-120.ec2.internal systemd[1]: Started httpd.service - The Apache HTTP Server.
Mar 09 15:51:46 ip-172-31-78-120.ec2.internal httpd[25532]: Server configured, listening on: port 80
[root@ip-172-31-78-120 ~]# systemctl enable httpd
Created symlink /etc/systemd/system/multi-user.target.wants/httpd.service → /usr/lib/systemd/system/httpd.service.
[root@ip-172-31-78-120 ~]# cd /var/www/html
[root@ip-172-31-78-120 html]# ls
[root@ip-172-31-78-120 html]# vi index.html
"index.html" [New] 100L, 1643B written
[root@ip-172-31-78-120 html]#
```

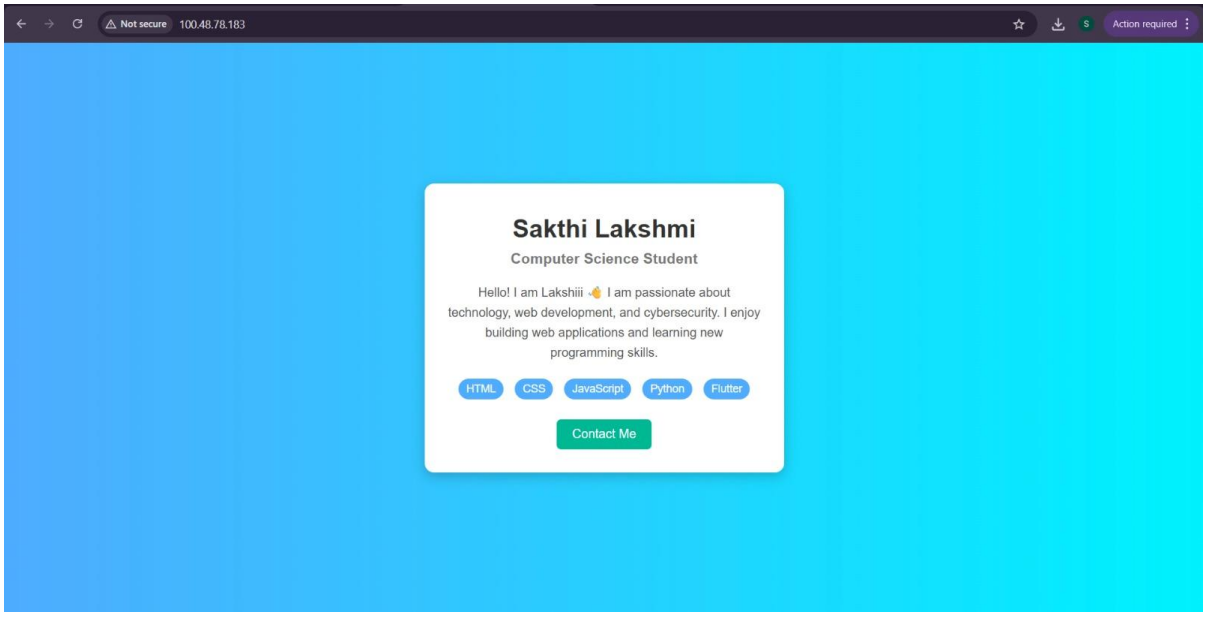

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

6. Configure Elastic IP Address to Windows Web Server in AWS

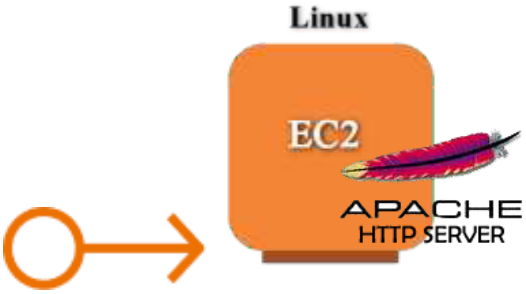

Sakthi Lakshmi L V,
CSE- Artificial Intelligence & Machine Learning,
Sri Eshwar College of Engineering,
Coimbatore.

Objective

An Elastic IP (EIP) in AWS is a static, public IP address designed for dynamic cloud computing. It is associated with your AWS account and can be quickly associated or disassociated with any EC2 instance in your account. This feature is particularly useful when you need to maintain a consistent IP address for your resources, even when you stop and start EC2 instances.

Common Use Cases for Elastic IP:

1. Highly Available Applications:
   - If you're running a service that requires high availability, you can use Elastic IPs to quickly reassign a static IP to a new instance if your primary instance fails, ensuring minimal downtime.
2. Web Servers:
   - If you host a website and need to ensure the IP address remains the same even if the underlying EC2 instance is restarted, an Elastic IP helps maintain this consistency.
3. Disaster Recovery:
   - Elastic IPs are useful for disaster recovery scenarios. If one instance goes down, you can quickly associate the EIP with a backup instance to ensure services are still accessible.

Best Practices:

- Use Elastic IPs only when necessary: Since they come with associated costs when unused, it's a good practice to release EIPs that are no longer required. ○ Move IPs during instance failure: Instead of keeping an EIP permanently attached, use it as a failover method, reassociating it to a new instance when needed.
- Monitor EIP Usage: Periodically review your usage to ensure you're not paying for unnecessary Elastic IP addresses.

Topology

How to Configure the Elastic IP Address to Linux Web Server with AWS EC2

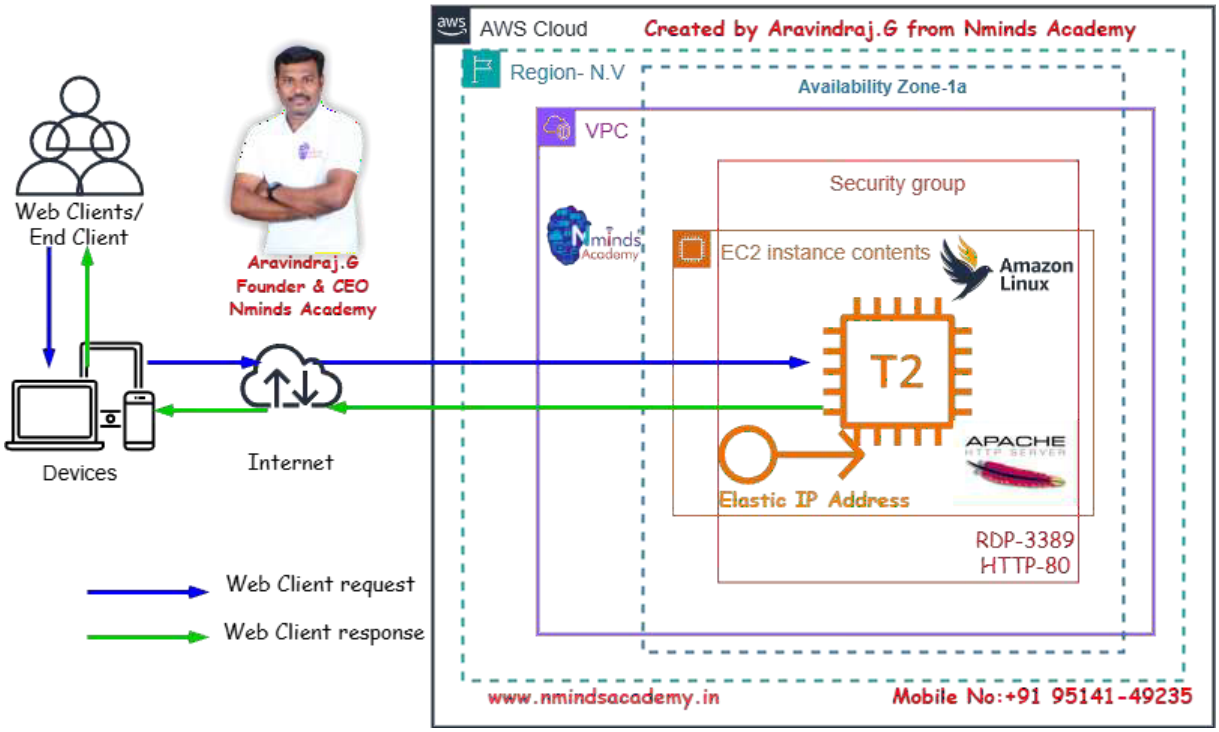

Used Services in AWS

Windows Server

Amazon EC2

Amazon Elastic IP Address

Used Services in Windows Server

APACHE HTTP SERVER

Apache Webserver

Execution Tasks:

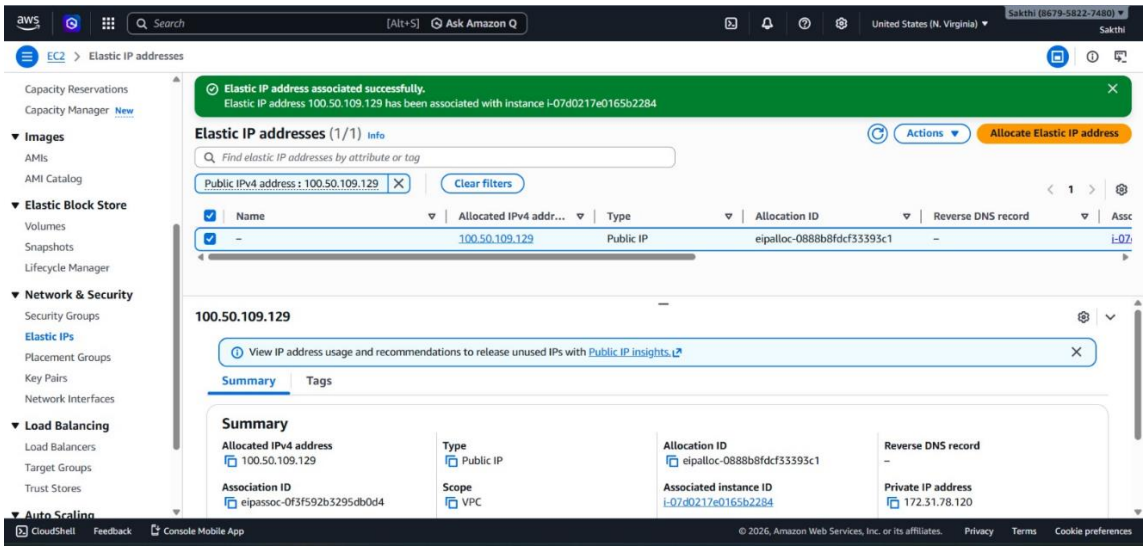

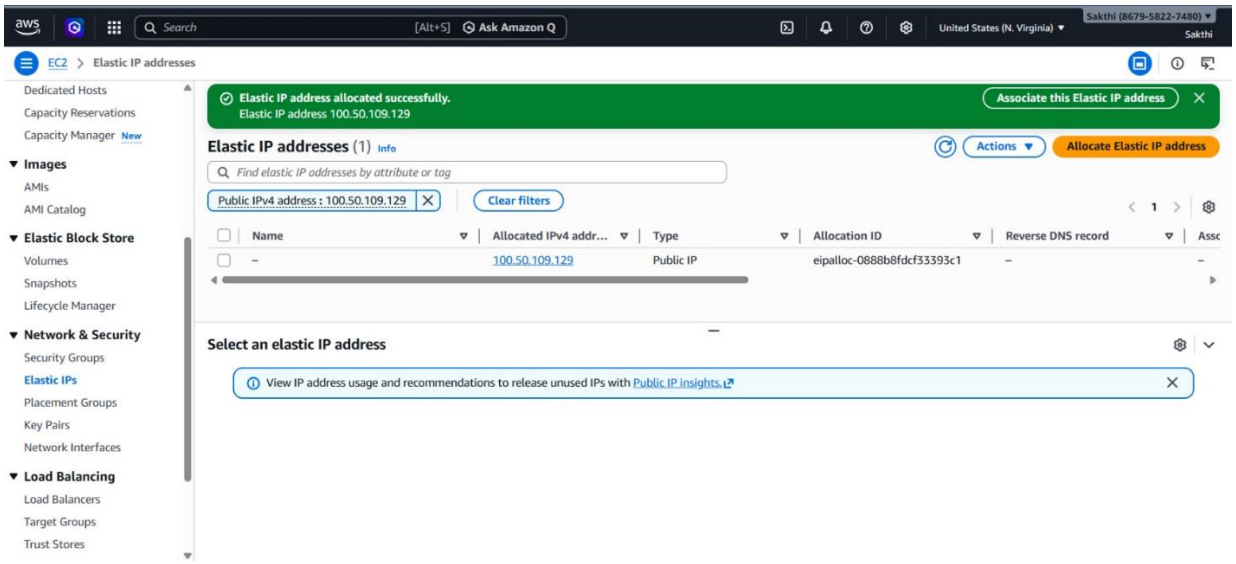

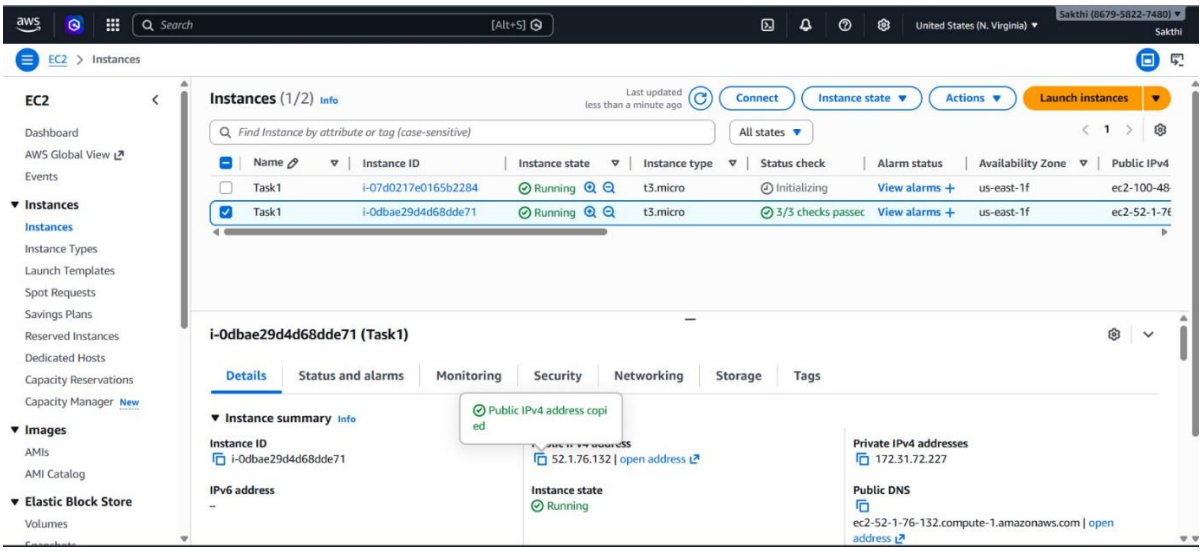
EC2 > Instances
EC2
Dashboard
AWS Global View
Events
Instances
Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
Capacity Manager New
Images
AMIs
AMI Catalog
Elastic Block Store
Volumes
Instances (1/2) Info
Last updated less than a minute ago
Connect
Instance state
Actions
Launch instances
Find Instance by attribute or tag (case-sensitive)
All states
Name
Instance ID
Instance state
Instance type
Status check
Alarm status
Availability Zone
Public IPv4
Task1
i-07d0217e0165b2284
Running
t3.micro
Initializing
View alarms
us-east-1f
Task1
i-0dbae29d4d68dde71
Running
t3.micro
3/3 checks passed
View alarms
us-east-1f
i-0dbae29d4d68dde71 (Task1)
Details
Status and alarms
Monitoring
Security
Networking
Storage
Tags
Instance summary Info
Public IPv4 address copied
Instance ID
i-0dbae29d4d68dde71
52.1.76.132 | open address
Private IPv4 addresses
172.31.72.227
IPv6 address
Instance state
Running
Public DNS
ec2-52-1-76-132.compute-1.amazonaws.com | open address

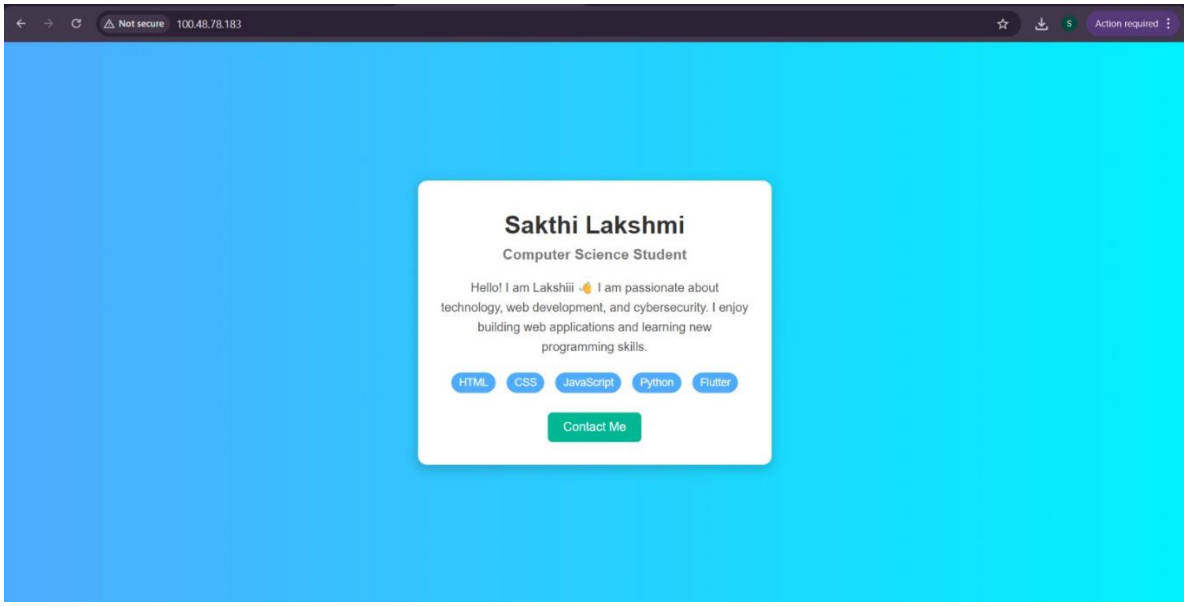
Not secure
100.48.78.183
Action required
Sakthi Lakshmi
Computer Science Student
Hello! I am Lakshiii 👋 I am passionate about technology, web development, and cybersecurity. I enjoy building web applications and learning new programming skills.
HTML
CSS
JavaScript
Python
Flutter
Contact Me

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

7.Configure SFTP to Linux Web Server in AWS

Sakthi Lakshmi L V,

CSE- Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

Use Cases for EC2 Linux Instances:

- Web and Application Hosting: Run Apache web servers or other Linuxbased web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Linux instances, using SSH or EC2 for more control.
- Remote Desktop Applications: Set up SSH (Remote Desktop Services) for remote access to Linux desktops in the cloud.
- Development and Testing: Create development environments with linux OS to test php,MySql or other Linux-based applications. SFTP-Secure File Transfer Protocol

SFTP (Secure File Transfer Protocol) is a secure network protocol that allows users to transfer files over a secure, encrypted connection. It is a more secure alternative to FTP (File Transfer Protocol) and is commonly used to upload, download, and manage files on remote servers.

Here are the key uses and advantages of SFTP:

1. File Transfer: SFTP allows secure transfer of files between a local and a remote computer over a network. It ensures that the data is encrypted during transmission, protecting it from eavesdropping or tampering.
2. File Management: Besides transferring files, SFTP also allows users to perform file management tasks such as renaming, deleting, and moving files on the remote server.
3. Secure Authentication: SFTP uses SSH (Secure Shell) for authentication, which provides a stronger level of security compared to FTP's traditional username/password system. It often supports public key authentication, adding an extra layer of security.
4. Encryption: The main advantage of SFTP over FTP is encryption. All data sent over SFTP is encrypted, ensuring that sensitive information (like passwords and files) is protected during transmission.
5. Firewall-Friendly: SFTP operates over a single port (usually port 22), making it easier to use behind firewalls and NAT (Network Address Translation) devices compared to FTP, which uses multiple ports.

Topology

How to Configure Developer's push their website code by using SFTP Protocol in Linux Server with AWS EC2 with Elastic IP Address

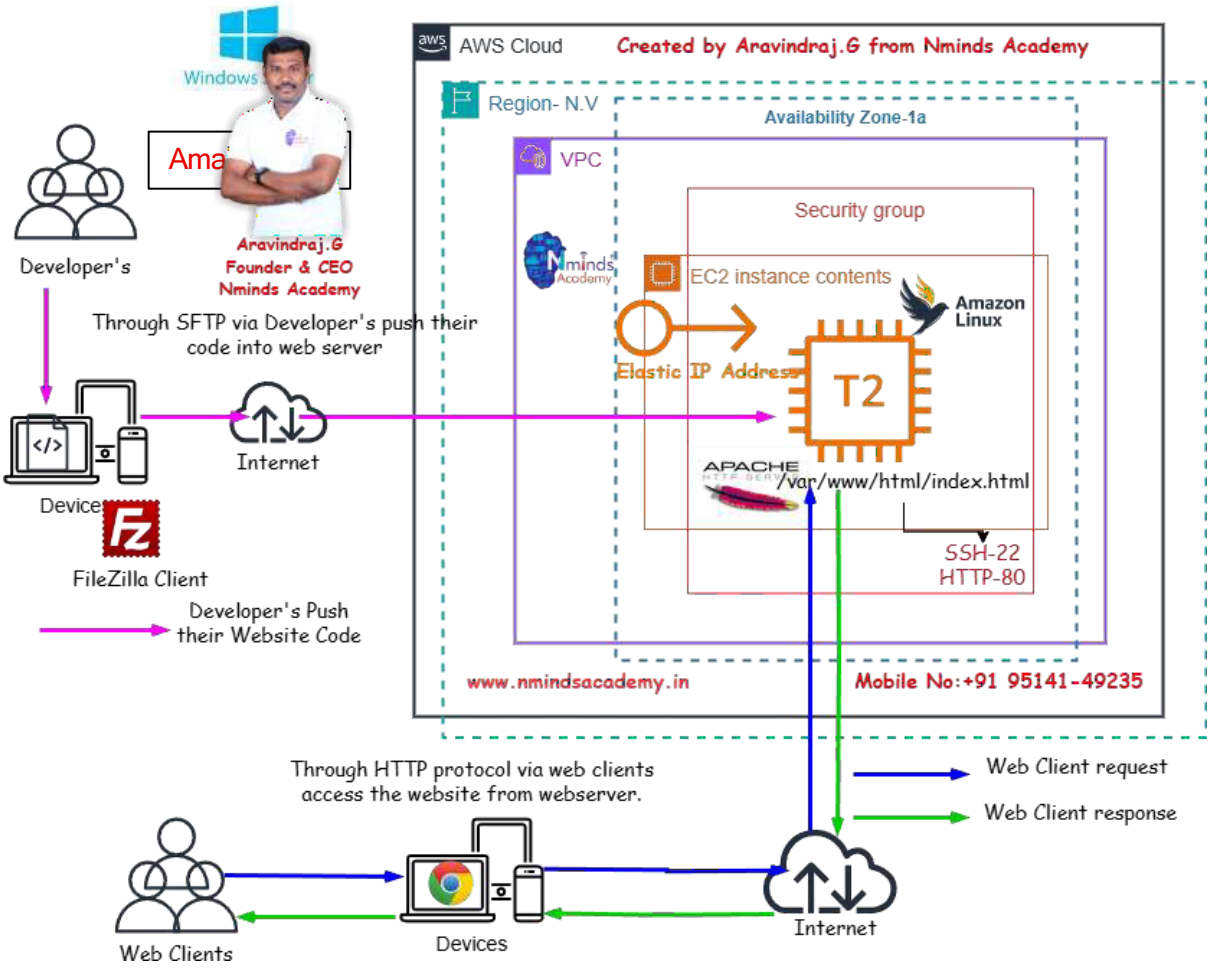

Used Services in AWS
Services in Windows Ser

Used

Apache Webserver

Amazon Elastic IP Address

Execution Tasks:

```
root@ip-172-31-78-120:~
Microsoft Windows [Version 10.0.22631.6199]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Acer>cd Downloads

C:\Users\Acer\Downloads>ssh -i task1.pem ec2-user@100.48.78.183
ssh: connect to host 100.48.78.183 port 22: Connection timed out

C:\Users\Acer\Downloads>ssh -i task1.pem ec2-user@100.50.109.129
The authenticity of host '100.50.109.129 (100.50.109.129)' can't be established.
ED25519 key fingerprint is SHA256:vg4db+VdAYWCQh1rNBMviQgcKrZqeTXbSWBytMb9FKQ.
This host key is known by the following other names/addresses:
    C:\Users\Acer/.ssh/known_hosts:7: 100.48.78.183
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '100.50.109.129' (ED25519) to the list of known hosts.
       #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _m/'
Last login: Mon Mar  9 15:48:17 2026 from 121.200.55.210
[ec2-user@ip-172-31-78-120 ~]$ sudo -i
[root@ip-172-31-78-120 ~]# useradd sakthi
[root@ip-172-31-78-120 ~]# useradd swetha
[root@ip-172-31-78-120 ~]# cat /etc/passwd
root:x:0:0:root:/root:/bin/bash
bin:x:1:1:bin:/bin:/sbin/nologin
daemon:x:2:2:daemon:/sbin:/sbin/nologin
adm:x:3:4:adm:/var/adm:/sbin/nologin
lp:x:4:7:lp:/var/spool/lpd:/sbin/nologin
sync:x:5:0:sync:/sbin:/bin/sync
shutdown:x:6:0:shutdown:/sbin:/sbin/shutdown
halt:x:7:0:halt:/sbin:/sbin/halt
mail:x:8:12:mail:/var/spool/mail:/sbin/nologin
operator:x:11:0:operator:/root:/sbin/nologin
games:x:12:100:games:/usr/games:/sbin/nologin
```

```
root@ip-172-31-78-120:~
[root@ip-172-31-78-120 ~]# passwd root
Changing password for user root.
New password:
BAD PASSWORD: The password fails the dictionary check - it is based on a dictionary word
Retype new password:
passwd: all authentication tokens updated successfully.
[root@ip-172-31-78-120 ~]# passwd ec2-user
Changing password for user ec2-user.
New password:
BAD PASSWORD: The password fails the dictionary check - it is based on a dictionary word
Retype new password:
passwd: all authentication tokens updated successfully.
[root@ip-172-31-78-120 ~]# passwd sakthi
Changing password for user sakthi.
New password:
BAD PASSWORD: The password contains the user name in some form
Retype new password:
passwd: all authentication tokens updated successfully.
[root@ip-172-31-78-120 ~]# passwd swetha
Changing password for user swetha.
New password:
BAD PASSWORD: The password fails the dictionary check - it is based on a dictionary word
Retype new password:
passwd: all authentication tokens updated successfully.
[root@ip-172-31-78-120 ~]# ls -ls /var/www/html
total 4
4 -rw-r--r--. 1 root root 1643 Mar  9 15:56 index.html
[root@ip-172-31-78-120 ~]# ls -ld /var/www/html
drwxr-xr-x. 2 root root 24 Mar  9 15:56 /var/www/html
[root@ip-172-31-78-120 ~]# chgrp friends /var/www/html
[root@ip-172-31-78-120 ~]# ls -ld /var/www/html
drwxr-xr-x. 2 root friends 24 Mar  9 15:56 /var/www/html
[root@ip-172-31-78-120 ~]# chmod 775 /var/www/html
[root@ip-172-31-78-120 ~]# ls -ld /var/www/html
drwxrwxr-x. 2 root friends 24 Mar  9 15:56 /var/www/html
[root@ip-172-31-78-120 ~]# vi /etc/ssh/sshd_config
"/etc/ssh/sshd_config" 133L, 3853B written
[root@ip-172-31-78-120 ~]# systemclt reload sshd
-bash: systemclt: command not found
[root@ip-172-31-78-120 ~]# systemctl reload sshd
[root@ip-172-31-78-120 ~]#
```

```
root@ip-172-31-78-120:~

# To modify the system-wide sshd configuration, create a  *.conf  file under
#  /etc/ssh/sshd_config.d/  which will be automatically included below
Include /etc/ssh/sshd_config.d/*.conf

# If you want to change the port on a SELinux system, you have to tell
# SELinux about this change.
# semanage port -a -t ssh_port_t -p tcp #PORTNUMBER
#
#Port 22
#AddressFamily any
#ListenAddress 0.0.0.0
#ListenAddress ::

#HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_ecdsa_key
#HostKey /etc/ssh/ssh_host_ed25519_key

# Ciphers and keying
#RekeyLimit default none

# Logging
#SyslogFacility AUTH
#LogLevel INFO

# Authentication:

#LoginGraceTime 2m
#PermitRootLogin prohibit-password
#StrictModes yes
#MaxAuthTries 6
#MaxSessions 10

PubkeyAuthentication no

# The default is to check both .ssh/authorized_keys and .ssh/authorized_keys2
# but this is overridden so installations will only check .ssh/authorized_keys
AuthorizedKeysFile      .ssh/authorized_keys

#AuthorizedPrincipalsFile none
```

```
root@ip-172-31-78-120:~

# To modify the system-wide sshd configuration, create a  *.conf  file under
#  /etc/ssh/sshd_config.d/  which will be automatically included below
Include /etc/ssh/sshd_config.d/*.conf

# If you want to change the port on a SELinux system, you have to tell
# SELinux about this change.
# semanage port -a -t ssh_port_t -p tcp #PORTNUMBER
#
#Port 22
#AddressFamily any
#ListenAddress 0.0.0.0
#ListenAddress ::

#HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_ecdsa_key
#HostKey /etc/ssh/ssh_host_ed25519_key

# Ciphers and keying
#RekeyLimit default none

# Logging
#SyslogFacility AUTH
#LogLevel INFO

# Authentication:

#LoginGraceTime 2m
#PermitRootLogin prohibit-password
```

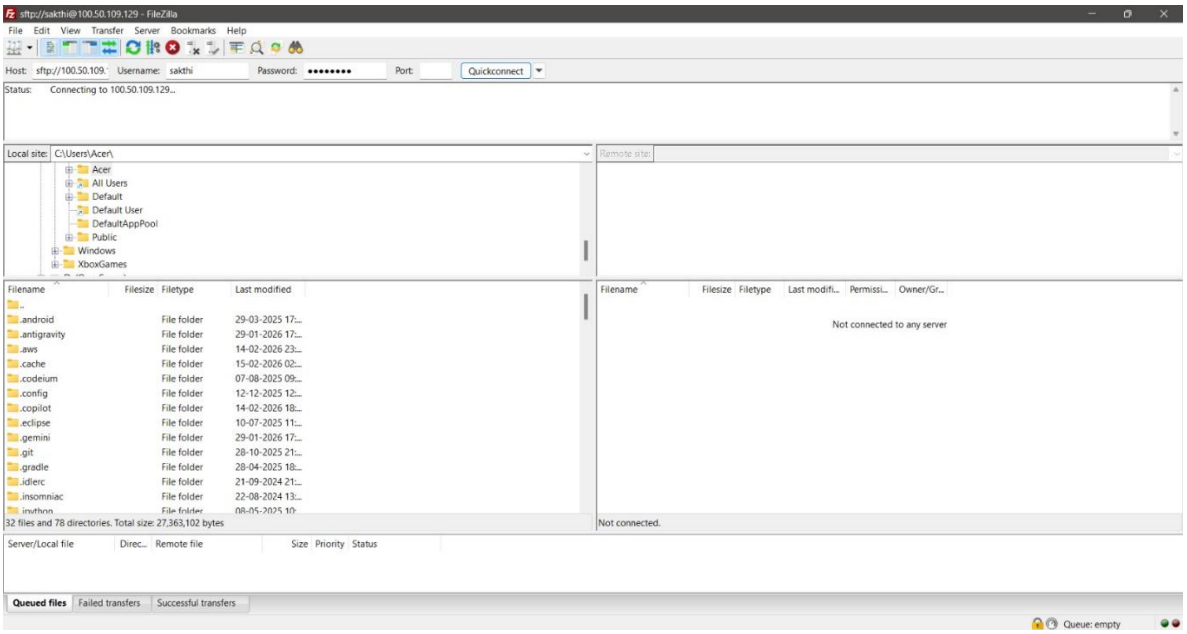
sftp://sakthi@100.50.109.129 - FileZilla
File Edit View Transfer Server Bookmarks Help
Host: sftp://100.50.109. Username: sakthi Password: ••••••••• Port: Quickconnect
Status: Connecting to 100.50.109.129...
Local site: C:\Users\Acer\
Acer
All Users
Default
Default User
DefaultAppPool
Public
Windows
XboxGames
Remote site:
Filename Filesize Filetype Last modified
.android File folder 29-03-2025 17:...
.antigravity File folder 29-01-2026 17:...
.aws File folder 14-02-2026 23:...
.cache File folder 15-02-2026 02:...
.codeium File folder 07-08-2025 09:...
.config File folder 12-12-2025 12:...
.copilot File folder 14-02-2026 18:...
.eclipse File folder 10-07-2025 11:...
.gemini File folder 29-01-2026 17:...
.git File folder 28-10-2025 21:...
.gradle File folder 28-04-2025 18:...
.idlerc File folder 21-09-2024 21:...
.insomniac File folder 22-08-2024 13:...
32 files and 78 directories. Total size: 27,363,102 bytes
Filename Filesize Filetype Last modifi... Permissi... Owner/Gr...
Not connected to any server
Not connected.
Server/Local file Direc... Remote file Size Priority Status
Queued files Failed transfers Successful transfers
Queue: empty

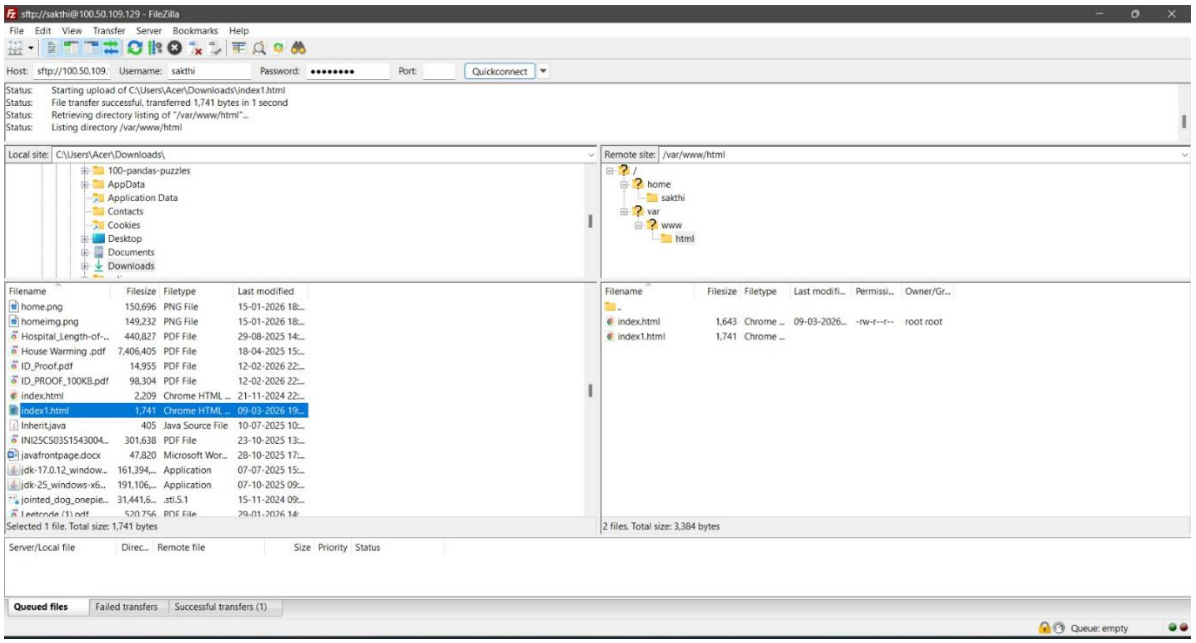
sftp://sakthi@100.50.109.129 - FileZilla
File Edit View Transfer Server Bookmarks Help
Host: sftp://100.50.109. Username: sakthi Password: ••••••••• Port: Quickconnect
Status: Starting upload of C:\Users\Acer\Downloads\index1.html
Status: File transfer successful, transferred 1,741 bytes in 1 second
Status: Retrieving directory listing of "/var/www/html"...
Status: Listing directory /var/www/html
Local site: C:\Users\Acer\Downloads\
100-pandas-puzzles
AppData
Application Data
Contacts
Cookies
Desktop
Documents
Downloads
Remote site: /var/www/html
/
home
sakthi
var
www
html
Filename Filesize Filetype Last modified
home.png 150,696 PNG File 15-01-2026 18:...
homeimg.png 149,232 PNG File 15-01-2026 18:...
Hospital_Length-of-... 440,827 PDF File 29-08-2025 14:...
House Warming .pdf 7,406,405 PDF File 18-04-2025 15:...
ID_Proof.pdf 14,955 PDF File 12-02-2026 22:...
ID_PROOF_100KB.pdf 98,304 PDF File 12-02-2026 22:...
index.html 2,209 Chrome HTML ... 21-11-2024 22:...
index1.html 1,741 Chrome HTML ... 09-03-2026 19:...
Inherit.java 405 Java Source File 10-07-2025 10:...
INI25CS03S1543004... 301,638 PDF File 23-10-2025 13:...
javafrontpage.docx 47,820 Microsoft Wor... 28-10-2025 17:...
jdk-17.0.12_window... 161,394,... Application 07-07-2025 15:...
jdk-25_windows-x6... 191,106,... Application 07-10-2025 09:...
jointed_dog_onepie... 31,441,6... .sti.S.1 15-11-2024 09:...
Selected 1 file. Total size: 1,741 bytes
Filename Filesize Filetype Last modifi... Permissi... Owner/Gr...
index.html 1,643 Chrome ... 09-03-2026... -rw-r--r-- root root
index1.html 1,741 Chrome ...
2 files. Total size: 3,384 bytes
Server/Local file Direc... Remote file Size Priority Status
Queued files Failed transfers Successful transfers (1)
Queue: empty

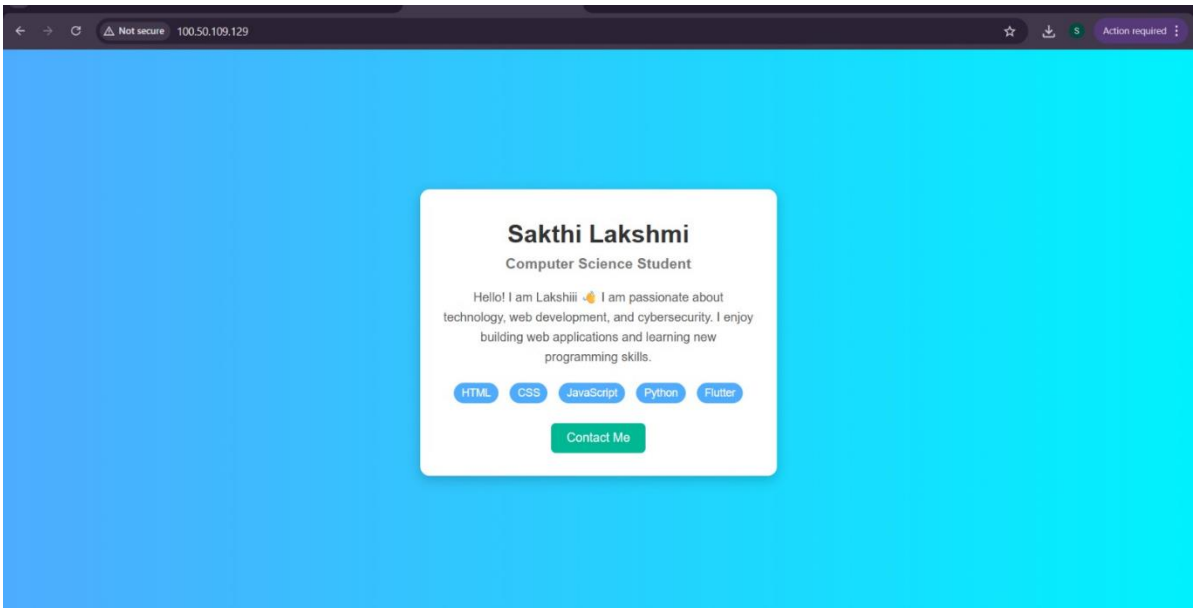
Not secure
100.50.109.129
Action required
Sakthi Lakshmi
Computer Science Student
Hello! I am Lakshiii 👋 I am passionate about technology, web development, and cybersecurity. I enjoy building web applications and learning new programming skills.
HTML
CSS
JavaScript
Python
Flutter
Contact Me