

GOVERNMENT ARTS COLLEGE (AUTONOMOUS)

SALEM-636 007.

Reaccredited with B by NAAC

(Affiliated To Periyar University, Salem-11)

PG & RESEARCH

DEPARTMENT OF COMPUTER SCIENCE



RECORD NOTE BOOK

Skill Enhancement course
Web Designing using HTML & CSS
(23UCSS6)

III-B.Sc. (Computer Science) SHIFT-II

OCTOBER-2026

GOVERNMENT ARTS COLLEGE (AUTONOMOUS)

SALEM-636 007.

Reaccredited with B by NAAC

(Affiliated To Periyar University, Salem-11)

PG & RESEARCH DEPARTMENT OF COMPUTER SCIENCE



Certified that this is a Bonafide record of **SKILL ENHANCEMENT COURSE(SEC)**

Web Designing using HTML & CSS (23UCSS6)

Project work done by

Staff in-Charge

Head of the Department

Submitted for the Autonomous Practical Examination held on _____

Internal Examiner

External Examiner

CONTENT

S.NO	DATE	TITLE	SIGNATURE
1		Text Analyzer – Count Characters, Words, and Lines	
2		Country and Capital Display with Styled Output using HTML, CSS & JavaScript	
3		Simple Calculator using JavaScript	
4		Age Calculator using JavaScript	
5		Display Current Date in Words using JavaScript Arrays	
6		Demonstration of JavaScript Browser Objects (Window, Navigator, History, Location, and Document)	
7		Form Validation for Registration, Login, and Payment using JavaScript	
8		Number to Words Converter with Range Validation using HTML & JavaScript	
9		Animated Text Grow and Shrink with Color Change using JavaScript	
10		Employee Payroll Calculator using HTML & JavaScript	

PROGRAM:1

```
<!DOCTYPE html>
<html>
<head><title>Text Counter</title></head>
<body>
<textarea id="textInput" rows="4" cols="40"></textarea>
<button onclick="analyze()">Submit</button>
<div id="result"></div>
<script>
function analyze() {
let t = textInput.value, w = t.trim().split(/\s+/).length, l =
t.split("\n").length;
result.innerHTML = "Characters: " + t.length + "<br>Words: " +
(t.trim() ? w : 0) + "<br>Lines: " + l;
}
</script>
</body>
</html>
```

Output:

Hello World

Submit

Characters: 12

Words: 2

Lines: 2

Result:

A web page is successfully designed that counts and displays the number of characters, words, and lines in the given text input.

PROGRAM:2

```
<!DOCTYPE html>
<html>
<head>
<title>Country Capital</title>
<style>.capital{color:blue;font-size:18px;font-weight:bold;}</style>
</head>
<body>
<select id="country" onchange="showCapital()">
<option value="">Select</option>
<option value="India">India</option>
<option value="USA">USA</option>
<option value="UK">UK</option>
<option value="France">France</option>
<option value="Japan">Japan</option>
</select>
<span id="cap" class="capital"></span>
<script>
let data = {India:'New Delhi',USA:'Washington
D.C.',UK:'London',France:'Paris',Japan:'Tokyo'};
function showCapital() {
let c = country.value;
cap.innerHTML = c ? "Capital: " + data[c] : "";
}
</script>
</body>
</html>
```

Output:

Capital: New Delhi

Result:

The web page displays the capital city of the selected country with styled text.

PROGRAM:3

```
<!DOCTYPE html>
<html>
<body>
<input id="d" readonly><br>
<button onclick="d.value="">C</button>
<button onclick="d.value+='/'>/</button>
<button onclick="d.value+='*'>*</button>
<button onclick="d.value=d.value.slice(0,-1)">←</button><br>
<button onclick="d.value+='7'">7</button>
<button onclick="d.value+='8'">8</button>
<button onclick="d.value+='9'">9</button>
<button onclick="d.value+='-'>-</button><br>
<button onclick="d.value+='4'">4</button>
<button onclick="d.value+='5'">5</button>
<button onclick="d.value+='6'">6</button>
<button onclick="d.value+='+'>+</button><br>
<button onclick="d.value+='1'">1</button>
<button onclick="d.value+='2'">2</button>
<button onclick="d.value+='3'">3</button>
<button onclick="d.value=eval(d.value)">=</button><br>
<button onclick="d.value+='0'">0</button>
<button onclick="d.value+='.'">.</button>
</body>
</html>
```

Output:

4312			
C	/	*	←
7	8	9	-
4	5	6	+
1	2	3	=
0	.		

Result:

A simple working calculator is designed using HTML, CSS, and JavaScript.

PROGRAM:4

```
<!DOCTYPE html>
<html>
<body>
DOB: <input type="date" id="dob"><button
onclick="calcAge()">Find Age</button>
<div id="out"></div>
<script>
function calcAge() {
let d = new Date(dob.value), t = new Date(),a=
t.getFullYear()-d.getFullYear();
if(t.getMonth()<d.getMonth()||(t.getMonth()==d.getMonth()&& t.getDate()<d.getDate()))a--;
out.innerHTML = "Age: "+a+"<br>DOB: "+d.toDateString()+"<br>Date: "+t.toDateString();
}
</script>
</body>
</html>
```

Output:

DOB:

Age: 20

DOB: Thu Nov 10 2005

Date: Wed Aug 26 2026

Result:

The web page correctly calculates and displays a person's age from their DOB.

PROGRAM:5

```
<!DOCTYPE html>

<html>

<body>

<button onclick="showDate()">Show Date</button>

<div id="res"></div>

<script>

let days=["Sunday","Monday","Tuesday","Wednesday","Thursday","Friday","Saturday"],
months=["January","February","March","April","May","June","July","August","September",
"October","November","December"];

function showDate(){
    let d=new Date();

    res.innerHTML="Day: "+days[d.getDay()]+ "<br>Month:" +months[d.getMonth()]+ "<br>
Year: "+d.getFullYear()+ "<br>Full Date: "+days[d.getDay()]+ ", "+months[d.getMonth()]+ "
"+d.getDate()+ ", "+d.getFullYear();


    }

</script>

</body>

</html>
```

Output:

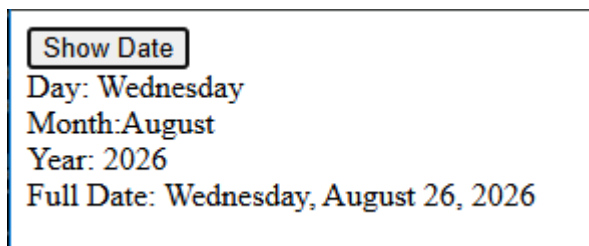

Result:

The web page displays the current date in words using JavaScript arrays.

PROGRAM:6

```
<!DOCTYPE html>
<html>
  <body>
    <button onclick="wInfo()">Window</button>
    <button onclick="nInfo()">Navigator</button>
    <button onclick="hInfo()">History</button>
    <button onclick="lInfo()">Location</button>
    <button onclick="dInfo()">Document</button>

    <div id="info"></div>

    <script>
      function wInfo(){info.innerHTML="Window:
"+window.innerWidth+"x"+window.innerHeight;}

      function nInfo(){info.innerHTML="Navigator:
"+navigator.appName+"<br>" +navigator.userAgent;}

      function hInfo(){info.innerHTML="History Length: "+history.length;}

      function lInfo(){info.innerHTML="Location: "+location.href;}

      function dInfo(){info.innerHTML="Document: "+document.title;}
    </script>
  </body>
</html>
```

Output:



Window Navigator History Location Document
Window: 1549x767

Result:

The web page demonstrates various JavaScript objects and their properties in a readable format.

PROGRAM:7

```
<!DOCTYPE html>
```

```
<html>
```

```
  <body>
```

```
    <h3>Register</h3>
```

```
    <input id="rname" placeholder="Name">
```

```
    <input id="remail" type="email" placeholder="Email">
```

```
    <input id="rpwd" type="password" placeholder="Password">
```

```
    <input id="rcpwd" type="password" placeholder="Confirm">
```

```
    <button onclick="reg()">Submit</button>
```

```
    <span id="rmsg"></span>
```

```
    <h3>Login</h3>
```

```
    <input id="lemail" type="email">
```

```
    <input id="lpwd" type="password">
```

```
    <button onclick="log()">Login</button>
```

```
    <span id="lmsg"></span>
```

```
    <h3>Credit Card Payment</h3>
```

```
    <input id="card" maxlength="16" placeholder="CardNo">
```

```
    <input id="cvv" maxlength="3" placeholder="CVV">
```

```
    <input id="exp" type="month">
```

```
    <input id="holder" placeholder="Holder">
```

```
    <button onclick="pay()">Pay</button>
```

```
    <span id="pmsg"></span>
```

```
  <script>
```

```
function reg(){rmsg.textContent = rpwd.value.length<6 ? "Pwd>6" :
rpwd.value!=rcpwd.value ? "Mismatch" : "Reg OK";}

function log(){lmsg.textContent = lemail.value&&lpwd.value?"Login OK":"Fill!";}

function pay(){pmsg.textContent = card.value.length!=16||isNaN(card.value)?
"CardNo ERR":cvv.value.length!=3||isNaN(cvv.value)?
"CVV ERR":!exp.value?"No Exp":!holder.value?"No Holder":"Success";}

</script>

</body>

</html>
```

Output:

Register

Reg OK

Login

Login OK

Credit Card Payment

Success

Result:

The web pages ensure correct input by validating user entries before submission.

PROGRAM:8

```
<!DOCTYPE html>

<html>

  <body>

    Enter (0-999): <input id="num">

    <button onclick="conv()">Convert</button>

    <div id="out"></div>

  <script>

    function conv()

      { let n = num.value.trim(),
o=["","one","two","three","four","five","six","seven","eight"," nine"],

      t=["ten","eleven","twelve","thirteen","fourteen","fifteen","sixtee
n","seventeen","eighteen","nineteen"],

      e=["","","twenty","thirty","forty","fifty","sixty","seventy","eig hty","ninety"];

      if(isNaN(n)||n==="")

        { out.innerHTML="not a number"; return;}

      let v = parseInt(n); if(v<0||v>999) {out.innerHTML="out of range";return;}

      let w = "";

      if(v==0)w="zero";

      else

        {

          if(v>=100)

            {w+=o[Math.floor(v/100)]+" hundred ";v%=100;}

          if(v>=20)

            {w+=e[Math.floor(v/10)]+" ";v%=10;}

          else if(v>=10)
```

```
        {w+=t[v-10]+" ";v=0;}
    if(v>0)w+=o[v]+" ";
    }
    out.innerHTML=w.trim(); }

</script>

</body>

</html>
```

Output:

Enter (0-999):
three hundred forty five

Result:

The web page converts numbers to words with proper validation and displays appropriate messages.

PROGRAM:9

```
<!DOCTYPE html>
<html>
  <body>
    <button onclick="start()">Start</button>
    <button onclick="stop()">Stop</button>
    <button onclick="reset()">Reset</button>
    <div id="txt" style="font-size:20pt;color:red;">TEXT-GROWING</div>

    <script>

      let si, sz=20, gr=true;
      function start()
      { if(si)return;
        si=setInterval(=>{ if(gr)sz+=2;if(sz>=50){gr=false;
          txt.innerHTML='TEXTSHRINKING';txt.style.color='blue';}
          if(!gr)sz=2;
          if(sz<=5)
            {gr=true;txt.innerHTML='TEXTGROWING';txt.style.color='red';}
          txt.style.fontSize=sz+'pt'; },100); }
      function stop()
      {clearInterval(si);si=0;}
      function reset()
      {stop();sz=20;gr=true;txt.innerHTML='TEXTGROWING';txt.style.color='red';txt.style.fontSize='20pt';}

    </script>

  </body>
</html>
```

Output:



Result:

The text grows in red color, changes to "TEXT-GROWING" in blue, and shrinks smoothly.

PROGRAM:10

```
<!DOCTYPE html>

<html>

  <body>

    Name:<input id="n"><br>
    Basic:<input id="b" type="number"><br>
    DA%:<input id="d" value="10"><br>
    HRA%:<input id="h" value="8"><br>
    PF%:<input id="p" value="12"><br>
    TAX%:<input id="t" value="5"><br>
    <button onclick="calc()">Calculate</button>
    <div id="o"></div>

    <script>

      function calc() {
        let name = n.value,
        basic = Number(b.value),
        da = basic * Number(d.value) / 100,
        hra = basic * Number(h.value) / 100,
        pf = basic * Number(p.value) / 100,
        gross = basic + da + hra,
        tax = gross * Number(t.value) / 100,
        ded = pf + tax,
        net = gross - ded;

        if (!name || !basic || basic <= 0)
          { o.innerHTML="Enter all details!"; return; }
```

```
o.innerHTML = `${name}<br>Gross: ₹${gross.toFixed(2)}<br>DA:
₹${da.toFixed(2)}<br>HRA: ₹${hra.toFixed(2)}<br>PF: ₹${pf.toFixed(2)}<br>Tax:
₹${tax.toFixed(2)}<br>Deduction: ₹${ded.toFixed(2)}<br>Net:
<b>₹${net.toFixed(2)}</b>`; }
```

```
</script>
```

```
</body>
```

```
</html>
```

Output:

Name:	SD
Basic:	400
DA%:	10
HRA%:	8
PF%:	12
TAX%:	5
Calculate	

SD
Gross: ₹472.00
DA: ₹40.00
HRA: ₹32.00
PF: ₹48.00
Tax: ₹23.60
Deduction: ₹71.60
Net: **₹400.40**

Result:

The web page accurately calculates and displays all salary components for the employee.

