

Appendix: Complete R Code for FINSTAD Case 1

CRUZ, Ricardo Miguel Iñigo GALEDO, Enrique Lorenzo Hermoso
SEBALLOS, Josiah Dweyn Panganiban SEECHUNG, Camille Castro
SISON, Aaron Joshua Estacio

```
# Load necessary libraries
library(dplyr)
library(tidyr)
library(lubridate)
library(DBI)
library(RSQLite)
library(ggplot2)
library(scales)

# Set working directory to project root so data paths resolve consistently
# Ensure data paths resolve correctly regardless of working directory
if (dir.exists("data")) {
  data_dir <- "data"
} else if (dir.exists("../data")) {
  data_dir <- "../data"
} else {
  stop("Cannot find data/ directory. Run from project root or scripts/.")
}

# Global options
options(stringsAsFactors = FALSE, scipen = 999, width = 72)

# Helper to parse BDO volume strings (e.g. "2.50M" to 2500000)
parse_bdo_volume <- function(x) {
  x <- gsub(",", "", x)
  mult <- ifelse(grepl("M", x, ignore.case = TRUE), 1e6,
                 ifelse(grepl("K", x, ignore.case = TRUE), 1e3, 1))
  x_num <- as.numeric(gsub("[A-Za-z%]", "", x))
  x_num * mult
}

# Define tickers
```

```
us_asset <- "AAPL"
ph_asset <- "BDO.PS"
crypto <- "BTC-USD"
```

Sec 4: Data Cleaning – GALEDO, Enrique Lorenzo Hermoso (data loading) and SISON, Aaron Joshua Estacio (cleaning)

Data cleaning operations: standardise dates, filter 2020-2025, count missing/duplicates, calculate daily returns.

```
# Data Loading -- GALEDO, Enrique Lorenzo Hermoso (Sec 3: Data Acquisition)

# Load all 8 CSVs from the data directory
aapl <- read.csv(file.path(data_dir, "AAPL.csv"), stringsAsFactors = FALSE)
bdo  <- read.csv(file.path(data_dir, "BDO.csv"), stringsAsFactors = FALSE,
  ↪ fileEncoding = "UTF-8-BOM")
btc  <- read.csv(file.path(data_dir, "BTC.csv"), stringsAsFactors = FALSE)
spy  <- read.csv(file.path(data_dir, "SPY.csv"), stringsAsFactors = FALSE)
cpi   <- read.csv(file.path(data_dir, "CPI.csv"), stringsAsFactors =
  ↪ FALSE)
dgs10 <- read.csv(file.path(data_dir, "DGS10.csv"), stringsAsFactors =
  ↪ FALSE)
fedfunds <- read.csv(file.path(data_dir, "FEDFUNDS.csv"), stringsAsFactors =
  ↪ FALSE)
vix     <- read.csv(file.path(data_dir, "VIX.csv"), stringsAsFactors =
  ↪ FALSE)

# Record original observations before any processing
obs_original <- data.frame(
  Dataset = c("AAPL", "BDO", "BTC", "SPY", "CPI", "DGS10", "FEDFUNDS",
  ↪ "VIX"),
  Original_Obs = c(nrow(aapl), nrow(bdo), nrow(btc), nrow(spy),
    nrow(cpi), nrow(dgs10), nrow(fedfunds), nrow(vix))
)
```

Dataset	Original Observations
AAPL	2,512
BDO	2,441
BTC	3,652
SPY	2,514
CPI	952
DGS10	16,105
FEDFUNDS	863

Dataset	Original Observations
VIX	9,216

```
# Sec 4: Data Cleaning -- SISON, Aaron Joshua Estacio

# Standardise date formats
# AAPL, BTC, SPY: POSIXct-style strings like "2016-06-30 00:00:00-04:00"
aapl <- aapl %>% mutate(Date = as.Date(ymd_hms(Date)))
btc  <- btc  %>% mutate(Date = as.Date(ymd_hms(Date)))
spy  <- spy  %>% mutate(Date = as.Date(ymd_hms(Date)))

# BDO: MM/DD/YYYY
bdo <- bdo %>% mutate(Date = mdy(Date))

# CPI, DGS10, FEDFUNDS, VIX: YYYY-MM-DD
cpi    <- cpi    %>% mutate(Date = ymd(Date))
dgs10  <- dgs10  %>% mutate(Date = ymd(Date))
fedfunds <- fedfunds %>% mutate(Date = ymd(Date))
vix    <- vix    %>% mutate(Date = ymd(Date))

# Filter ALL datasets to 2020-01-01 to 2025-12-31
start_date <- as.Date("2020-01-01")
end_date   <- as.Date("2025-12-31")

aapl <- aapl %>% filter(Date >= start_date & Date <= end_date)
bdo  <- bdo  %>% filter(Date >= start_date & Date <= end_date)
btc  <- btc  %>% filter(Date >= start_date & Date <= end_date)
spy  <- spy  %>% filter(Date >= start_date & Date <= end_date)
cpi   <- cpi   %>% filter(Date >= start_date & Date <= end_date)
dgs10 <- dgs10 %>% filter(Date >= start_date & Date <= end_date)
fedfunds <- fedfunds %>% filter(Date >= start_date & Date <= end_date)
vix    <- vix    %>% filter(Date >= start_date & Date <= end_date)

# Observations after filtering
obs_filtered <- data.frame(
  Dataset = c("AAPL", "BDO", "BTC", "SPY", "CPI", "DGS10", "FEDFUNDS",
    ↪ "VIX"),
  Filtered_Obs = c(nrow(aapl), nrow(bdo), nrow(btc), nrow(spy),
    ↪ nrow(cpi), nrow(dgs10), nrow(fedfunds), nrow(vix))
)

# Missing values count
missing_summary <- data.frame(
  Dataset = c("AAPL", "BDO", "BTC", "SPY", "CPI", "DGS10", "FEDFUNDS",
    ↪ "VIX"),
```

```

Missing_Values = c(sum(is.na(aapl)), sum(is.na(bdo)), sum(is.na(btc)),
                    sum(is.na(spy)), sum(is.na(cpi)), sum(is.na(dgs10)),
                    sum(is.na(fedfunds)), sum(is.na(vix)))
)

# Duplicate rows count
dup_summary <- data.frame(
  Dataset = c("AAPL", "BDO", "BTC", "SPY", "CPI", "DGS10", "FEDFUNDS",
    ↪ "VIX"),
  Duplicates = c(sum(duplicated(aapl)), sum(duplicated(bdo)),
    ↪ sum(duplicated(btc)),
    ↪ sum(duplicated(spy)), sum(duplicated(cpi)),
    ↪ sum(duplicated(dgs10)),
    ↪ sum(duplicated(fedfunds)), sum(duplicated(vix)))
)

# Clean BDO: parse Vol. column if it exists
if ("Vol." %in% colnames(bdo)) {
  bdo <- bdo %>% mutate(`Vol.` = parse_bdo_volume(`Vol.`))
}

# Calculate daily returns for OHLC assets
# Daily_Return = (Close / lag(Close)) - 1
# For BDO the Price column is the close price
aapl <- aapl %>% arrange(Date) %>% mutate(Daily_Return = (Close /
  ↪ lag(Close)) - 1)
bdo <- bdo %>% arrange(Date) %>% mutate(Daily_Return = (Price /
  ↪ lag(Price)) - 1)
btc <- btc %>% arrange(Date) %>% mutate(Daily_Return = (Close /
  ↪ lag(Close)) - 1)
spy <- spy %>% arrange(Date) %>% mutate(Daily_Return = (Close /
  ↪ lag(Close)) - 1)

# Note: BDO's Change. column can be used to verify Daily_Return computation
# The first observation of each asset will have NA for Daily_Return (no
  ↪ prior day)

```

Dataset	After Filtering	Missing	Duplicates
AAPL	1,508	0	0
BDO	1,468	0	0
BTC	2,192	0	0
SPY	1,508	0	0
CPI	71	0	0
DGS10	1,500	0	0

Dataset	After Filtering	Missing	Duplicates
FEDFUNDS	72	0	0
VIX	1,535	0	0

FRED data (CPI, DGS10, FEDFUNDS) has fewer rows due to monthly or business-daily reporting frequency. Missing values introduced by join operations are handled in Section 5.

Sec 5: Database Integration – SISON, Aaron Joshua Estacio

Perform joins and justify strategy.

```
# Sec 5: Database Integration -- SISON, Aaron Joshua Estacio

# Prepare asset data for joining
# Standardise column names: BDO uses Price (close price) and Vol. (volume)
bdo_clean <- bdo %>% rename(Close = Price, Volume = `Vol.`)

# Add Asset identifier to each OHLC dataset and select common columns
aapl_clean <- aapl %>% mutate(Asset = "AAPL") %>%
  select(Date, Asset, Open, High, Low, Close, Volume, Daily_Return)
bdo_clean <- bdo_clean %>% mutate(Asset = "BDO") %>%
  select(Date, Asset, Open, High, Low, Close, Volume, Daily_Return)
btc_clean <- btc %>% mutate(Asset = "BTC") %>%
  select(Date, Asset, Open, High, Low, Close, Volume, Daily_Return)
spy_clean <- spy %>% mutate(Asset = "SPY") %>%
  select(Date, Asset, Open, High, Low, Close, Volume, Daily_Return)

# Combine all assets into one long-format table
assets_all <- bind_rows(aapl_clean, bdo_clean, btc_clean, spy_clean)

# Pivot to wide format: one row per date, columns per asset
assets_wide <- assets_all %>%
  select(Date, Asset, Close, Daily_Return) %>%
  pivot_wider(names_from = Asset,
              values_from = c(Close, Daily_Return),
              names_sep = "_")

# Prepare macro datasets with descriptive column names
cpi_clean <- cpi %>% rename(CPI = Value)
dgs10_clean <- dgs10 %>% rename(DGS10 = Value)
fedfunds_clean <- fedfunds %>% rename(FEDFUNDS = Value)
vix_clean <- vix %>% rename(VIX = Value)
```

```

# Demonstration of all four join types

# 1) left_join: keep all asset dates, attach macro data where available
left_example <- assets_wide %>%
  left_join(cpi_clean, by = "Date") %>%
  left_join(dgs10_clean, by = "Date") %>%
  left_join(fedfunds_clean, by = "Date") %>%
  left_join(vix_clean, by = "Date")

# 2) inner_join: only dates present in ALL datasets
inner_example <- assets_wide %>%
  inner_join(cpi_clean, by = "Date") %>%
  inner_join(dgs10_clean, by = "Date") %>%
  inner_join(fedfunds_clean, by = "Date") %>%
  inner_join(vix_clean, by = "Date")

# 3) full_join: all dates from any dataset
full_example <- assets_wide %>%
  full_join(cpi_clean, by = "Date") %>%
  full_join(dgs10_clean, by = "Date") %>%
  full_join(fedfunds_clean, by = "Date") %>%
  full_join(vix_clean, by = "Date")

# 4) anti_join: asset dates with NO macro data
anti_example <- assets_wide %>%
  anti_join(cpi_clean, by = "Date")

# Build the final analytical dataset
final_dataset <- left_example

# Observation reduction table

reduction_table <- data.frame(
  Dataset = c("AAPL", "BDO", "BTC", "SPY", "CPI", "DGS10", "FEDFUNDS",
    ↪ "VIX",
    "Assets (wide)", "Final Dataset"),
  Original_Obs = c(obs_original$Original_Obs, NA, NA),
  After_Cleaning = c(nrow(aapl), nrow(bdo), nrow(btc), nrow(spy),
    nrow(cpi), nrow(dgs10), nrow(fedfunds), nrow(vix),
    nrow(assets_wide), NA),
  After_Joins = c(rep(NA, 8), NA, nrow(final_dataset))
)

```

Sec 6: SQL-Based Financial Investigation – SISON, Aaron Joshua Estacio (Q1-Q3, Q8-Q10)

10 meaningful financial questions using select, filter, mutate, arrange, group_by, summarise.

```
# SQLite database setup for SQL-based investigations

con <- dbConnect(RSQLite::SQLite(), ":memory:")

# Build long-format analytical dataset for SQL queries
# Each row is one asset-date combination with macro variables attached
sql_long <- bind_rows(
  final_dataset %>%
    select(Date, CPI, DGS10, FEDFUNDS, VIX,
           Close = Close_AAPL, Daily_Return = Daily_Return_AAPL) %>%
    mutate(Asset = "AAPL"),
  final_dataset %>%
    select(Date, CPI, DGS10, FEDFUNDS, VIX,
           Close = Close_BDO, Daily_Return = Daily_Return_BDO) %>%
    mutate(Asset = "BDO"),
  final_dataset %>%
    select(Date, CPI, DGS10, FEDFUNDS, VIX,
           Close = Close_BTC, Daily_Return = Daily_Return_BTC) %>%
    mutate(Asset = "BTC"),
  final_dataset %>%
    select(Date, CPI, DGS10, FEDFUNDS, VIX,
           Close = Close_SPY, Daily_Return = Daily_Return_SPY) %>%
    mutate(Asset = "SPY")
)

# Pre-calculate CPI YoY for Q10 (inflation analysis)
# CPI is monthly; YoY change = (current / 12-month-ago) - 1
cpi_yoy <- cpi_clean %>%
  arrange(Date) %>%
  mutate(CPI_YoY = (CPI / lag(CPI, 12)) - 1) %>%
  select(Date, CPI_YoY)

# Join CPI_YoY into the long dataset and forward-fill to cover all trading
# days
sql_long <- sql_long %>%
  left_join(cpi_yoy, by = "Date") %>%
  arrange(Date) %>%
  tidyr::fill(CPI_YoY, .direction = "down")
```

```

dbWriteTable(con, "integrated_data", sql_long, overwrite = TRUE)
fin_data <- tbl(con, "integrated_data")

# Q1: Risk-Adjusted Daily Return by Asset -- SISON, Aaron Joshua Estacio

q1 <- fin_data %>%
  group_by(Asset) %>%
  summarise(
    Mean_Daily_Return = mean(Daily_Return, na.rm = TRUE),
    SD_Daily_Return = sd(Daily_Return, na.rm = TRUE)
  ) %>%
  mutate(Risk_Adjusted_Return = Mean_Daily_Return / SD_Daily_Return) %>%
  arrange(desc(Risk_Adjusted_Return)) %>%
  collect()


spy_ratio <- q1 %>% filter(Asset == "SPY") %>% pull(Risk_Adjusted_Return)

ggplot(q1, aes(x = Risk_Adjusted_Return, y = reorder(Asset,
  ↪ Risk_Adjusted_Return),
              fill = Asset)) +
  geom_col(width = 0.6, show.legend = FALSE) +
  geom_vline(xintercept = spy_ratio, linetype = "dashed",
             color = "#B3B3B3", linewidth = 0.4) +
  geom_text(aes(x = Risk_Adjusted_Return / 2,
                label = sprintf("%.4f", Risk_Adjusted_Return)),
            hjust = 0.5, size = 3.2, color = "white", fontface = "bold") +
  annotate("text", x = spy_ratio, y = 4.5, label = "SPY benchmark",
          size = 2.8, color = "#595959", hjust = -0.1) +
  scale_fill_manual(values = c(AAPL = "#555555", BDO = "#003D6B",
                               BTC = "#F7931A", SPY = "#00733E")) +
  labs(title = "Risk-Adjusted Daily Return by Asset",
       subtitle = "Mean return divided by standard deviation, 2020 to 2025",
       x = "Risk-Adjusted Return", y = NULL) +
  xlim(0, 0.07) +
  theme_minimal(base_size = 11) +
  theme(panel.grid.major.y = element_blank(),
        panel.grid.minor = element_blank(),
        axis.ticks = element_blank(),
        plot.title = element_text(face = "bold", size = 13),
        plot.subtitle = element_text(size = 9, color = "#595959"))

```


Risk-Adjusted Daily Return by Asset

Mean return divided by standard deviation, 2020 to 2025

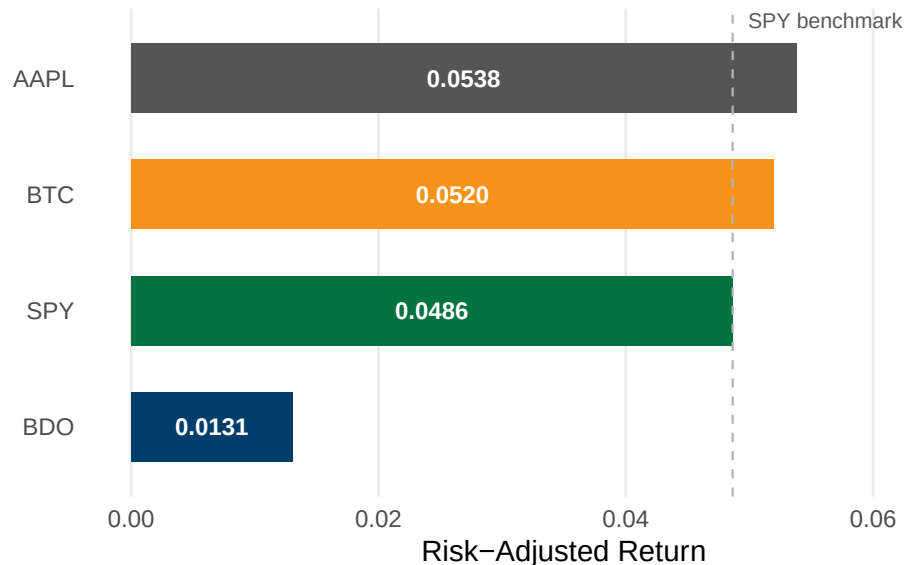

```
ggsave("../reports/fig_q1.pdf", width = 7, height = 3.5, device = "pdf")
```

```
# Q2: COVID-19 Crash Cumulative Returns -- SISON, Aaron Joshua Estacio
```

```
q2_raw <- fin_data %>%
  select(Date, Asset, Daily_Return) %>%
  collect() %>%
  mutate(Date = as.Date(Date))

q2 <- q2_raw %>%
  filter(Date >= as.Date("2020-02-01") & Date <= as.Date("2020-03-31")) %>%
  filter(!is.na(Daily_Return)) %>%
  group_by(Asset) %>%
  arrange(Date) %>%
  mutate(Cumulative_Return = cumprod(1 + Daily_Return) - 1)


q2_summary <- q2 %>%
  summarise(
    Start_Date = min(Date),
    End_Date = max(Date),
    Total_Cumulative_Return = last(Cumulative_Return),
    Observations = n()
  )

ggplot(q2, aes(x = Date, y = Cumulative_Return, color = Asset)) +
  geom_line(linewidth = 0.8) +
  geom_hline(yintercept = 0, linetype = "dashed", color = "#B3B3B3",
    ↪ linewidth = 0.3) +
```

```

scale_color_manual(values = c(AAPL = "#555555", BDO = "#003D6B",
                              BTC = "#F7931A", SPY = "#00733E")) +
scale_y_continuous(labels = scales::percent_format()) +
labs(title = "Cumulative Returns During the COVID-19 Crash",
      subtitle = "February to March 2020, indexed to 100% at period start",
      x = "Date", y = "Cumulative Return", color = "Asset") +
theme_minimal(base_size = 11) +
theme(panel.grid.minor = element_blank(),
      axis.ticks = element_blank(),
      plot.title = element_text(face = "bold", size = 13),
      plot.subtitle = element_text(size = 9, color = "#595959"),
      legend.position = "bottom")

```

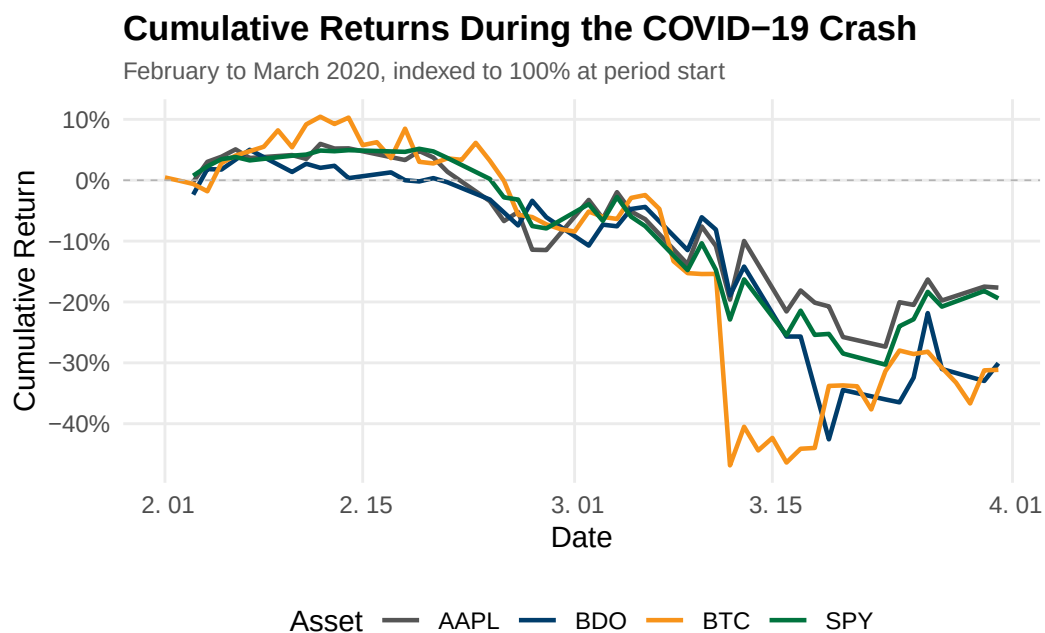

```

ggsave("../reports/fig_q2.pdf", width = 7, height = 4, device = "pdf")

```

Q3: Pairwise Correlation of Daily Returns -- SISON, Aaron Joshua Estacio

```

returns_wide <- fin_data %>%
  select(Date, Asset, Daily_Return) %>%
  collect() %>%
  pivot_wider(names_from = Asset, values_from = Daily_Return)

cor_matrix <- returns_wide %>%
  select(AAPL, BDO, BTC, SPY) %>%
  cor(use = "pairwise.complete.obs")

cor_long <- as.data.frame(cor_matrix) %>%
  tibble::rownames_to_column("Asset1") %>%

```

```


tidyr::pivot_longer(-Asset1, names_to = "Asset2", values_to =
  ↪ "Correlation") %>%
mutate(Asset1 = factor(Asset1, levels = rev(c("AAPL", "BDO", "BTC",
  ↪ "SPY"))),
       Asset2 = factor(Asset2, levels = c("AAPL", "BDO", "BTC", "SPY")))

ggplot(cor_long, aes(x = Asset2, y = Asset1, fill = Correlation)) +
  geom_tile(color = "white", linewidth = 1) +
  geom_text(aes(label = sprintf("%.3f", Correlation)), size = 3.5) +
  scale_fill_gradient2(low = "#1DC9A4", mid = "#F2F2F2", high = "#2E45B8",
    midpoint = 0.4, limits = c(0, 1)) +
  labs(title = "Pairwise Correlation of Daily Returns",
    subtitle = "Pearson correlation coefficients, 2020 to 2025",
    x = NULL, y = NULL, fill = "Correlation") +
  theme_minimal(base_size = 11) +
  theme(panel.grid = element_blank(),
    axis.ticks = element_blank(),
    plot.title = element_text(face = "bold", size = 13),
    plot.subtitle = element_text(size = 9, color = "#595959"),
    legend.position = "right")

```

Pairwise Correlation of Daily Returns

Pearson correlation coefficients, 2020 to 2025

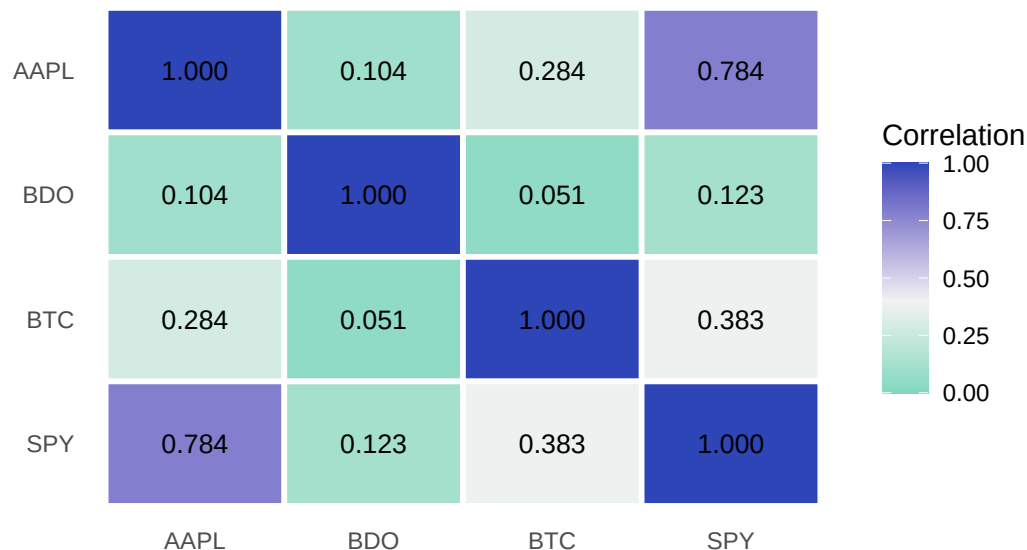

```
ggsave("../reports/fig_q3.pdf", width = 6, height = 4.5, device = "pdf")
```

```

# Q4-Q7: Assigned to CRUZ, Ricardo Miguel Inigo
# Q4: Asset Ranking by Total Return
# Q5: Best and Worst Trading Days
# Q6: Moving Average Crossover Analysis

```

```
# Q7: Volume and Volatility Relationship
# Code to be provided by responsible group member
```

```
# Q8: VIX Regime Analysis -- SISON, Aaron Joshua Estacio
```

```
q8_raw <- fin_data %>%
  filter(!is.na(VIX)) %>%
  select(Asset, Date, Daily_Return, VIX) %>%
  collect() %>%
  mutate(Date = as.Date(Date))

q8 <- q8_raw %>%
  mutate(
    VIX_Regime = case_when(
      VIX > 30 ~ "High Volatility (VIX > 30)",
      VIX < 20 ~ "Low Volatility (VIX < 20)",
      TRUE ~ "Moderate (20 <= VIX <= 30)"
    )
  ) %>%
  group_by(Asset, VIX_Regime) %>%
  summarise(
    Mean_Daily_Return = mean(Daily_Return, na.rm = TRUE),
    SD_Daily_Return = sd(Daily_Return, na.rm = TRUE),
    Observations = n(),
    .groups = "drop"
  ) %>%
  arrange(Asset, VIX_Regime)


q8_plot <- q8 %>%
  filter(VIX_Regime %in% c("High Volatility (VIX > 30)", "Low Volatility
    ↪ (VIX < 20)")) %>%
  mutate(VIX_Regime = recode(VIX_Regime,
    "High Volatility (VIX > 30)" = "VIX > 30 (High Fear)",
    "Low Volatility (VIX < 20)" = "VIX < 20 (Low Fear)"))

ggplot(q8_plot, aes(x = Asset, y = Mean_Daily_Return, fill = VIX_Regime)) +
  geom_col(position = position_dodge(width = 0.7), width = 0.6) +
  geom_hline(yintercept = 0, linewidth = 0.3, color = "#595959") +
  scale_fill_manual(values = c("VIX > 30 (High Fear)" = "#C91D42",
    "VIX < 20 (Low Fear)" = "#2E45B8")) +
  scale_y_continuous(labels = scales::percent_format()) +
  labs(title = "Mean Daily Return by VIX Regime",
    subtitle = "Comparing asset performance under high versus low market
    ↪ fear, 2020 to 2025",
    x = NULL, y = "Mean Daily Return", fill = NULL) +
```

```
theme_minimal(base_size = 11) +
theme(panel.grid.major.x = element_blank(),
      panel.grid.minor = element_blank(),
      axis.ticks = element_blank(),
      plot.title = element_text(face = "bold", size = 13),
      plot.subtitle = element_text(size = 9, color = "#595959"),
      legend.position = "bottom")
```

Mean Daily Return by VIX Regime

Comparing asset performance under high versus low market fear, 2020 to 2025

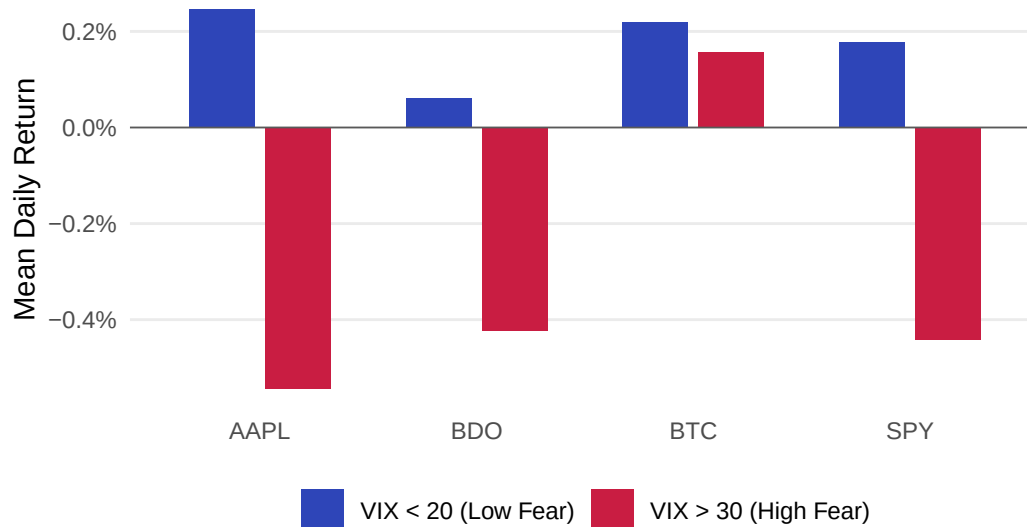

```
ggsave("../reports/fig_q8.pdf", width = 7, height = 4, device = "pdf")
```

Q9: Interest Rate Sensitivity -- SISON, Aaron Joshua Estacio

```
q9_raw <- fin_data %>%
  filter(!is.na(DGS10)) %>%
  select(Asset, Date, Daily_Return, DGS10) %>%
  collect() %>%
  mutate(Date = as.Date(Date))

q9 <- q9_raw %>%
  group_by(Asset) %>%
  arrange(Date) %>%
  mutate(DGS10_Change = DGS10 - lag(DGS10)) %>%
  ungroup() %>%
  filter(!is.na(DGS10_Change)) %>%
  mutate(
    Yield_Direction = case_when(
      DGS10_Change > 0 ~ "Yields Rising",
```

```

      DGS10_Change < 0 ~ "Yields Falling",
      TRUE ~ "No Change"
    )
  ) %>%
group_by(Asset, Yield_Direction) %>%
summarise(
  Mean_Daily_Return = mean(Daily_Return, na.rm = TRUE),
  SD_Daily_Return = sd(Daily_Return, na.rm = TRUE),
  Observations = n(),
  .groups = "drop"
) %>%
arrange(Asset, Yield_Direction)


q9_plot <- q9 %>%
  filter(Yield_Direction %in% c("Yields Rising", "Yields Falling"))

ggplot(q9_plot, aes(x = Asset, y = Mean_Daily_Return, fill =
  ↪ Yield_Direction)) +
  geom_col(position = position_dodge(width = 0.7), width = 0.6) +
  geom_hline(yintercept = 0, linewidth = 0.3, color = "#595959") +
  scale_fill_manual(values = c("Yields Rising" = "#F97A1F",
    "Yields Falling" = "#2E45B8")) +
  scale_y_continuous(labels = scales::percent_format()) +
  labs(title = "Mean Daily Return by 10-Year Treasury Yield Direction",
    subtitle = "Asset returns conditional on daily yield changes, 2020 to
    ↪ 2025",
    x = NULL, y = "Mean Daily Return", fill = NULL) +
  theme_minimal(base_size = 11) +
  theme(panel.grid.major.x = element_blank(),
    panel.grid.minor = element_blank(),
    axis.ticks = element_blank(),
    plot.title = element_text(face = "bold", size = 13),
    plot.subtitle = element_text(size = 9, color = "#595959"),
    legend.position = "bottom")

```

Mean Daily Return by 10-Year Treasury Yield Direction

Asset returns conditional on daily yield changes, 2020 to 2025

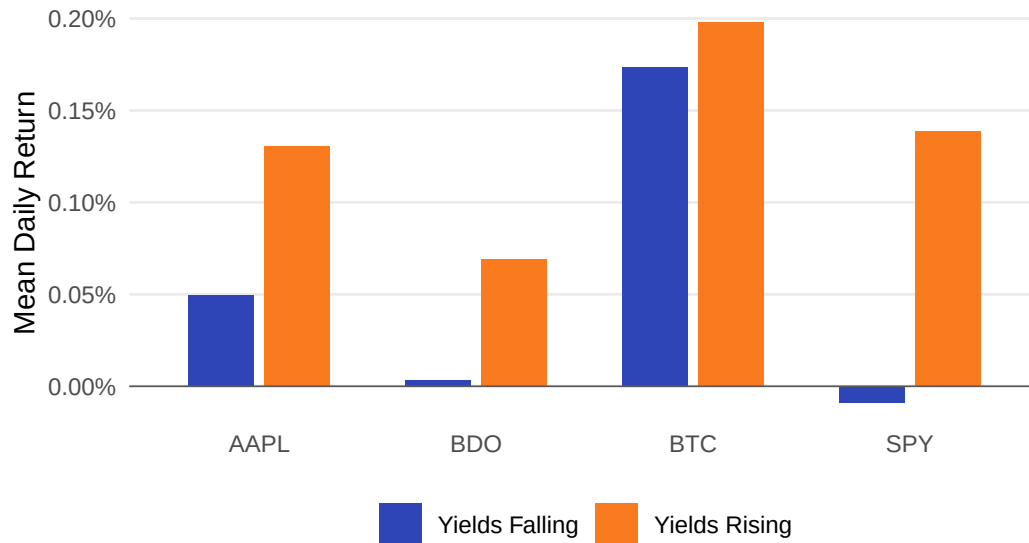

```
ggsave("../reports/fig_q9.pdf", width = 7, height = 4, device = "pdf")
```

```
# Q10: Inflation Hedge Performance -- SISON, Aaron Joshua Estacio
```

```
q10_raw <- fin_data %>%
  select(Date, Asset, Daily_Return, CPI_YoY) %>%
  collect() %>%
  mutate(Date = as.Date(Date))


q10 <- q10_raw %>%
  filter(!is.na(CPI_YoY) & CPI_YoY > 0.05) %>%
  filter(!is.na(Daily_Return)) %>%
  group_by(Asset) %>%
  arrange(Date) %>%
  mutate(Cumulative_Return = cumprod(1 + Daily_Return) - 1) %>%
  summarise(
    Start_Date = min(Date),
    End_Date = max(Date),
    Start_CPI_YoY = first(CPI_YoY),
    End_CPI_YoY = last(CPI_YoY),
    Total_Cumulative_Return = last(Cumulative_Return),
    Mean_Daily_Return = mean(Daily_Return, na.rm = TRUE),
    Observations = n()
  ) %>%
  arrange(desc(Total_Cumulative_Return))

q10_plot <- q10 %>%
  mutate(Asset = factor(Asset, levels =
    ↪ q10$Asset[order(q10$Total_Cumulative_Return)]))
```

```
ggplot(q10_plot, aes(x = Total_Cumulative_Return, y = Asset, fill = Asset))
  +
  geom_col(width = 0.6, show.legend = FALSE) +
  geom_text(aes(x = Total_Cumulative_Return / 2,
                label = sprintf("%+.1f%%", Total_Cumulative_Return * 100)),
            hjust = 0.5, size = 3.2, color = "white", fontface = "bold") +
  scale_fill_manual(values = c(AAPL = "#555555", BDO = "#003D6B",
                               BTC = "#F7931A", SPY = "#00733E")) +
  scale_x_continuous(labels = scales::percent_format(),
                    expand = expansion(mult = c(0.15, 0.15))) +
  labs(title = "Cumulative Return During High Inflation Period",
       subtitle = "June 2021 to February 2023, CPI year-on-year above 5%",
       x = "Cumulative Return", y = NULL) +
  theme_minimal(base_size = 11) +
  theme(panel.grid.major.y = element_blank(),
        panel.grid.minor = element_blank(),
        axis.ticks = element_blank(),
        plot.title = element_text(face = "bold", size = 13),
        plot.subtitle = element_text(size = 9, color = "#595959"))
```

Cumulative Return During High Inflation Period

June 2021 to February 2023, CPI year-on-year above 5%

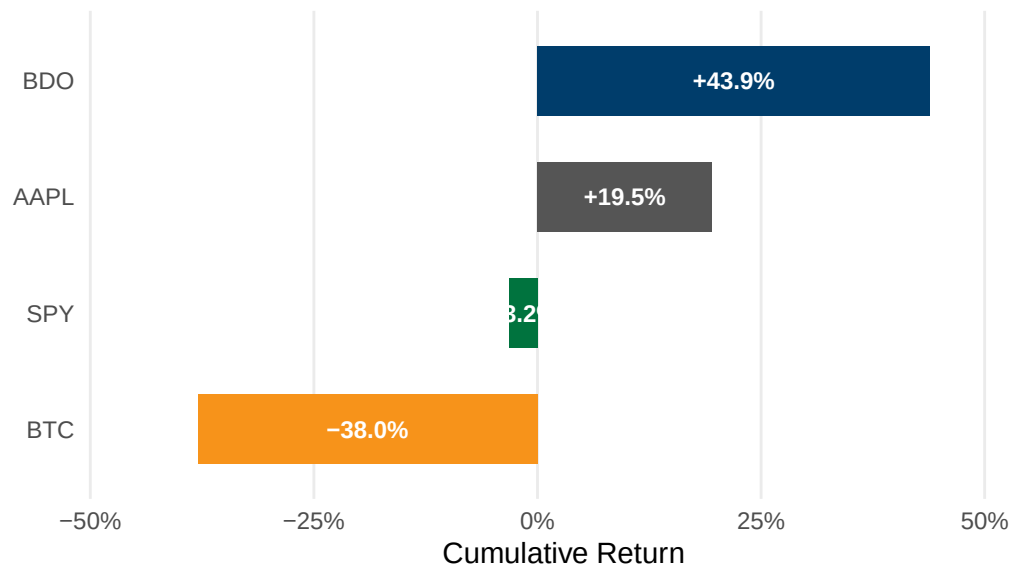

```
ggsave("../reports/fig_q10.pdf", width = 7, height = 3.5, device = "pdf")
```

Sec 7: Descriptive Statistics – GALEDO, Enrique Lorenzo Hermoso

Mean, median, variance, std dev, min, max, range, skewness, kurtosis.


```
# Sec 7: Descriptive Statistics -- compute mean, median, variance, skewness,  
↪ kurtosis -- GALEDO, Enrique Lorenzo Hermoso
```

Sec 8: Data Visualization – SEBALLOS, Josiah Dweyn Panganiban

At least 8 professional-quality figures.

```
# Sec 8: Data Visualization -- create 8 professional figures with ggplot2 --  
↪ SEBALLOS, Josiah Dweyn Panganiban
```

Sec 9: Exploratory Analysis – SEECHUNG, Camille Castro

Compare returns, volatility, inflationary periods, high-VIX periods, interest-rate environments.

```
# Sec 9: Exploratory Financial Analysis -- compare returns, volatility,  
↪ inflation, VIX, interest rates -- SEECHUNG, Camille Castro
```

Sec 10: Investment Recommendation – SEECHUNG, Camille Castro

Allocate USD 1,000,000.

```
# Sec 10: Investment Recommendation -- USD 1,000,000 allocation among AAPL,  
↪ BDO, BTC, cash -- SEECHUNG, Camille Castro
```

Sec 11: Executive Dashboard – CRUZ, Ricardo Miguel Iñigo

```
# Sec 11: Executive Dashboard -- key stats, charts, SQL findings,  
↪ recommendation summary -- CRUZ, Ricardo Miguel Iñigo
```