

Artificial Intelligence

AI2002

Rushda Muneer

Spring 2026

Supervised vs. Unsupervised Learning

- Supervised learning (classification)
 - Supervision: The training data (observations, measurements, etc.) are accompanied by **labels** indicating the class of the observations
 - New data is classified based on the training set
- Unsupervised learning (clustering)
 - The class label of training data is unknown
 - Given a set of measurements, observations, etc. with the aim of establishing the existence of classes or clusters in the data

What is clustering?

- **Clustering** is the [classification](#) of objects into different groups, or more precisely, the [partitioning](#) of a [data set](#) into [subsets](#) (clusters), so that the data in each subset (ideally) share some common trait - often according to some defined [distance measure](#).

Types of clustering:

1. **Hierarchical algorithms**: these find successive clusters using previously established clusters.
 1. Agglomerative ("bottom-up"): Agglomerative algorithms begin with each element as a separate cluster and merge them into successively larger clusters.
 2. Divisive ("top-down"): Divisive algorithms begin with the whole set and proceed to divide it into successively smaller clusters.
2. **Partitional clustering**: Partitional algorithms determine all clusters at once. They include:
 - ***K*-means**
 - ***K*-mediod**

Common Distance measures:

- *Distance measure* will determine how the *similarity* of two elements is calculated and it will influence the shape of the clusters.

They include:

1. The [Euclidean distance](#) (also called 2-norm distance) is given by:

$$d(x, y) = \sqrt{\sum_{i=1}^p |x_i - y_i|^2}$$

2. The [Manhattan distance](#) (also called taxicab norm or 1-norm) is given by:

$$d(x, y) = \sum_{i=1}^p |x_i - y_i|$$

Common Distance measures:

3. The [maximum norm](#) is given by:

$$d(x, y) = \max_{1 \leq i \leq p} |x_i - y_i|$$

4. The [Mahalanobis distance](#) corrects data for different scales and correlations in the variables.
5. [Inner product space](#): The angle between two vectors can be used as a distance measure when clustering high dimensional data
6. [Hamming distance](#) (sometimes edit distance) measures the minimum number of substitutions required to change one member into another.

K-MEANS CLUSTERING

- The **k-means algorithm** is an algorithm to [cluster](#) n objects based on attributes into k [partitions](#), where $k < n$.
- It assumes that the object attributes form a [vector space](#).

K-MEANS CLUSTERING

- An algorithm for partitioning (or clustering) N data points into K disjoint subsets S_j containing data points so as to minimize the sum-of-squares criterion


$$J = \sum_{j=1}^K \sum_{n \in S_j} |x_n - \mu_j|^2,$$

where x_n is a vector representing the n^{th} data point and μ_j is the [geometric centroid](#) of the data points in S_j .

K-MEANS CLUSTERING

- Simply speaking k-means clustering is an algorithm to classify or to group the objects based on attributes/features into K number of group.
- K is positive integer number.
- The grouping is done by minimizing the sum of squares of distances between data and the corresponding cluster centroid.

How the K-Mean Clustering algorithm works?

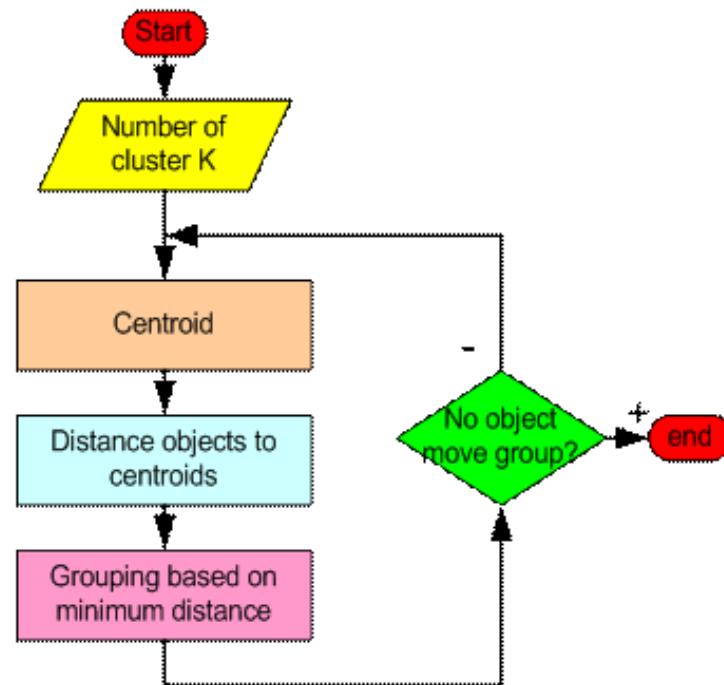

Steps:

- **Step 1**: Begin with a decision on the value of k = number of clusters .
- **Step 2**: Put any initial partition that classifies the data into k clusters. You may assign the training samples randomly, or systematically as the following:
 1. Take the first k training sample as single-element clusters
 2. Assign each of the remaining $(N-k)$ training sample to the cluster with the nearest centroid. After each assignment, recompute the centroid of the gaining cluster.

Steps:

- **Step 3:** Take each sample in sequence and compute its [distance](#) from the centroid of each of the clusters. If a sample is not currently in the cluster with the closest centroid, switch this sample to that cluster and update the centroid of the cluster gaining the new sample and the cluster losing the sample.
- **Step 4 .** Repeat step 3 until convergence is achieved, that is until a pass through the training sample causes no new assignments.

A Simple example showing the implementation of
k-means algorithm
(using K=2)

Individual	Variable 1	Variable 2
1	1.0	1.0
2	1.5	2.0
3	3.0	4.0
4	5.0	7.0
5	3.5	5.0
6	4.5	5.0
7	3.5	4.5

Step 1:

Initialization: Randomly we choose following two centroids (k=2) for two clusters.

In this case the 2 centroid are: $m1=(1.0,1.0)$ and $m2=(5.0,7.0)$.

Individual	Variable 1	Variable 2
1	1.0	1.0
2	1.5	2.0
3	3.0	4.0
4	5.0	7.0
5	3.5	5.0
6	4.5	5.0
7	3.5	4.5

	Individual	Mean Vector
Group 1	1	(1.0, 1.0)
Group 2	4	(5.0, 7.0)

Step 2:

- Thus, we obtain two clusters containing:
 {1,2,3} and {4,5,6,7}.
- Their new centroids are:

$$m_1 = \left(\frac{1}{3}(1.0 + 1.5 + 3.0), \frac{1}{3}(1.0 + 2.0 + 4.0) \right) = (1.83, 2.33)$$

$$m_2 = \left(\frac{1}{4}(5.0 + 3.5 + 4.5 + 3.5), \frac{1}{4}(7.0 + 5.0 + 5.0 + 4.5) \right) \\ = (4.12, 5.38)$$

$$d(m_1, 2) = \sqrt{|1.0 - 1.5|^2 + |1.0 - 2.0|^2} = 1.12$$

$$d(m_2, 2) = \sqrt{|5.0 - 1.5|^2 + |7.0 - 2.0|^2} = 6.10$$

Individual	Centroid 1	Centroid 2
1	0	7.21
2 (1.5, 2.0)	1.12	6.10
3	3.61	3.61
4	7.21	0
5	4.72	2.5
6	5.31	2.06
7	4.30	2.92

Step 3:

- Now using these centroids we compute the Euclidean distance of each object, as shown in table.
- Therefore, the new clusters are:
 $\{1,2\}$ and $\{3,4,5,6,7\}$
- Next centroids are:
 $m1=(1.25,1.5)$ and $m2 = (3.9,5.1)$

Individual	Centroid 1	Centroid 2
1	1.57	5.38
2	0.47	4.28
3	2.04	1.78
4	5.64	1.84
5	3.15	0.73
6	3.78	0.54
7	2.74	1.08

- Step 4:


The clusters obtained are:

{1,2} and {3,4,5,6,7}

- Therefore, there is no change in the cluster.
- Thus, the algorithm comes to a halt here and final result consist of 2 clusters {1,2} and {3,4,5,6,7}.

Individual	Centroid 1	Centroid 2
1	0.56	5.02
2	0.56	3.92
3	3.05	1.42
4	6.66	2.20
5	4.16	0.41
6	4.78	0.61
7	3.75	0.72

PLOT

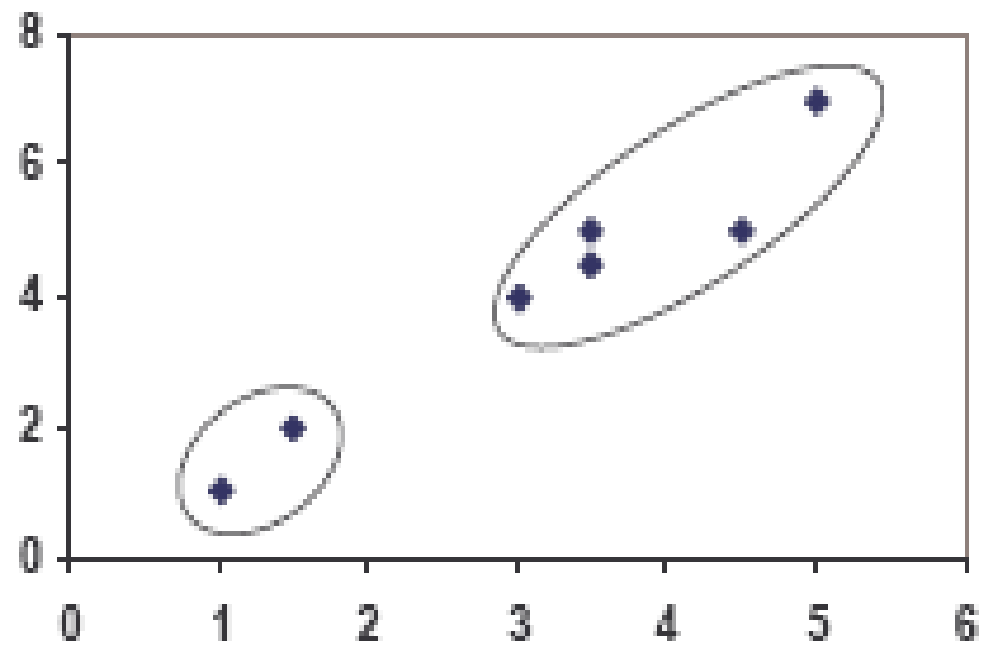

(with $K=3$)

Individual	$m_1 = 1$	$m_2 = 2$	$m_3 = 3$	cluster
1	0	1.11	3.61	1
2	1.12	0	2.5	2
3	3.61	2.5	0	3
4	7.21	6.10	3.61	3
5	4.72	3.61	1.12	3
6	5.31	4.24	1.80	3
7	4.30	3.20	0.71	3




clustering with initial centroids (1, 2, 3)

Step 1

Individual	m_1 (1.0, 1.0)	m_2 (1.5, 2.0)	m_3 (3.9, 5.1)	cluster
1	0	1.11	5.02	1
2	1.12	0	3.92	2
3	3.61	2.5	1.42	3
4	7.21	6.10	2.20	3
5	4.72	3.61	0.41	3
6	5.31	4.24	0.61	3
7	4.30	3.20	0.72	3

Step 2

PLOT

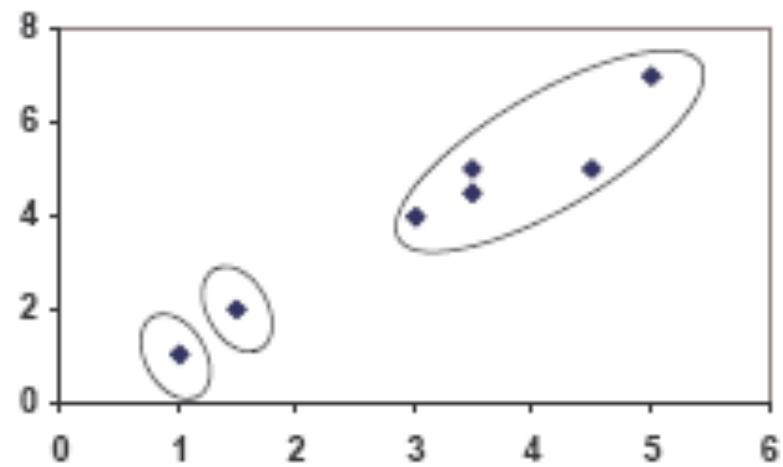


Real-Life Numerical Example of K-Means Clustering

We have 4 medicines as our training data points object and each medicine has 2 attributes. Each attribute represents coordinate of the object. We have to determine which medicines belong to cluster 1 and which medicines belong to the other cluster.

Object	Attribute1 (X): weight index	Attribute 2 (Y): pH
Medicine A	1	1
Medicine B	2	1
Medicine C	4	3
Medicine D	5	4

Step 1:

- **Initial value of centroids :**
Suppose we use medicine A and medicine B as the first centroids.
- Let c_1 and c_2 denote the coordinate of the centroids, then $c_1=(1,1)$ and $c_2=(2,1)$

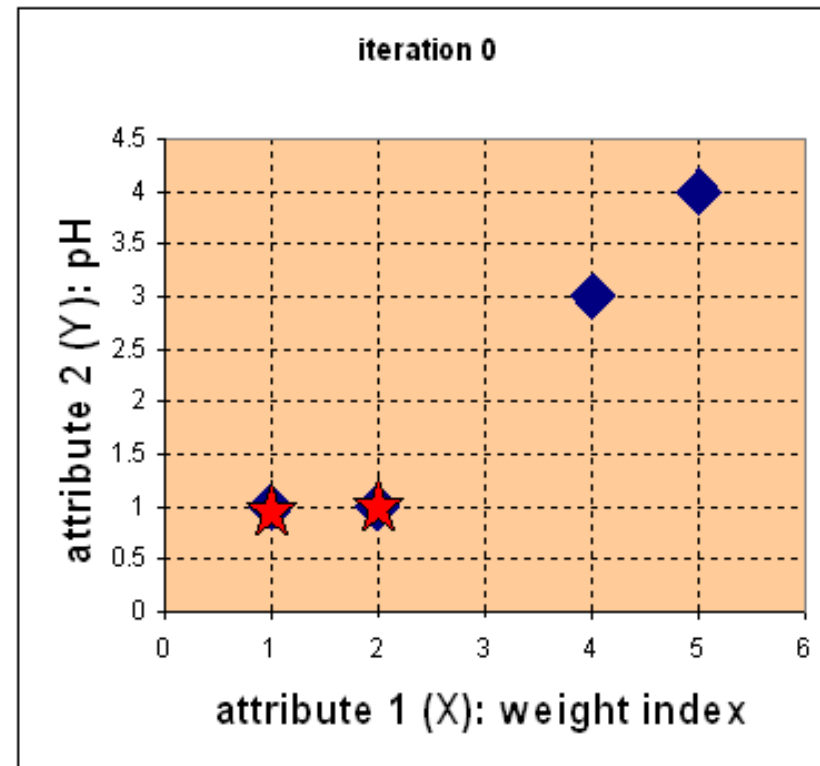

- **Objects-Centroids distance** : we calculate the distance between cluster centroid to each object. Let us use [Euclidean distance](#), then we have distance matrix at iteration 0 is

$$\mathbf{D}^0 = \begin{array}{c} \begin{bmatrix} 0 & 1 & 3.61 & 5 \\ 1 & 0 & 2.83 & 4.24 \end{bmatrix} \quad \begin{array}{l} \mathbf{c}_1 = (1,1) \text{ group-1} \\ \mathbf{c}_2 = (2,1) \text{ group-2} \end{array} \\ \begin{array}{cccc} A & B & C & D \end{array} \\ \begin{bmatrix} 1 & 2 & 4 & 5 \\ 1 & 1 & 3 & 4 \end{bmatrix} \quad \begin{array}{l} X \\ Y \end{array} \end{array}$$

- Each column in the distance matrix symbolizes the object.
- The first row of the distance matrix corresponds to the distance of each object to the first centroid and the second row is the distance of each object to the second centroid.
- For example, distance from medicine C = (4, 3) to the first centroid is ,

$$\mathbf{c}_1 = (1,1) \quad \sqrt{(4-1)^2 + (3-1)^2} = 3.61$$

- and its distance to the second centroid is.


$$\mathbf{c}_2 = (2,1) \quad \sqrt{(4-2)^2 + (3-1)^2} = 2.83$$

Step 2:

- **Objects clustering** : We assign each object based on the minimum distance.
- Medicine A is assigned to group 1, medicine B to group 2, medicine C to group 2 and medicine D to group 2.
- The elements of Group matrix below is 1 if and only if the object is assigned to that group.

$$\mathbf{G}^0 = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 1 & 1 \end{bmatrix} \begin{matrix} \text{group-1} \\ \text{group-2} \end{matrix}$$

$A \quad B \quad C \quad D$

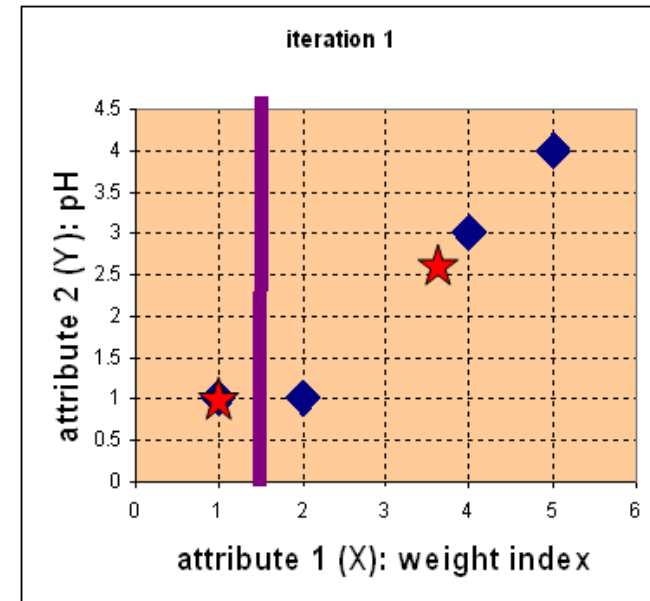

- **Iteration-1, Objects-Centroids distances** : The next step is to compute the distance of all objects to the new centroids.
- Similar to step 2, we have distance matrix at iteration 1 is

$$\mathbf{D}^1 = \begin{bmatrix} 0 & 1 & 3.61 & 5 \\ 3.14 & 2.36 & 0.47 & 1.89 \end{bmatrix} \quad \begin{array}{l} \mathbf{c}_1 = (1,1) \text{ group-1} \\ \mathbf{c}_2 = (\frac{11}{3}, \frac{8}{3}) \text{ group-2} \end{array}$$

<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	
1	2	4	5	<i>X</i>
1	1	3	4	<i>Y</i>

- **Iteration-1, Objects**

clustering: Based on the new distance matrix, we move the medicine B to Group 1 while all the other objects remain. The Group matrix is shown below

$$\mathbf{G}^1 = \begin{bmatrix} 1 & 1 & 0 & 0 \\ 0 & 0 & 1 & 1 \end{bmatrix} \quad \begin{array}{l} \text{group - 1} \\ \text{group - 2} \end{array}$$

$A \quad B \quad C \quad D$


- **Iteration 2, determine centroids:**

Now we repeat step 4 to calculate the new centroids coordinate based on the clustering of previous iteration. Group1 and group 2 both has two members, thus the new centroids are

and

$$\mathbf{c}_1 = \left(\frac{1+2}{2}, \frac{1+1}{2} \right) = \left(1\frac{1}{2}, 1 \right)$$

$$\mathbf{c}_2 = \left(\frac{4+5}{2}, \frac{3+4}{2} \right) = \left(4\frac{1}{2}, 3\frac{1}{2} \right)$$

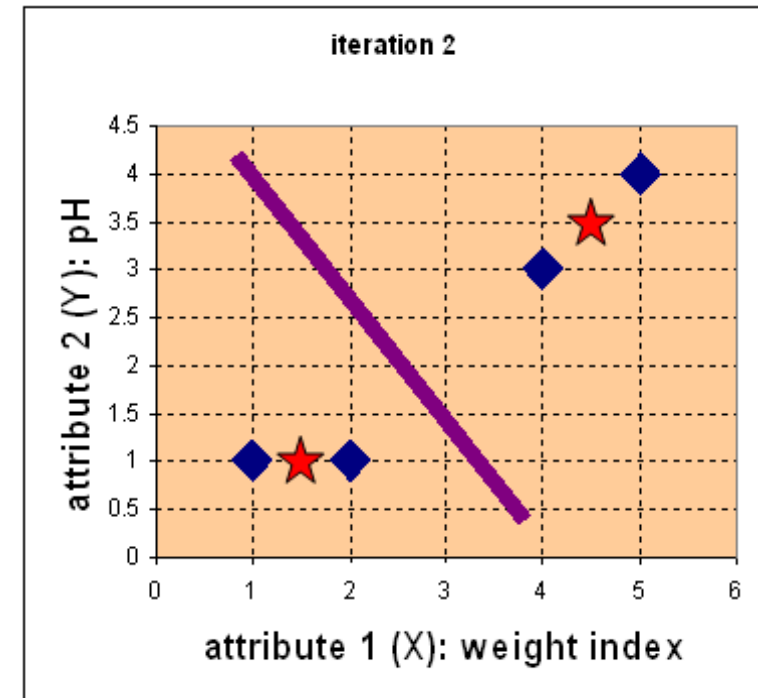

- **Iteration-2, Objects-Centroids distances** : Repeat step 2 again, we have new distance matrix at iteration 2 as

$$\mathbf{D}^2 = \begin{bmatrix} 0.5 & 0.5 & 3.20 & 4.61 \\ 4.30 & 3.54 & 0.71 & 0.71 \end{bmatrix} \quad \begin{array}{l} \mathbf{c}_1 = (1\frac{1}{2}, 1) \text{ group-1} \\ \mathbf{c}_2 = (4\frac{1}{2}, 3\frac{1}{2}) \text{ group-2} \end{array}$$

	<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	
	1	2	4	5	<i>X</i>
	1	1	3	4	<i>Y</i>

- **Iteration-2, Objects clustering:** Again, we assign each object based on the minimum distance.

$$\mathbf{G}^2 = \begin{bmatrix} 1 & 1 & 0 & 0 \\ 0 & 0 & 1 & 1 \end{bmatrix} \begin{matrix} \text{group-1} \\ \text{group-2} \end{matrix}$$

$A \quad B \quad C \quad D$

- We obtain result that $\mathbf{G}^2 = \mathbf{G}^1$. Comparing the grouping of last iteration and this iteration reveals that the objects does not move group anymore.
- Thus, the computation of the k-mean clustering has reached its stability and no more iteration is needed..

We get the final grouping as the results as:

<u>Object</u>	<u>Feature1(X): weight index</u>	<u>Feature2 (Y): pH</u>	<u>Group (result)</u>
Medicine A	1	1	1
Medicine B	2	1	1
Medicine C	4	3	2
Medicine D	5	4	2

Weaknesses of K-Mean Clustering

1. When the numbers of data are not so many, **initial grouping** will determine the cluster significantly.
2. The **number of cluster, K, must be determined before hand**. Its disadvantage is that it does not yield the same result with each run, since the resulting clusters depend on the initial random assignments.
3. We never know the real cluster, using the same data, because if it is inputted in a **different order it may produce different cluster** if the number of data is few.
4. It is **sensitive to initial condition**. Different initial condition may produce different result of cluster. The algorithm may be trapped in the local optimum.

Applications of K-Mean Clustering

- It is relatively *efficient and fast*. It computes result at **$O(tkn)$** , where n is number of objects or points, k is number of clusters and t is number of iterations.
- k-means clustering can be applied to *machine learning or data mining*
- *Used on acoustic data in speech understanding to convert waveforms into one of k categories (known as Vector Quantization or Image Segmentation).*
- *Also used for choosing color palettes on old fashioned graphical display devices and Image Quantization.*

CONCLUSION

- *K-means algorithm* is useful for undirected knowledge discovery and is relatively simple. K-means has found wide spread usage in lot of fields, ranging from unsupervised learning of neural network, Pattern recognitions, Classification analysis, Artificial intelligence, image processing, machine vision, and many others.

CLUSTER ANALYSIS

Partitioning Methods: k-medoids

Instead of mean we nominate a median of the cluster

This makes it less sensitive to outliers

Input: The number of clusters k , and a database containing n objects.

Output: A set of k clusters which minimizes the sum of the dissimilarities of all the objects to their nearest medoid.

Method:

```
arbitrarily choose  $k$  objects as the initial medoids;  
repeat  
    assign each remaining object to the cluster with the nearest medoid;  
    randomly select a non-medoid object,  $o_{random}$ ;  
    compute the total cost,  $S$ , of swapping  $o_j$  with  $o_{random}$ ;  
    if  $S < 0$  then swap  $o_j$  with  $o_{random}$  to form the new set of  $k$  medoids;  
until no change;
```

It is computationally expensive

How to find Mediods:

For odd sum:

$[(1, 5), (3, 8), (4, 9), (6, 10), (9, 12)]$

$X = 1, 3, 4, 6, 9$

Sum is 5 (odd)

$Y = 5, 8, 9, 10, 12$

Mediods = Median of each attribute = (4, 9)

For even sum:

$X = 2, 4, 5, 7, 9, 10$

$Y = 3, 4, 6, 8, 12, 14$

Sum = 6 (even)


Mediods = mean of center two elements = (6, 7)

$X = (5+7)/2 = 6$

$Y = (6+8)/2 = 7$

CLUSTER ANALYSIS

Partitioning Methods: k-medoids & PAM

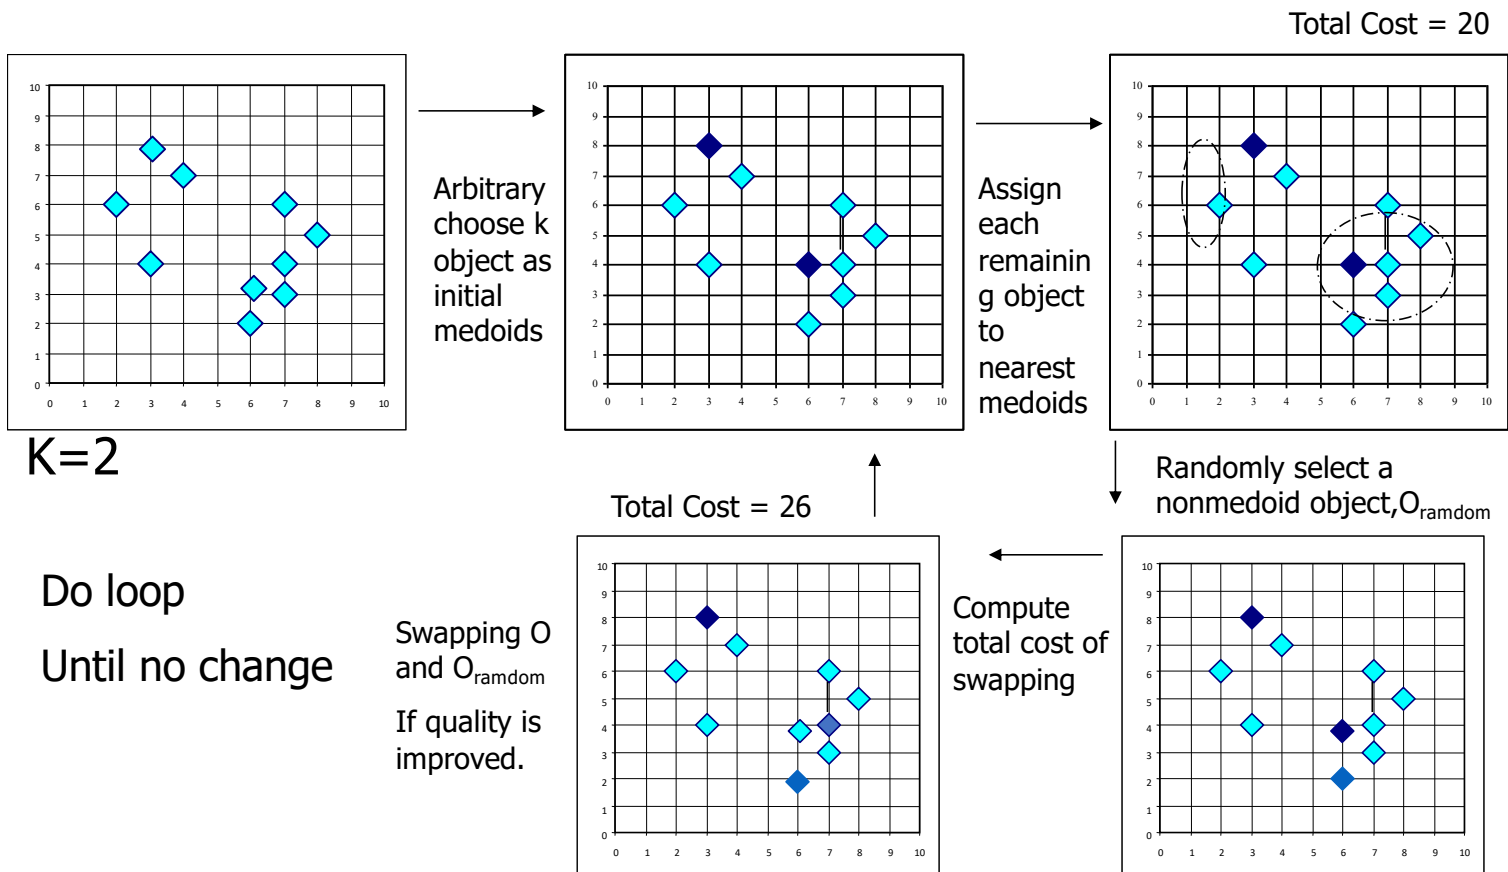

CLUSTER ANALYSIS

Partitioning Methods: k-means & k-medoids

The mean or median can be used as a model for its cluster

A new example can be assigned to the cluster on the basis of smallest distance between the cluster mean (median) and the example

Thus the data space is *partitioned* into k regions

A medoid can be defined as the object of a cluster whose average dissimilarity to all the objects in the cluster is minimal, that is, it is a most centrally located point in the cluster.

CLUSTER ANALYSIS

Partitioning Methods

Construct a partition of a database D of n objects into a set of k clusters. Given a k , find a partition of k clusters that optimizes the chosen partitioning criterion

Global optimal: exhaustively enumerate all partitions

Heuristic methods: *k-means* and *k-medoids* algorithms

k-means (MacQueen'67): Each cluster is represented by the center of the cluster

k-medoids or PAM (Partition around medoids) (Kaufman & Rousseeuw'87): Each cluster is represented by one of the objects in the cluster

CLUSTER ANALYSIS

Partitioning Methods: CLARA *(Clustering Large Applications)*

Proposed in 1990

Implementation of the Partitioning Around Medoids algorithm in a subset of the dataset.

It draws multiple samples of the dataset, applies PAM on the samples, and then outputs the best clustering out of these samples.

CLUSTER ANALYSIS

Partitioning Methods: CLARANS

*(Clustering Large Applications based upon
Randomized Search)*

It usually starts with an arbitrary set of k medoids

It picks a medoid and replaces it by a non-medoid. If it is more suitable as a medoid, it is made a medoid

If it is not a better medoid, a counter is incremented

If the value of the counter reaches a pre-set number, a local minimum is said to be found and algorithm restarts with a new random set of medoids

This process is repeated n times and the best set of medoids is retained