
Architecture & data flows

Desktop application and configurable integrations. Mobile access and associated Connect/relay flows are excluded.

Solid: desktop paths. **Dashed:** depends on configuration or use.

Zana provides a unified global UI and orchestration layer over existing coding-agent harnesses, without forking or rewriting their source code. It connects through ACP (Agent Client Protocol) where supported and through provider-native APIs/SDKs for other integrations, including Codex app-server and Claude Agent SDK. Session settings, prompts, instructions and tools are supplied through these interfaces.

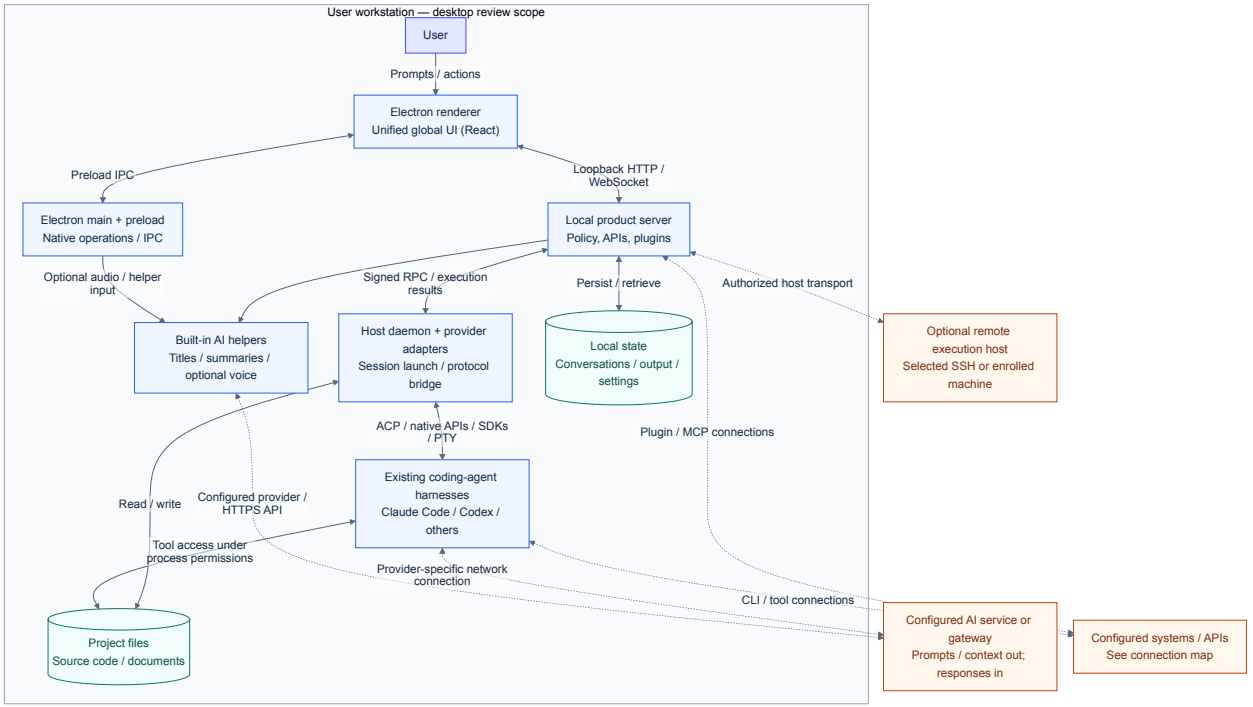


The Electron interface communicates with local product services and native IPC. The product server coordinates the host daemon and adapters, which launch and communicate with existing coding-agent and terminal processes. Conversation events and settings are persisted locally. Project files, subprocess output, and connected-system results can enter agent context.

AI data can leave through coding-agent providers **and** built-in AI helpers. Some helpers use Claude CLI; configured OpenAI and Gemini transports make direct HTTPS requests. Optional voice transcription sends audio to its selected service. Remote agents can make equivalent connections from their execution host.

The diagram shows intended authority boundaries. It does not imply that subprocesses or installed plugins are sandboxed: current plugins are full-trust server-side code, and child processes have their own OS/tool permissions.


2. Internal systems & connection map

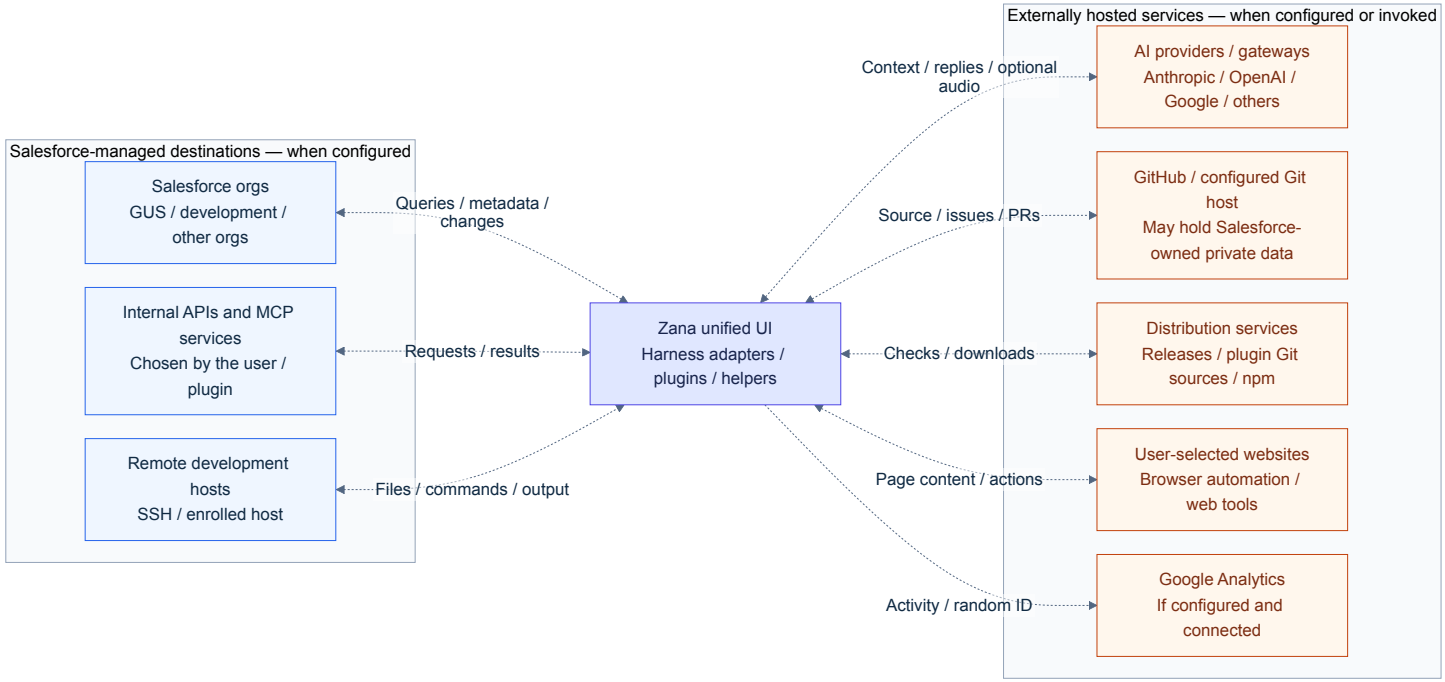

Destination	Connection and data
Salesforce orgs, including GUS	Optional Salesforce tooling / CLI / plugins. SOQL results, work items, metadata, Apex and Agentforce operations, and authorized changes. Access depends on the selected org and account.
Corporate source repositories	Git and GitHub CLI/plugin. Source code, diffs, issues, pull requests and comments. GitHub is externally hosted even when the repository and its data belong to Salesforce; a configured enterprise Git host may differ.
Internal APIs / MCP services	User-configured integrations and agent tools. Exact service names, endpoints and returned data depend on the installed configuration.
Remote development machines	Configured SSH or enrolled hosts. Files, commands and execution output. Ownership and network placement depend on the registered host.

These are supported connection paths, not a statement that every integration is enabled. Org queries may reach sandbox **or production-classified orgs** according to the selected connection; the diagrams do not establish a non-production-only environment.

3. Data classification

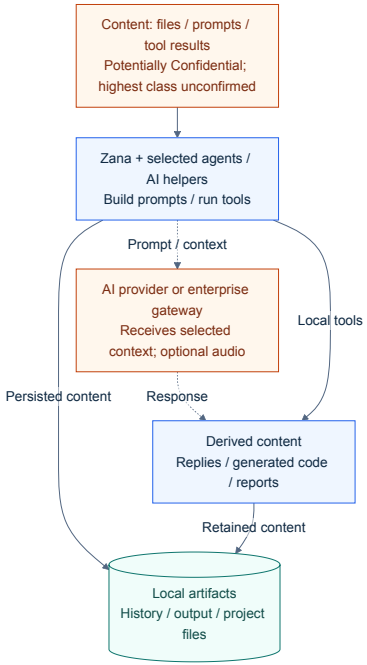

Working assumption: potentially Confidential. The actual highest classification remains unconfirmed. The labels below are content examples for scoping, not an interpretation of Salesforce's formal classification standard.

Classification	Possible content
Public	Public documentation, open-source code, public repository content.
Internal	Internal project metadata, engineering discussions and internal work items, where classified Internal by their owner.
Confidential	Proprietary source code, non-public technical documents, sensitive work items, prompts and outputs containing that information.
Restricted	Cannot be ruled out from architecture alone. Whether any reachable credentials, records or other sensitive content are Restricted requires owner confirmation.

Classification follows the underlying content into prompts, tool results, transcripts, generated output and exports. Credentials also participate in authentication and require separate handling; they are not intended prompt content. Production-data exposure depends on connected accounts, systems and tool use. No model-training pipeline is shown; inference, coding-agent execution and optional transcription are shown.

4. External APIs & services

Coding-agent inference uses the selected harness's provider connection. Built-in AI helpers and plugins have their own network paths, as shown in the architecture diagram.

Service	Purpose / data exchanged	Activation or endpoint detail
Anthropic / Claude Code	AI prompts, selected context and responses; CLI account/usage traffic.	Selected Claude provider or helper. Actual model endpoint can be changed by provider/gateway configuration.
OpenAI / ChatGPT / Codex	AI prompts, context and responses; optional audio transcription; account/usage traffic.	Selected Codex provider or configured API key. Source includes `api.openai.com` and `chatgpt.com` transports.
Google Gemini	AI helper requests and generated text.	Configured API key / helper selection; `generativelanguage.googleapis.com`.
Other configured AI services / gateways	Coding-agent inference and related provider traffic.	Determined by Cursor, OpenCode, Pi, ACP or other selected harness/provider configuration.
GitHub, configured Git sources and npm	Repository operations, issues/PRs, application updates, plugin/provider installation and downloads.	GitHub/CLI/installer/updater operations. Packaged update configuration points to `salesforce/zana` GitHub releases; an HTTPS override exists.
Google Analytics 4	Coarse activity/page labels, session information and a random installation ID; Google sees the connection IP. Documented payload excludes prompts, replies and file paths.	If configured and connected; credentials can come from settings, environment or release defaults. `www.google-analytics.com/mp/collect`.
User-selected websites / HTTP and MCP services	Web content and tool-specific requests/results.	Browser automation, plugins and agent commands can add destinations. The list is not a network allowlist.

Optional Slack functionality exists. Its documented hosted path shares the mobile/Connect transport excluded above; any intended Slack grid installation needs its transport and deployment included explicitly in the final review scope.