

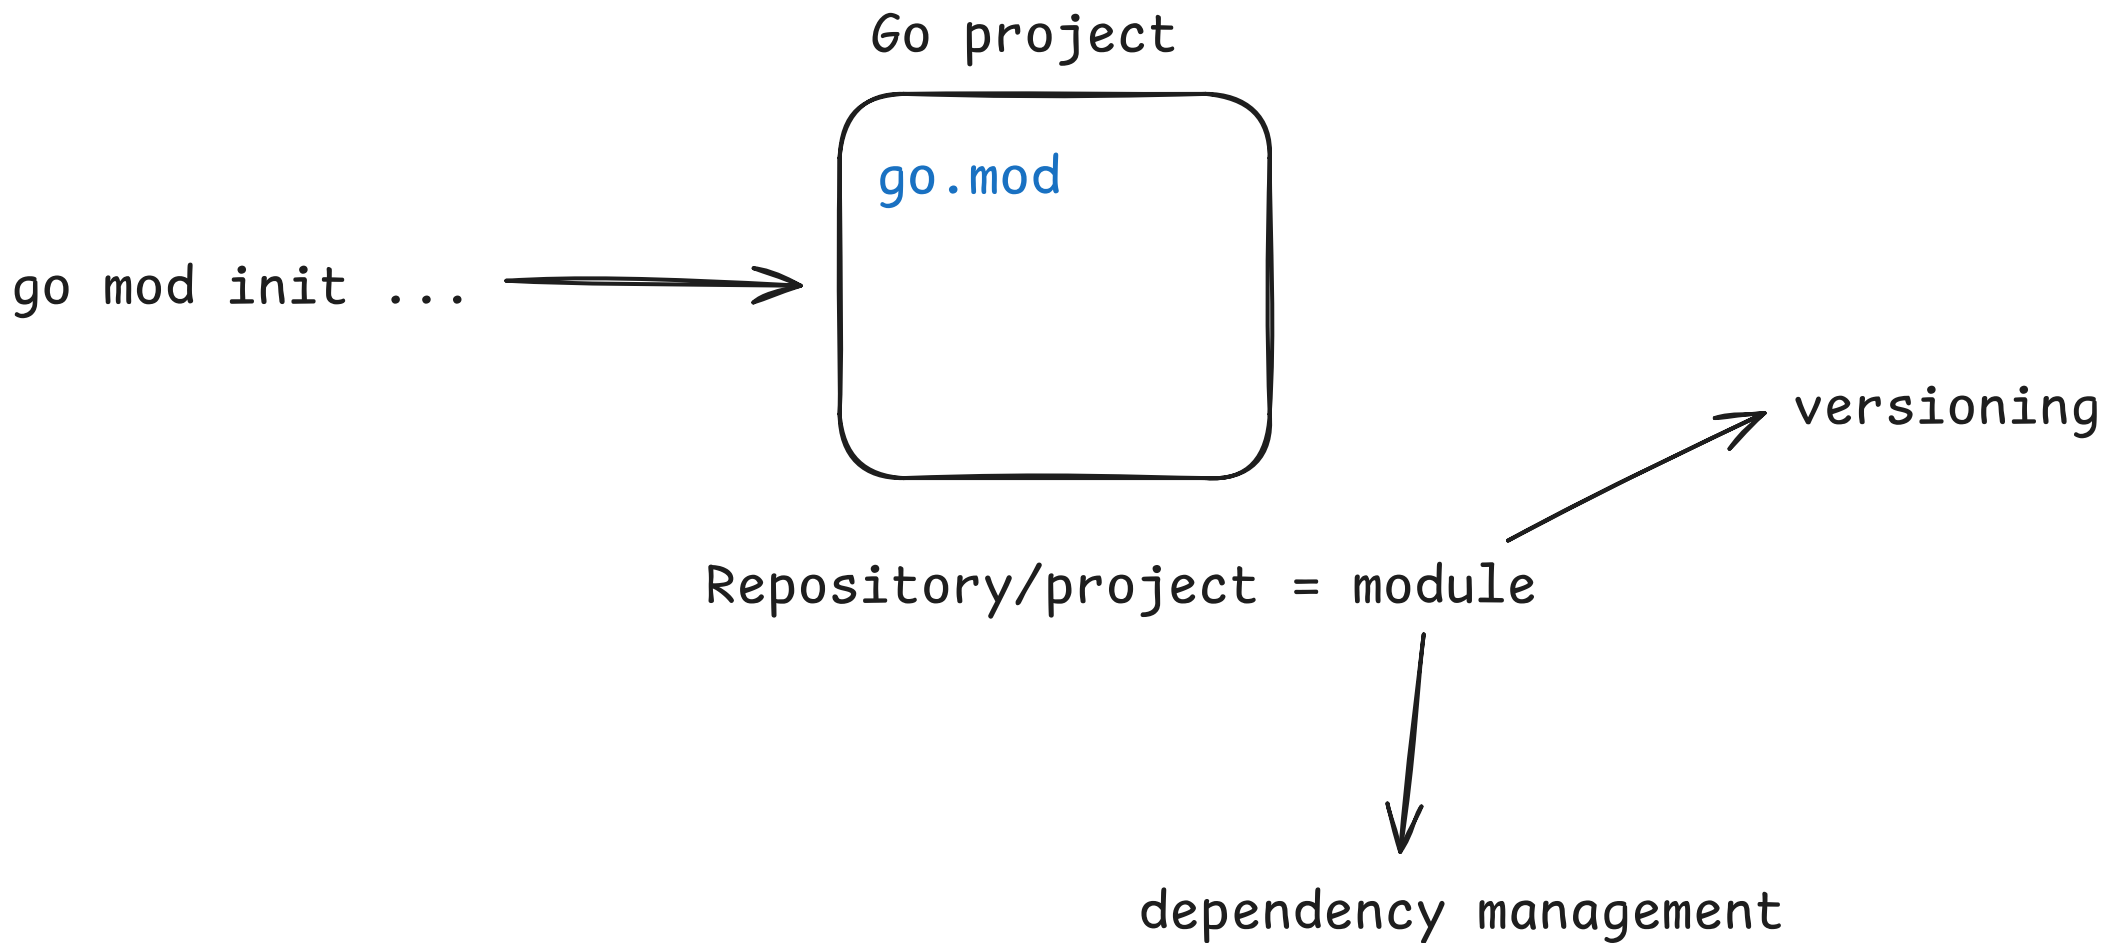


Lecture 01 - Go Foundations

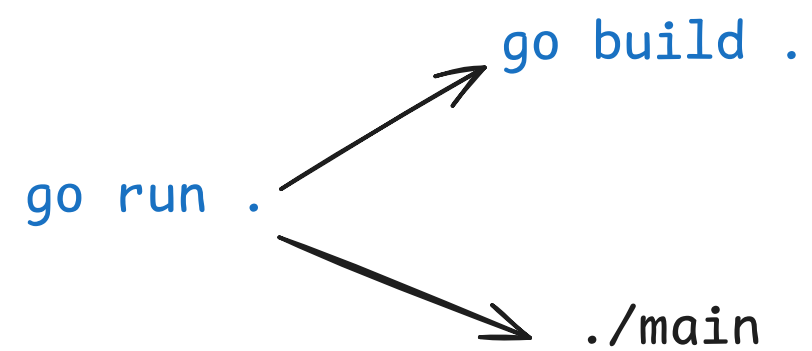

module

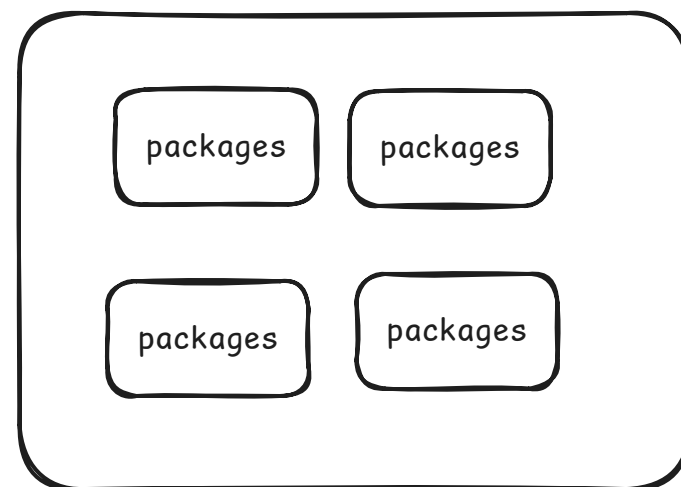


go fmt .

go test .

go vet

go mod tidy $\longrightarrow$ go.mod $\leq$ go.sum

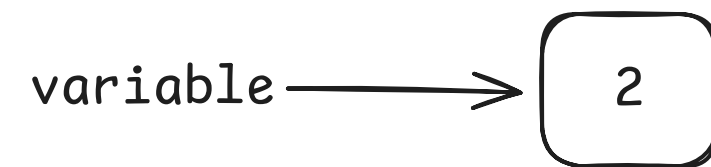

```
var age int = 2
```

Type inference:

```
var age = 2
```

Short declaration:

```
age := 2
```

available only inside
a function

```
package main  
a := 10
```

```
name := "John"  
age := 21
```

```
var (  
    name string  
    age int  
)
```

Every variable in Golang always has a value

```
var age int
```

zero values

```
fmt.Println(age)
```

```
def createName(name, suffix="bek")
```

```
    var age = 20  
    age = 21
```

```
    age := 21  
    age = "John"
```

```
func createName(name string)
```

```
func createNameWithSuffix(name, suffix string)
```

```
    const age = 20  
    age = 21
```

```
    const x = 10  
    var a int = x  
    var b float = x
```

```
var x int
var y int64
```

```
x = y
```

```
var x int = 10
var y int64 = 20
```

```
x = y
x = int(y)
```

```
a := 5
b := 2
```

```
fmt.Println(float64(a) / float64(b))
```

```
func add(a int, b int) int {
}
```

```
func add(a, b, c int) int {
}
```

```
func sayHello() {
    fmt.Println("Hello!")
}
```