SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

TPDE O0

SPECspeed®2017_int_base = 4.65

SPECspeed®2017_int_peak = Not Run

CPU2017 License: nnn (Your SPEC license number)
Test Sponsor: TPDE O0
Tested by: TPDE O0

Test Date: Mar-2026
Hardware Availability:
Software Availability:

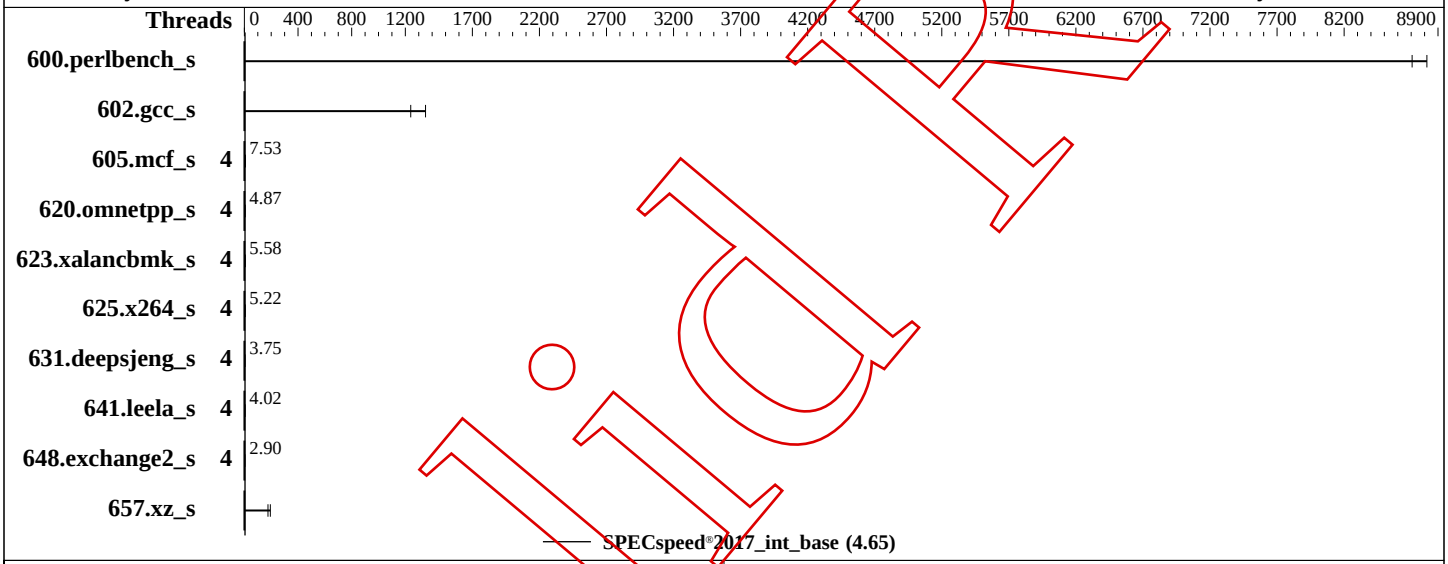

Hardware

CPU Name: AMD Ryzen 5 5600X 6-Core
Max MHz:
Nominal:
Enabled: cores, 1 chip, threads/core
Orderable:
Cache L1:
L2:
L3:
Other:
Memory: 31.242 GB fixme: If using DDR4, the format is: 'N GB (N x N GB nRxn PC4-nnnnX-X)'
Storage: 1.9 TB add more disk info here
Other:

Software

OS: Fedora release 42 (Adams) 6.18.12-200.fc43.x86_64
Compiler: TPDE
TPDE
Parallel: No
Firmware:
File System: overlay
System State: Run level N (add definition here)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other:
Power Management: --

Errors

'reportable' flag not set during run
600.perlbench_s (base) had invalid runs!
657.xz_s (base) had invalid runs!
602.gcc_s (base) had invalid runs!
Run of 600.perlbench_s (base) was not valid; status is RE
Run of 602.gcc_s (base) was not valid; status is RE
Run of 657.xz_s (base) was not valid; status is RE
Unknown flags were used! See
https://www.spec.org/cpu2017/Docs/runcpu.html#flagsurl
for information about how to get rid of this error.

Invalid Run

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

TPDE O0

SPECspeed®2017_int_base = 4.65

SPECspeed®2017_int_peak = Not Run

CPU2017 License: nnn (Your SPEC license number)
Test Sponsor: TPDE O0
Tested by: TPDE O0

Test Date: Mar-2026
Hardware Availability:
Software Availability:

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	4	0.201	0.00	0.204	0.00									
602.gcc_s	4	2.95	0.00	3.21	0.00									
605.mcf_s	4	623	7.57	**627**	**7.53**									
620.omnetpp_s	4	331	4.92	**335**	**4.87**									
623.xalancbmk_s	4	**254**	**5.58**	248	5.71									
625.x264_s	4	337	5.23	**338**	**5.22**									
631.deepsjeng_s	4	**382**	**3.75**	381	3.76									
641.leela_s	4	**424**	**4.02**	417	4.09									
648.exchange2_s	4	1009	2.91	**1013**	**2.90**									
657.xz_s	4	35.1	0.00	32.0	0.00									

SPECspeed®2017_int_base = 4.65

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/bench/llvm/lib64/:/bench/llvm/lib/:/lib64"
TPDE_LLC = "/bench/tpde/tpde-llvm/tpde-llc"
```

Platform Notes

```
 Sysinfo program /bench/spec/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on 13ec994fe132 Sun Mar  8 22:57:54 2026

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD Ryzen 5 5600X 6-Core Processor
       1  "physical id"s (chips)
       12 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 6
       siblings  : 12
       physical 0: cores 0 1 2 3 4 5

 From lscpu:
```

(Continued on next page)

Invalid Run

Platform Notes (Continued)

```
Architecture:                          x86_64
CPU op-mode(s):                        32-bit, 64-bit
Address sizes:                         48 bits physical, 48 bits virtual
Byte Order:                            Little Endian
CPU(s):                                12
On-line CPU(s) list:                   0-11
Vendor ID:                             AuthenticAMD
Model name:                            AMD Ryzen 5 5600X 6-Core Processor
CPU family:                            25
Model:                                 33
Thread(s) per core:                    2
Core(s) per socket:                    6
Socket(s):                             1
Stepping:                              0
Frequency boost:                       enabled
CPU(s) scaling MHz:                    76%
CPU max MHz:                           4654.2881
CPU min MHz:                           560.7580
BogoMIPS:                              7385.73
Flags:                                 fpu vme de pse tsc msr pae mce cx8 apic sep
mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid
aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes
xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba ibrs ibpb stibp
vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap
clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local user_shstk clzero irperf xsaveerptr rdpru wbnoinvd arat
npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes
vpclmulqdq rdpid overflow_recov succor smca fsrm debug_swap
Virtualization:                        AMD-V
L1d cache:                             192 KiB (6 instances)
L1i cache:                             192 KiB (6 instances)
L2 cache:                              3 MiB (6 instances)
L3 cache:                              32 MiB (1 instance)
NUMA node(s):                          1
NUMA node0 CPU(s):                     0-11
Vulnerability Gather data sampling:    Not affected
Vulnerability Ghostwrite:              Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit:           Not affected
Vulnerability L1tf:                    Not affected
Vulnerability Mds:                     Not affected
Vulnerability Meltdown:                Not affected
Vulnerability Mmio stale data:         Not affected
```

(Continued on next page)

Invalid RUN

Platform Notes (Continued)

```
      Vulnerability Old microcode:             Not affected
      Vulnerability Reg file data sampling:    Not affected
      Vulnerability Retbleed:                  Not affected
      Vulnerability Spec rstack overflow:      Mitigation; Safe RET
      Vulnerability Spec store bypass:         Mitigation; Speculative Store Bypass
      disabled via prctl
      Vulnerability Spectre v1:                Mitigation; usercopy/swapgs barriers and
      __user pointer sanitization
      Vulnerability Spectre v2:               Mitigation; Retpolines; IBPB conditional;
      IBRS_FW; STIBP always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
      Vulnerability Srbds:                     Not affected
      Vulnerability Tsa:                       Mitigation; Clear CPU buffers
      Vulnerability Tsx async abort:           Not affected
      Vulnerability Vmscape:                  Mitigation; IBPB before exit to userspace

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.

 From /proc/meminfo
    MemTotal:       32759452 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    fedora-release: Fedora release 42 (Adams)
    os-release:
       NAME="Fedora Linux"
       VERSION="42 (Container Image)"
       RELEASE_TYPE=stable
       ID=fedora
       VERSION_ID=42
       VERSION_CODENAME=""
       PLATFORM_ID="platform:f42"
       PRETTY_NAME="Fedora Linux 42 (Container Image)"
    redhat-release: Fedora release 42 (Adams)
    system-release: Fedora release 42 (Adams)
    system-release-cpe: cpe:/o:fedoraproject:fedora:42

 uname -a:
    Linux 13ec994fe132 6.18.12-200.fc43.x86_64 #1 SMP PREEMPT_DYNAMIC Mon Feb 16 18:58:26
    UTC 2026 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:
```

(Continued on next page)

Invalid Run

Platform Notes (Continued)

```
 gather_data_sampling:                    Not affected
 ghostwrite:                              Not affected
 indirect_target_selection:               Not affected
 itlb_multihit:                           Not affected
 CVE-2018-3620 (L1 Terminal Fault):       Not affected
 Microarchitectural Data Sampling:        Not affected
 CVE-2017-5754 (Meltdown):                Not affected
 mmio_stale_data:                         Not affected
 old_microcode:                           Not affected
 reg_file_data_sampling:                  Not affected
 retbleed:                                Not affected
 spec_rstack_overflow:                    Mitigation: Safe RET
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                          via prctl
 CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs barriers and __user
                                          pointer sanitization
 CVE-2017-5715 (Spectre variant 2):       Mitigation: Retpolines; IBPB: conditional;
                                          IBRS_FW; STIBP: always-on; RSB filling;
                                          PBRSB-eIBRS: Not affected; BHI: Not affected
 srbds:                                   Not affected
 tsa:                                     Mitigation: Clear CPU buffers
 tsx_async_abort:                         Not affected
 vmscape:                                 Mitigation: IBPB before exit to userspace


 SPEC is set to: /bench/spec
    Filesystem     Type     Size  Used Avail Use% Mounted on
    overlay        overlay  1.9T  237G  1.6T  13% /

 From /sys/devices/virtual/dmi/id
     BIOS:    American Megatrends Inc. 2201 04/08/2021
     Vendor:  ASUS
     Product: System Product Name
     Serial:  System Serial Number

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 605.mcf_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass 0) 625.x264_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=22
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=31
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=32
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Unpublished

Compiler Version Notes (Continued)

```
C       | 602.gcc_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 625.x264_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass 0) 625.x264_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=22
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
C       | 600.perlbench_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=31
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=32
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 625.x264_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid RUN

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass 0) 625.x264_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=22
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=31
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=32
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass )
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 625.x264_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
==============================================================================
C       | 602.gcc_s(base pass 0) 625.x264_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=22
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=31
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=32
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
C       | 625.x264_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Unvalidated

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass 0) 625.x264_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
```

(Continued on next page)

Compiler Version Notes (Continued)

```
+ args=("$@")
+ n=22
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=31
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
C       | 657.xz_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=32
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 625.x264_s(base pass )
------------------------------------------------------------------------------
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass 0) 625.x264_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=22
+ timetrace=
+ tracepath=
+ (( i=0 ))
```

(Continued on next page)

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=31
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=32
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 625.x264_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
==============================================================================
C       | 657.xz_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass 0) 625.x264_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=22
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 10: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=31
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=32
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 625.x264_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass 0) 625.x264_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=22
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=31
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=32
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 625.x264_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
==============================================================================
C       | 605.mcf_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass 0) 625.x264_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=22
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=31
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=32
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C       | 600.perlbench_s(base pass )
------------------------------------------------------------------------------
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/600.perlbench_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 602.gcc_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/602.gcc_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 605.mcf_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/605.mcf_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 625.x264_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/625.x264_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C       | 657.xz_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/657.xz_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++     | 631.deepsjeng_s(base pass 0) 641.leela_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
```

(Continued on next page)

Unpublished

Compiler Version Notes (Continued)

```
+ n=15
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++      | 623.xalancbmk_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=35
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++      | 620.omnetpp_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 623.xalancbmk_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 631.deepsjeng_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 641.leela_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
==============================================================================
C++     | 631.deepsjeng_s(base pass 0) 641.leela_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=15
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++     | 623.xalancbmk_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=35
+ timetrace=
+ tracepath=
+ (( i=0 ))
```

(Continued on next page)

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++      | 620.omnetpp_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 623.xalancbmk_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 631.deepsjeng_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 641.leela_s(base pass )
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++     | 631.deepsjeng_s(base pass 0) 641.leela_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=15
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=-time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Tivaliart

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 10: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++     | 623.xalancbmk_s(base pass 0)
------------------------------------------------------------------------------
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ compile=
+ args=("$@")
+ n=35
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++     | 623.xalancbmk_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++     | 631.deepsjeng_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 641.leela_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 631.deepsjeng_s(base pass 0) 641.leela_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=15
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------

==============================================================================
C++      | 620.omnetpp_s(base pass 0)
------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++      | 623.xalancbmk_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=35
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++      | 620.omnetpp_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 623.xalancbmk_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
==============================================================================
C++      | 631.deepsjeng_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 641.leela_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 631.deepsjeng_s(base pass 0) 641.leela_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=15
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++      | 623.xalancbmk_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=35
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++      | 620.omnetpp_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 623.xalancbmk_s(base pass )
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 631.deepsjeng_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 641.leela_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 631.deepsjeng_s(base pass 0) 641.leela_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=15
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
```

(Continued on next page)

Invalid Run

Invalid Run

Compiler Version Notes (Continued)

```
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
```

(Continued on next page)

Compiler Version Notes (Continued)

```
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++     | 623.xalancbmk_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=35
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n '--time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++      | 620.omnetpp_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 623.xalancbmk_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 631.deepsjeng_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 641.leela_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 631.deepsjeng_s(base pass 0) 641.leela_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=15
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
```

(Continued on next page)

Unpublished

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++      | 620.omnetpp_s(base pass 0)
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=18
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 10: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
C++      | 623.xalancbmk_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=35
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
==============================================================================
C++      | 620.omnetpp_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/620.omnetpp_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 623.xalancbmk_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/623.xalancbmk_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 631.deepsjeng_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/631.deepsjeng_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
C++      | 641.leela_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/641.leela_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=6
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/648.exchange2_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/648.exchange2_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base pass 0)
------------------------------------------------------------------------------
+ compile=
+ args=("$@")
+ n=6
+ timetrace=
+ tracepath=
+ (( i=0 ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
```

(Continued on next page)

Invalid Run

Compiler Version Notes (Continued)

```
+ timetrace=--time-trace=time_trace
+ tracepath=time_trace
+ unset 'args[i]'
+ unset 'args[i+1]'
+ (( ++i ))
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ case ${args[i]} in
+ (( ++i ))
+ (( i<n ))
+ '[' -n --time-trace=time_trace ']'
/bench/tpde-clang: line 19: output: unbound variable
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base pass )
------------------------------------------------------------------------------
specmake[1]: Entering directory
  '/bench/spec/benchspec/CPU/648.exchange2_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
specmake[1]: Leaving directory
  '/bench/spec/benchspec/CPU/648.exchange2_s/build/paper-tpde-rt-o1ir/build_base_x86_64-tpde-rt-m64.0000'
------------------------------------------------------------------------------
```

Base Unknown Flags

600.perlbench_s: "/bench/tpde-clang /bench/llvm/bin/clang -std=c99 -m64 --time-trace time_trace" (in CC)
"/bench/tpde-clang /bench/llvm/bin/clang -std=c99 -m64 --time-trace time_trace" (in LD)
"-DLONG_DOUBLEKIND=-1" (in PORTABILITY)
"-ffp-exception-behavior=ignore" (in EXTRA_PORTABILITY)
"-O1" (in OPTIMIZE)

602.gcc_s: "/bench/tpde-clang /bench/llvm/bin/clang -std=c99 -m64 --time-trace time_trace" (in CC)
"/bench/tpde-clang /bench/llvm/bin/clang -std=c99 -m64 --time-trace time_trace" (in LD)
"-ffp-exception-behavior=ignore" (in EXTRA_PORTABILITY)
"-O1" (in OPTIMIZE)

(Continued on next page)

Invalid Run

Base Unknown Flags (Continued)

605.mcf_s: "/bench/tpde-clang /bench/llvm/bin/clang -std=c99 -m64 --time-trace time_trace" (in CC)
"/bench/tpde-clang /bench/llvm/bin/clang -std=c99 -m64 --time-trace time_trace" (in LD)
"-ffp-exception-behavior=ignore" (in EXTRA_PORTABILITY)
"-O1" (in OPTIMIZE)

620.omnetpp_s: "/bench/tpde-clang /bench/llvm/bin/clang++ -std=c++03 -m64 --time-trace time_trace" (in CXX)
"/bench/tpde-clang /bench/llvm/bin/clang++ -std=c++03 -m64 --time-trace time_trace" (in LD)
"-ffp-exception-behavior=ignore" (in EXTRA_PORTABILITY)
"-O1" (in OPTIMIZE)

623.xalancbmk_s: "/bench/tpde-clang /bench/llvm/bin/clang++ -std=c++03 -m64 --time-trace time_trace" (in CXX)
"/bench/tpde-clang /bench/llvm/bin/clang++ -std=c++03 -m64 --time-trace time_trace" (in LD)
"-fdelayed-template-parsing -mlong-double-64" (in PORTABILITY)
"-ffp-exception-behavior=ignore" (in EXTRA_PORTABILITY)
"-O1" (in OPTIMIZE)

625.x264_s: "/bench/tpde-clang /bench/llvm/bin/clang -std=c99 -m64 --time-trace time_trace" (in CC)
"/bench/tpde-clang /bench/llvm/bin/clang -std=c99 -m64 --time-trace time_trace" (in LD)
"-fcommon" (in PORTABILITY)
"-ffp-exception-behavior=ignore" (in EXTRA_PORTABILITY)
"-O1" (in OPTIMIZE)

631.deepsjeng_s: "/bench/tpde-clang /bench/llvm/bin/clang++ -std=c++03 -m64 --time-trace time_trace" (in CXX)
"/bench/tpde-clang /bench/llvm/bin/clang++ -std=c++03 -m64 --time-trace time_trace" (in LD)
"-ffp-exception-behavior=ignore" (in EXTRA_PORTABILITY)
"-O1" (in OPTIMIZE)

641.leela_s: "/bench/tpde-clang /bench/llvm/bin/clang++ -std=c++03 -m64 --time-trace time_trace" (in CXX)
"/bench/tpde-clang /bench/llvm/bin/clang++ -std=c++03 -m64 --time-trace time_trace" (in LD)
"-ffp-exception-behavior=ignore" (in EXTRA_PORTABILITY)
"-O1" (in OPTIMIZE)

648.exchange2_s: "/bench/tpde-clang /bench/llvm/bin/flang --time-trace time_trace" (in FC)

(Continued on next page)

Unpublished

Base Unknown Flags (Continued)

648.exchange2_s (continued):
"/bench/tpde-clang /bench/llvm/bin/flang --time-trace time_trace" (in LD) "-O1" (in OPTIMIZE)

657.xz_s: "/bench/tpde-clang /bench/llvm/bin/clang -std=c99 -m64 --time-trace time_trace" (in CC)
"/bench/tpde-clang /bench/llvm/bin/clang -std=c99 -m64 --time-trace time_trace" (in LD)
"-ffp-exception-behavior=ignore" (in EXTRA_PORTABILITY)
"-O1" (in OPTIMIZE)

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_NO_HAS_LONG_DOUBLE -DLONG_DOUBLESIZE=8 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-march=opteron -fno-unsafe-math-optimizations -fno-strict-aliasing -fgnu89-inline -DSPEC_SUPPRESS_OPENMP(*)

C++ benchmarks:
-march=opteron -fno-unsafe-math-optimizations -DSPEC_SUPPRESS_OPENMP(*)

Fortran benchmarks:
-march=opteron -DSPEC_SUPPRESS_OPENMP(*)

(*) Indicates an optimization flag that was found in a portability variable.

Invalid Run

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

TPDE O0

SPECspeed®2017_int_base = 4.65

SPECspeed®2017_int_peak = Not Run

CPU2017 License: nnn (Your SPEC license number)
Test Sponsor: TPDE O0
Tested by: TPDE O0

Test Date: Mar-2026
Hardware Availability:
Software Availability:

Invalid Run

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2026-03-08 22:57:54+0000.
Report generated on 2026-03-09 00:53:03 by CPU2017 PDF formatter v6255.