



Name-Salman ahmed•
Roll no-2520089070

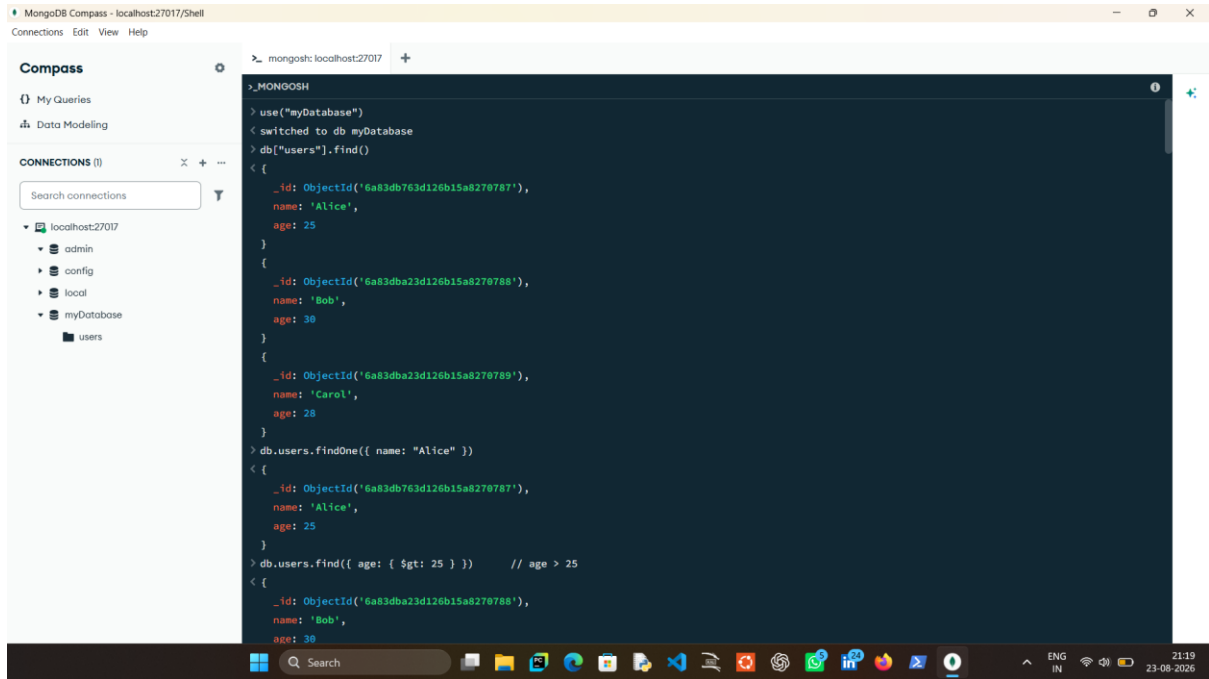

The screenshot shows the MongoDB Compass interface. On the left, the 'CONNECTIONS' panel lists the 'localhost:27017' connection, expanded to show the 'myDatabase' and 'users' collections. The main panel displays the results of a query: `db["users"].find()`. The results are a list of three documents representing users: Alice (age 25), Bob (age 30), and Carol (age 28). The status bar at the bottom indicates the time is 21:19 on 23-08-2026.


```
>_MONGOSH
> use("myDatabase")
< switched to db myDatabase
> db["users"].find()
< [
  {
    _id: ObjectId("6a83db763d126b15a8270787"),
    name: 'Alice',
    age: 25
  },
  {
    _id: ObjectId("6a83dba23d126b15a8270788"),
    name: 'Bob',
    age: 30
  },
  {
    _id: ObjectId("6a83dba23d126b15a8270789"),
    name: 'Carol',
    age: 28
  }
]
> db.users.findOne({ name: "Alice" })
< {
  _id: ObjectId("6a83db763d126b15a8270787"),
  name: 'Alice',
  age: 25
}
> db.users.find({ age: { $gt: 25 } }) // age > 25
< [
  {
    _id: ObjectId("6a83dba23d126b15a8270788"),
    name: 'Bob',
    age: 30
  }
]
```

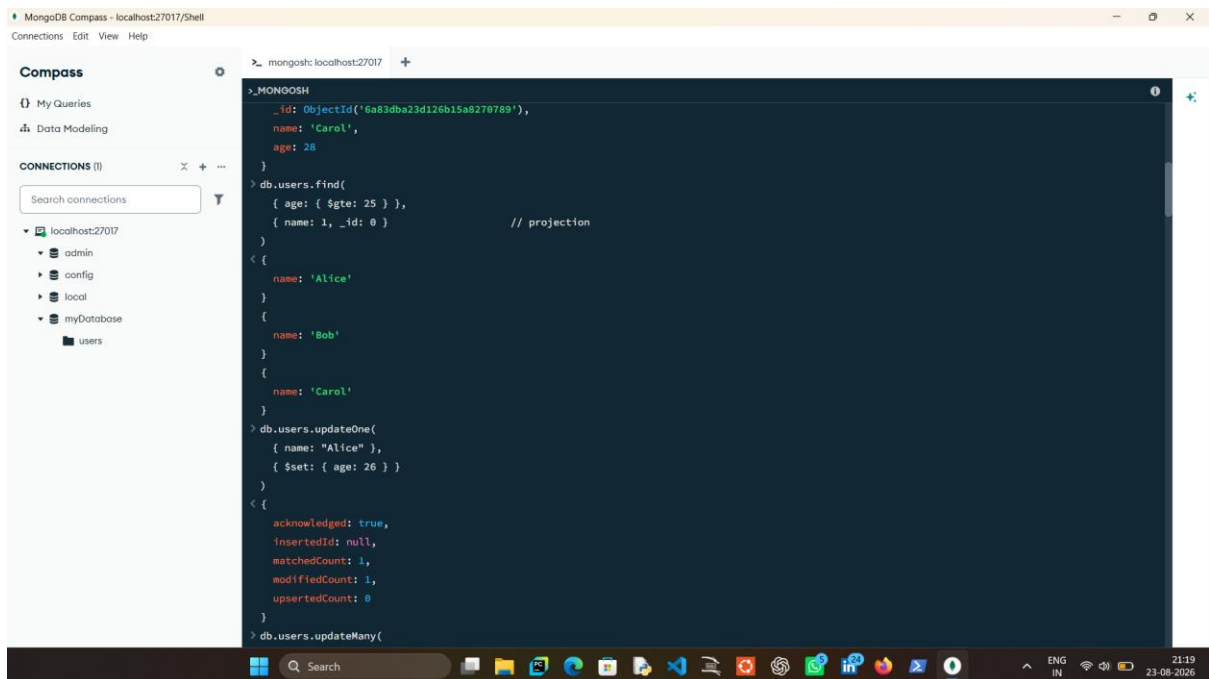

The screenshot shows the MongoDB Compass interface. The main panel displays the results of a query: `db.users.find({ age: { $gte: 25 }, { name: 1, _id: 0 } })`. The results are a list of three documents representing users: Alice (age 25), Bob (age 30), and Carol (age 28). The status bar at the bottom indicates the time is 21:19 on 23-08-2026.

```
>_MONGOSH
{
  _id: ObjectId("6a83dba23d126b15a8270789"),
  name: 'Carol',
  age: 28
}
> db.users.find(
  { age: { $gte: 25 } },
  { name: 1, _id: 0 } // projection
)
< [
  {
    name: 'Alice'
  },
  {
    name: 'Bob'
  },
  {
    name: 'Carol'
  }
]
> db.users.updateOne(
  { name: "Alice" },
  { $set: { age: 26 } }
)
< {
  acknowledged: true,
  insertedId: null,
  matchedCount: 1,
  modifiedCount: 1,
  upsertedCount: 0
}
> db.users.updateMany(
```

Name-Salman ahmed•
Roll no-2520089070

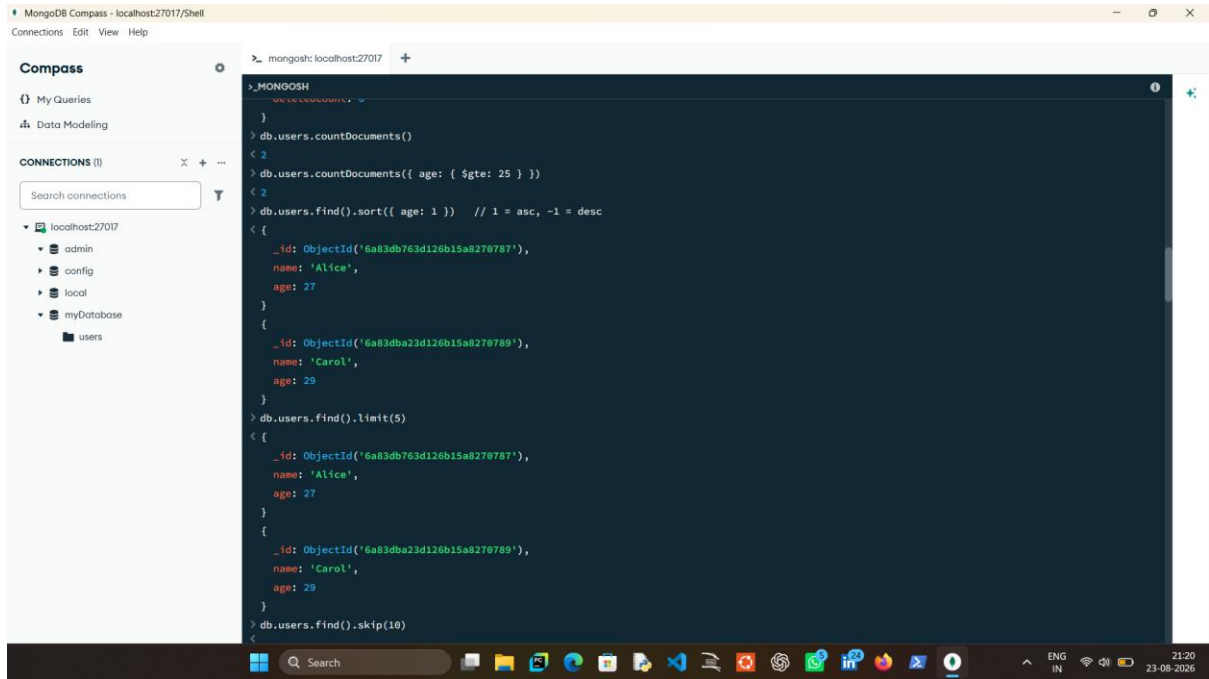

MongoDB Compass - localhost:27017/Shell

Connections Edit View Help

Compass

My Queries

Data Modeling


CONNECTIONS (1)

Search connections

localhost:27017

- admin
- config
- local
- myDatabase
 - users

```
> _MONGOSH
> db.users.countDocuments()
< 2
> db.users.countDocuments({ age: { $gte: 25 } })
< 2
> db.users.find().sort({ age: 1 }) // 1 = asc, -1 = desc
< [
  {
    _id: ObjectId('6a83db763d126b15a8270787'),
    name: 'Alice',
    age: 27
  },
  {
    _id: ObjectId('6a83db763d126b15a8270789'),
    name: 'Carol',
    age: 29
  }
]
> db.users.find().limit(5)
< [
  {
    _id: ObjectId('6a83db763d126b15a8270787'),
    name: 'Alice',
    age: 27
  },
  {
    _id: ObjectId('6a83db763d126b15a8270789'),
    name: 'Carol',
    age: 29
  }
]
> db.users.find().skip(10)
<
```

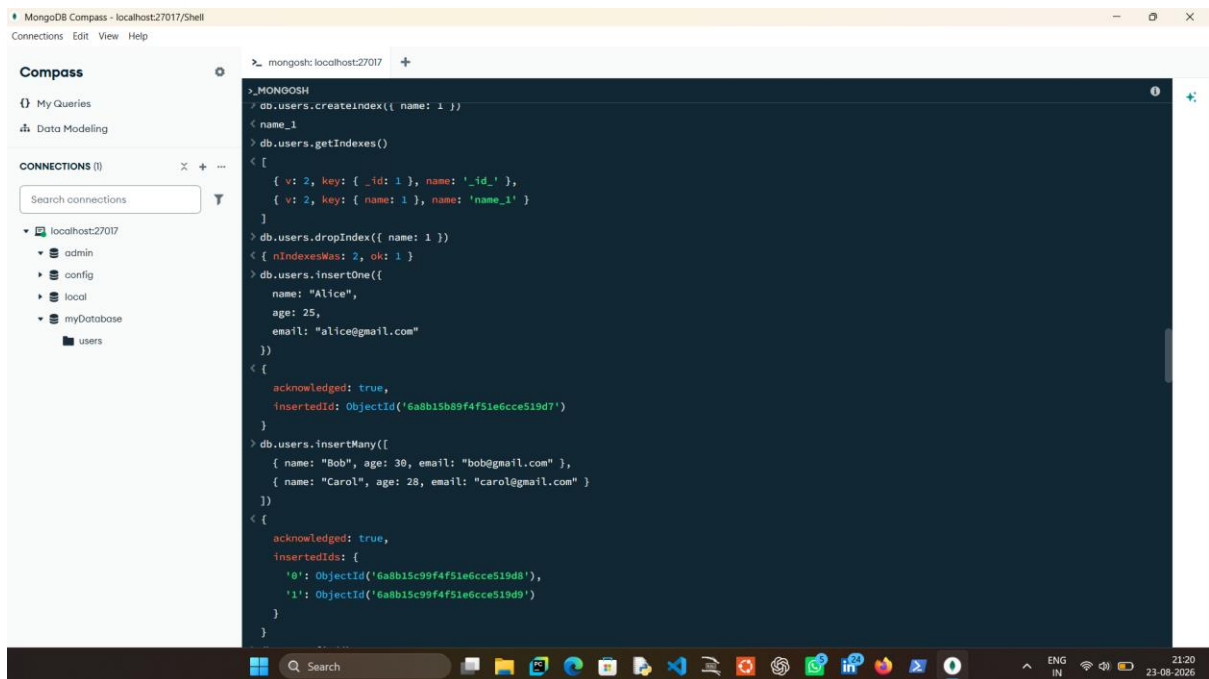

MongoDB Compass - localhost:27017/Shell

Connections Edit View Help

Compass

My Queries

Data Modeling

CONNECTIONS (1)

Search connections


localhost:27017

- admin
- config
- local
- myDatabase
 - users

```
> _MONGOSH
> db.users.createIndex({ name: 1 })
< name_1
> db.users.getIndexes()
< [
  { v: 2, key: { _id: 1 }, name: '_id_' },
  { v: 2, key: { name: 1 }, name: 'name_1' }
]
> db.users.dropIndex({ name: 1 })
< { nIndexesWas: 2, ok: 1 }
> db.users.insertOne({
  name: "Alice",
  age: 25,
  email: "alice@gmail.com"
})
< {
  acknowledged: true,
  insertedId: ObjectId('6a8b15b89f4f51e6cce519d7')
}
> db.users.insertMany([
  { name: "Bob", age: 30, email: "bob@gmail.com" },
  { name: "Carol", age: 28, email: "carol@gmail.com" }
])
< {
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('6a8b15c99f4f51e6cce519d8'),
    '1': ObjectId('6a8b15c99f4f51e6cce519d9')
  }
}
```


Name-Salman ahmed•

Roll no-2520089070

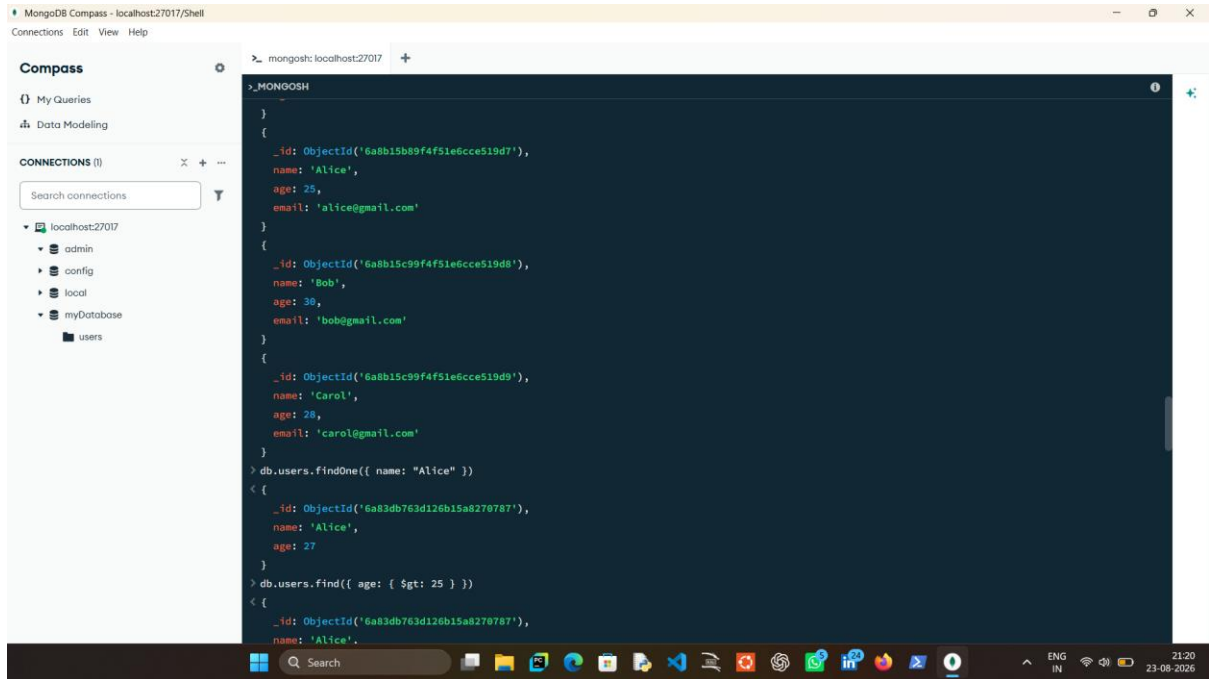

The screenshot shows the MongoDB Compass interface. On the left, the 'CONNECTIONS' panel lists the local connection 'localhost:27017' and the database 'myDatabase' with a collection 'users'. The main panel displays the 'users' collection in a JSON format. The data includes three documents for Alice, Bob, and Carol, each with a unique _id, name, age, and email. Below the collection, two queries are shown: a findOne query for Alice and a find query for users with age greater than 25.


```
>_MONGOSH
{
  "_id": ObjectId("6a8b15b89f4f51e6cce519d7"),
  "name": "Alice",
  "age": 25,
  "email": "alice@gmail.com"
}
{
  "_id": ObjectId("6a8b15c99f4f51e6cce519d8"),
  "name": "Bob",
  "age": 30,
  "email": "bob@gmail.com"
}
{
  "_id": ObjectId("6a8b15c99f4f51e6cce519d9"),
  "name": "Carol",
  "age": 28,
  "email": "carol@gmail.com"
}
> db.users.findOne( { name: "Alice" } )
< {
  "_id": ObjectId("6a83db763d126b15a8270787"),
  "name": "Alice",
  "age": 27
}
> db.users.find( { age: { $gt: 25 } } )
< {
  "_id": ObjectId("6a83db763d126b15a8270787"),
  "name": "Alice",
}
```

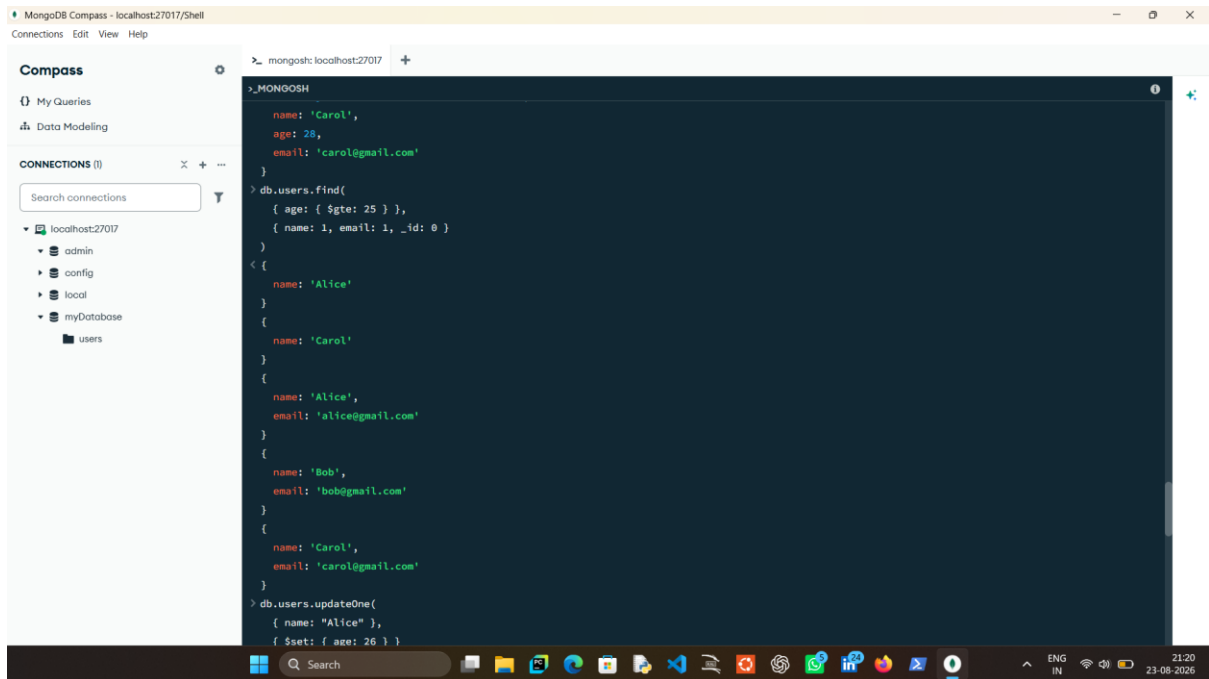

The screenshot shows the MongoDB Compass interface. On the left, the 'CONNECTIONS' panel lists the local connection 'localhost:27017' and the database 'myDatabase' with a collection 'users'. The main panel displays the 'users' collection in a JSON format. The data includes three documents for Alice, Bob, and Carol, each with a unique _id, name, age, and email. Below the collection, a query is shown that filters users by age greater than 25 and name 'Alice'.


```
>_MONGOSH
{
  "name": "Carol",
  "age": 28,
  "email": "carol@gmail.com"
}
> db.users.find(
  { age: { $gte: 25 } },
  { name: 1, email: 1, _id: 0 }
)
< {
  "name": "Alice"
}
{
  "name": "Alice",
  "email": "alice@gmail.com"
}
{
  "name": "Bob",
  "email": "bob@gmail.com"
}
{
  "name": "Carol",
  "email": "carol@gmail.com"
}
> db.users.updateOne(
  { name: "Alice" },
  { $set: { age: 26 } }
)
```

Name-Salman ahmed•
Roll no-2520089070

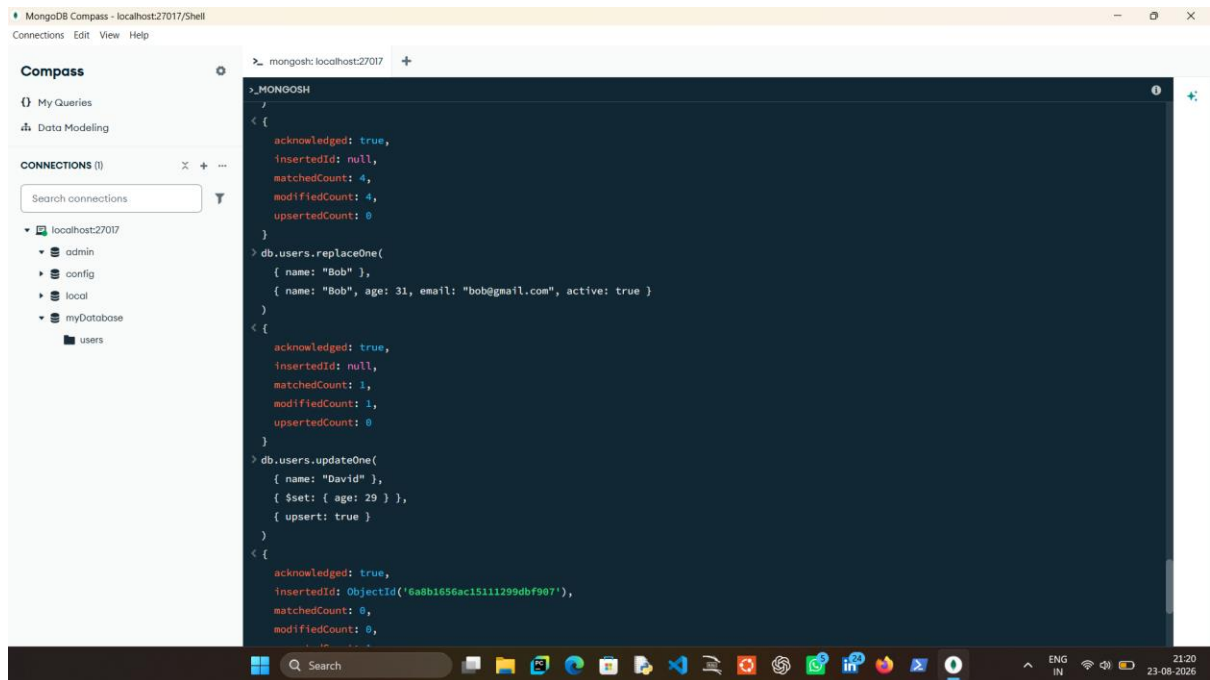

The screenshot shows the MongoDB Compass interface with a shell session open. The left sidebar displays the 'Connections' panel with a tree view showing the local connection and the 'myDatabase' collection. The main panel shows the shell output for the following commands:

```
>_MONGOSH
>
< {
  acknowledged: true,
  insertedId: null,
  matchedCount: 4,
  modifiedCount: 4,
  upsertedCount: 0
}
> db.users.replaceOne(
  { name: "Bob" },
  { name: "Bob", age: 31, email: "bob@gmail.com", active: true }
)
< {
  acknowledged: true,
  insertedId: null,
  matchedCount: 1,
  modifiedCount: 1,
  upsertedCount: 0
}
> db.users.updateOne(
  { name: "David" },
  { $set: { age: 29 } },
  { upsert: true }
)
< {
  acknowledged: true,
  insertedId: ObjectId('6a8b1656ac15111299dbf907'),
  matchedCount: 0,
  modifiedCount: 0,
  upsertedCount: 1
}
```

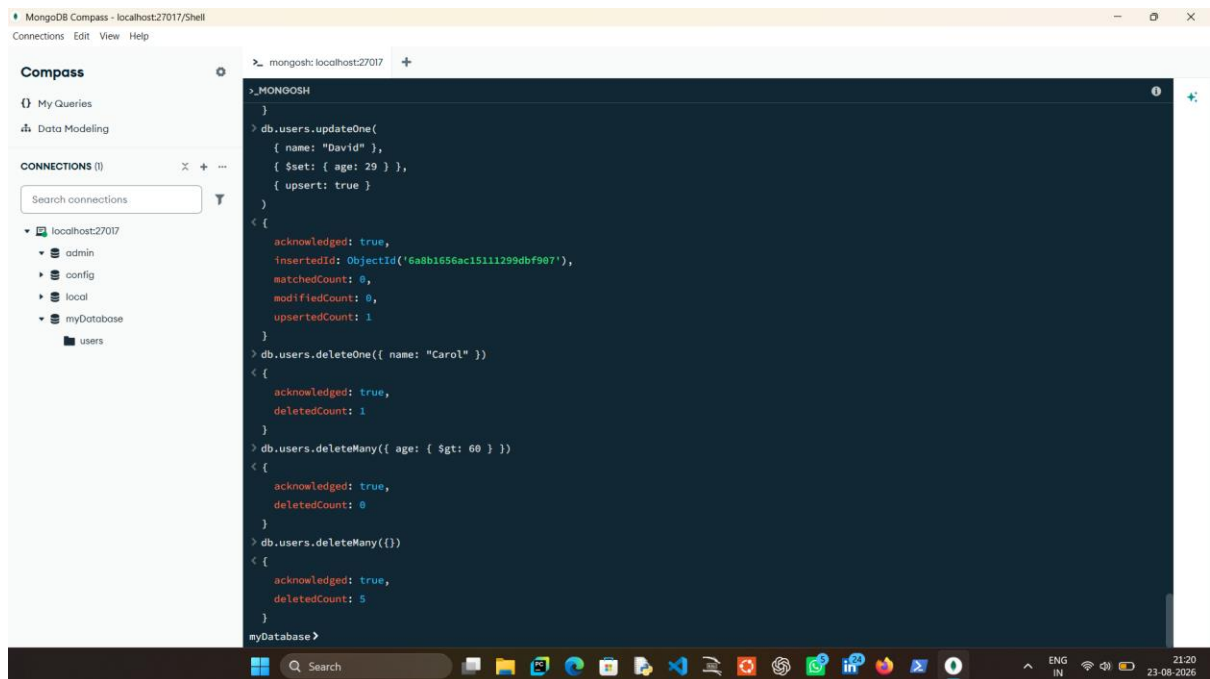

The screenshot shows the MongoDB Compass interface with a shell session open. The left sidebar displays the 'Connections' panel with a tree view showing the local connection and the 'myDatabase' collection. The main panel shows the shell output for the following commands:

```
>_MONGOSH
>
< {
  acknowledged: true,
  insertedId: null,
  matchedCount: 4,
  modifiedCount: 4,
  upsertedCount: 0
}
> db.users.replaceOne(
  { name: "Bob" },
  { name: "Bob", age: 31, email: "bob@gmail.com", active: true }
)
< {
  acknowledged: true,
  insertedId: null,
  matchedCount: 1,
  modifiedCount: 1,
  upsertedCount: 0
}
> db.users.updateOne(
  { name: "David" },
  { $set: { age: 29 } },
  { upsert: true }
)
< {
  acknowledged: true,
  insertedId: ObjectId('6a8b1656ac15111299dbf907'),
  matchedCount: 0,
  modifiedCount: 0,
  upsertedCount: 1
}
> db.users.deleteOne({ name: "Carol" })
< {
  acknowledged: true,
  deletedCount: 1
}
> db.users.deleteMany({ age: { $gt: 60 } })
< {
  acknowledged: true,
  deletedCount: 0
}
> db.users.deleteMany({})
< {
  acknowledged: true,
  deletedCount: 5
}
myDatabase>
```