



```
root@DESKTOP-GEP6I4T: ~  
mmap(NULL, 360460, PROT_READ, MAP_PRIVATE, 3, 0) = 0x72b5e5a1e000  
close(3) = 0  
fstat(1, {st_mode=S_IFCHR|0600, st_rdev=makedev(0x88, 0), ...}) = 0  
openat(AT_FDCWD, "sample.txt", O_RDONLY) = 3  
fstat(3, {st_mode=S_IFREG|0644, st_size=54, ...}) = 0  
fadvise64(3, 0, 0, POSIX_FADV_SEQUENTIAL) = 0  
mmap(NULL, 139264, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0) = 0x72b5e57de000  
read(3, "Hello Operating Systems\nThis is "..., 131072) = 54  
write(1, "Hello Operating Systems\nThis is "..., 54Hello Operating Systems  
This is my OS Lab experiment.  
) = 54  
read(3, "", 131072) = 0  
munmap(0x72b5e57de000, 139264) = 0  
close(3) = 0  
close(1) = 0  
close(2) = 0  
exit_group(0) = ?  
+++ exited with 0 +++  
root@DESKTOP-GEP6I4T:~# strace -o trace.txt cat sample.txt  
Hello Operating Systems  
This is my OS Lab experiment.  
root@DESKTOP-GEP6I4T:~# nano trace.txt  
root@DESKTOP-GEP6I4T:~# cat trace.txt  
execve("/usr/bin/cat", ["cat", "sample.txt"], 0x7ffdf7122708 /* 26 vars */) = 0  
brk(NULL) = 0x64e31c35d000  
mmap(NULL, 8192, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0) = 0x784e78e3d000  
access("/etc/ld.so.preload", R_OK) = -1 ENOENT (No such file or directory)  
openat(AT_FDCWD, "/etc/ld.so.cache", O_RDONLY|O_CLOEXEC) = 3  
fstat(3, {st_mode=S_IFREG|0644, st_size=67827, ...}) = 0  
mmap(NULL, 67827, PROT_READ, MAP_PRIVATE, 3, 0) = 0x784e78e2c000  
close(3) = 0  
openat(AT_FDCWD, "/lib/x86_64-linux-gnu/libc.so.6", O_RDONLY|O_CLOEXEC) = 3  
read(3, "\177ELF\2\1\1\3\0\0\0\0\0\0\0\3\0>\0\1\0\0\0\220\243\2\0\0\0\0"..., 832) = 832  
pread64(3, "\6\0\0\0\4\0\0\0@ \0\0\0\0\0\0\0@ \0\0\0\0\0\0\0@ \0\0\0\0\0\0\0"..., 784, 64) = 784  
fstat(3, {st_mode=S_IFREG|0755, st_size=2125328, ...}) = 0  
pread64(3, "\6\0\0\0\4\0\0\0@ \0\0\0\0\0\0\0@ \0\0\0\0\0\0\0@ \0\0\0\0\0\0\0"..., 784, 64) = 784  
mmap(NULL, 2170256, PROT_READ, MAP_PRIVATE|MAP_DENYWRITE, 3, 0) = 0x784e78c00000  
mmap(0x784e78c28000, 1605632, PROT_READ|PROT_EXEC, MAP_PRIVATE|MAP_FIXED|MAP_DENYWRITE, 3, 0x28000) = 0x784e78c28000  
mmap(0x784e78db0000, 323584, PROT_READ, MAP_PRIVATE|MAP_FIXED|MAP_DENYWRITE, 3, 0x1b0000) = 0x784e78db0000  
mmap(0x784e78dff000, 24576, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_FIXED|MAP_DENYWRITE, 3, 0x1fe000) = 0x784e78dff000  
mmap(0x784e78e05000, 52624, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_FIXED|MAP_ANONYMOUS, -1, 0) = 0x784e78e05000
```

1:27
2026


```
root@DESKTOP-GEP6I4T: ~ × + ∨
close(3) = 0
openat(AT_FDCWD, "/usr/lib/locale/C.UTF-8/LC_MONETARY", O_RDONLY|O_CLOEXEC) = -1 ENOENT (No such file or directory)
openat(AT_FDCWD, "/usr/lib/locale/C.utf8/LC_MONETARY", O_RDONLY|O_CLOEXEC) = 3
fstat(3, {st_mode=S_IFREG|0644, st_size=270, ...}) = 0
mmap(NULL, 270, PROT_READ, MAP_PRIVATE, 3, 0) = 0x784e78e2e000
close(3) = 0
openat(AT_FDCWD, "/usr/lib/locale/C.UTF-8/LC_COLLATE", O_RDONLY|O_CLOEXEC) = -1 ENOENT (No such file or directory)
openat(AT_FDCWD, "/usr/lib/locale/C.utf8/LC_COLLATE", O_RDONLY|O_CLOEXEC) = 3
fstat(3, {st_mode=S_IFREG|0644, st_size=1406, ...}) = 0
mmap(NULL, 1406, PROT_READ, MAP_PRIVATE, 3, 0) = 0x784e78e2d000
close(3) = 0
openat(AT_FDCWD, "/usr/lib/locale/C.UTF-8/LC_TIME", O_RDONLY|O_CLOEXEC) = -1 ENOENT (No such file or directory)
openat(AT_FDCWD, "/usr/lib/locale/C.utf8/LC_TIME", O_RDONLY|O_CLOEXEC) = 3
fstat(3, {st_mode=S_IFREG|0644, st_size=3360, ...}) = 0
mmap(NULL, 3360, PROT_READ, MAP_PRIVATE, 3, 0) = 0x784e78e2c000
close(3) = 0
openat(AT_FDCWD, "/usr/lib/locale/C.UTF-8/LC_NUMERIC", O_RDONLY|O_CLOEXEC) = -1 ENOENT (No such file or directory)
openat(AT_FDCWD, "/usr/lib/locale/C.utf8/LC_NUMERIC", O_RDONLY|O_CLOEXEC) = 3
fstat(3, {st_mode=S_IFREG|0644, st_size=50, ...}) = 0
mmap(NULL, 50, PROT_READ, MAP_PRIVATE, 3, 0) = 0x784e78e28000
close(3) = 0
openat(AT_FDCWD, "/usr/lib/locale/C.UTF-8/LC_CTYPE", O_RDONLY|O_CLOEXEC) = -1 ENOENT (No such file or directory)
openat(AT_FDCWD, "/usr/lib/locale/C.utf8/LC_CTYPE", O_RDONLY|O_CLOEXEC) = 3
fstat(3, {st_mode=S_IFREG|0644, st_size=360460, ...}) = 0
mmap(NULL, 360460, PROT_READ, MAP_PRIVATE, 3, 0) = 0x784e78ba7000
close(3) = 0
fstat(1, {st_mode=S_IFCHR|0600, st_rdev=makedev(0x88, 0), ...}) = 0
openat(AT_FDCWD, "sample.txt", O_RDONLY) = 3
fstat(3, {st_mode=S_IFREG|0644, st_size=54, ...}) = 0
fadvise64(3, 0, 0, POSIX_FADV_SEQUENTIAL) = 0
mmap(NULL, 139264, PROT_READ|PROT_WRITE, MAP_PRIVATE|MAP_ANONYMOUS, -1, 0) = 0x784e78b85000
read(3, "Hello Operating Systems\nThis is "..., 131072) = 54
write(1, "Hello Operating Systems\nThis is "..., 54) = 54
read(3, "", 131072) = 0
munmap(0x784e78b85000, 139264) = 0
close(3) = 0
close(1) = 0
close(2) = 0
exit_group(0) = ?
+++ exited with 0 +++
root@DESKTOP-GEP6I4T:~#
```



ENG
IN



11:28
03-08-2026

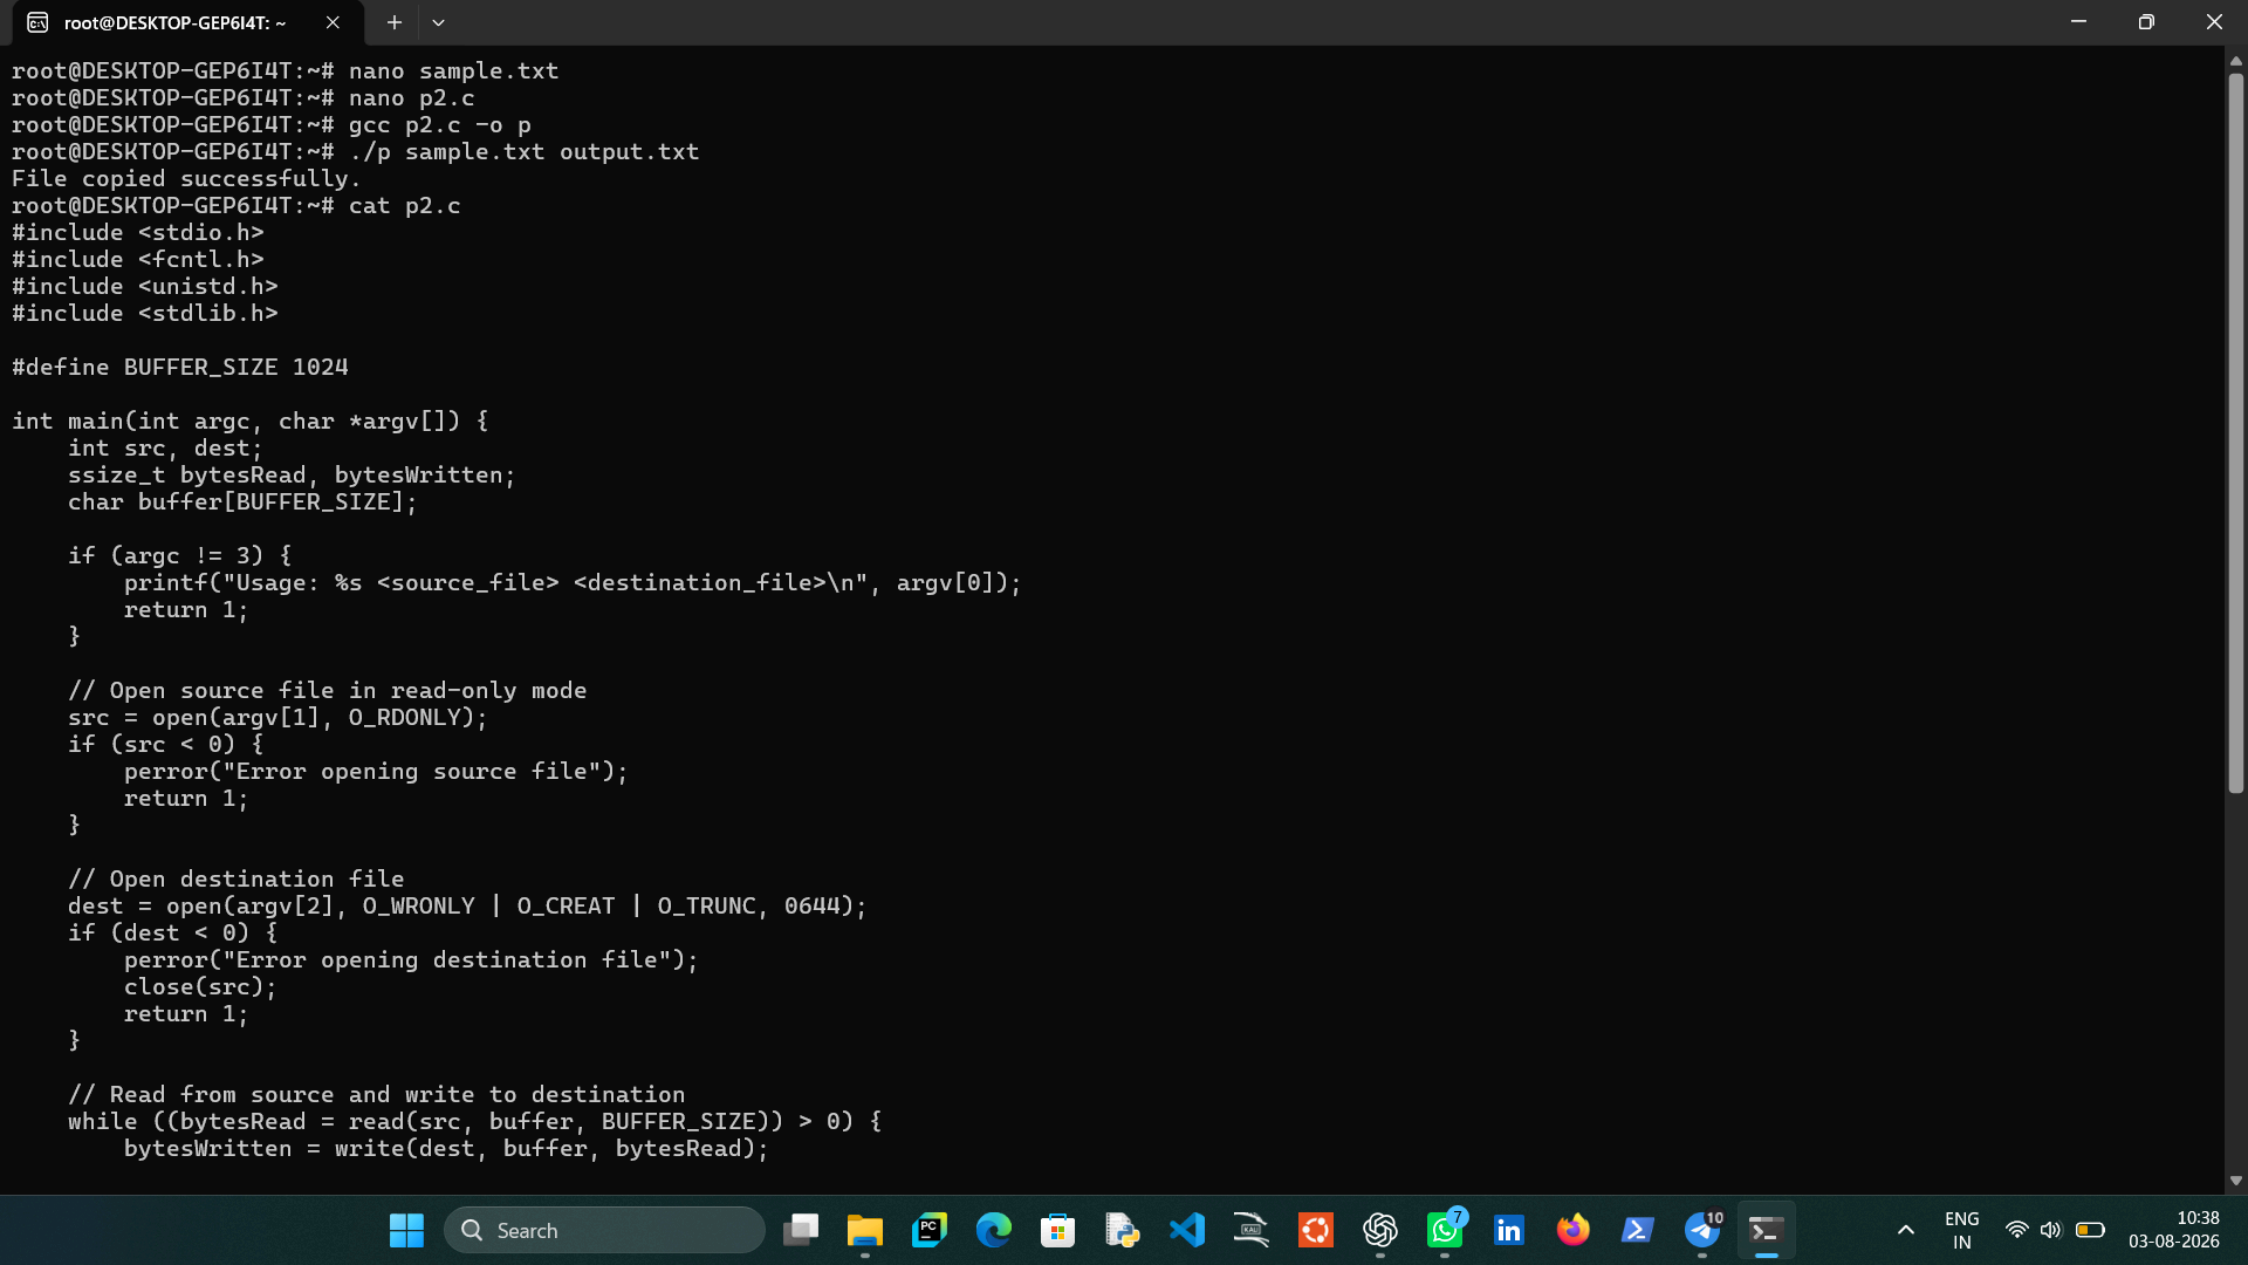

```
root@DESKTOP-GEP6I4T: ~  
root@DESKTOP-GEP6I4T:~# nano sample.txt  
root@DESKTOP-GEP6I4T:~# nano p2.c  
root@DESKTOP-GEP6I4T:~# gcc p2.c -o p  
root@DESKTOP-GEP6I4T:~# ./p sample.txt output.txt  
File copied successfully.  
root@DESKTOP-GEP6I4T:~# cat p2.c  
#include <stdio.h>  
#include <fcntl.h>  
#include <unistd.h>  
#include <stdlib.h>  
  
#define BUFFER_SIZE 1024  
  
int main(int argc, char *argv[]) {  
    int src, dest;  
    ssize_t bytesRead, bytesWritten;  
    char buffer[BUFFER_SIZE];  
  
    if (argc != 3) {  
        printf("Usage: %s <source_file> <destination_file>\n", argv[0]);  
        return 1;  
    }  
  
    // Open source file in read-only mode  
    src = open(argv[1], O_RDONLY);  
    if (src < 0) {  
        perror("Error opening source file");  
        return 1;  
    }  
  
    // Open destination file  
    dest = open(argv[2], O_WRONLY | O_CREAT | O_TRUNC, 0644);  
    if (dest < 0) {  
        perror("Error opening destination file");  
        close(src);  
        return 1;  
    }  
  
    // Read from source and write to destination  
    while ((bytesRead = read(src, buffer, BUFFER_SIZE)) > 0) {  
        bytesWritten = write(dest, buffer, bytesRead);  
    }  
}
```



Search



ENG
IN



10:38
03-08-2026