


NAME : SALMAN KHAN

REGNO : 24380

LAB : 11

TASK:1

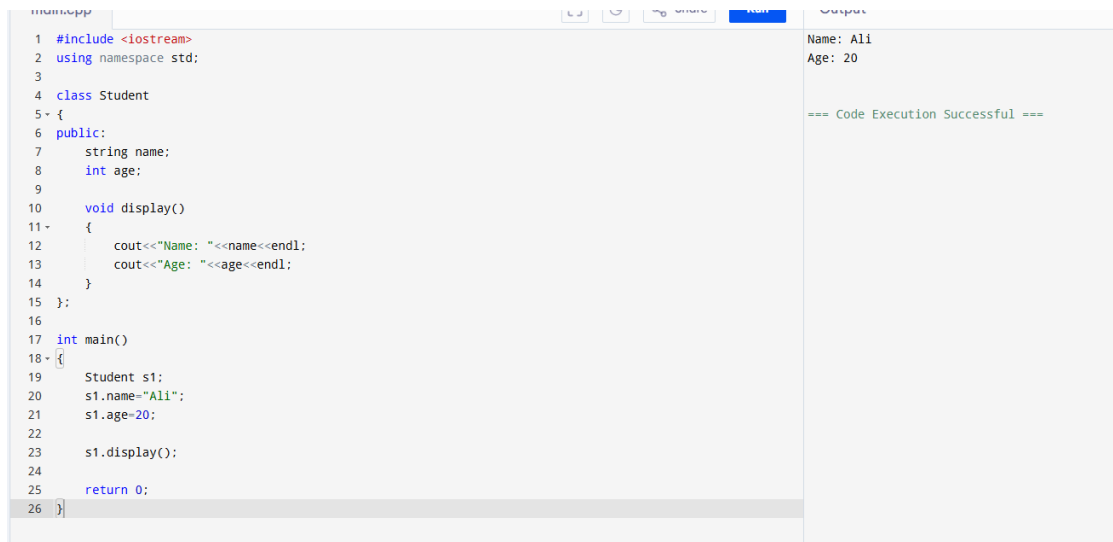

The screenshot shows a C++ IDE with a file named 'main.cpp'. The code defines a 'Student' class with a 'display()' method and a 'main()' function that creates a 'Student' object 's1' with name 'Ali' and age 20, then calls 's1.display()'. The output window on the right shows 'Name: Ali' and 'Age: 20' on separate lines, followed by '=== Code Execution Successful ==='.


```
1 #include <iostream>
2 using namespace std;
3
4 class Student
5 {
6 public:
7     string name;
8     int age;
9
10    void display()
11    {
12        cout<<"Name: "<<name<<endl;
13        cout<<"Age: "<<age<<endl;
14    }
15 };
16
17 int main()
18 {
19     Student s1;
20     s1.name="Ali";
21     s1.age=20;
22
23     s1.display();
24
25     return 0;
26 }
```

Output:

```
Name: Ali
Age: 20

=== Code Execution Successful ===
```

TASK:2

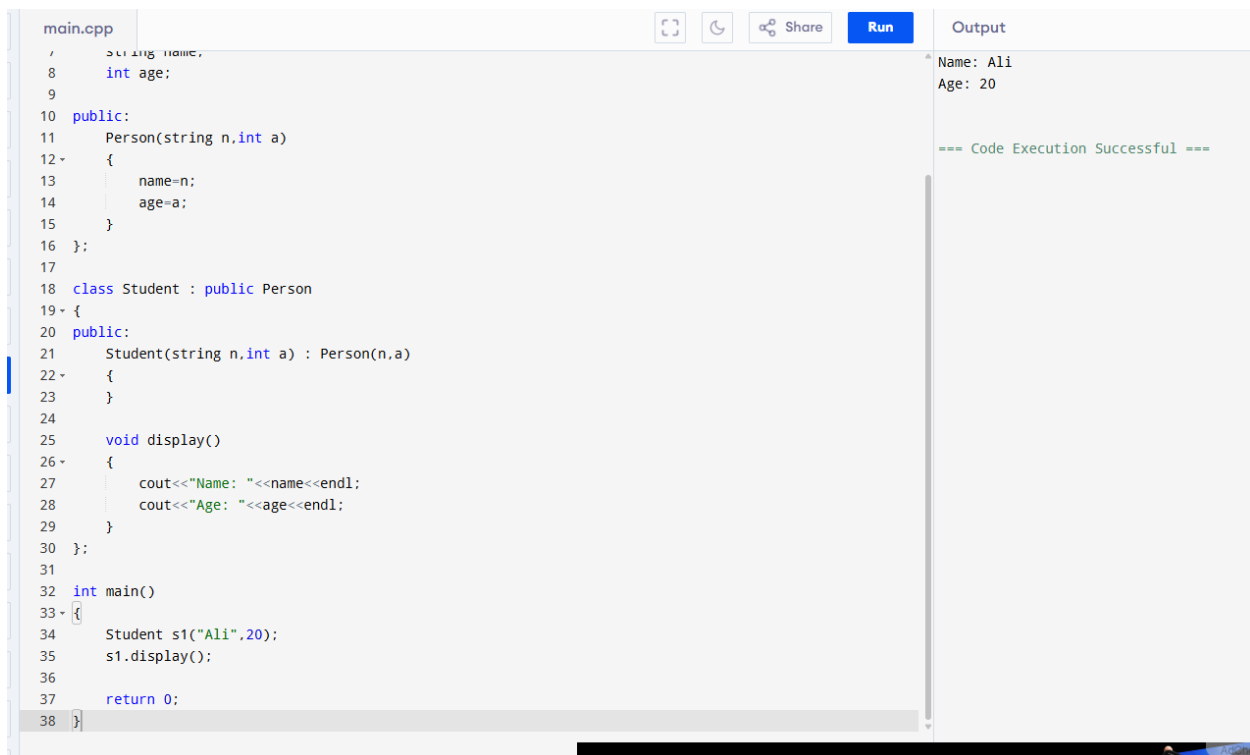

The screenshot shows a C++ IDE with a file named 'main.cpp'. The code defines a 'Person' class with a constructor and a 'display()' method, and a 'Student' class that inherits from 'Person'. The 'main()' function creates a 'Student' object 's1' with name 'Ali' and age 20, then calls 's1.display()'. The output window on the right shows 'Name: Ali' and 'Age: 20' on separate lines, followed by '=== Code Execution Successful ==='.


```
1 // string name;
2 int age;
3
4 public:
5     Person(string n,int a)
6     {
7         name=n;
8         age=a;
9     }
10 };
11
12 class Student : public Person
13 {
14 public:
15     Student(string n,int a) : Person(n,a)
16     {
17     }
18
19     void display()
20     {
21         cout<<"Name: "<<name<<endl;
22         cout<<"Age: "<<age<<endl;
23     }
24 };
25
26 int main()
27 {
28     Student s1("Ali",20);
29     s1.display();
30
31     return 0;
32 }
```

Output:

```
Name: Ali
Age: 20

=== Code Execution Successful ===
```

TASK:3

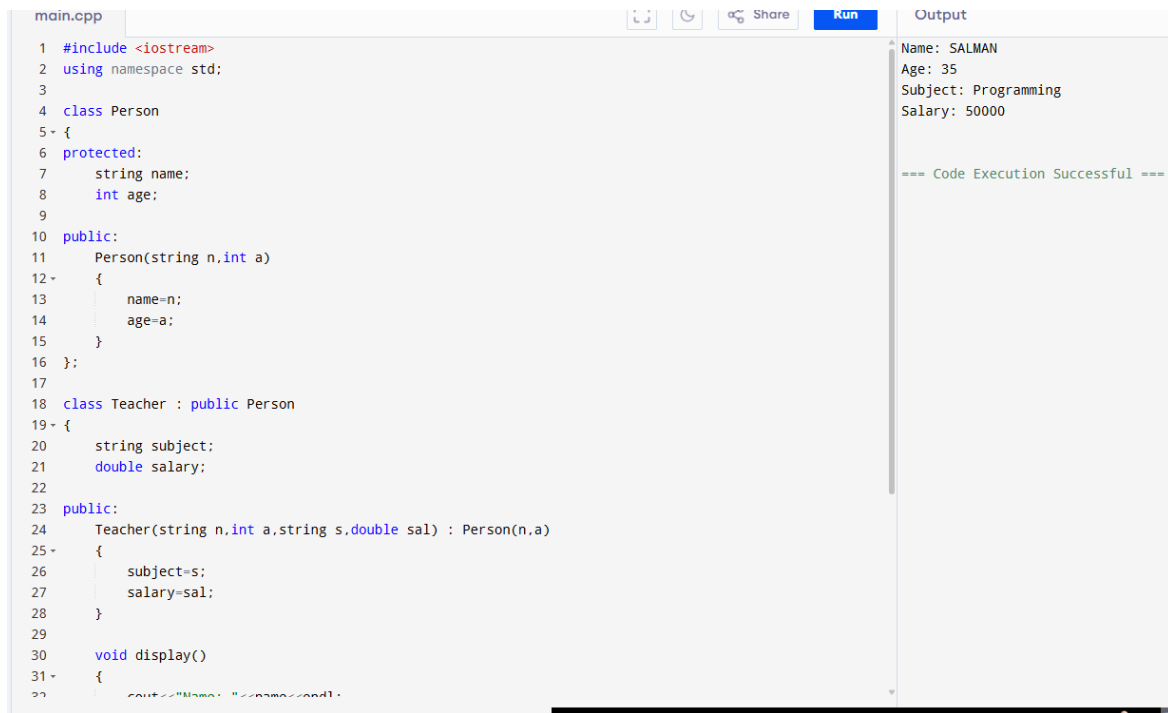


```
main.cpp
1 #include <iostream>
2 using namespace std;
3
4 class Person
5 {
6 protected:
7     string name;
8     int age;
9
10 public:
11     Person(string n,int a)
12     {
13         name=n;
14         age=a;
15     }
16 };
17
18 class Teacher : public Person
19 {
20     string subject;
21     double salary;
22
23 public:
24     Teacher(string n,int a,string s,double sal) : Person(n,a)
25     {
26         subject=s;
27         salary=sal;
28     }
29
30     void display()
31     {
32         cout<<"Name: "<<name<<endl;
```

Output

```
Name: SALMAN
Age: 35
Subject: Programming
Salary: 50000

=== Code Execution Successful ===
```

TASK:4

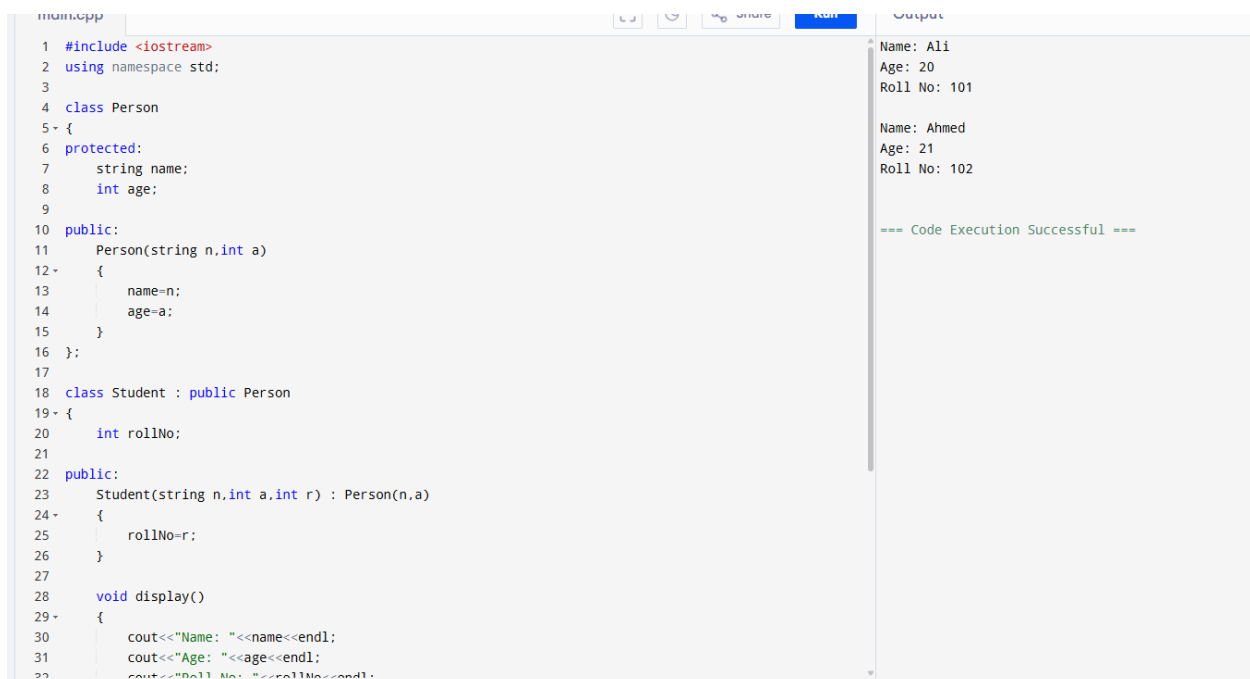

```
main.cpp
1 #include <iostream>
2 using namespace std;
3
4 class Person
5 {
6 protected:
7     string name;
8     int age;
9
10 public:
11     Person(string n,int a)
12     {
13         name=n;
14         age=a;
15     }
16 };
17
18 class Student : public Person
19 {
20     int rollNo;
21
22 public:
23     Student(string n,int a,int r) : Person(n,a)
24     {
25         rollNo=r;
26     }
27
28     void display()
29     {
30         cout<<"Name: "<<name<<endl;
31         cout<<"Age: "<<age<<endl;
32         cout<<"Roll No: "<<rollNo<<endl;
```

Output

```
Name: Ali
Age: 20
Roll No: 101

Name: Ahmed
Age: 21
Roll No: 102

=== Code Execution Successful ===
```