

GIT & GITHUB TASK – 01

1. Created a GitHub account.

The image shows two screenshots of a GitHub repository. The top screenshot displays the repository 'Bash-Scripting-Task-02' by user 'salmansbab94'. The repository is public and has a 'Public' badge. The bottom screenshot shows the repository 'GitHUB-TASK02' by the same user. This repository also has a 'Public' badge and a 'Watch' button with 0 watchers. The repository has a 'main' branch, 1 branch, and 0 tags. The commit history shows an 'Initial commit' by 'salmansbab94' with a commit hash of 'a1d9564' and a timestamp of 'now'. The commit includes two files: '.gitignore' and 'README.md', both with an 'Initial commit' timestamp. The 'README' file is visible, showing the title 'GitHUB-TASK02' and the text 'Creating repository for a task'.

Bash-Scripting-Task-02 Public

GitHUB-TASK02 Public

main 1 Branch 0 Tags

Go to file

salmansbab94 Initial commit a1d9564 · now 1 Commit

File	Commit	Timestamp
.gitignore	Initial commit	now
README.md	Initial commit	now

README

GitHUB-TASK02

Creating repository for a task

2. Set up Multi Factor Authentication for GitHub using mobile app.



Two-factor authentication (2FA) is now enabled for your GitHub account



 You have enabled two-factor authentication using your authenticator app.

Don't get locked out, configure additional authentication methods

Configuring additional authentication methods will help you gain access to your account in case you lose your device and don't have your recovery codes.

 **Passkeys**

Passkeys are webauthn credentials that validate your identity using touch, facial recognition, a device password, or a PIN. They can be used as a password replacement or as a 2FA method.

Add a passkey →

 **Security keys**

Use your device with Touch ID, Windows Hello, etc. or a physical security key (e.g. YubiKey)

Manage

 **GitHub Mobile**



Two-factor authentication (2FA) is now enabled for your GitHub account



 You have enabled two-factor authentication using your authenticator app.

Don't get locked out, configure additional authentication methods

Configuring additional authentication methods will help you gain access to your account in case you lose your device and don't have your recovery codes.

 **Passkeys**

Passkeys are webauthn credentials that validate your identity using touch, facial recognition, a device password, or a PIN. They can be used as a password replacement or as a 2FA method.

Add a passkey →

 **Security keys**

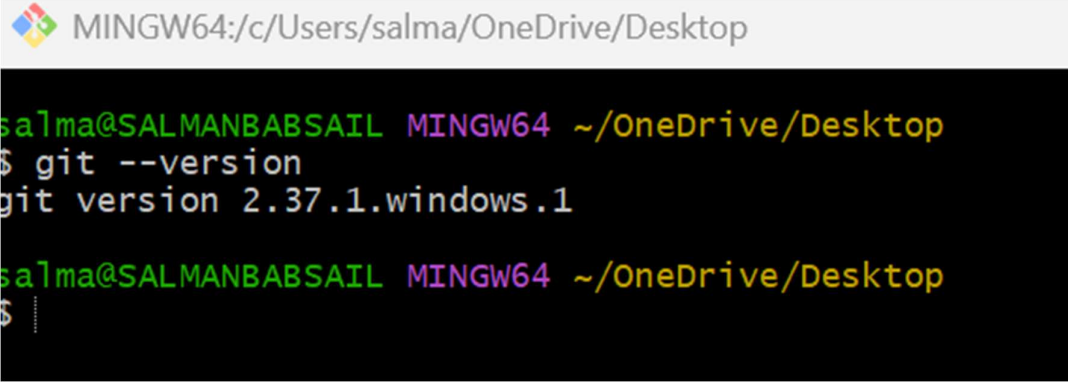
Use your device with Touch ID, Windows Hello, etc. or a physical security key (e.g. YubiKey)

Manage

 **GitHub Mobile**

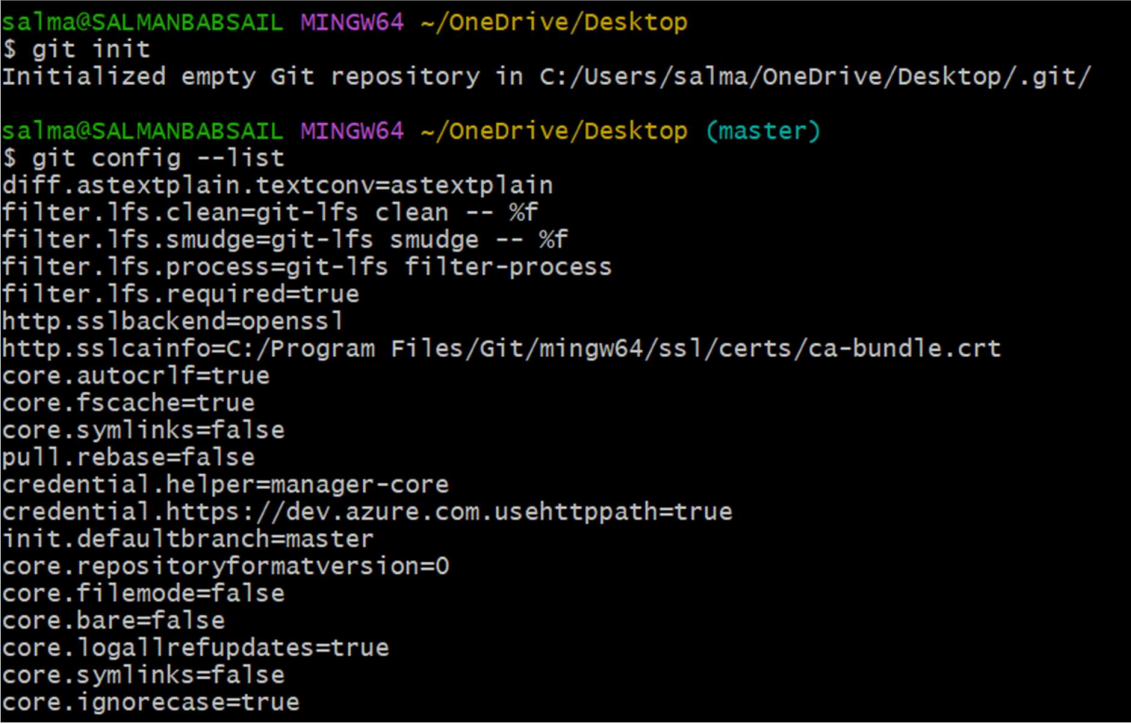
3. Execute all commands shown in the video.

a) Used `git --version` command to check the installed git version.

A terminal window with a title bar that reads "MINGW64:/c/Users/salma/OneDrive/Desktop". The prompt is "salma@SALMANBABSAIL MINGW64 ~/OneDrive/Desktop". The user enters the command "\$ git --version", and the output is "git version 2.37.1.windows.1". The prompt then changes to "\$" on a new line.

```
salma@SALMANBABSAIL MINGW64 ~/OneDrive/Desktop
$ git --version
git version 2.37.1.windows.1
salma@SALMANBABSAIL MINGW64 ~/OneDrive/Desktop
$
```

b) `git init` : To initialize the `.git/` directory.

A terminal window with a title bar that reads "MINGW64:/c/Users/salma/OneDrive/Desktop". The prompt is "salma@SALMANBABSAIL MINGW64 ~/OneDrive/Desktop". The user enters the command "\$ git init", and the output is "Initialized empty Git repository in C:/Users/salma/OneDrive/Desktop/.git/". The prompt then changes to "salma@SALMANBABSAIL MINGW64 ~/OneDrive/Desktop (master)". The user enters the command "\$ git config --list", and the output is a list of configuration settings.

```
salma@SALMANBABSAIL MINGW64 ~/OneDrive/Desktop
$ git init
Initialized empty Git repository in C:/Users/salma/OneDrive/Desktop/.git/
salma@SALMANBABSAIL MINGW64 ~/OneDrive/Desktop (master)
$ git config --list
diff.astextplain.textconv=astextplain
filter.lfs.clean=git-lfs clean -- %f
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
http.sslbackend=openssl
http.sslcainfo=C:/Program Files/Git/mingw64/ssl/certs/ca-bundle.crt
core.autocrlf=true
core.fscache=true
core.symlinks=false
pull.rebase=false
credential.helper=manager-core
credential.https://dev.azure.com.usehttppath=true
init.defaultbranch=master
core.repositoryformatversion=0
core.filemode=false
core.bare=false
core.logallrefupdates=true
core.symlinks=false
core.ignorecase=true
```

c) `$ git config --global user.name "User name"`

`$ git config --global user.email "email address"`

To configure the user name and email address associated with the GitHub account.

```

salma@SALMANBABSAIL MINGW64 ~/OneDrive/Desktop (master)
$ git config --global user.name "salmansbab94"

salma@SALMANBABSAIL MINGW64 ~/OneDrive/Desktop (master)
$ git config --global user.email "salmansbab94@outlook.com"

salma@SALMANBABSAIL MINGW64 ~/OneDrive/Desktop (master)
$ git config --list
diff.astextplain.textconv=astextplain
filter.lfs.clean=git-lfs clean -- %f
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
http.sslbackend=openssl
http.sslcainfo=C:/Program Files/Git/mingw64/ssl/certs/ca-bundle.crt
core.autocrlf=true
core.fscache=true
core.symlinks=false
pull.rebase=false
credential.helper=manager-core
credential.https://dev.azure.com.usehttppath=true
init.defaultbranch=master
user.name=salmansbab94
user.email=salmansbab94@outlook.com
core.repositoryformatversion=0
core.filemode=false
core.bare=false
core.logallrefupdates=true
core.symlinks=false
core.ignorecase=true

```

d) git add <file name>

To add the files to the local git repository

 MINGW64:/c/Users/salma

```

salma@SALMANBABSAIL MINGW64 ~ (master)
$ git init
Reinitialized existing Git repository in C:/Users/salma/.git/

salma@SALMANBABSAIL MINGW64 ~ (master)
$ touch test1 test2

salma@SALMANBABSAIL MINGW64 ~ (master)
$ git add test1 test2

salma@SALMANBABSAIL MINGW64 ~ (master)
$ git status

```

e) git commit -m "message"

To commit the files to the repository with a comment or message.

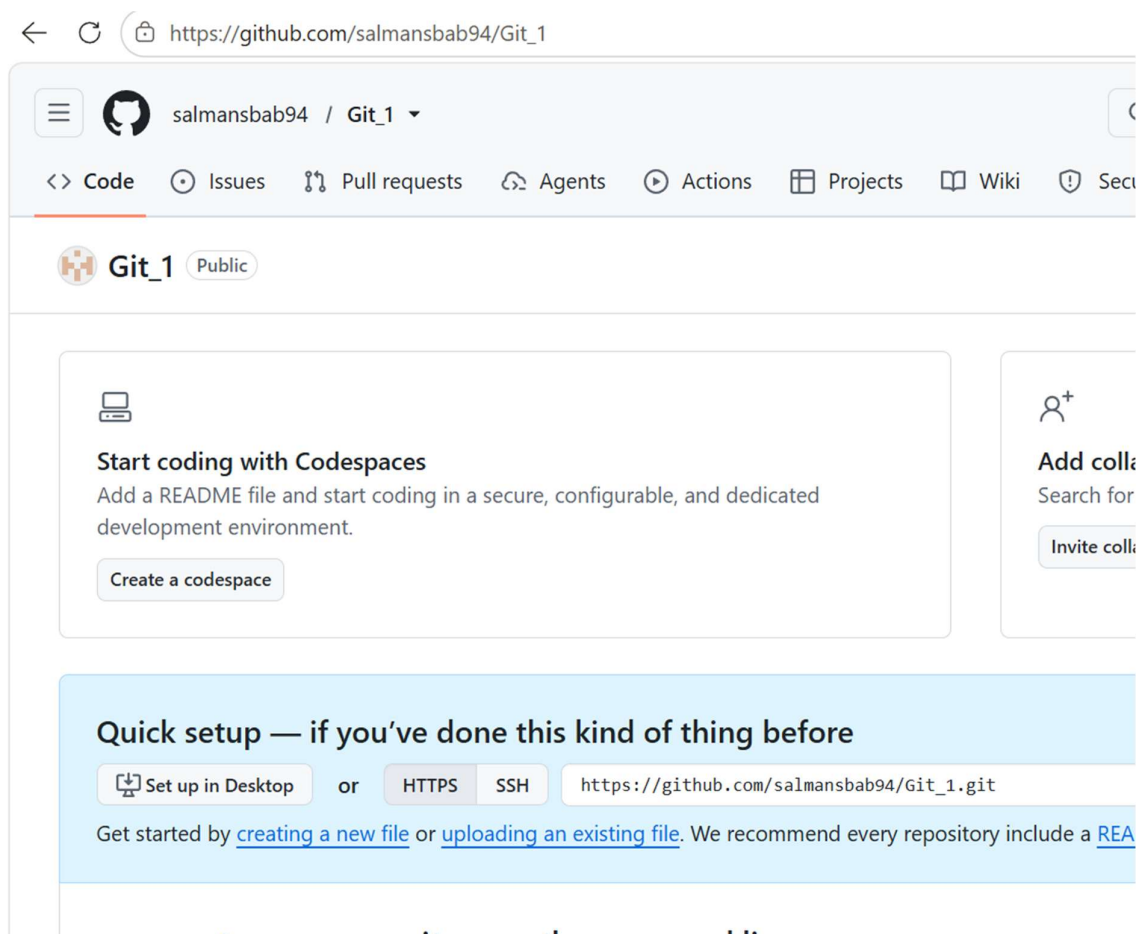
```
MINGW64:/c/Users/salma

salma@SALMANBABSAIL MINGW64 ~ (master)
$ git commit -m "added test files"
[master (root-commit) 22b3d93] added test files
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 test1
 create mode 100644 test2

salma@SALMANBABSAIL MINGW64 ~ (master)
$ git log
commit 22b3d93574227d4f54a313624b064f0db1ac95b1 (HEAD -> master)
Author: salmansbab94 <salmansbab94@outlook.com>
Date:   Wed Jul 8 20:03:37 2026 +0530

    added test files
```

f) Created a Git_1 repository in Github account



g) \$ git remote add origin <ssh url> : To add the new repository created in the Github account

\$ git remote -v : To show any existing repositories.

```
salma@SALMANBABSAIL MINGW64 ~ (master)
$ git remote add origin git@github.com:salmansbab94/Git_1.git

salma@SALMANBABSAIL MINGW64 ~ (master)
$ git remote -v
origin git@github.com:salmansbab94/Git_1.git (fetch)
origin git@github.com:salmansbab94/Git_1.git (push)

salma@SALMANBABSAIL MINGW64 ~ (master)
$ git push -u origin master
The authenticity of host 'github.com (20.207.73.82)' can't be established.
ED25519 key fingerprint is SHA256:+DiY3wvV6TuJJhbpZisF/zLDA0zPMSvHdkr4UvCoQU.
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'github.com' (ED25519) to the list of known hosts.
git@github.com: Permission denied (publickey).
fatal: Could not read from remote repository.

Please make sure you have the correct access rights
and the repository exists.
```

h) ssh-keygen : To create a ssh-keygen and add it in the Github account to connect the local machine with the Github account.

```
salma@SALMANBABSAIL MINGW64 ~ (master)
$ git push -u origin master
git@github.com: Permission denied (publickey).
fatal: Could not read from remote repository.

Please make sure you have the correct access rights
and the repository exists.

salma@SALMANBABSAIL MINGW64 ~ (master)
$ ssh-keygen
Generating public/private rsa key pair.
Enter file in which to save the key (/c/Users/salma/.ssh/id_rsa):
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /c/Users/salma/.ssh/id_rsa
Your public key has been saved in /c/Users/salma/.ssh/id_rsa.pub
The key fingerprint is:
SHA256:qGq/31cTVwwiKEYMPzPtpw98sj4tfww9euuHc5F1vDM salma@SALMANBABSAIL
The key's randomart image is:
+---[RSA 3072]-----+
|.o. . . .o*|
|o. . . .E|
|B o o . .|
|B o . . o|
|.S o o .o|
|o o o .o|
|. =+.o o.|
|.. .+.o *o+|
|...oo. .ooo ++=+|
+---[SHA256]-----+

salma@SALMANBABSAIL MINGW64 ~ (master)
$ cat /c/Users/salma/.ssh/id_rsa.pub
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQGDhtNmGWh/YzK/FxEyImcNT7C0rsF8
phrLy1ttYGP7X7ZCz04g1yAZuEDqE700/XMsq23FIQBT3qH9qgX1UxdQbqXIqOcehnu
rg4mSVomr6ru/z1P51LT/XSBOnQ83WVEOWcaJH/MFKcgpctHOCQVOAb11BSdNX7BasJ
VZAJ33d/FTxhfJ4WdTR7yTktJ4xSeFFeBLM= salma@SALMANBABSAIL

salma@SALMANBABSAIL MINGW64 ~ (master)
$ git push -u origin master
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 16 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 214 bytes | 71.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'master' on GitHub by visiting:
remote: https://github.com/salmansbab94/Git_1/pull/new/master
remote:
To github.com:salmansbab94/Git_1.git
 * [new branch] master -> master
branch 'master' set up to track 'origin/master'.
```

i) `git push -u origin master` : To push the repository from local machine to Github/central repository.

```
salma@SALMANBABSAIL MINGW64 ~ (master)
$ git push -u origin master
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 16 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 214 bytes | 71.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'master' on GitHub by visiting:
remote:   https://github.com/salmansbab94/Git_1/pull/new/master
remote:
To github.com:salmansbab94/Git_1.git
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.
```

j) git pull : To pull files from Github repository.

```

salma@SALMANBABSAIL MINGW64 ~ (master)
$ git pull
remote: Enumerating objects: 7, done.
remote: Counting objects: 100% (7/7), done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (6/6), 1.76 KiB | 39.00 KiB/s, done.
From github.com:salmansbab94/git_1
 * [new branch]      main          -> origin/main
 * [new branch]      salmansbab94-Release1 -> origin/salmansbab94-Release1
Already up to date.

salma@SALMANBABSAIL MINGW64 ~ (master)
$ ls -la
./
../
.viminfo          Links/
.vscode/          Local Settings'@
VirtualBox/       vscode-shared/
bash_history      AppData/
.cache/           'Application Data'@
.docker/          Contacts/
.git/             NTUSER.DAT
gitconfig         Documents/
lesshtp           Downloads/
.ssh/             Favorites/
                 OneDrive/

PrintHood@
Recent
'Saved Games'//
Searches/
SendTo@
'Start Menu'@
Temp'ites@
Videos/
'VirtualBox VMs'//
abc
ntuser.dat.LOG1
ntuser.dat.LOG2
ntuser.ini
salmam
test1
test2

```

k) `git clone <ssh url>` : To clone all the files from the Github repository.

```
salman@SALMANBABSAIL MINGW64 ~ (master)
$ git pull
remote: Enumerating objects: 7, done.
remote: Counting objects: 100% (7/7), done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (6/6), 1.76 KiB | 39.00 KiB/s, done.
From github.com:salmansbab94/git_1
* [new branch]      main                -> origin/main
* [new branch]      salmansbab94-Release1 -> origin/salmansbab94-Release1
Already up to date.

salman@SALMANBABSAIL MINGW64 ~ (master)
$ ls -la
./
../
.viminfo          Links/
.vscode           'Local Settings'@
.virtualbox/      'vscode-shared/'@
.bash_history     AppData/
.cache/           'Application Data'@
.docker/          Contacts/
.git/             Cookies/
.gitconfig        Documents/
.lesshst         Downloads
.ssh/            Favorites/
                 NetHood/
                 OneDrive/
                 PrintHood@
                 Recent@
                 'Saved Games'/'
                 Searches/
                 SendTo@
                 'Start Menu'@
                 Templates@
                 Videos/
                 'VirtualBox VMs'/'
ntuser.dat.LOG1
ntuser.dat.LOG2
ntuser.ini
salman
test1
test2
```

l) git log : To check the logs/activities of git.

```
MINGW64:/c/Users/salma

salma@SALMANBABSAIL MINGW64 ~ (master)
$ git log
commit aadff72043a7a057f62bf2eae3d9adc39248dd (HEAD -> master, origin/master)
Author: salmansbab94 <salmansbab94@outlook.com>
Date:   Wed Jul 8 20:27:50 2026 +0530

    added abc file

commit 22b3d93574227d4f54a313624b064f0db1ac95b1
Author: salmansbab94 <salmansbab94@outlook.com>
Date:   Wed Jul 8 20:03:37 2026 +0530

    added test files

salma@SALMANBABSAIL MINGW64 ~ (master)
$ git revert aadff7
warning: could not open directory 'Application Data/': Permission denied
warning: could not open directory 'Cookies/': Permission denied
warning: could not open directory 'Documents/My Music/': Permission denied
warning: could not open directory 'Documents/My Pictures/': Permission denied
warning: could not open directory 'Documents/My Videos/': Permission denied
warning: could not open directory 'Local Settings/': Permission denied
warning: could not open directory 'My Documents/': Permission denied
warning: could not open directory 'NetHood/': Permission denied
warning: could not open directory 'PrintHood/': Permission denied
warning: could not open directory 'Recent/': Permission denied
warning: could not open directory 'SendTo/': Permission denied
warning: could not open directory 'Start Menu/': Permission denied
warning: could not open directory 'Templates/': Permission denied
[master ea0d9af] Revert :wq"added abc file"
 1 file changed, 0 insertions(+), 0 deletions(-)
 delete mode 100644 abc
```