

Linux Task 03

1) Install nginx and run nginx on port number 81

- Launched EC2 instance on AWS cloud.
- Used `ssh -i Linux_test1.pem ec2-user@public-ip` address to remotely access the server.
- Installed nginx using `yum install nginx`

```
salm@SALMANABSAAIL MINGW64 ~/Downloads
$ ssh -i Linux_test1.pem ec2-user@54.227.124.125
The authenticity of host '54.227.124.125 (54.227.124.125)' can't be established.
ED25519 key fingerprint is SHA256:icLzO1GuJhqEG0dz8hBVzox3Om47zFCoqSi2vIBtWUM.
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])? y
Please type 'yes', 'no' or the fingerprint: yes
Warning: Permanently added '54.227.124.125' (ED25519) to the list of known hosts.
```

```
#-
~\   ####-      Amazon Linux 2023
~~~  #####\
~~~~ \###|
~~~~  #/\
~~~~  V~'-> https://aws.amazon.com/linux/amazon-linux-2023
~~~~
~~~~
~~~~
~~~~
~/m/'
```

```
Last login: Tue Jun 30 10:19:35 2026 from 18.206.107.28
[ec2-user@ip-172-31-19-215 ~]$ sudo -i
[root@ip-172-31-19-215 ~]# yum install nginx -y
Amazon Linux 2023 Kernel Livepatch repository
Dependencies resolved.
```

Package	Architecture	Version
Installing:		
nginx	x86_64	1:1.30.2
Installing dependencies:		
generic-logos-httpd	noarch	18.0.0-1
gperftools-libs	x86_64	2.9.1-1
libunwind	x86_64	1.4.0-5
nginx-core	x86_64	1:1.30.2
nginxfilesystem	noarch	1:1.30.2
nginx-mimetypes	noarch	2.1.49-


```
Transaction Summary
=====
Install 7 Packages

Total download size: 1.1 M
Installed size: 3.7 M
Downloading Packages:
(1/7): libunwind-1.4.0-5.amzn2023.0.3.x86_64.rpm
(2/7): generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch.rpm
```

- Used systemctl start nginx to start the service
- Configured the port number to 81 by editing the file available in file /etc/httpd/conf/httpd.conf using vi command.


```
[root@ip-172-31-25-27 ~]# find / -name httpd.conf
/etc/httpd/conf/httpd.conf
/usr/lib/tmpfiles.d/httpd.conf
/usr/lib/sysusers.d/httpd.conf
[root@ip-172-31-25-27 ~]# ^C
[root@ip-172-31-25-27 ~]# cat ^[[200~/etc/httpd/conf/httpd.conf
cat: '$'\033'[200~/etc/httpd/conf/httpd.conf': No such file or directory
[root@ip-172-31-25-27 ~]# cat /etc/httpd/conf/httpd.conf
#
# This is the main Apache HTTP server configuration file. It contains the
# configuration directives that give the server its instructions.
# See <URL:http://httpd.apache.org/docs/2.4/> for detailed information.
# In particular, see
# <URL:http://httpd.apache.org/docs/2.4/mod/directives.html>
# for a discussion of each configuration directive.
#
# See the httpd.conf(5) man page for more information on this configuration,
# and httpd.service(8) on using and configuring the httpd service.
#
# Do NOT simply read the instructions in here without understanding
# what they do. They're here only as hints or reminders. If you are unsure
# consult the online docs. You have been warned.
#
# Configuration and logfile names: If the filenames you specify for many
# of the server's control files begin with "/" (or "drive:/" for win32), the
# server will use that explicit path. If the filenames do *not* begin
# with "/", the value of ServerRoot is prepended -- so 'log/access_log'
# with ServerRoot set to '/www' will be interpreted by the
# server as '/www/log/access_log', where as '/log/access_log' will be
# interpreted as '/log/access_log'.
```

- By entering public-IP:81 on the browser, the Apache service is running.

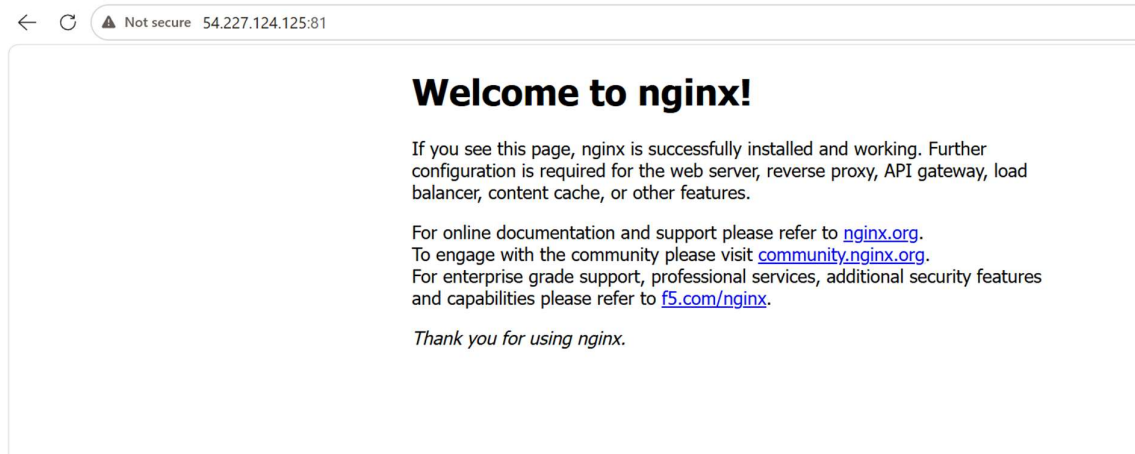

2) Deploy a sample index.html file on nginx

Used deployment location /usr/share/nginx/html to create sample index.html file.

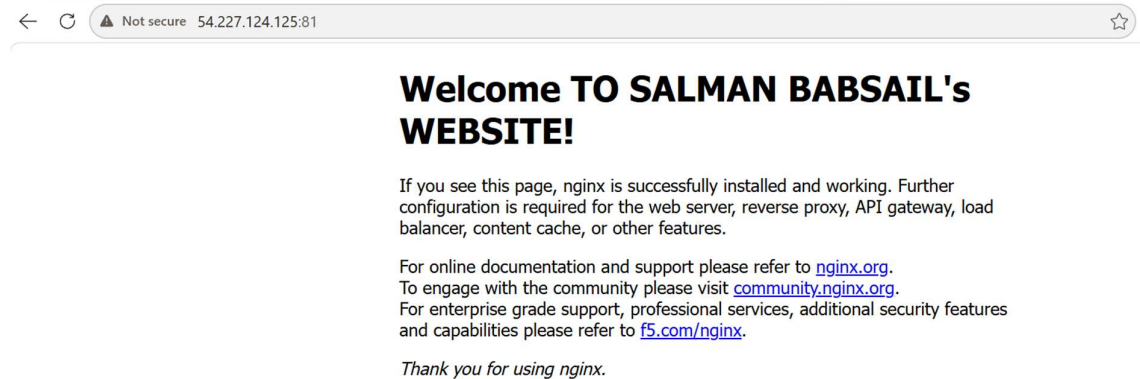

3) Install Apache and run Apache on port number 82

- Installed Apache using yum install httpd
- Used systemctl start httpd to start the service.
- Used systemctl status httpd to check the service is active or not.
- Configured the port number by making changes to httpd.conf file in location /etc/httpd/conf/httpd.conf

```
root@ip-172-31-19-215:/usr/share/nginx/html
[root@ip-172-31-19-215 html]# yum install httpd
Last metadata expiration check: 0:16:51 ago on Tue Jun 30 10:20:42 2026.
Dependencies resolved.
=====
Package                                     Architecture                               Version
=====
Installing:
httpd                                       x86_64                                    2.4.68-1.amzn2023.0.1
Installing dependencies:
apr                                         x86_64                                    1.7.5-1.amzn2023.0.4
apr-util                                   x86_64                                    1.6.3-1.amzn2023.0.2
apr-util-ldap                             x86_64                                    1.6.3-1.amzn2023.0.2
httpd-core                                x86_64                                    2.4.68-1.amzn2023.0.1
httpd-filesystem                          noarch                                     2.4.68-1.amzn2023.0.1
httpd-tools                               x86_64                                    2.4.68-1.amzn2023.0.1
libbrotli                                 x86_64                                    1.0.9-4.amzn2023.0.2
mailcap                                   noarch                                     2.1.49-3.amzn2023.0.3
Installing weak dependencies:
apr-util-openssl                           x86_64                                    1.6.3-1.amzn2023.0.2
mod_http2                                  x86_64                                    2.0.42-1.amzn2023.0.1
mod_lua                                    x86_64                                    2.4.68-1.amzn2023.0.1
Transaction Summary
=====
Install 12 Packages

Total download size: 2.3 M
Installed size: 6.9 M
Is this ok [y/N]: y
Downloading Packages:
(1/12): apr-util-1.6.3-1.amzn2023.0.2.x86_64.rpm
(2/12): apr-util-ldap-1.6.3-1.amzn2023.0.2.x86_64.rpm
(3/12): apr-1.7.5-1.amzn2023.0.4.x86_64.rpm
(4/12): apr-util-openssl-1.6.3-1.amzn2023.0.2.x86_64.rpm
(5/12): httpd-2.4.68-1.amzn2023.0.1.x86_64.rpm
```

```

Installed:
  apr-1.7.5-1.amzn2023.0.4.x86_64      apr-util-1.6.3-1.amzn2023.0.2.x86_64      apr-util-1.6.3-1.amzn2023.0.2.x86_64
  httpd-2.4.68-1.amzn2023.0.1.x86_64  httpd-core-2.4.68-1.amzn2023.0.1.x86_64    httpd-filesystem-2.4.68-1.amzn2023.0.1.x86_64
  libbrotli-1.0.9-4.amzn2023.0.2.x86_64  mailcap-2.1.49-3.amzn2023.0.3.noarch      mod_http2-2.0.42-1.amzn2023.0.1.x86_64

Complete!
[root@ip-172-31-19-215 html]# systemctl start httpd
[root@ip-172-31-19-215 html]# systemctl status httpd
● httpd.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; disabled; preset: disabled)
   Active: active (running) since Tue 2026-06-30 10:37:52 UTC; 6s ago
     Docs: man:httpd.service(8)
  Main PID: 27306 (httpd)
    Status: "Started, listening on: port 80"
    Tasks: 177 (limit: 1059)
   Memory: 13.9M
      CPU: 81ms
   CGroup: /system.slice/httpd.service
           └─27306 /usr/sbin/httpd -DFOREGROUND
             └─27328 /usr/sbin/httpd -DFOREGROUND
               └─27331 /usr/sbin/httpd -DFOREGROUND
                 └─27335 /usr/sbin/httpd -DFOREGROUND
                   └─27336 /usr/sbin/httpd -DFOREGROUND

Jun 30 10:37:52 ip-172-31-19-215.ec2.internal systemd[1]: Starting httpd.service - The Apache HTTP Server...
Jun 30 10:37:52 ip-172-31-19-215.ec2.internal systemd[1]: Started httpd.service - The Apache HTTP Server.
Jun 30 10:37:52 ip-172-31-19-215.ec2.internal httpd[27306]: Server configured, listening on: port 80
[root@ip-172-31-19-215 html]# netstat -na | grep 80
tcp        0      0 172.31.19.215:46754 169.254.169.254:80  TIME_WAIT
tcp        0      0 172.31.19.215:46760 169.254.169.254:80  TIME_WAIT
tcp        0      0 172.31.19.215:46770 169.254.169.254:80  TIME_WAIT
tcp6       0      0 :::80                :::*                LISTEN
udp6       0      0 fe80::8ff:f6ff:feac:546 :::*
unix 3      [ ]  STREAM  CONNECTED  4380
[root@ip-172-31-19-215 html]#

```

← ↻ ⚠ Not secure 54.227.124.125:82

It works!

4) Deploy a sample index.html file on Apache

Created a index.html file in deployment location /var/www/html

← ↻ ⚠ Not secure 54.227.124.125:82

HELLO & WELCOME TO SALMAN BABSAIL's WEBSITE

5) Install Apache tomcat on port number 8082

- Downloaded tomcat using wget <url download link of tomcat>
- Extracted the tar file by using tar xvf <filename>
- Started Tomcat by running bash startup.sh script in bin folder of the extracted file.

```
apache-tomcat-9.0.119 apache-tomcat-9.0.119.tar.gz
[root@ip-172-31-19-215 ~]# cd apache-tomcat-9.0.119
[root@ip-172-31-19-215 apache-tomcat-9.0.119]# ls
BUILDING.txt CONTRIBUTING.md LICENSE NOTICE README.md RELEASE-NOTES RUNNING.txt bin conf lib logs temp webapps work
[root@ip-172-31-19-215 apache-tomcat-9.0.119]# cd bin
[root@ip-172-31-19-215 bin]# ls
bootstrap.jar catalina.sh commons-daemon-native.tar.gz configtest.sh digest.sh setclasspath.bat shutdown.sh tomcat-juli.jar tool-wrapper.sh
catalina-tasks.xml ciphers.bat commons-daemon.jar daemon.sh makebase.bat setclasspath.sh startup.bat tomcat-native.tar.gz version.bat
catalina.bat ciphers.sh configtest.bat digest.bat makebase.sh shutdown.bat startup.sh tool-wrapper.bat version.sh
[root@ip-172-31-19-215 bin]# bash startup.sh
Using CATALINA_BASE:   /root/apache-tomcat-9.0.119
Using CATALINA_HOME:   /root/apache-tomcat-9.0.119
Using CATALINA_TMPDIR: /root/apache-tomcat-9.0.119/temp
Using JRE_HOME:         /usr
Using CLASSPATH:        /root/apache-tomcat-9.0.119/bin/bootstrap.jar:/root/apache-tomcat-9.0.119/bin/tomcat-juli.jar
Tomcat started.
[root@ip-172-31-19-215 bin]#
```

Configured the port number to 8082 in server.xml file in conf folder.

6) Deploy a sample file on webapps

Downloaded a sample.war file from internet and deployed in the /webapps location.

Enter in the browser 'ip-address:8082/sample to run the sample application.

```

[root@ip-172-31-19-215 bin]# cd ..
[root@ip-172-31-19-215 apache-tomcat-9.0.119]# ls
BUILDING.txt  CONTRIBUTING.md  LICENSE  NOTICE  README.md  RELEASE-NOTES  RUNNING.txt
[root@ip-172-31-19-215 apache-tomcat-9.0.119]# cd webapps
[root@ip-172-31-19-215 webapps]# ls
ROOT  docs  examples  host-manager  manager
[root@ip-172-31-19-215 webapps]# wget https://tomcat.apache.org/tomcat-7.0-doc/appdev/s
--2026-06-30 12:25:29-- https://tomcat.apache.org/tomcat-7.0-doc/appdev/sample/sample.
Resolving tomcat.apache.org (tomcat.apache.org)... 151.101.2.132, 2a04:4e42::644
Connecting to tomcat.apache.org (tomcat.apache.org)|151.101.2.132|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 4606 (4.5K)
Saving to: 'sample.war'

sample.war                                     100%[=====
2026-06-30 12:25:29 (48.5 MB/s) - 'sample.war' saved [4606/4606]

[root@ip-172-31-19-215 webapps]# ls
ROOT  docs  examples  host-manager  manager  sample.war
[root@ip-172-31-19-215 webapps]# ll
total 40
drwxr-x---. 3 root root 16384 Jun 30 11:43 ROOT
drwxr-x---. 16 root root 16384 Jun 30 11:43 docs
drwxr-x---. 7 root root 99 Jun 30 11:43 examples
drwxr-x---. 6 root root 79 Jun 30 11:43 host-manager
drwxr-x---. 6 root root 114 Jun 30 11:43 manager
drwxr-x---. 5 root root 86 Jun 30 12:25 sample
-rw-r--r--. 1 root root 4606 Mar 31 2012 sample.war
[root@ip-172-31-19-215 webapps]#

```



Not secure 54.227.124.125:8082/sample/



Sample "Hello, World" Application

This is the home page for a sample application used to illustrate the source directory organization of a web Developer's Guide.

To prove that they work, you can execute either of the following links:

- To a [JSP page](#).
- To a [servlet](#).

7) Create a tomcat.service file for tomcat.

Created a tomcat.service file in location /usr/lib/systemd/system

```
root@ip-172-31-19-215:/usr/lib/systemd/system
[root@ip-172-31-19-215 webapps]# cd
[root@ip-172-31-19-215 ~]# cd /usr/lib/systemd/system
[root@ip-172-31-19-215 system]# ls
acpid.service          initrd-parse-etc.service
acpid.service.d        initrd-root-device.target
acpid.socket           initrd-root-device.target.wants
amazon-ssm-agent.service initrd-root-fs.target
arp-ethers.service     initrd-root-fs.target.wants
atd.service            initrd-switch-root.service
auditd.service         initrd-switch-root.target
auth-rpcgss-module.service initrd-udevadm-cleanup-db.service
autovt@.service        initrd-usr-fs.target
```

```
root@ip-172-31-19-215:/usr/lib/systemd/system
[root@ip-172-31-19-215 system]# cat tomcat.service
[Unit]
Description=Apache Tomcat Web Application Container
After=network.target

[Service]
Type=forking

User=tomcat
Group=tomcat

Environment="JAVA_HOME=/usr/lib/jvm/java-17-openjdk"
Environment="CATALINA_HOME=/opt/tomcat"
Environment="CATALINA_BASE=/opt/tomcat"
Environment="CATALINA_PID=/opt/tomcat/temp/tomcat.pid"
Environment="CATALINA_OPTS=-Xms512M -Xmx1024M -server -XX:+UseParallelGC"

ExecStart=/opt/tomcat/bin/startup.sh
ExecStop=/opt/tomcat/bin/shutdown.sh

Restart=on-failure

[Install]
WantedBy=multi-user.target
[root@ip-172-31-19-215 system]# |
```

8) Configure HA Proxy server

Installed Apache httpd on Server-1 and added load balancer IP in the /etc/hosts file in and ran httpd on port 80.

```
salm@SALMANBABSAIL MINGW64 ~/Downloads
$ ssh -i Linux_test1.pem ec2-user@3.238.107.178
The authenticity of host '3.238.107.178 (3.238.107.178)' can't be established
ED25519 key fingerprint is SHA256:GJbsZdFcPU/aDzaPa3ltDyv3tB8z2a2k2S8d4MGtb3c
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '3.238.107.178' (ED25519) to the list of known hosts
```

```
#_
~\#####_      Amazon Linux 2023
~~~\#####\
~~~\###|
~~~\#/
~~~~V~'->      https://aws.amazon.com/linux/amazon-linux-2023
~~~~
~~~~.-.
~-/_/'-/_/
~/m/'-/_/

[ec2-user@ip-172-31-6-36 ~]$ sudo -i
[root@ip-172-31-6-36 ~]# yum update -y
Amazon Linux 2023 Kernel Livepatch repository
Dependencies resolved.
Nothing to do.
Complete!
[root@ip-172-31-6-36 ~]# yum install httpd -y
Last metadata expiration check: 0:00:35 ago on Wed Jul 1 06:20:49 2026.
Dependencies resolved.
```

Package	Architecture
---------	--------------

```

Installed:
apr-1.7.5-1.amzn2023.0.4.x86_64
apr-util-1.6.3-1.amzn2023.0.2.x86_64
httpd-core-2.4.68-1.amzn2023.0.1.x86_64
libbrotli-1.0.9-4.amzn2023.0.2.x86_64
mod_lua-2.4.68-1.amzn2023.0.1.x86_64

apr-util-1.6.3-1.amzn2023.0.2.x86_64
generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch
httpd-filesystem-2.4.68-1.amzn2023.0.1.noarch
mailcap-2.1.49-3.amzn2023.0.3.noarch

Complete!
[root@ip-172-31-6-36 ~]# vi /etc/hosts
[root@ip-172-31-6-36 ~]# cat /etc/hosts
127.0.0.1    localhost localhost.localdomain localhost4 localhost4.localdomain4
::1         localhost6 localhost6.localdomain6
32.195.45.130 load balancer
[root@ip-172-31-6-36 ~]# ping load_balancer -c 4
ping: load_balancer: Name or service not known
[root@ip-172-31-6-36 ~]# ping load_balancer -c 4
PING load (32.195.45.130) 56(124) bytes of data.

--- load ping statistics ---
4 packets transmitted, 0 received, 100% packet loss, time 3102ms

[root@ip-172-31-6-36 ~]# systemctl start httpd
[root@ip-172-31-6-36 ~]# systemctl status httpd
● httpd.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; disabled; preset: disabled)
   Active: active (running) since Wed 2026-07-01 06:25:44 UTC; 11s ago
     Docs: man:httpd.service(8)
    Main PID: 26104 (httpd)
   Status: "Total requests: 0; Idle/Busy workers 100/0; Requests/sec: 0; Bytes served/sec: 0 B/sec"
     Tasks: 177 (limit: 1059)
    Memory: 13.9M
       CPU: 85ms
    CGroup: /system.slice/httpd.service
            └─26104 /usr/sbin/httpd -DFOREGROUND
              └─26128 /usr/sbin/httpd -DFOREGROUND
                └─26129 /usr/sbin/httpd -DFOREGROUND
                  └─26130 /usr/sbin/httpd -DFOREGROUND
                    └─26131 /usr/sbin/httpd -DFOREGROUND

Jul 01 06:25:44 ip-172-31-6-36.ec2.internal systemd[1]: Starting httpd.service - The Apache HTTP Server...
Jul 01 06:25:44 ip-172-31-6-36.ec2.internal systemd[1]: Started httpd.service - The Apache HTTP Server.
Jul 01 06:25:44 ip-172-31-6-36.ec2.internal httpd[26104]: Server configured. Listening on: port 80.
```


← ↻ ⚠ Not secure 3.238.107.178

It works!

```
Installed:
apr-1.7.5-1.amzn2023.0.4.x86_64                apr-util-1.6.3-1.amzn2023.0.2.x86_64
apr-util-openssl-1.6.3-1.amzn2023.0.2.x86_64  generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch
httpd-core-2.4.68-1.amzn2023.0.1.x86_64      httpd-filesystem-2.4.68-1.amzn2023.0.1.noarch
libbrotli-1.0.9-4.amzn2023.0.2.x86_64        mailcap-2.1.49-3.amzn2023.0.3.noarch
mod_lua-2.4.68-1.amzn2023.0.1.x86_64

Complete!
[root@ip-172-31-6-36 ~]# vi /etc/hosts
[root@ip-172-31-6-36 ~]# cat /etc/hosts
127.0.0.1    localhost localhost.localdomain localhost4 localhost4.localdomain4
::1         localhost6 localhost6.localdomain6
32.195.45.130 load balancer
[root@ip-172-31-6-36 ~]# ping load_balancer -c 4
ping: load_balancer: Name or service not known
[root@ip-172-31-6-36 ~]# ping load balancer -c 4
PING load (32.195.45.130) 56(124) bytes of data.

--- load ping statistics ---
4 packets transmitted, 0 received, 100% packet loss, time 3102ms

[root@ip-172-31-6-36 ~]# systemctl start httpd
[root@ip-172-31-6-36 ~]# systemctl status httpd
● httpd.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; disabled; preset: disabled)
   Active: active (running) since Wed 2026-07-01 06:25:44 UTC; 11s ago
     Docs: man:httpd.service(8)
  Main PID: 26104 (httpd)
    Status: "Total requests: 0; Idle/Busy workers 100/0; Requests/sec: 0; Bytes served/sec: 0 B/sec"
     Tasks: 177 (limit: 1059)
    Memory: 13.9M
       CPU: 85ms
    CGroup: /system.slice/httpd.service
            └─26104 /usr/sbin/httpd -DFOREGROUND
              └─26128 /usr/sbin/httpd -DFOREGROUND
                └─26129 /usr/sbin/httpd -DFOREGROUND
                  └─26130 /usr/sbin/httpd -DFOREGROUND
                    └─26131 /usr/sbin/httpd -DFOREGROUND

Jul 01 06:25:44 ip-172-31-6-36.ec2.internal systemd[1]: Starting httpd.service - The Apache HTTP Server...
Jul 01 06:25:44 ip-172-31-6-36.ec2.internal systemd[1]: Started httpd.service - The Apache HTTP Server.
Jul 01 06:25:44 ip-172-31-6-36.ec2.internal httpd[26104]: Server configured, listening on: port 80
```

Installed nginx on Server-2 and added load balancer IP in /etc/hosts file and ran nginx on port number 80

```
salma@SALMANBABSAIL MINGW64 ~/Downloads
$ ssh -i Linux_test1.pem ec2-user@100.60.79.176
The authenticity of host '100.60.79.176 (100.60.79.176)' can't be established.
ED25519 key fingerprint is SHA256:zR/TiywzLHQktpZVwY/uMlcd7KezX9Rmg9cxEvma1zM.
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '100.60.79.176' (ED25519) to the list of known hosts.

##### Amazon Linux 2023
#####
##### https://aws.amazon.com/linux/amazon-linux-2023
#####

[ec2-user@ip-172-31-1-157 ~]$ sudo -i
[root@ip-172-31-1-157 ~]# yum update -y
Amazon Linux 2023 Kernel Livepatch repository
Dependencies resolved.
Nothing to do.
Complete!
[root@ip-172-31-1-157 ~]# yum install nginx -y
Last metadata expiration check: 0:00:36 ago on wed Jul 1 06:31:40 2026.
Dependencies resolved.

=====
Package                                     Architecture                               Ver
=====
Installing:
nginx                                       x86_64                                    1:1
Installing dependencies:
generic-logos-httpd                       noarch                                    18.
=====
```

```

Installed:
  generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch      gperftools-libs-2.9.
  nginx-1:1.30.2-1.amzn2023.0.1.x86_64                 nginx-core-1:1.30.2-
  nginx-mimetypes-2.1.49-3.amzn2023.0.3.noarch

Complete!
[root@ip-172-31-1-157 ~]# vi /etc/hosts
[root@ip-172-31-1-157 ~]# cat /etc/hosts
127.0.0.1      localhost localhost.localdomain localhost4 localhost4.localdomain4
::1           localhost6 localhost6.localdomain6
32.195.45.130 load balancer
[root@ip-172-31-1-157 ~]# ping load balancer -c 4
PING load (32.195.45.130) 56(124) bytes of data.

--- load ping statistics ---
4 packets transmitted, 0 received, 100% packet loss, time 3135ms

```

```

[root@ip-172-31-1-157 ~]# systemctl start nginx
[root@ip-172-31-1-157 ~]# systemctl status nginx
● nginx.service - The nginx HTTP and reverse proxy server
   Loaded: loaded (/usr/lib/systemd/system/nginx.service; disabled; preset: disabled)
   Active: active (running) since Wed 2026-07-01 06:37:20 UTC; 7s ago
     Process: 26278 ExecStartPre=/usr/bin/rm -f /run/nginx.pid (code=exited, status=0/SUCCESS)
     Process: 26285 ExecStartPre=/usr/sbin/nginx -t (code=exited, status=0/SUCCESS)
     Process: 26296 ExecStart=/usr/sbin/nginx (code=exited, status=0/SUCCESS)
   Main PID: 26308 (nginx)
      Tasks: 3 (limit: 1059)
     Memory: 3.5M
        CPU: 79ms
    CGroup: /system.slice/nginx.service
            └─26308 "nginx: master process /usr/sbin/nginx"
              └─26309 "nginx: worker process"
                └─26310 "nginx: worker process"

Jul 01 06:37:20 ip-172-31-1-157.ec2.internal systemd[1]: Starting nginx.service - The nginx HTTP and reverse proxy server...
Jul 01 06:37:20 ip-172-31-1-157.ec2.internal nginx[26285]: nginx: the configuration file /etc/nginx/nginx.conf syntax is ok
Jul 01 06:37:20 ip-172-31-1-157.ec2.internal nginx[26285]: nginx: configuration file /etc/nginx/nginx.conf test is successful
Jul 01 06:37:20 ip-172-31-1-157.ec2.internal systemd[1]: Started nginx.service - The nginx HTTP and reverse proxy server.

```

Not secure 100.60.79.176

Welcome to nginx!

If you see this page, nginx is successfully installed and working. Further configuration is required for the web server, reverse proxy, API gateway, load balancer, content cache, or other features.

For online documentation and support please refer to nginx.org.
 To engage with the community please visit community.nginx.org.
 For enterprise grade support, professional services, additional security features and capabilities please refer to f5.com/nginx.

Thank you for using nginx.

Installed haproxy service and added Server-1 and Server-2 Ips in /etc/hosts and /etc/haproxy/haproxy.cfg files and changed the port number to 80 in the config file and started haproxy service.

Entered the IP address of HA-Proxy-Server in the browser and the load balancer distributed the load to Server-1 and Server-2.

