

IAM TASK

1. Create one IAM user and assign EC2 and S3 full access roles.

Steps:

IAM → IAM Users → Create User → Provide EC2fullaccesspolicy and S3fullaccesspolicy in the permissions section.

Result : Created one task-user with the above permissions.

The screenshot shows the 'Review and create' step in the AWS IAM console. The left sidebar indicates the current step is 'Review and create' (Step 3). The main content area shows the 'User details' and 'Permissions summary'.

User details

User name	Console password type	Require password reset
Task-user	None	No

Permissions summary

Name	Type	Used as
AmazonEC2FullAccess	AWS managed	Permissions policy
AmazonS3FullAccess	AWS managed	Permissions policy

The second screenshot shows the 'Task-user' page in the AWS IAM console. A green notification banner at the top states 'User created successfully' and provides a 'View user' button. The 'Permissions' tab is selected, showing a list of permissions policies.


Permissions policies (2)

Policy name	Type	Attached via
AmazonEC2FullAccess	AWS managed	Directly
AmazonS3FullAccess	AWS managed	Directly

2. Create one group in IAM and assign read access for EC2.

Steps:


IAM → User groups → Create group → Add group name and group permissions → Create group.

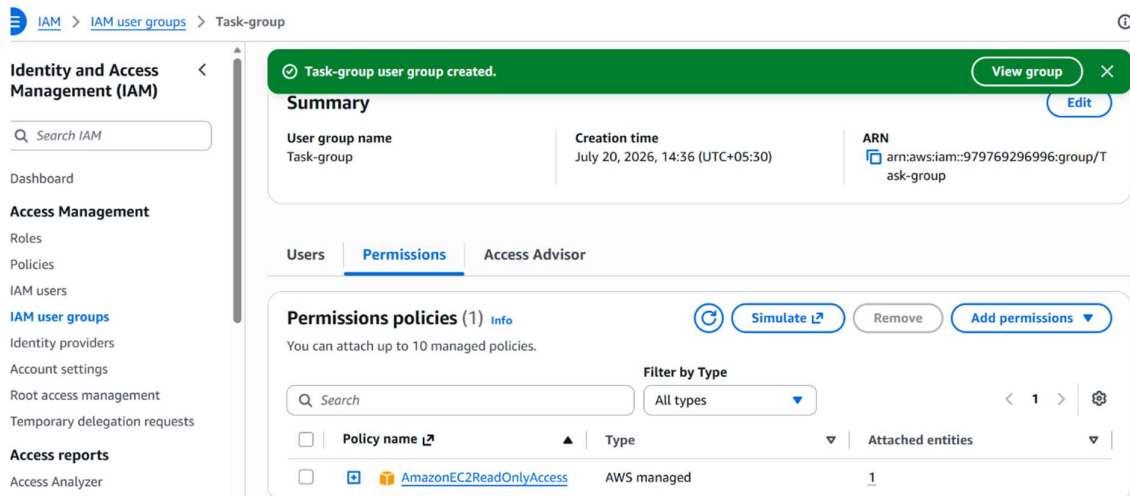

3. Create a new user named "Devops" and add to the group created in task 2.

Steps :

IAM → Create new user → Add name “Devops” → Create user → Add the user Devops to task-group created in task 2.

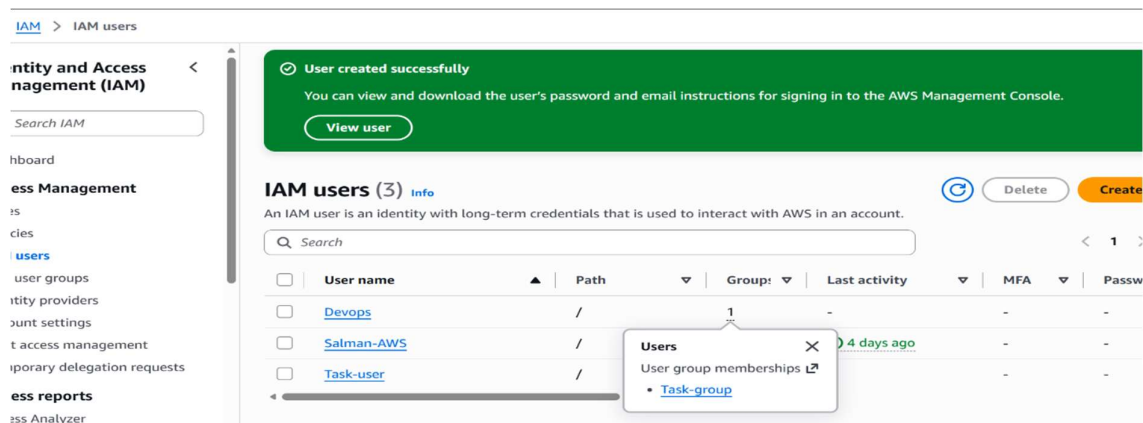

IAM > IAM users > Devops

Identity and Access Management (IAM)

Search IAM

Dashboard

Access Management

Roles

Policies

M users

M user groups

Entity providers

Account settings

Account access management

Temporary delegation requests

Access reports

Access Analyzer

Resource analytics

Devops Info

Delete

Summary

ARN
arn:aws:iam::979769296996:user/Devops

Console access
Disabled

Access key 1
[Create access key](#)

Created
July 20, 2026, 14:38 (UTC+05:30)

Last console sign-in
-

Permissions | **Groups (1)** | Tags | Security credentials | Last Accessed

User groups membership

[Remove](#) [Add user to groups](#)

A user group is a collection of IAM users. Use groups to specify permissions for a collection of users. A user can be a member of up to 10 groups at a time.

☐ Group name	Attached policies
☐ Task-group	AmazonEC2ReadOnlyAccess

4. Write a bash script to create an IAM user with VPC full access.

Created a bash script to create an IAM user with VPC full access.

```
#!/bin/bash

User-name="Salman-VPC"

# Create IAM User
echo "Creating IAM User: $User-name.."
aws iam create-user --user-name "$User-name"

#Attach AmazonVPCFullAccess Policy
echo "Attaching AmazonVPCFullAccess Policy.."
aws iam attach-user-policy \
    --user-name "$User-name" \
    --policy-arn arn:aws:iam::aws:policy/AmazonVPCFullAccess

echo "-----"
echo "IAM User '$User-name' created successfully."
echo "AmazonVPCFullAccess Policy attached."
echo "-----"
```

5. Create an IAM policy to allow EC2 access for a specific user in specific regions only.

Steps :

Policies → Create new policy → Add permissions in json format

> Create policy

Policy editor

VisualJSON

1 {
2 "Version": "2012-10-17",
3 "Statement": [
4 {
5 "Sid": "AllowEC2OnlyInSpecificRegions",
6 "Effect": "Allow",
7 "Action": "ec2:*",
8 "Resource": "*",
9 "Condition": {
10 "StringEquals": {
11 "aws:RequestedRegion": [
12 "us-east-1",
13 "us-west-2"
14]
15 }
16 }
17]
18 }
19 }

Edit state
AllowEC2On

Add actions

Choose a ser
Search

Included
EC2

Available
AI Operator

> IAMTask-5

Policy details

Type
Customer managed

Creation time
July 20, 2026, 14:55
(UTC+05:30)

Edited time
July 20, 2026, 14:55
(UTC+05:30)

ARN
arn:aws:iam::979769296996:policy/IAMTask-5

Permissions

Entities attached

Tags

Policy versions (1)

Last Accessed

Permissions defined in this policy

EditSummaryJSON

Permissions defined in this policy document specify which actions are allowed or denied. To define permissions for an IAM identity (user, user group, or role), attach a policy to it

Search

Allow (1 of 472 services)

Show remaining 471 services

Service	Access level	Resource	Request condition
EC2	Full access	All resources	aws:RequestedRegion 1,us-west-2

6. We have two accounts: Account A and Account B. **Account A user should access an S3 bucket in Account B.**


Steps to do in Account B:

→ Create an S3 bucket

→ Create an IAM role (test-role).

→ Grant the role permissions to the bucket.

→ Configure the role's trust policy to allow Account A to assume it.

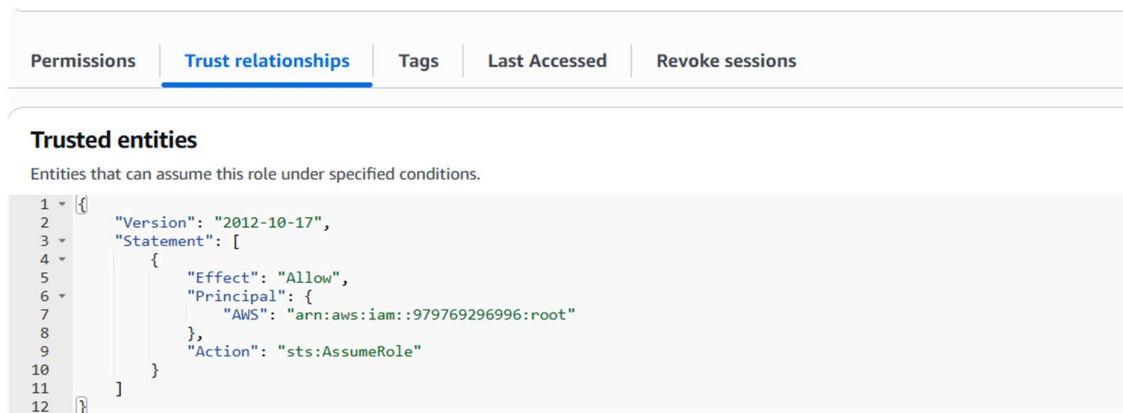


Permissions | **Trust relationships** | Tags | Last Accessed | Revoke sessions

Trusted entities

Entities that can assume this role under specified conditions.

```
1 {  
2   "Version": "2012-10-17",  
3   "Statement": [  
4     {  
5       "Effect": "Allow",  
6       "Principal": {  
7         "AWS": "arn:aws:iam::979769296996:root"  
8       },  
9       "Action": "sts:AssumeRole"  
10    }  
11  ]  
12 }
```

Create a permissions policy : cross-accounts3

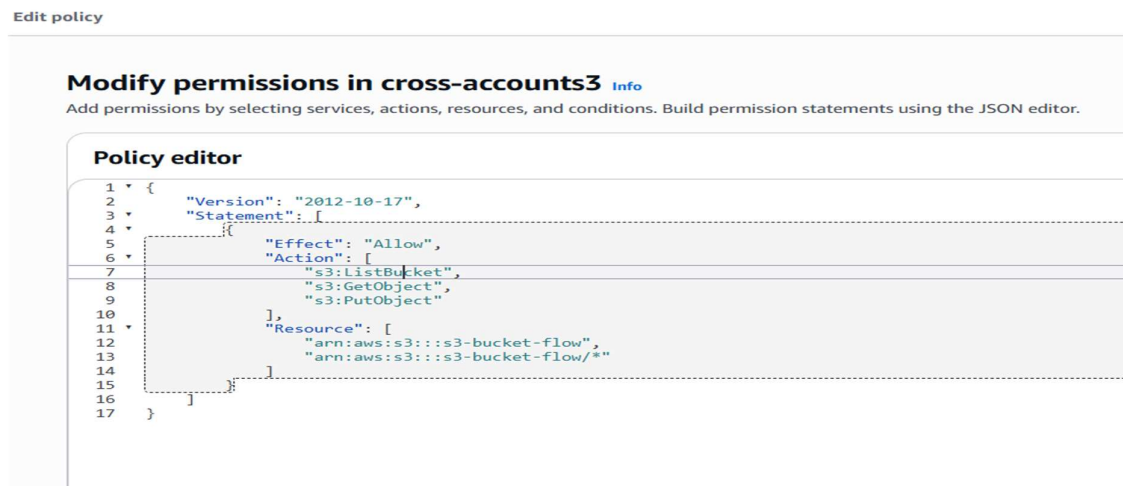

Edit policy

Modify permissions in cross-accounts3 [Info](#)

Add permissions by selecting services, actions, resources, and conditions. Build permission statements using the JSON editor.

Policy editor

```
1 {  
2   "Version": "2012-10-17",  
3   "Statement": [  
4     {  
5       "Effect": "Allow",  
6       "Action": [  
7         "s3:ListBucket",  
8         "s3:GetObject",  
9         "s3:PutObject"  
10      ],  
11      "Resource": [  
12        "arn:aws:s3:::s3-bucket-flow",  
13        "arn:aws:s3:::s3-bucket-flow/*"  
14      ]  
15    }  
16  ]  
17 }
```

Steps to do in Account A :

➔ Assume the role created in Account B

```
[ec2-user@ip-172-31-18-233 ~]$ aws configure
AWS Access Key ID [None]: AKIA6IHWNBBSLSXTQ5WX
AWS Secret Access Key [None]: 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
Default region name [None]: us-east-1
Default output format [None]: json
[ec2-user@ip-172-31-18-233 ~]$ aws sts assume-role \
> --role-arn arn:aws:iam::652723183187:role/test-role \
> --role-session-name DemoSession
{
  "Credentials": {
    "AccessKeyId": "ASIAZP6KVLZJ24UOHQ7N",
    "SecretAccessKey": "oOYX7OKjVKViXjGFjYEMnnGvgWi6/2PtOcrmrQF+",
    "SessionToken": "IQoJb3JpZ2luX2VjENv////////wEaCXVzLWVhc3QtMSJGMEQCIUidoFngeod4Qx2a0aVs5pinafB5EGCqhAgik////////8BEAAADDYlMjcyMzE4MzE4NyIM3/SPJid
iUNXncAjsxovs0fCHAoqy3KFVEf4KKGBxHr+Ln1050Lx0hctQZLjnrUX7j1ZFe8aRQwDO+JS967NeKod
u7qx8uLhrsLhD72pbmK6gCiPgmnXVB9eLaMswb4RThDQOy0/9ZGqIxWRd4mmTJmCZngeXpmUjgYdEv
Xa/EZho0wk0730gY6ngFUxvbfhG1VbOTuFrapo7vCebCm8w9chxYz1D4ED5uyEkTj1lGH9qW75TXGe
oacYdoP28alg/z3r+m3ne53gloFreJh2NuGo08aqNirsea07E9AJ0Ub8IPfniCeHw5edOP5NXZx4+O
    "Expiration": "2026-07-20T11:23:12+00:00"
  },
  "AssumedRoleUser": {
    "AssumedRoleId": "AROAZP6KVLZJ24BVQGOIC:DemoSession",
    "Arn": "arn:aws:sts::652723183187:assumed-role/test-role/DemoSession"
  }
}
➔
[ec2-user@ip-172-31-18-233 ~]$ export AWS_ACCESS_KEY_ID=ASIAZP6KVLZJ24UOHQ7N
[ec2-user@ip-172-31-18-233 ~]$ export AWS_SECRET_ACCESS_KEY=oOYX7OKjVKViXjGFjYEMnnGvgWi6/2PtOcrmrQF+
[ec2-user@ip-172-31-18-233 ~]$ export AWS_SESSION_TOKEN=IQoJb3JpZ2luX2VjENv////////wEaCXVzLWVhc3QtMSJGMEQCIUidoFngeod4Qx2a0aVs5pinafB5EGCqhAgik////////8BEAAADDYlMjcyMzE4MzE4NyIM3/SPJid
iUNXncAjsxovs0fCHAoqy3KFVEf4KKGBxHr+Ln1050Lx0hctQZLjnrUX7j1ZFe8aRQwDO+JS967NeKod
u7qx8uLhrsLhD72pbmK6gCiPgmnXVB9eLaMswb4RThDQOy0/9ZGqIxWRd4mmTJmCZngeXpmUjgYdEv
Xa/EZho0wk0730gY6ngFUxvbfhG1VbOTuFrapo7vCebCm8w9chxYz1D4ED5uyEkTj1lGH9qW75TXGe
oacYdoP28alg/z3r+m3ne53gloFreJh2NuGo08aqNirsea07E9AJ0Ub8IPfniCeHw5edOP5NXZx4+O
➔
[ec2-user@ip-172-31-18-233 ~]$
```

Create a sample file to send to s3 bucket

```
[ec2-user@ip-172-31-18-233 ~]$ aws s3 ls s3://s3-bucket-flow
[ec2-user@ip-172-31-18-233 ~]$ echo "Hello AWS" > test.txt
[ec2-user@ip-172-31-18-233 ~]$ aws s3 cp test.txt s3://s3-bucket-flow/
upload: ./test.txt to s3://s3-bucket-flow/test.txt
[ec2-user@ip-172-31-18-233 ~]$
```

Check the result in s3 bucket of Account B

s3-bucket-flow

Info

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems -

Objects (1)

Copy S3 URI

Copy URL

Download

Op

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. [Learn more](#)

Find objects by prefix

☐	Name	Type	Last modified
☐	 test.txt	txt	July 20, 2026, 15:57:35 (UTC+05:30)