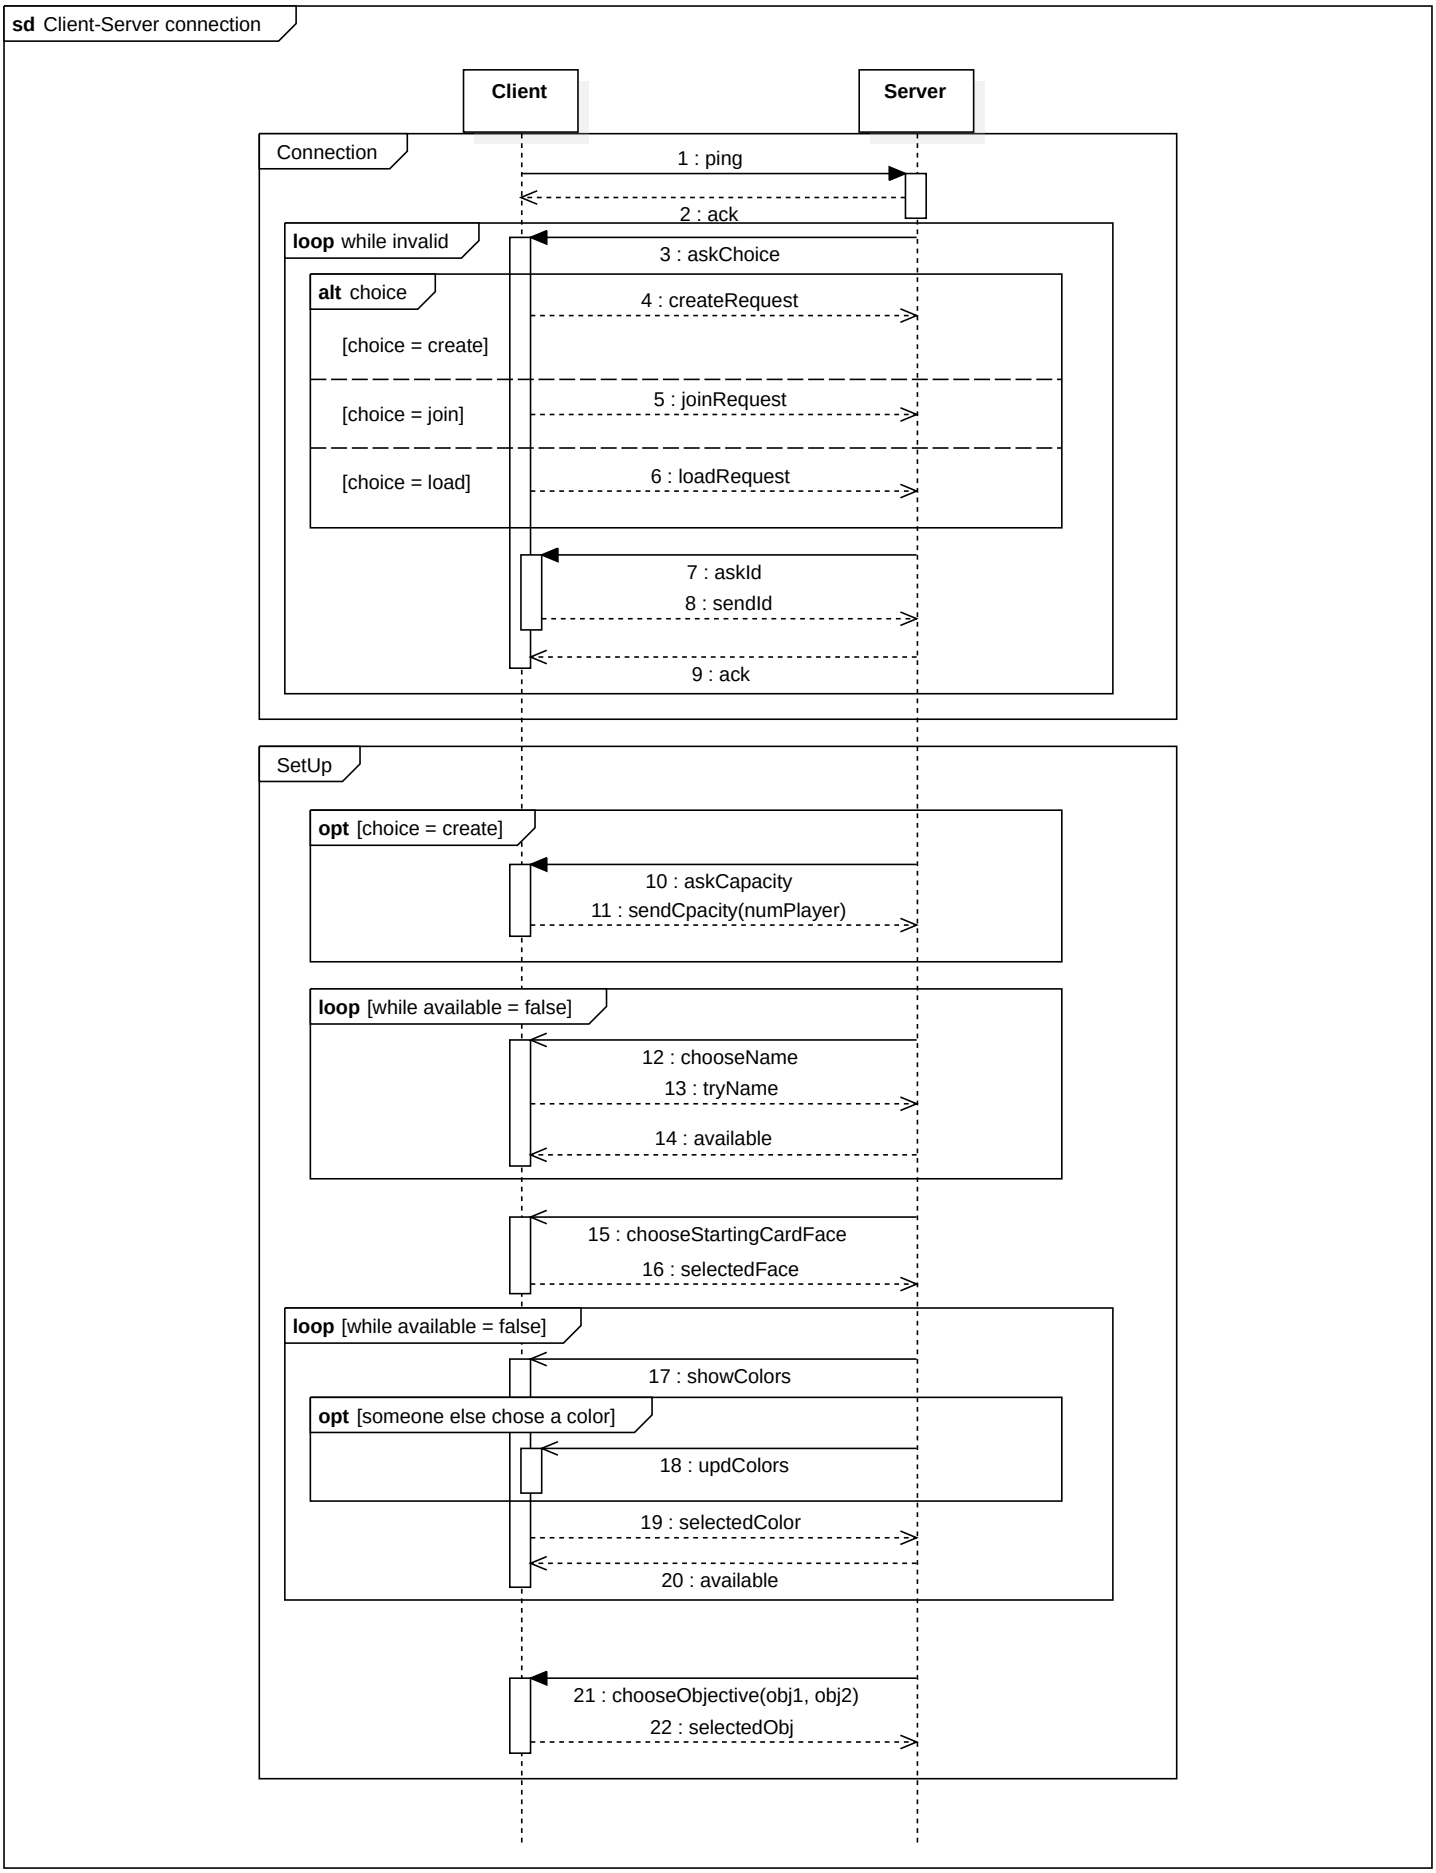
sd Client-Server connection
Client
Server
Connection
1 : ping
2 : ack
loop while invalid
3 : askChoice
alt choice
4 : createRequest
[choice = create]
[choice = join]
5 : joinRequest
[choice = load]
6 : loadRequest
7 : askId
8 : sendId
9 : ack
SetUp
opt [choice = create]
10 : askCapacity
11 : sendCpacity(numPlayer)
loop [while available = false]
12 : chooseName
13 : tryName
14 : available
15 : chooseStartingCardFace
16 : selectedFace
loop [while available = false]
17 : showColors
opt [someone else chose a color]
18 : updColors
19 : selectedColor
20 : available
21 : chooseObjective(obj1, obj2)
22 : selectedObj

1: ping is used to inform the Server of the effective presence of the client
2: Ack messages are always sent in response to Ping messages.
4: createRequest is used to ask the server to create a new game.
5: joinRequest is used to ask the server to join in an existing game.
6: loadRequest is used to load an existing save
9: ack messages are always sent to confirm a correct connection.
10: askCapacity is used to ask the client the number of players who will take part in the game.
11: sendCapacity is used to communicate to the server the number of players that can take part in the game.
14: available returns true if the name is available, false if it has already been taken.
15: chooseStartingCardFace is used to ask for the face on which to place the card
17: showColors is used to communicate to the Comm which colors are available.
19: selectedColor communicates to the Comm which color the player has chosen.
20: available returns true if the color is available, false if it has already been taken.
21: chooseObjective takes 2 random objectives from the CommonGround's pool.
22: selectedObj communicates the random objectives taken.