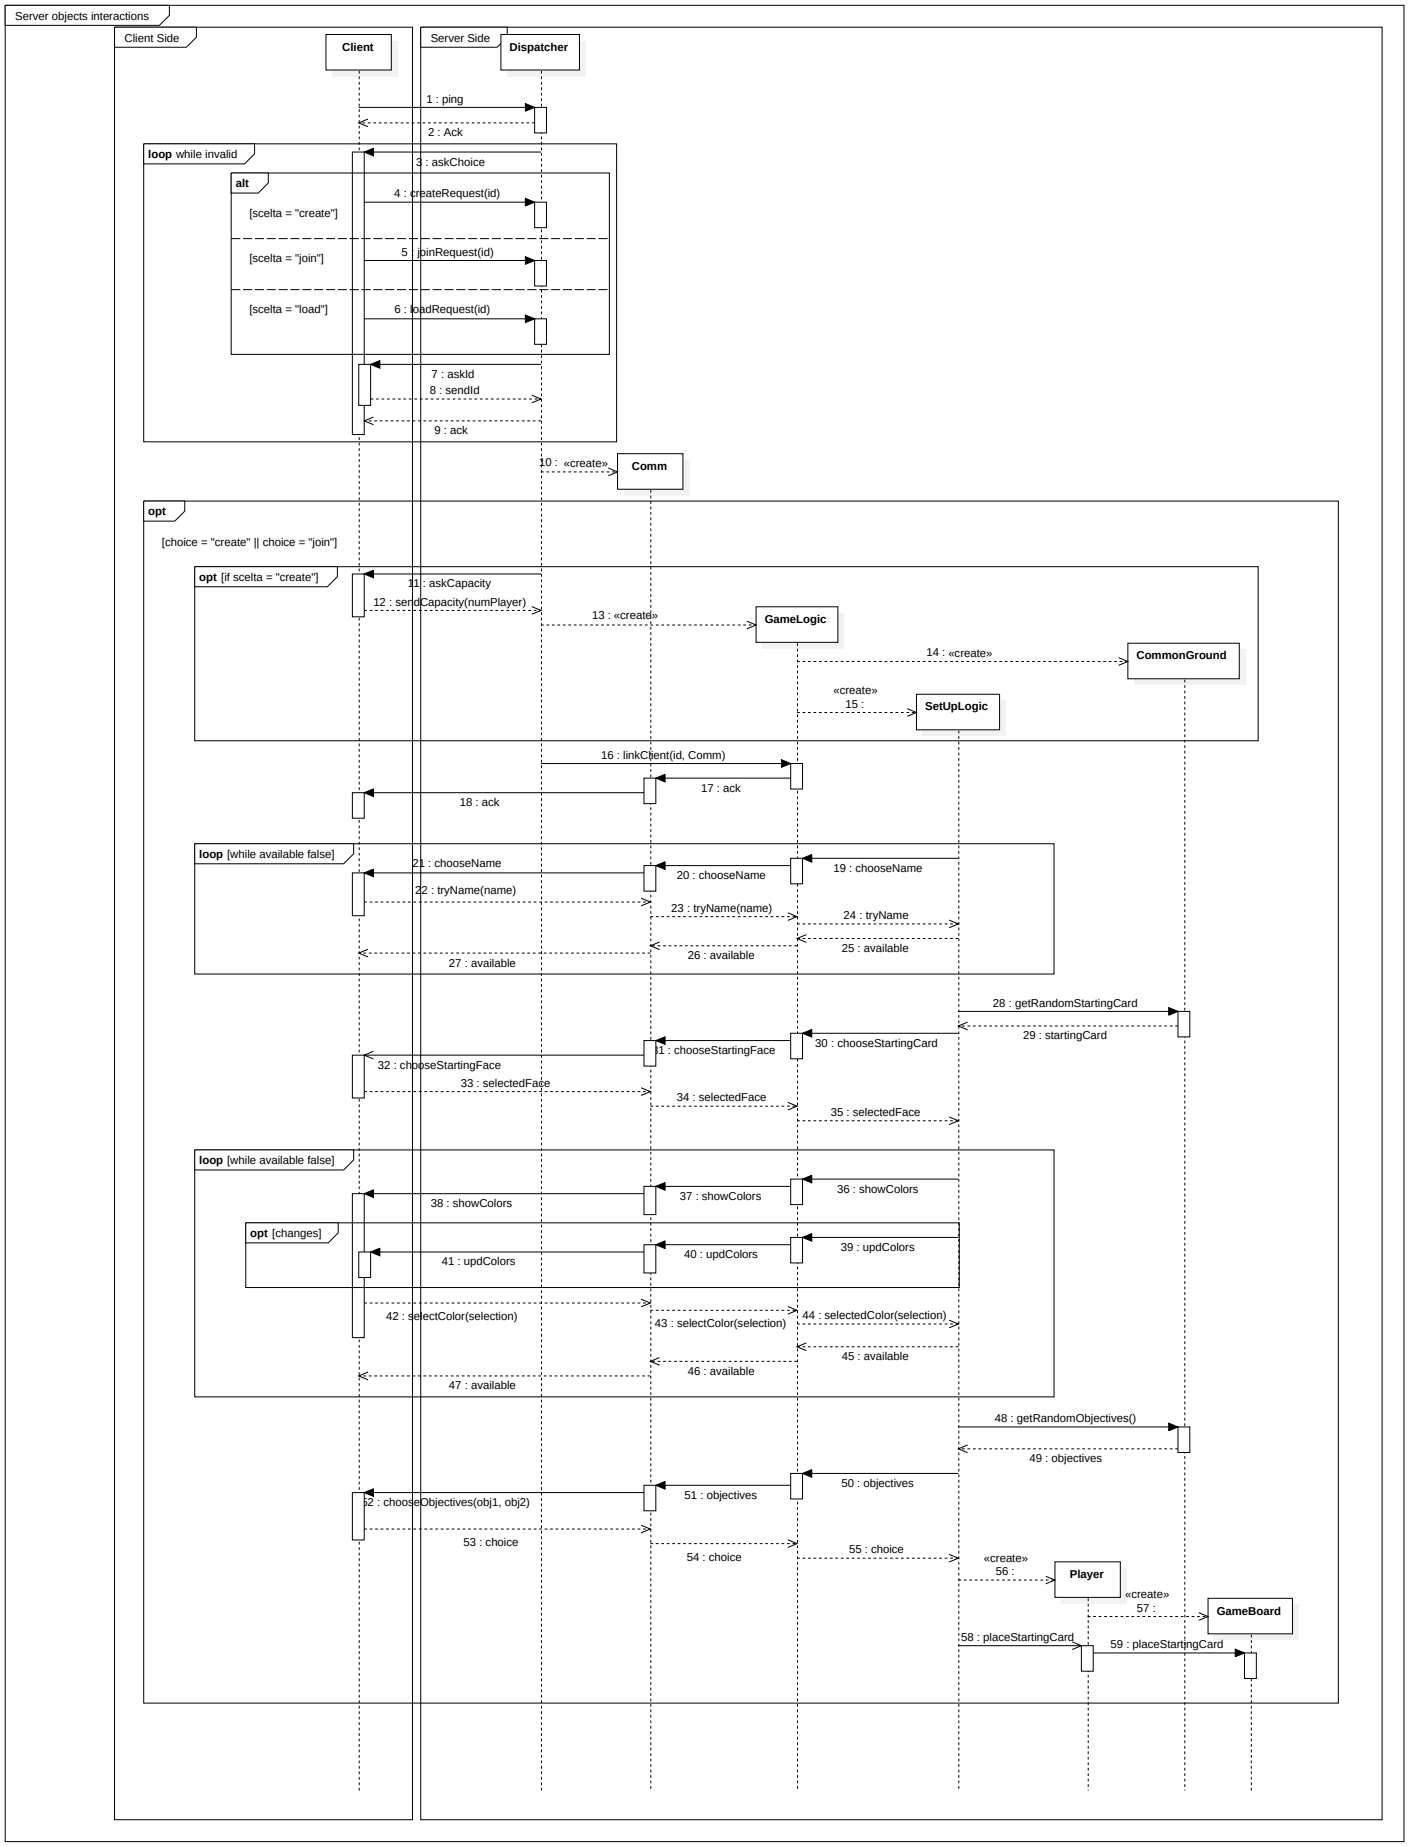
Server objects interactions
Client Side
Server Side
Client
Dispatcher
1 : ping
2 : Ack
loop while invalid
3 : askChoice
alt
[scelta = "create"]
4 : createRequest(id)
[scelta = "join"]
5 : joinRequest(id)
[scelta = "load"]
6 : loadRequest(id)
7 : askId
8 : sendId
9 : ack
10 : «create»
Comm
opt
[choice = "create" || choice = "join"]
opt [if scelta = "create"]
11 : askCapacity
12 : sendCapacity(numPlayer)
13 : «create»
GameLogic
14 : «create»
CommonGround
«create»
15 :
SetUpLogic
16 : linkClient(id, Comm)
17 : ack
18 : ack
loop [while available false]
21 : chooseName
20 : chooseName
19 : chooseName
22 : tryName(name)
23 : tryName(name)
24 : tryName
25 : available
26 : available
27 : available
28 : getRandomStartingCard
29 : startingCard
31 : chooseStartingFace
30 : chooseStartingCard
32 : chooseStartingFace
33 : selectedFace
34 : selectedFace
35 : selectedFace
loop [while available false]
38 : showColors
37 : showColors
36 : showColors
opt [changes]
41 : updColors
40 : updColors
39 : updColors
42 : selectColor(selection)
43 : selectColor(selection)
44 : selectedColor(selection)
45 : available
46 : available
47 : available
48 : getRandomObjectives()
49 : objectives
50 : objectives
51 : objectives
52 : chooseObjectives(obj1, obj2)
53 : choice
54 : choice
55 : choice
«create»
56 :
Player
«create»
57 :
GameBoard
58 : placeStartingCard
59 : placeStartingCard

1: ping is used to inform the Server of the effective presence of the client
2: Ack messages are always sent in response to Ping messages.
4: createRequest is used to ask the server to create a new game.
5: joinRequest is used to ask the server to join in an existing game.
6: loadRequest is used to load an existing save
9: ack messages are always sent to confirm a correct connection.
11: askCapacity is used to ask the client the number of players who will take part in the game.
12: sendCapacity is used to communicate to the server the number of players that can take part in the game.
16: linkClient is used to link the Comm, associated with the Client, with the GameLogic.
25: available returns true if the name is available, false if it has already been taken.
28: getRandomStartingCard takes a starting card from the startingcard's deck.
31: chooseStartingFace is used to ask for the face on which to place the card
37: showColors is used to communicate to the Comm which colors are available.
42: selectColor communicates to the Comm which color the player has chosen.
47: available returns true if the color is available, false if it has already been taken.
48: getRandomObjectives takes 2 random objectives from the CommonGround's pool.
49: objectives communicates the random objectives taken.
52: ChooseObjectives sends the random objectives taken to the client.
53: choice returns the chosen one.