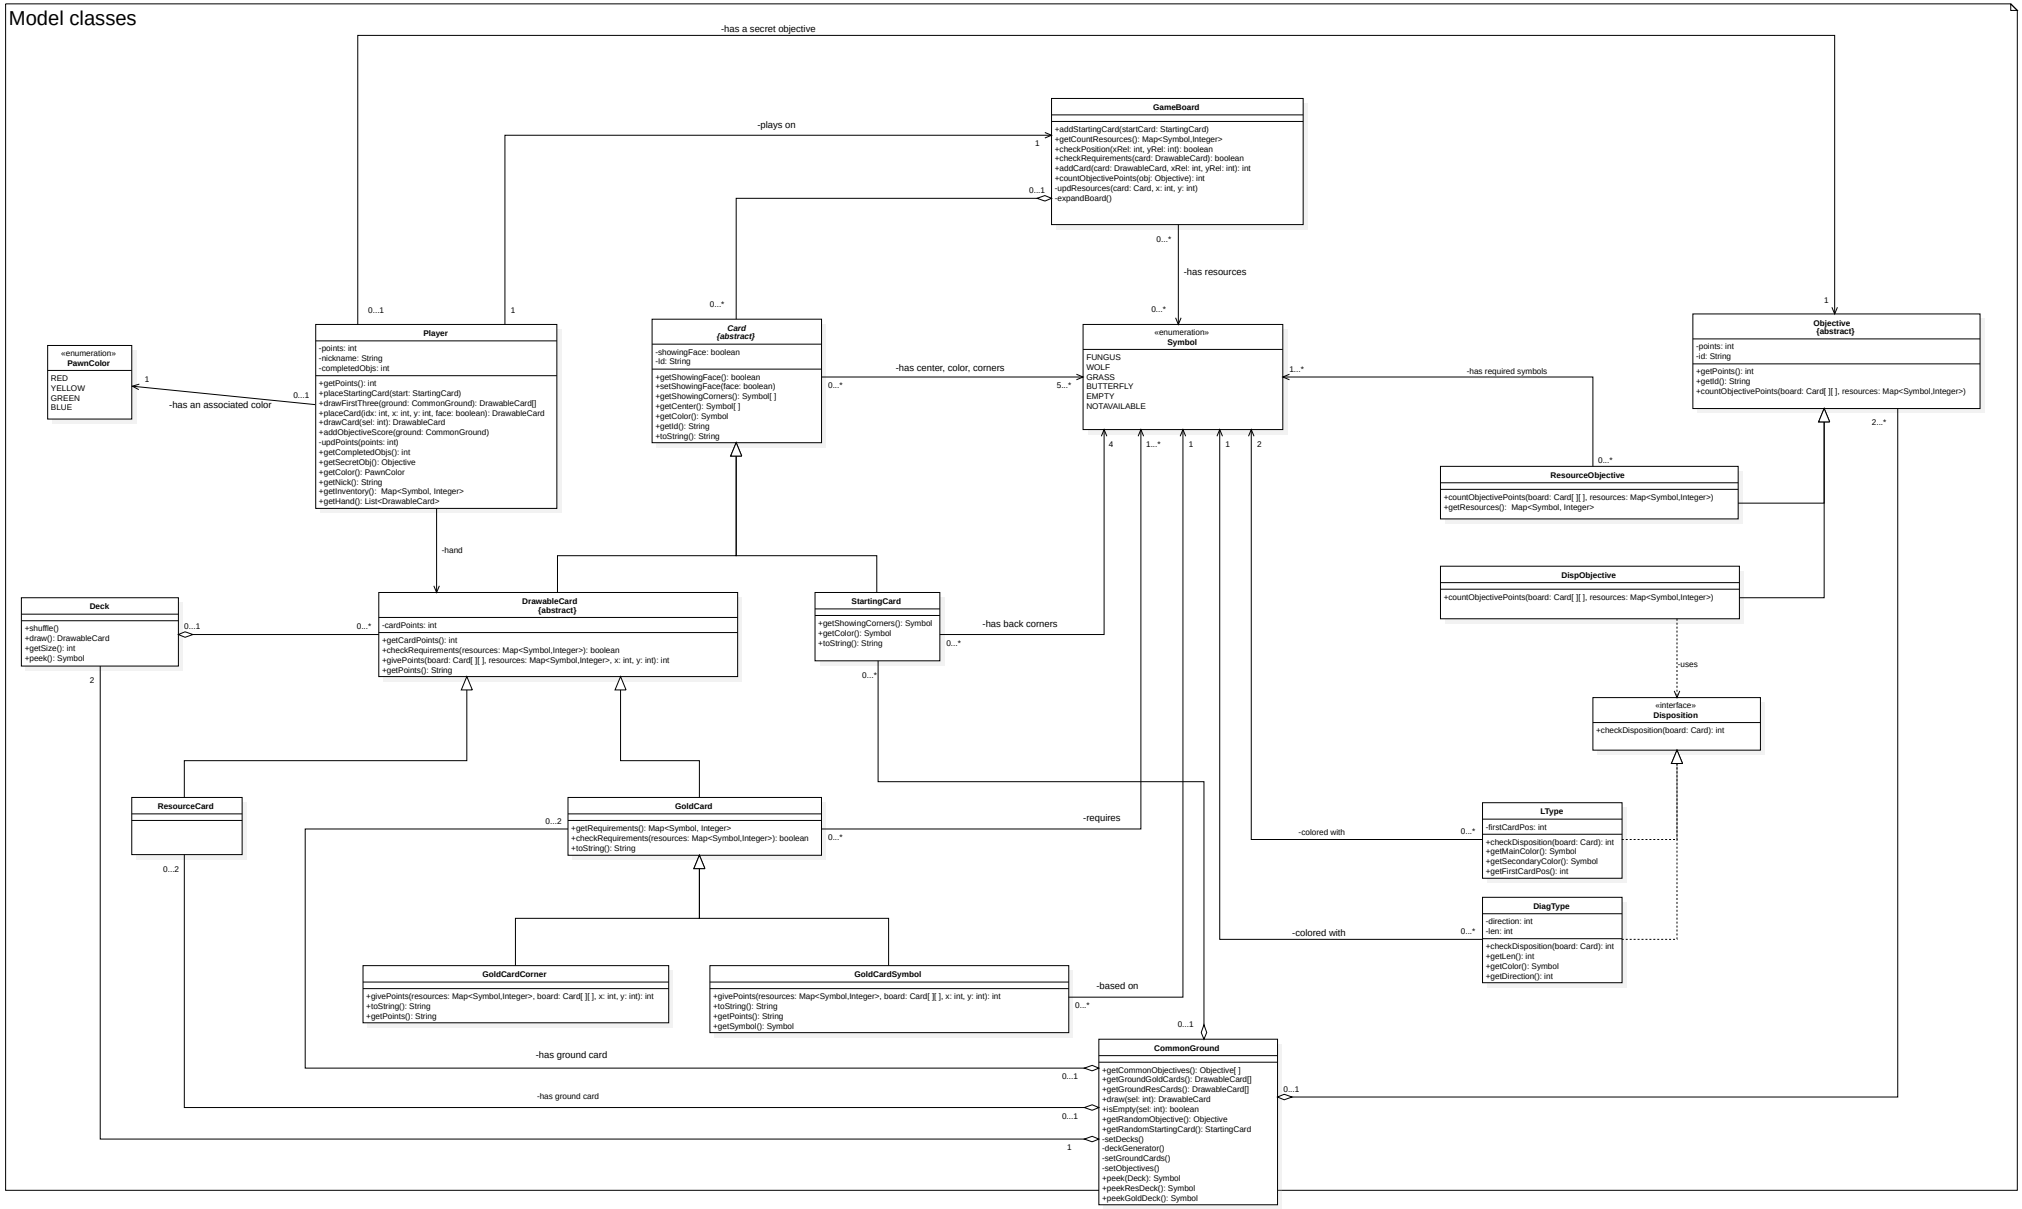

Model classes
-has a secret objective
-plays on
GameBoard
+addStartingCard(startCard: StartingCard)
+getCountResources(): Map<Symbol,Integer>
+checkPosition(xRel: int, yRel: int): boolean
+checkRequirements(card: DrawableCard): boolean
+addCard(card: DrawableCard, xRel: int, yRel: int): int
+countObjectivePoints(obj: Objective): int
-updResources(card: Card, x: int, y: int)
-expandBoard()
-has resources
Player
-points: int
-nickname: String
-completedObjs: int
+getPoints(): int
+placeStartingCard(start: StartingCard)
+drawFirstThree(ground: CommonGround): DrawableCard[]
+placeCard(idx: int, x: int, y: int, face: boolean): DrawableCard
+drawCard(sel: int): DrawableCard
+addObjectiveScore(ground: CommonGround)
-updPoints(points: int)
+getCompletedObjs(): int
+getSecretObj(): Objective
+getColor(): PawnColor
+getNick(): String
+getInventory(): Map<Symbol, Integer>
+getHand(): List<DrawableCard>
«enumeration»
PawnColor
RED
YELLOW
GREEN
BLUE
-has an associated color
Card
{abstract}
-showingFace: boolean
-Id: String
+getShowingFace(): boolean
+setShowingFace(face: boolean)
+getShowingCorners(): Symbol[ ]
+getCenter(): Symbol[ ]
+getColor(): Symbol
+getId(): String
+toString(): String
-has center, color, corners
«enumeration»
Symbol
FUNGUS
WOLF
GRASS
BUTTERFLY
EMPTY
NOTAVAILABLE
-has required symbols
Objective
{abstract}
-points: int
-Id: String
+getPoints(): int
+getId(): String
+countObjectivePoints(board: Card[ ][ ], resources: Map<Symbol,Integer>)
ResourceObjective
+countObjectivePoints(board: Card[ ][ ], resources: Map<Symbol,Integer>)
+getResources(): Map<Symbol, Integer>
DispObjective
+countObjectivePoints(board: Card[ ][ ], resources: Map<Symbol,Integer>)
-uses
«interface»
Disposition
+checkDisposition(board: Card): int
-hand
Deck
+shuffle()
+draw(): DrawableCard
+getSize(): int
+peek(): Symbol
DrawableCard
{abstract}
-cardPoints: int
+getCardPoints(): int
+checkRequirements(resources: Map<Symbol,Integer>): boolean
+givePoints(board: Card[ ][ ], resources: Map<Symbol,Integer>, x: int, y: int): int
+getPoints(): String
StartingCard
+getShowingCorners(): Symbol
+getColor(): Symbol
+toString(): String
-has back corners
ResourceCard
GoldCard
+getRequirements(): Map<Symbol, Integer>
+checkRequirements(resources: Map<Symbol,Integer>): boolean
+toString(): String
-requires
LType
-firstCardPos: int
+checkDisposition(board: Card): int
+getMainColor(): Symbol
+getSecondaryColor(): Symbol
+getFirstCardPos(): int
-colored with
DiagType
-direction: int
-len: int
+checkDisposition(board: Card): int
+getLen(): int
+getColor(): Symbol
+getDirection(): int
-colored with
GoldCardCorner
+givePoints(resources: Map<Symbol,Integer>, board: Card[ ][ ], x: int, y: int): int
+toString(): String
+getPoints(): String
GoldCardSymbol
+givePoints(resources: Map<Symbol,Integer>, board: Card[ ][ ], x: int, y: int): int
+toString(): String
+getPoints(): String
+getSymbol(): Symbol
-based on
-has ground card
-has ground card
CommonGround
+getCommonObjectives(): Objective[ ]
+getGroundGoldCards(): DrawableCard[]
+getGroundResCards(): DrawableCard[]
+draw(sel: int): DrawableCard
+isEmpty(sel: int): boolean
+getRandomObjective(): Objective
+getRandomStartingCard(): StartingCard
-setDecks()
-deckGenerator()
-setGroundCards()
-setObjectives()
+peek(Deck): Symbol
+peekResDeck(): Symbol
+peekGoldDeck(): Symbol

Model classes

