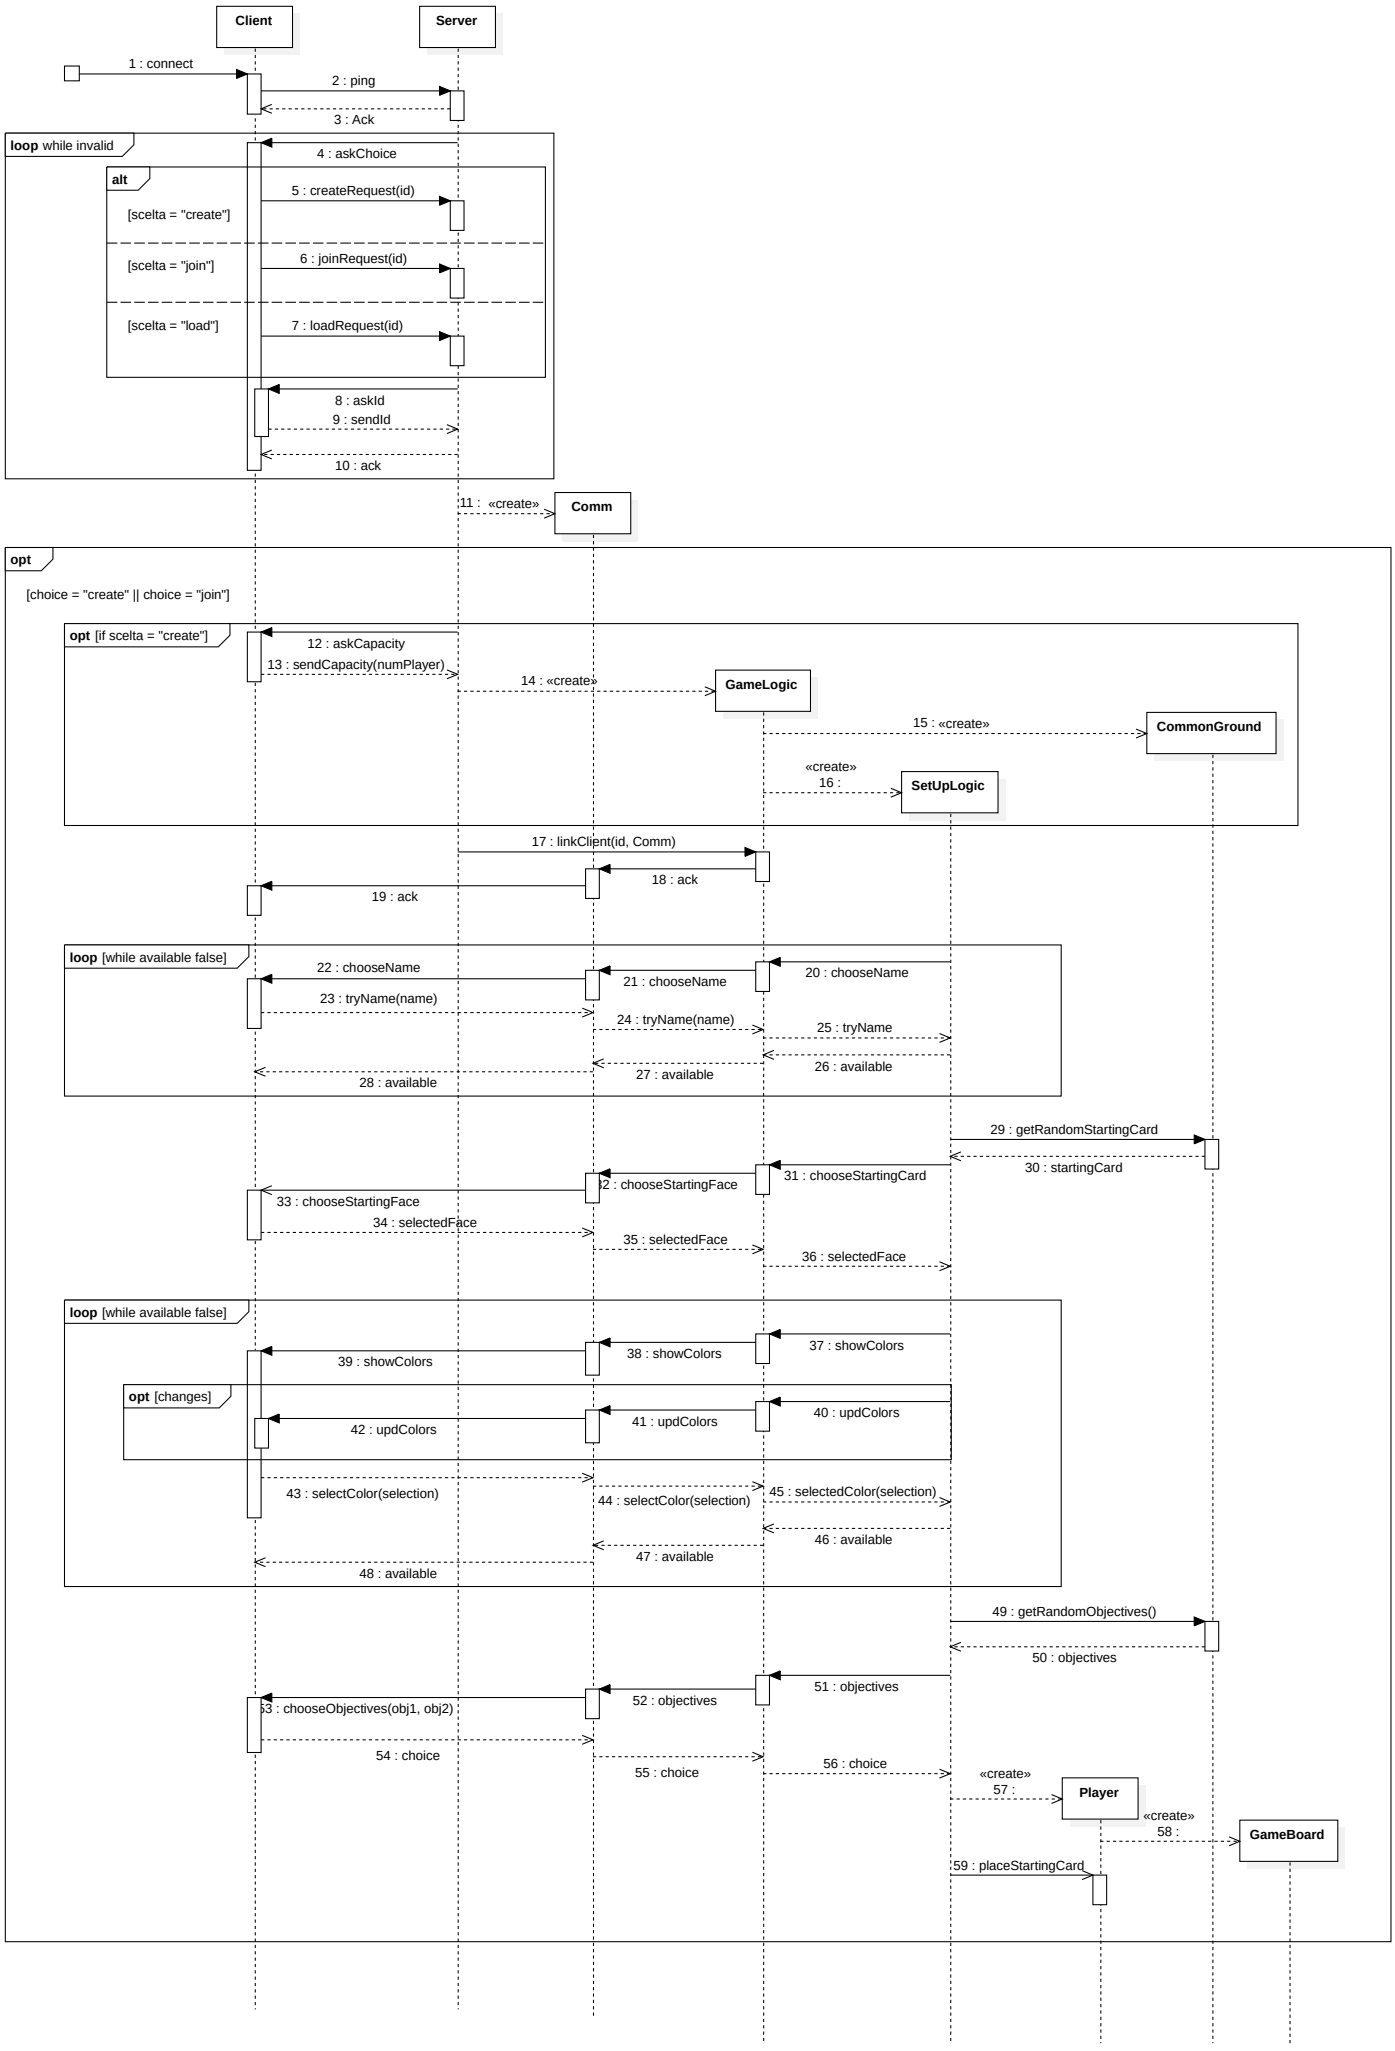
Client
Server
1 : connect
2 : ping
3 : Ack
loop while invalid
4 : askChoice
alt
[scelta = "create"]
5 : createRequest(id)
[scelta = "join"]
6 : joinRequest(id)
[scelta = "load"]
7 : loadRequest(id)
8 : askId
9 : sendId
10 : ack
11 : «create»
Comm
opt
[choice = "create" || choice = "join"]
opt [if scelta = "create"]
12 : askCapacity
13 : sendCapacity(numPlayer)
14 : «create»
GameLogic
15 : «create»
CommonGround
«create»
16 :
SetUpLogic
17 : linkClient(id, Comm)
18 : ack
19 : ack
loop [while available false]
22 : chooseName
21 : chooseName
20 : chooseName
23 : tryName(name)
24 : tryName(name)
25 : tryName
26 : available
27 : available
28 : available
29 : getRandomStartingCard
30 : startingCard
31 : chooseStartingCard
32 : chooseStartingFace
33 : chooseStartingFace
34 : selectedFace
35 : selectedFace
36 : selectedFace
loop [while available false]
37 : showColors
38 : showColors
39 : showColors
opt [changes]
40 : updColors
41 : updColors
42 : updColors
43 : selectColor(selection)
44 : selectColor(selection)
45 : selectedColor(selection)
46 : available
47 : available
48 : available
49 : getRandomObjectives()
50 : objectives
51 : objectives
52 : objectives
53 : chooseObjectives(obj1, obj2)
54 : choice
55 : choice
56 : choice
«create»
57 :
Player
«create»
58 :
GameBoard
59 : placeStartingCard

2: ping is used to inform the Server of the effective presence of the client
3: Ack messages are always sent in response to Ping messages.
5: createRequest is used to ask the server to create a new game.
6: joinRequest is used to ask the server to join in an existing game.
7: loadRequest is used to load an existing save
10: ack messages are always sent to confirm a correct connection.
12: askCapacity is used to ask the client the number of players who will take part in the game.
13: sendCapacity is used to communicate to the server the number of players that can take part in the game.
16: linkClient is used to link the Comm, associated with the Client, with the GameLogic.
23: available returns true if the name is available, false if it has already been taken.
29: getRandomStartingCard takes a starting card from the startingcard's deck.
33: chooseStartingFace is used to ask for the face on which to place the card
37: showColors is used to communicate to the Comm which colors are available.
43: selectColor communicates to the Comm which color the player has chosen.
46: available returns true if the color is available, false if it has already been taken.
49: getRandomObjectives takes 2 random objectives from the CommonGround's pool.
50: objectives communicates the random objectives taken.
53: ChooseObjectives sends the random objectives taken to the client.
54: choice returns the chosen one.