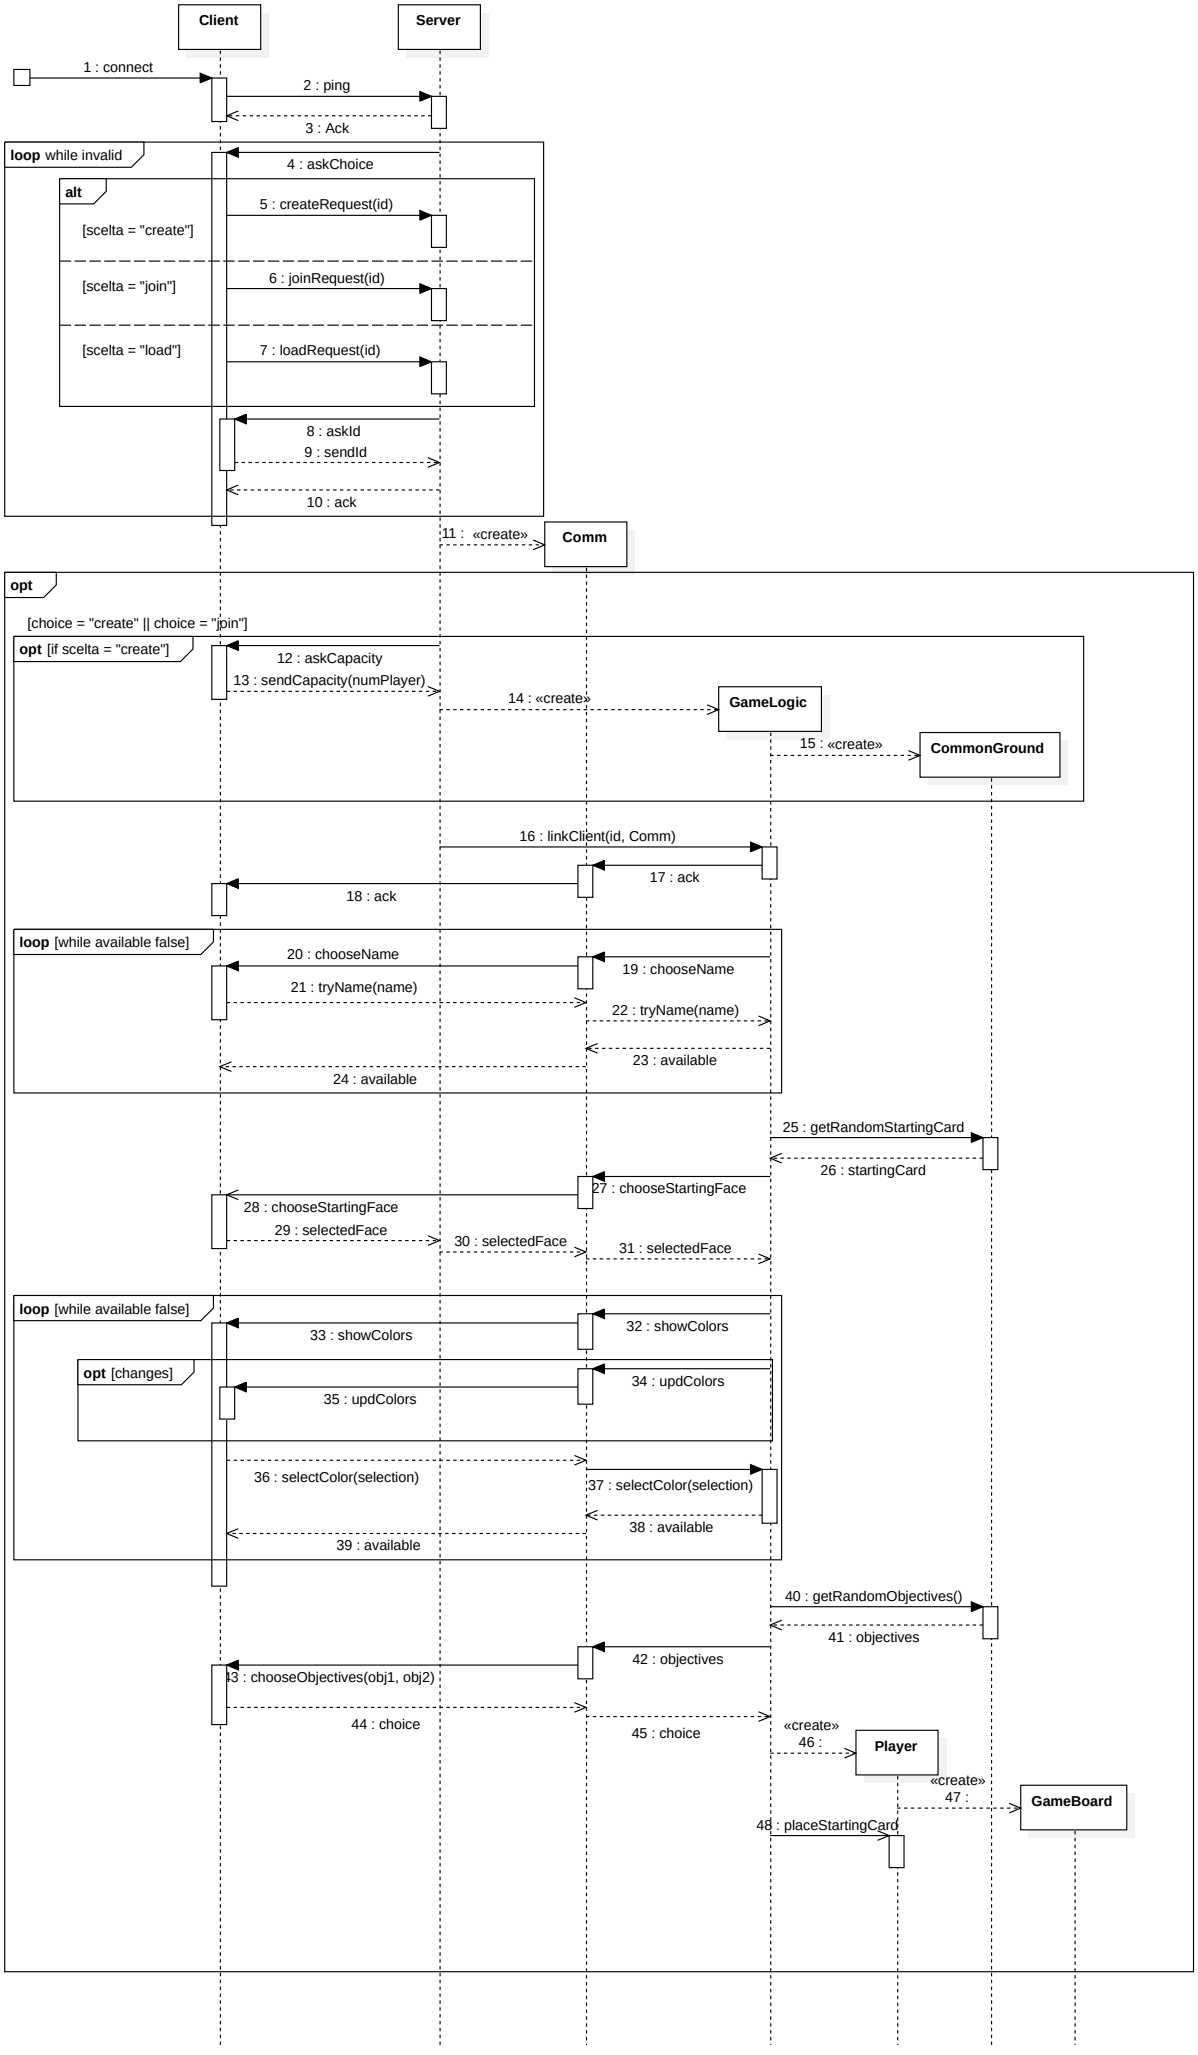
Client
Server
1 : connect
2 : ping
3 : Ack
loop while invalid
4 : askChoice
alt
5 : createRequest(id)
[scelta = "create"]
6 : joinRequest(id)
[scelta = "join"]
7 : loadRequest(id)
[scelta = "load"]
8 : askId
9 : sendId
10 : ack
11 : «create»
Comm
opt
[choice = "create" || choice = "join"]
opt [if scelta = "create"]
12 : askCapacity
13 : sendCapacity(numPlayer)
14 : «create»
GameLogic
15 : «create»
CommonGround
16 : linkClient(id, Comm)
17 : ack
18 : ack
loop [while available false]
20 : chooseName
19 : chooseName
21 : tryName(name)
22 : tryName(name)
23 : available
24 : available
25 : getRandomStartingCard
26 : startingCard
27 : chooseStartingFace
28 : chooseStartingFace
29 : selectedFace
30 : selectedFace
31 : selectedFace
loop [while available false]
33 : showColors
32 : showColors
opt [changes]
34 : updColors
35 : updColors
36 : selectColor(selection)
37 : selectColor(selection)
38 : available
39 : available
40 : getRandomObjectives()
41 : objectives
42 : objectives
43 : chooseObjectives(obj1, obj2)
44 : choice
45 : choice
«create»
46 :
Player
«create»
47 :
GameBoard
48 : placeStartingCard

2: ping is used to inform the Server of the effective presence of the client
3: Ack messages are always sent in response to Ping messages.
5: createRequest is used to ask the server to create a new game.
6: joinRequest is used to ask the server to join in an existing game.
7: loadRequest is used to load an existing save
10: ack messages are always sent to confirm a correct connection.
12: askCapacity is used to ask the client the number of players who will take part in the game.
13: sendCapacity is used to communicate to the server the number of players that can take part in the game.
16: linkClient is used to link the Comm, associated with the Client, with the GameLogic.
23: available returns true if the name is available, false if it has already been taken.
33: showColors is used to communicate to the Comm which colors are available.
36: selectColor communicates to the Comm which color the player has chosen.
38: available returns true if the color is available, false if it has already been taken.
40: getRandomObjectives takes 2 random objectives from the CommonGround's pool.
41: objectives communicates the random objectives taken.
43: ChooseObjectives sends the random objectives taken to the client.
44: choice returns the chosen one.