

Microsoft Excel ribbon showing Font, Alignment, Number, Styles, Cells, and Editing tabs.

Font: Calibri, 11, Bold (B), Italic (I), Underline (U), Text Color (A), Background Color (fill icon).

Alignment: Left, Center, Right, Justify, Indent, Decrease Indent, Increase Indent, Wrap Text, Merge & Center.


Number: General, Currency (\$), Percentage (%), Comma (,), Thousand Separator (.), Negative numbers in parentheses (0.00 to -0.00), Fraction (1/2).

Styles: Conditional Formatting, Format as Table, Cell Styles.

Cells: Insert, Delete, Format.

Editing: Find & Replace, Fill, Sort & Filter, Conditional Formatting, Styles.

	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W
	Table join Information: Optum CDM																

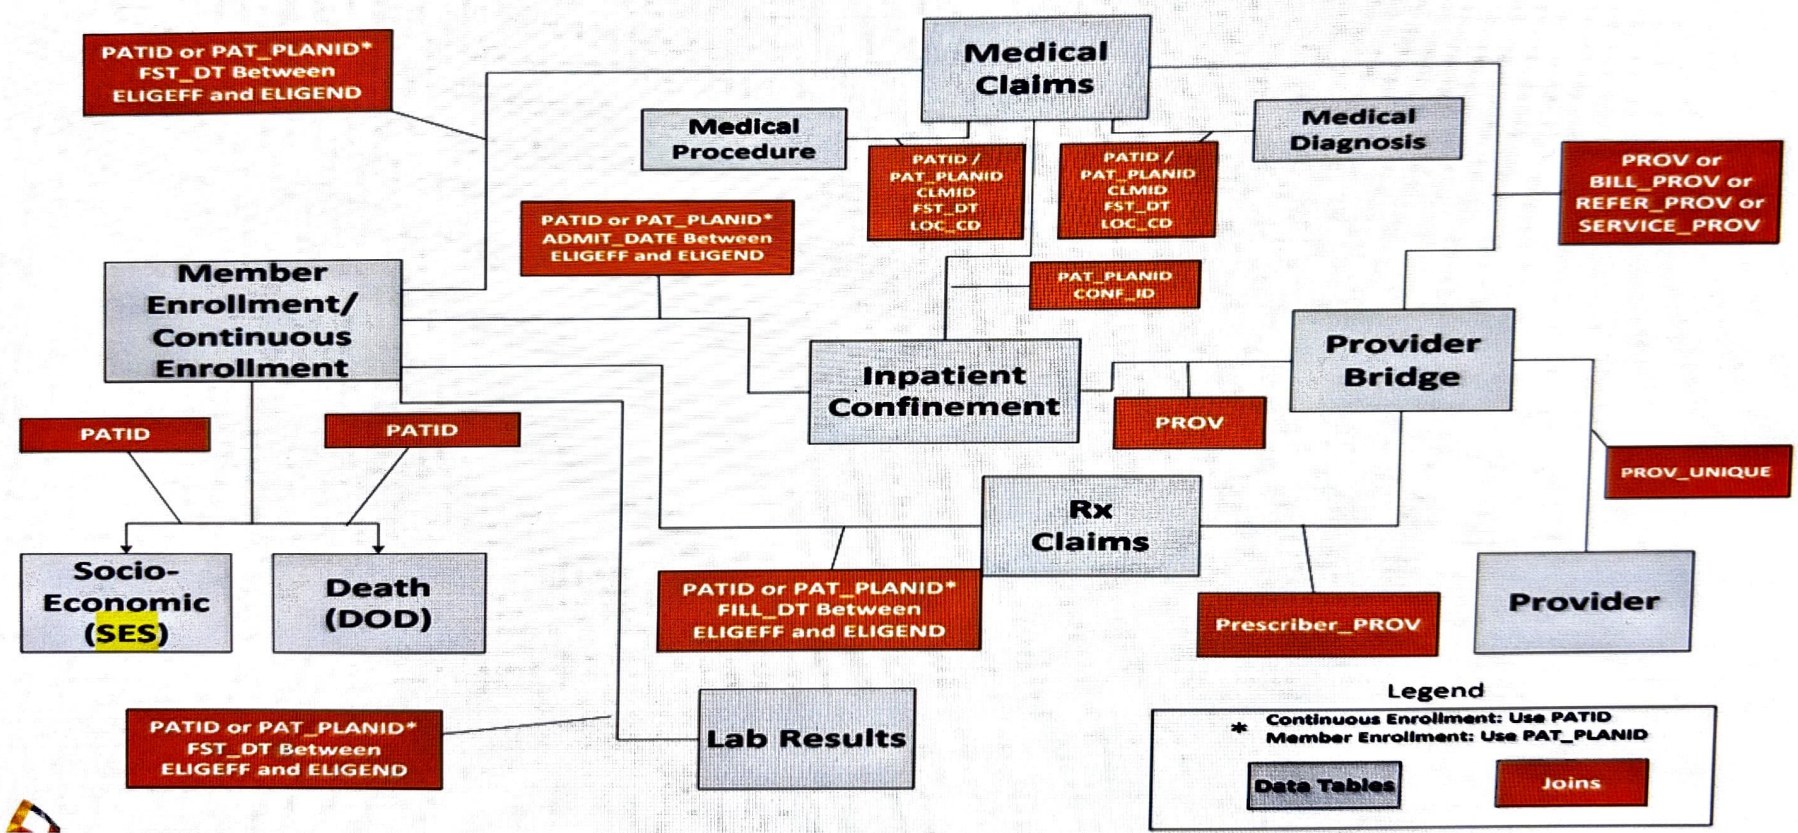

S.No	Information required	Variables	Table names	Steps to be followed	
1	Finding the patients with diagnosis of a disease	diag, diag_position,icd_flag, fst_dt	t_med_diagnosis	1. DIAG and FST_DT from T_MED_DIAGNOSIS table will help to identify the patients from particular disease 2. DIAG_POSITION corresponds to claim position and hence used to identify primary diagnosis 3. ICD_FLAG will distinguish between ICD-9 and ICD-10 codes. ICD_FLAG='9' for ICD-9 code, ICD_FLAG='10' for ICD-10 code	DIAG_POSI Diagnosis po Diagnosis Ta DIAG_POSIT the primary d
2	Finding the patients with specific diagnosis by using description of a disease	1. diag_cd, diag_desc 2. diag, fst_dt	1. t_lu_diagnosis 2. t_med_diagnosis	1. diag_desc from T_LU_DIAGNOSIS table will help to identify the diagnosis codes for a particular disease 2. Join the T_MED_DIAGNOSIS table and above dataset where DIAG = DIAG_CD, and apply date condition by using FST_DT from T_MED_DIAGNOSIS	
3	Finding the patients undergoing certain procedure	1. proc_cd, fst_dt 2. proc, icd_flag, fst_dt	1. t_medical 2. t_med_procedure	1. PROC_CD and FST_DT from T_MEDICAL table will help to identify the patients undergoing certain procedure using CPT/HCPCS code 2. PROC and FST_DT from T_MED_PROCEDURE table will help to identify the patients undergoing certain procedure using ICD9/ICD10 procedure and use ICD_FLAG='9' for ICD-9 code, ICD_FLAG='10' for ICD-10 code to distinguish between ICD-9 and ICD-10 codes.	
4	Finding the patients with description of specific procedure performed or service provided.	1. proc_cd, proc_desc 2. proc_cd, fst_dt 3. proc, fst_dt	1. t_lu_procedure 2. t_medical 3. t_med_procedure	1. PROC_DESC from T_LU_PROCEDURE table will help to identify ICDX/CPT/HCPCS procedures 2. Join the T_MEDICAL table and above dataset where PROC_CD = PROC_CD, and apply date condition by using FST_DT from t_medical table 3. Join the T_MED_PROCEDURE table and above dataset (1) where PROC_CD = PROC, and apply date condition by using FST_DT from t_medical table	

S.No	Information required	Variables	Table names	Steps to be followed	Additional Information
1	Finding the patients with diagnosis of a disease	diag, diag_position, icd_flag, fst_dt	t_med_diagnosis	1. DIAG and FST_DT from T_MED_DIAGNOSIS table will help to identify the patients from particular disease 2. DIAG_POSITION corresponds to claim position and hence used to identify primary diagnosis 3. ICD_FLAG will distinguish between ICD-9 and ICD-10 codes. ICD_FLAG='9' for ICD-9 code, ICD_FLAG='10' for ICD-10 code	DIAG_POSITION variable has from 1 to 25 Diagnosis positions on each claim in Medical Diagnosis Table. e.g., patients with DIAG_POSITION=1 can be typically considered as the primary diagnosis.
2	Finding the patients with specific diagnosis by using description of a disease	1. diag_cd, diag_desc 2. diag, fst_dt	1. t_lu_diagnosis 2. t_med_diagnosis	1. diag_desc from T_LU_DIAGNOSIS table will help to identify the diagnosis codes for a particular disease 2. Join the T_MED_DIAGNOSIS table and above dataset where DIAG = DIAG_CD, and apply date condition by using FST_DT from T_MED_DIAGNOSIS	
3	Finding the patients undergoing certain procedure	1. proc_cd, fst_dt 2. proc, icd_flag, fst_dt	1. t_medical 2. t_med_procedure	1. PROC_CD and FST_DT from T_MEDICAL table will help to identify the patients undergoing certain procedure using CPT/HCPSC code 2. PROC and FST_DT from T_MED_PROCEDURE table will help to identify the patients undergoing certain procedure using ICD9/ICD10 procedure and use ICD_FLAG='9' for ICD-9 code, ICD_FLAG='10' for ICD-10 code to distinguish between ICD-9 and ICD-10 codes.	
4	Finding the patients with description of specific procedure performed or service provided.	1. proc_cd, proc_desc 2. proc_cd, fst_dt 3. proc, fst_dt	1. t_lu_procedure 2. t_medical 3. t_med_procedure	1. PROC_DESC from T_LU_PROCEDURE table will help to identify ICDX/CPT/HCPSC procedures 2. Join the T_MEDICAL table and above dataset where PROC_CD = PROC_CD, and apply date condition by using FST_DT from t_medical table 3. Join the T_MED_PROCEDURE table and above dataset (1) where PROC_CD = PROC, and apply date condition by using FST_DT from t_medical table	
		1. ndc, fill_dt	1. t_rx	1. NDC and FILL_DT from T_RX table can be used to identify drug of interest 2. NDC and FST_DT from T_MEDICAL table can be used to identify drug of interest 3. PROC_CD and FST_DT from T_MEDICAL table will help to identify the patients taking the drug as	

C4

Finding the patients with specific diagnosis by using description of a disease

A	B	C	D	E	F
6					
5	Finding the patients who took the drug of interest	1. ndc, fill_dt 2. proc_cd, fst_dt 3. proc, fst_dt	1. t_rx 2. t_med_procedure 3. t_medical	1. NDC and FILL_DT from T_RX table can be used to identify drug of interest 2. NDC and FST_DT from T_MEDICAL table can be used to identify drug of interest 3. PROC_CD and FST_DT from T_MEDICAL table will help to identify the patients taking the procedure using ICD9/ICD10 procedure and use ICD_FLAG='9' for ICD-9 code, ICD_FLAG='10' for ICD-10 code 4. PROC and FST_DT from T_MED_PROCEDURE table will help to identify the patients taking particular drug as procedure using HCPCS/CPT code	
7	Identifying patients with a generic name (drug ingredient name for a specific drug)	GNRC_NM	t_rx	1. User can use "GNRC_NM" column to extract the records by generic name of a drug of interest T_RX tables.	
8	Information on lab tests with LOINC codes	loinc_cd, fst_dt, rslt_txt	t_lab	1. LOINC_CD column can be used to identify the lab test 2. RSLT_TXT column gives the test results 3. FST_DT column can be used to identify date of the lab test	
9	Information on lab tests without LOINC CD	tst_desc, fst_dt, rslt_txt	t_lab	1. TST_DESC column can be used to identify the lab test. User just need to check with lab test description name. for e.g. tst_desc="PLATELETS" 2. RSLT_TXT column gives the test results 3. FST_DT column can be used to identify date of the lab test	
10	Checking for enrollment information	eligeff, eligend	t_member_enrollment	1. ELIGEFF and ELIGEND columns help to find start and end dates of member coverage row of information. User will be required to stitch the data to find start and end dates for continuous enrollment	
11	Checking for enrollment information with less than 30 days break in coverage	eligeff, eligend	t_member_continuous_enrollment	1. ELIGEFF and ELIGEND columns help to find start and end dates of member coverage for continuous enrollment	

Clipboard Font Alignment Number Styles Cells Editing Sensitivity Add-ins

Arial 11 A^ A^

B I U

Font

Alignment

Number

Styles

Cells

Editing

Sensitivity

Add-ins

Finding the patients with specific diagnosis by using description of a disease

B	C	D	E	F	G
11	Checking for enrollment information with less than 30 days break in coverage	eligeff, eligend	t_member_continuous_enrollment	1. ELIGEFF and ELIGEND columns help to find start and end dates of member coverage for continuous enrollment	
12	Death information	ymdod	t_dod	1. YMDOD column from T_DOD table can be used to find death month and year	
13	Identifying all diagnoses reported within a hospitalization	1. patid, clmid 2. patid, clmid, conf_id 3. patid, conf_id	1. t_med_diagnosis 2. t_medical 3. t_confinement	1. Merge the T_MED_DIAGNOSIS table and the T_Medical table by PAT_ID and CLMID to get the information about the Confinement ID associated to the diagnoses 2. Merge the above dataset and T_CONFINEMENT table by PAT_ID and CONF_ID to retrieve the diagnoses reported within a hospitalization Approach 1: It is a fine approach to use TOS_CD if conditions are not restricted on inpatient services associated with a hospitalization which requires an admission and discharge date. 1. Extract the records from T_Medical and T_CONFINEMENT datasets Inpatient -> POS IN (21, 51, 61) or TOS_CD IN ('FAC_IP_ACUTE', 'FAC_IP_REHSNF', 'PROF_INPVIS', 'FAC_IP_SNF') Outpatient -> none of the above Approach 2: For anything related to services happening during a hospitalization with room and board, user should apply the condition on the CONF_ID because the majority of the work we do includes both diagnoses and medical services e.g. procedures, and when we talk about inpatient utilization, it is usually in the context of an admission and discharge. 1. Inpatient records should be restricted to cases where CONF_ID is not NULL, from the T_CONFINEMENT table, where this has associated admission and discharge dates. 2. The confinement table has summary information, so if users are pulling medical claims for specific inclusion, user should match on the CONF_ID variable, where it is not NULL in the confinement table. All other records without a CONF_ID or where CONF_ID is NULL should be considered non-inpatient.	
14	Identifying inpatient and non-inpatient claims	1. pos, tos_cd 2. pos, tos_cd	1. t_medical 2. t_confinement	Non-inpatient records can be classified into various categories as per the study requirements Source: https://phsdocs.stanford.edu/v1/0ineed-help/faq-optum	