Resultado Taller de Consultas

Oracle XE 21c - esquema TALLER - creación del esquema y consultas a-o

Datos del aprendiz

Nombre	Yamil Montoya Salinas
Identificación	
Ficha	

Creación del esquema (tablespace, usuario taller y permisos) conectado como sys en xepdb1


Código

```
CREATE TABLESPACE taller_tblspc
DATAFILE '/opt/oracle/oradata/XE/XEPDB1/taller_tblspc01.dbf'
SIZE 50M
AUTOEXTEND ON
NEXT 10M
MAXSIZE UNLIMITED
SEGMENT SPACE MANAGEMENT AUTO;

CREATE USER taller IDENTIFIED BY taller_pwd
DEFAULT TABLESPACE taller_tblspc
TEMPORARY TABLESPACE temp
QUOTA UNLIMITED ON taller_tblspc;

GRANT CREATE SESSION, CREATE TABLE, CREATE VIEW, CREATE SEQUENCE, CREATE PROCEDURE, CREATE TRIGGER TO taller;
```

Captura de la sesión de SQL*Plus

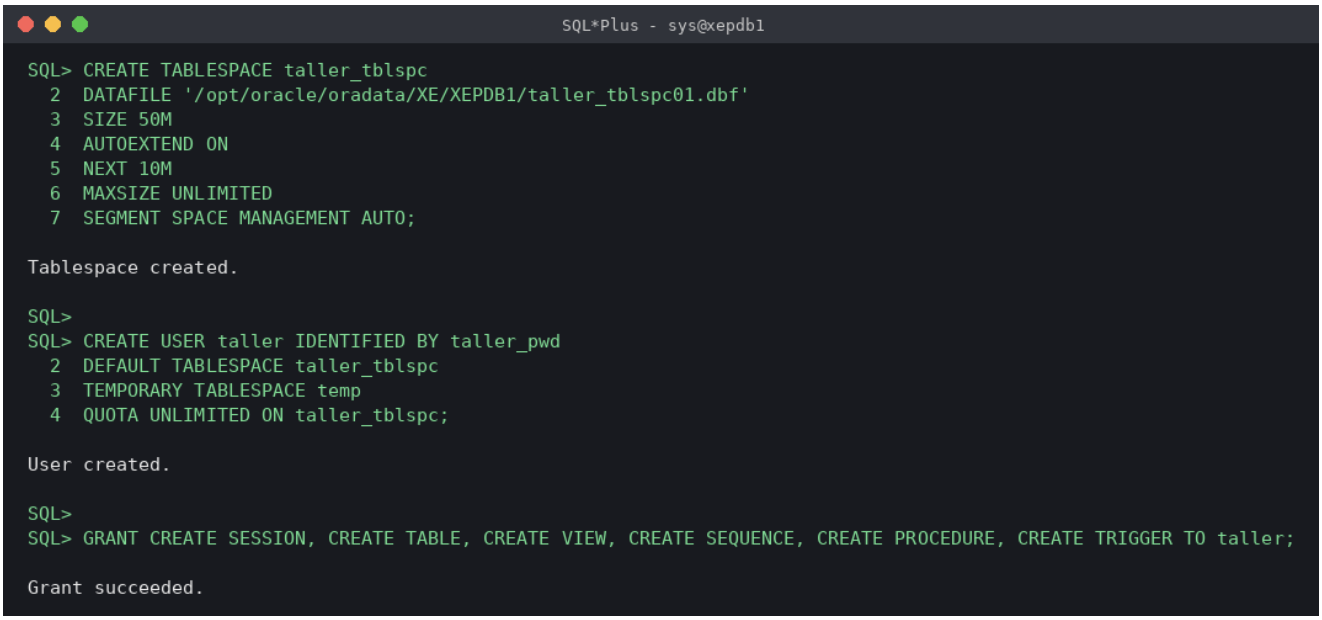


Carga del script del instructor: filas por tabla (EMPLOYEES debe tener 107)

Código

```
SELECT 'EMPLOYEES' AS tabla, COUNT(*) AS filas FROM employees
UNION ALL SELECT 'DEPARTMENTS', COUNT(*) FROM departments
UNION ALL SELECT 'LOCATIONS', COUNT(*) FROM locations
UNION ALL SELECT 'COUNTRIES', COUNT(*) FROM countries
UNION ALL SELECT 'REGIONS', COUNT(*) FROM regions
UNION ALL SELECT 'JOBS', COUNT(*) FROM jobs
UNION ALL SELECT 'JOB_HISTORY', COUNT(*) FROM job_history;
```

Captura de la sesión de SQL*Plus

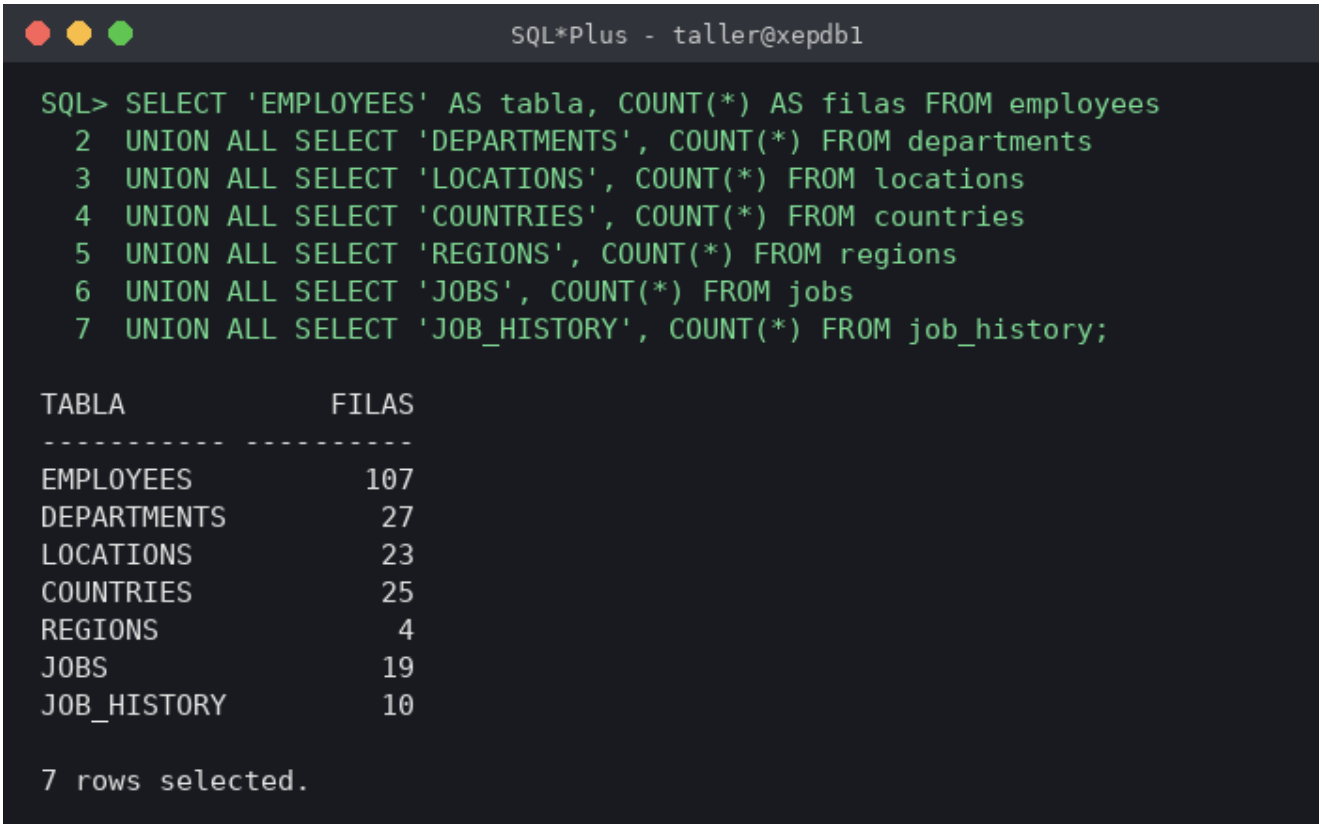


Creación de la tabla JOB_GRADES

Código

```
CREATE TABLE job_grades (
    grade_level VARCHAR2(3),
    lowest_sal  NUMBER,
    highest_sal NUMBER
);
INSERT INTO job_grades VALUES ('A', 1000, 2999);
INSERT INTO job_grades VALUES ('B', 3000, 5999);
INSERT INTO job_grades VALUES ('C', 6000, 9999);
INSERT INTO job_grades VALUES ('D', 10000, 14999);
INSERT INTO job_grades VALUES ('E', 15000, 24999);
INSERT INTO job_grades VALUES ('F', 25000, 40000);
COMMIT;
```

Captura de la sesión de SQL*Plus

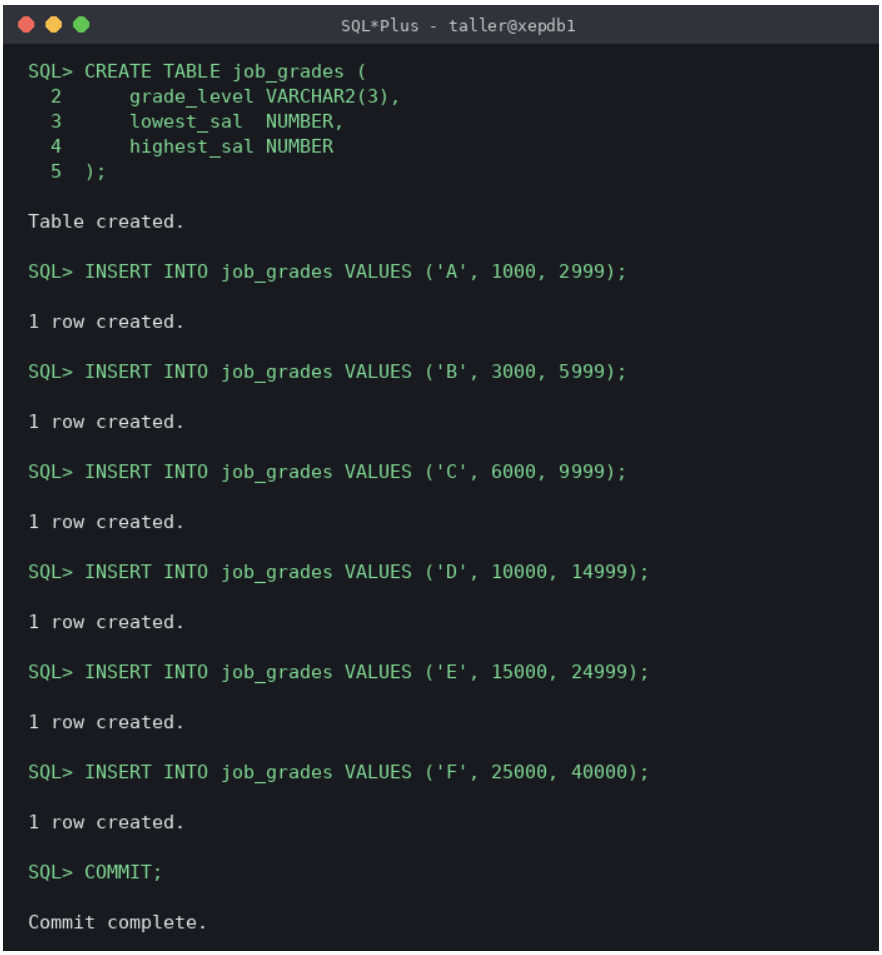

a) Direcciones de las ubicaciones con el nombre de su país

Código

```
SELECT l.location_id, l.street_address, l.city, l.state_province, c.country_name
FROM locations l
JOIN countries c ON l.country_id = c.country_id;
```

Captura de la sesión de SQL*Plus

SQL*Plus - taller@xepdb1

```
SQL> SELECT l.location_id, l.street_address, l.city, l.state_province, c.country_name
  2  FROM locations l
  3  JOIN countries c ON l.country_id = c.country_id;

LOCATION_ID STREET_ADDRESS               CITY           STATE_PROVINCE COUNTRY_NAME
----------- ---------------------------- -------------- -------------- --------------
       1000 1297 Via Cola di Rie         Roma                          Italy
       1100 93091 Calle della Testa      Venice                        Italy
       1200 2017 Shinjuku-ku             Tokyo          Tokyo Prefectu Japan
                                                        re

       1300 9450 Kamiya-cho              Hiroshima                     Japan
       1400 2014 Jabberwocky Rd          Southlake      Texas          United States
                                                                       of America

       1500 2011 Interiors Blvd          South San Fran California     United States
                                         cisco                         of America

       1600 2007 Zagora St               South Brunswic New Jersey     United States
                                         k                             of America

       1700 2004 Charade Rd              Seattle        Washington     United States
                                                                       of America

       1800 147 Spadina Ave              Toronto        Ontario        Canada
...


23 rows selected.
```

b) Apellido, departamento y nombre de departamento de todos los empleados (LEFT JOIN)

Código

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e
LEFT JOIN departments d ON e.department_id = d.department_id;
```

Captura de la sesión de SQL*Plus

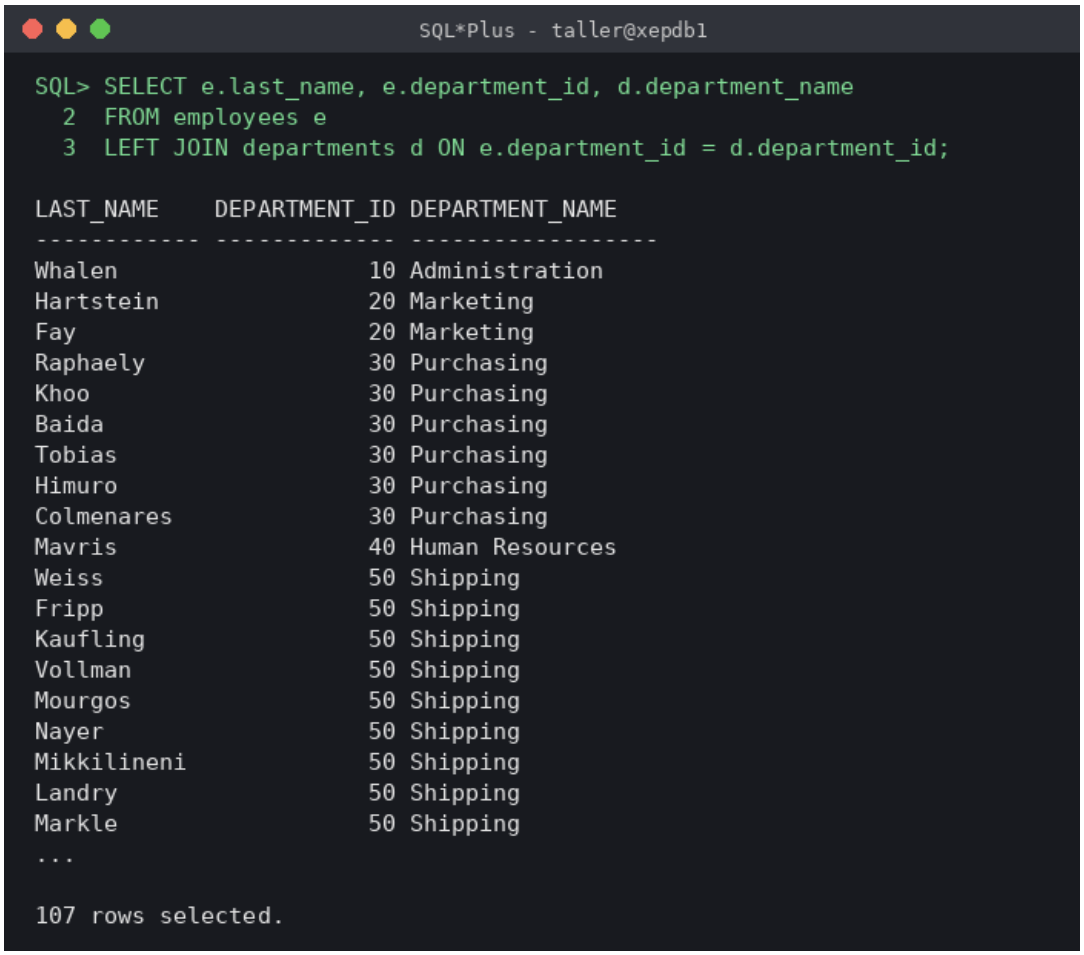


c) Empleados que trabajan en Toronto

Código

```
SELECT e.last_name, j.job_title, e.department_id, d.department_name
FROM employees e
JOIN departments d ON e.department_id = d.department_id
JOIN locations l ON d.location_id = l.location_id
JOIN jobs j ON e.job_id = j.job_id
WHERE l.city = 'Toronto';
```

Captura de la sesión de SQL*Plus

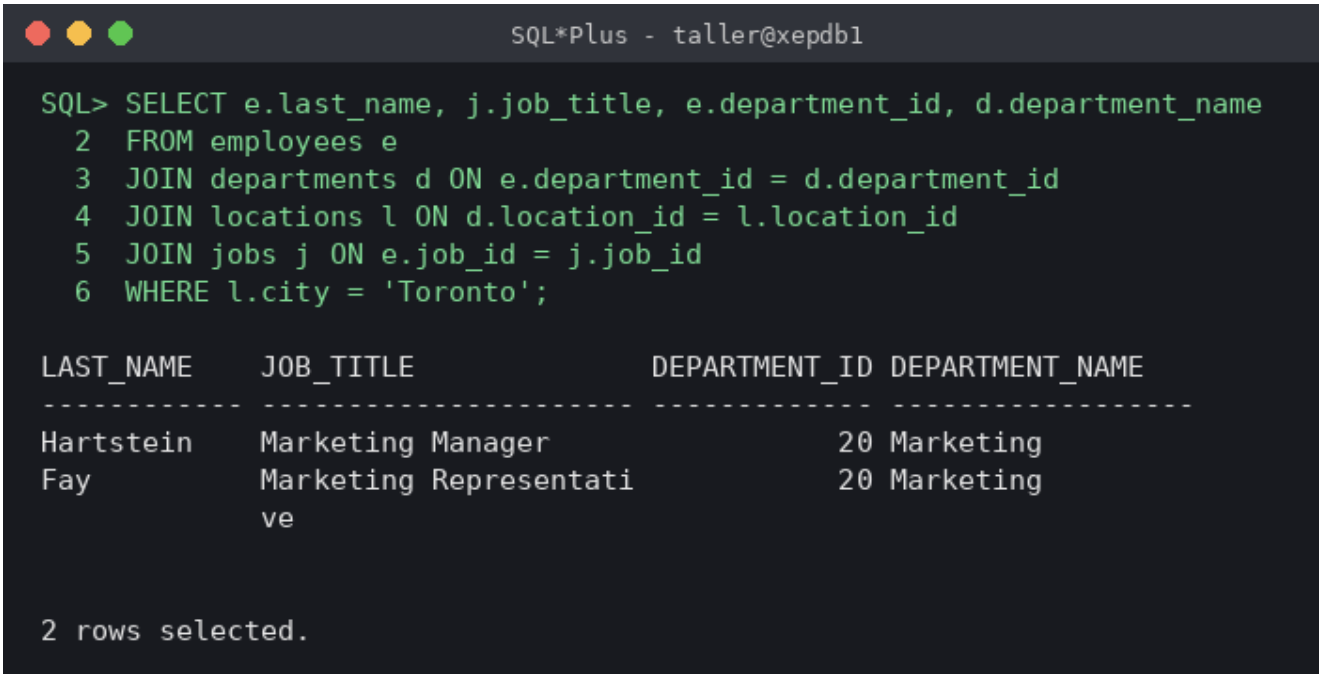


d) Empleados y sus gerentes (autounión)

Código

```
SELECT e.last_name AS "Employee", e.employee_id AS "Emp#", m.last_name AS "Manager", m.employee_id AS "Mgr#"
FROM employees e
JOIN employees m ON e.manager_id = m.employee_id;
```

Captura de la sesión de SQL*Plus

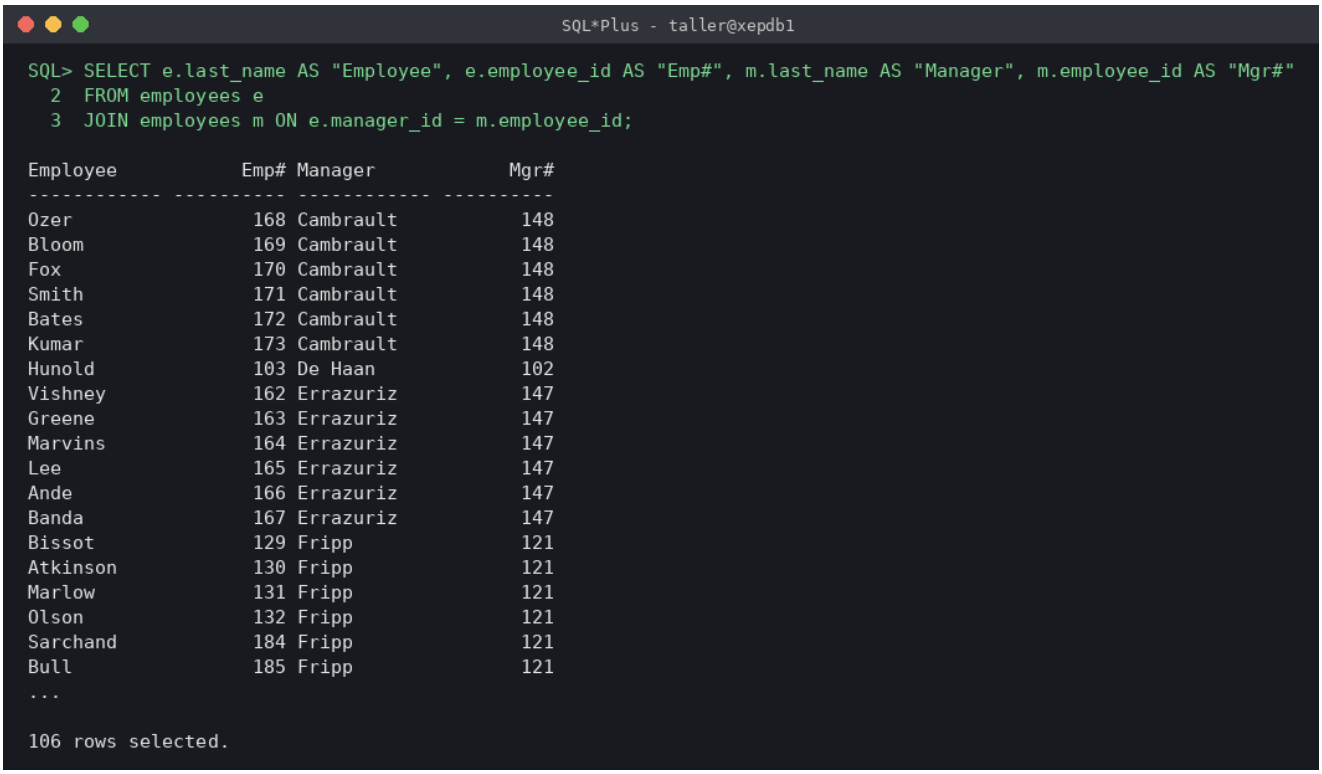


e) Empleados y sus gerentes, incluido quien no tiene gerente (LEFT JOIN)

Código

```
SELECT e.last_name AS "Employee", e.employee_id AS "Emp#", m.last_name AS "Manager", m.employee_id AS "Mgr#"
FROM employees e
LEFT JOIN employees m ON e.manager_id = m.employee_id
ORDER BY e.employee_id;
```

Captura de la sesión de SQL*Plus

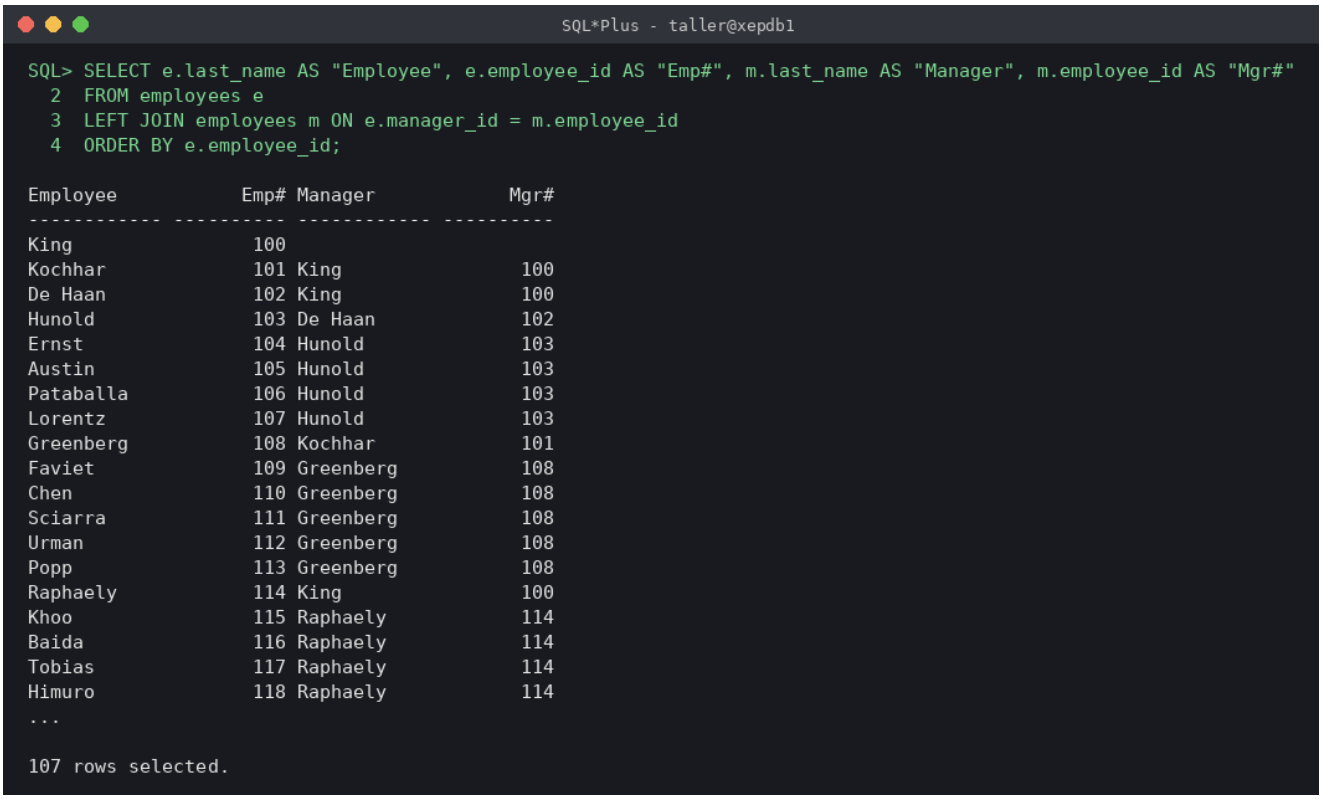


f) Compañeros de departamento de cada empleado

Código

```
SELECT e.department_id AS "Departamento", e.last_name AS "Empleado", c.last_name AS "Colega"
FROM employees e
JOIN employees c ON e.department_id = c.department_id AND e.employee_id <> c.employee_id
ORDER BY e.department_id, e.last_name, c.last_name;
```

Captura de la sesión de SQL*Plus

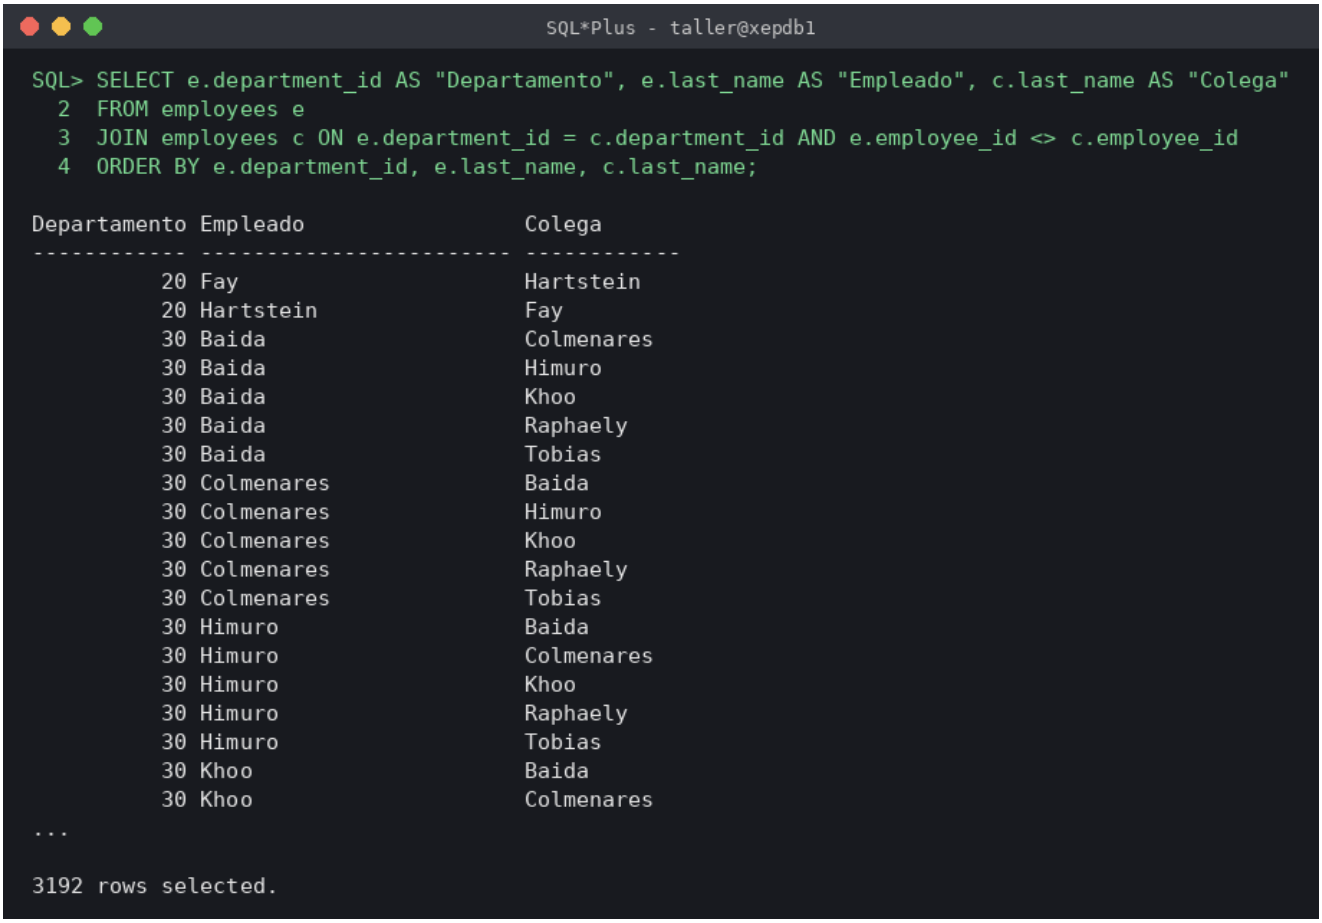


g) Estructura de JOB_GRADES y grado salarial de cada empleado

Código

```
DESCRIBE job_grades;
```


Captura de la sesión de SQL*Plus

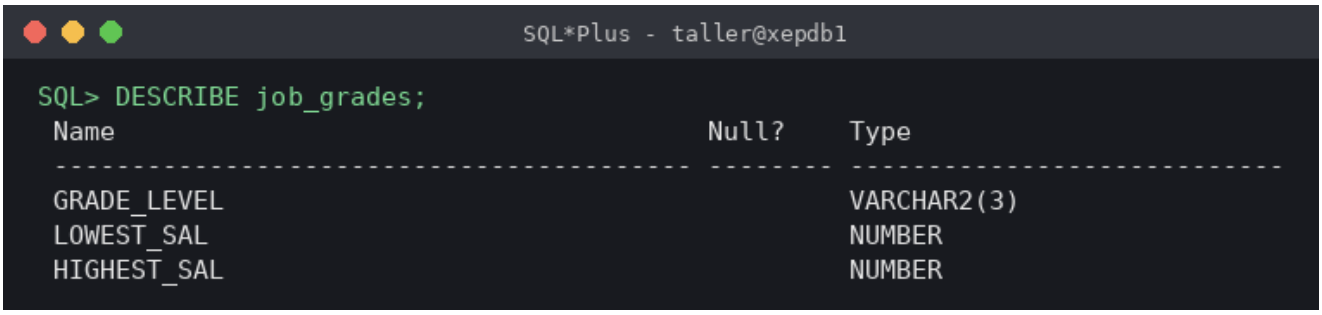

Código

```
SELECT e.last_name, j.job_title, d.department_name, e.salary, g.grade_level
FROM employees e
JOIN jobs j ON e.job_id = j.job_id
LEFT JOIN departments d ON e.department_id = d.department_id
JOIN job_grades g ON e.salary BETWEEN g.lowest_sal AND g.highest_sal;
```

Captura de la sesión de SQL*Plus

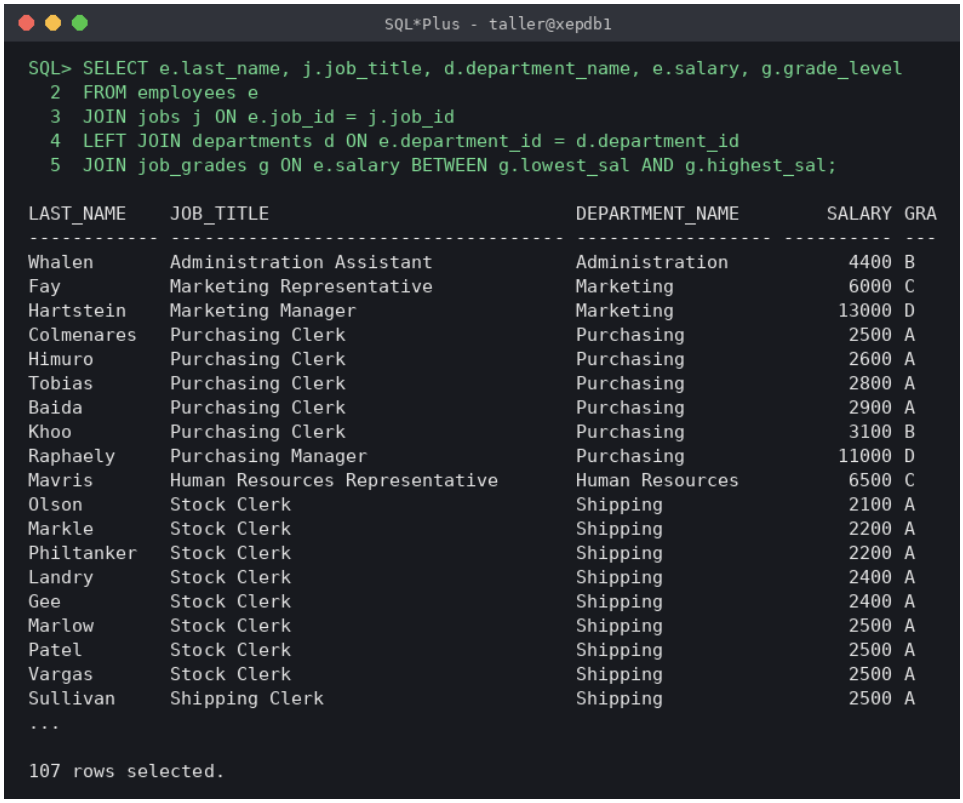


h) Empleados contratados después de Davies

Código

```
SELECT e.first_name || ' ' || e.last_name AS nombre, e.hire_date
FROM employees e
JOIN employees dv ON dv.last_name = 'Davies' AND dv.hire_date < e.hire_date;
```

Captura de la sesión de SQL*Plus

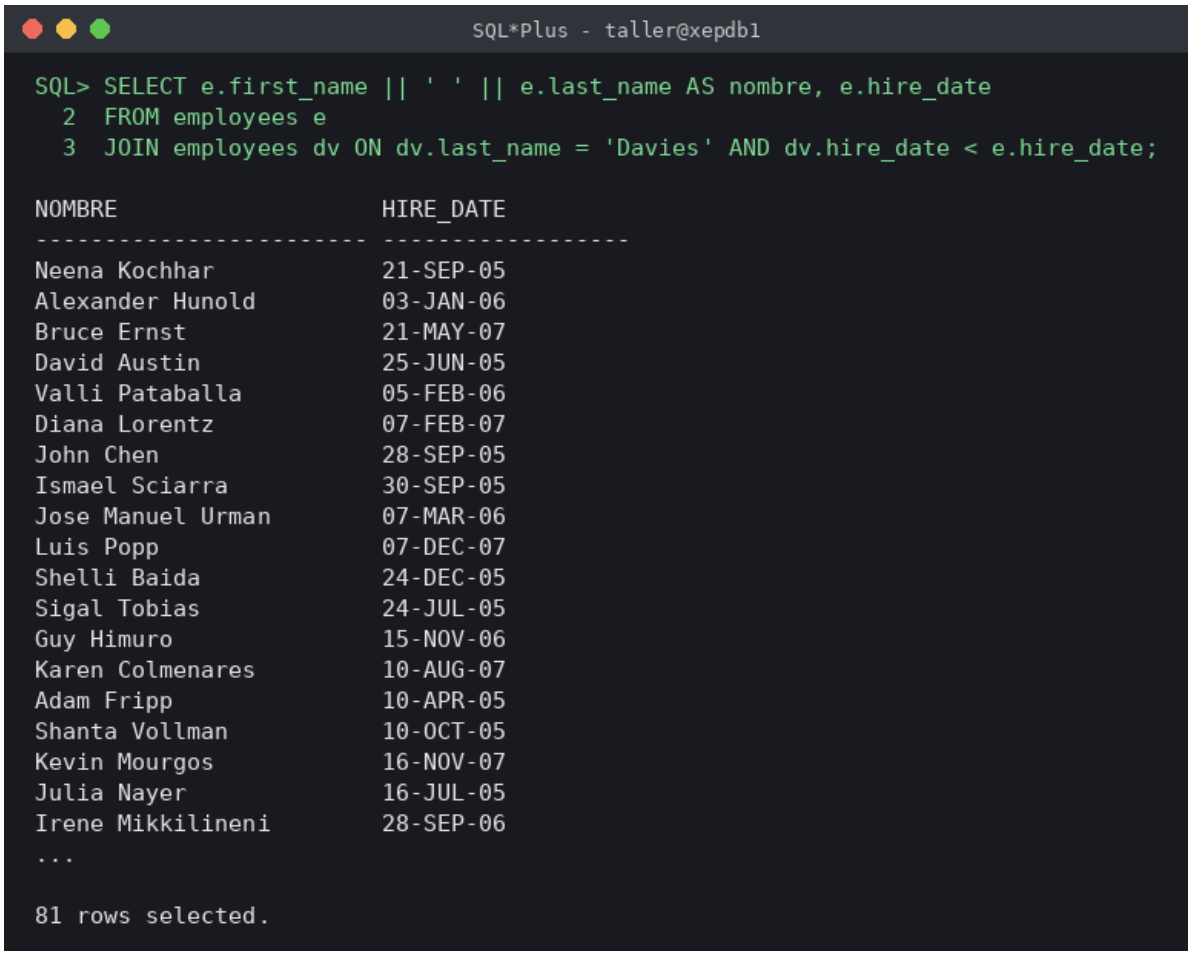


i) Empleados contratados antes que su supervisor

Código

```
SELECT e.first_name || ' ' || e.last_name AS "Empleado", e.hire_date AS "Contratacion Empleado",
       m.first_name || ' ' || m.last_name AS "Supervisor", m.hire_date AS "Contratacion Supervisor"
FROM employees e
JOIN employees m ON e.manager_id = m.employee_id
WHERE e.hire_date < m.hire_date;
```

Captura de la sesión de SQL*Plus

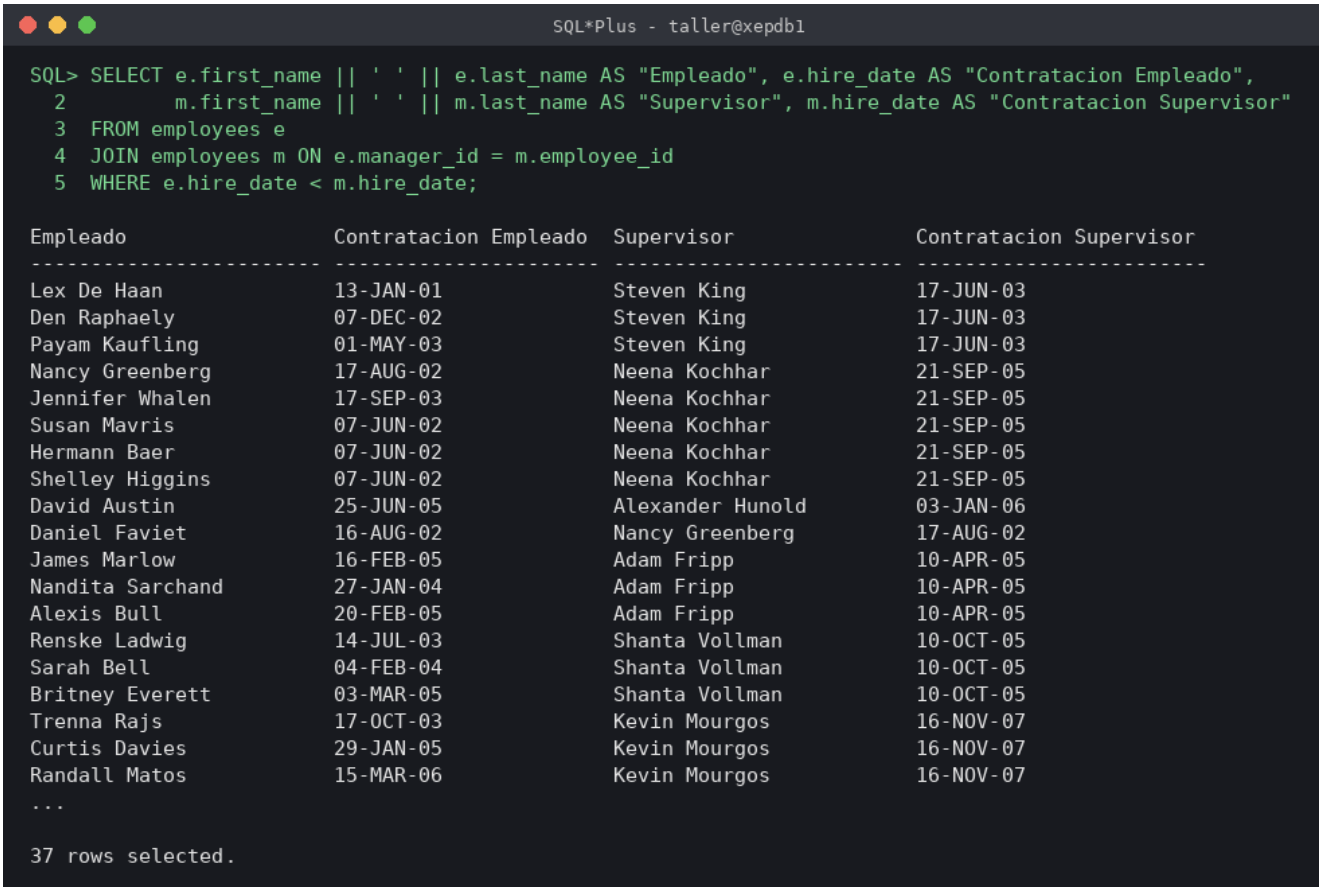


j) Empleados del mismo departamento que un empleado dado (DEFINE apellido = Davies)

Código

```
DEFINE apellido = Davies
SELECT last_name, hire_date
FROM employees
WHERE department_id IN (SELECT department_id FROM employees WHERE last_name = '&&apellido')
AND last_name <> '&&apellido';
UNDEFINE apellido
```

Captura de la sesión de SQL*Plus

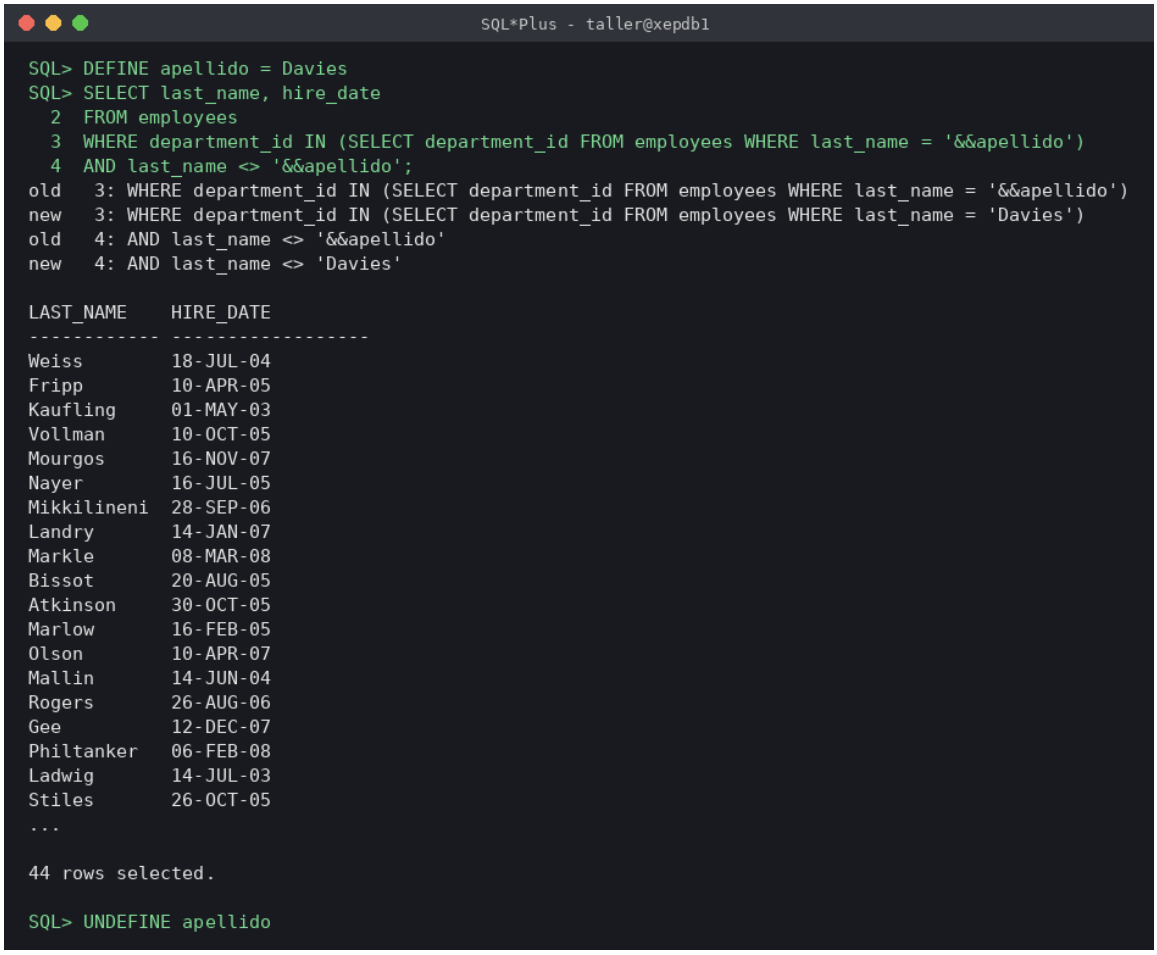


k) Empleados con salario superior al promedio

Código

```
SELECT employee_id, last_name
FROM employees
WHERE salary > (SELECT AVG(salary) FROM employees)
ORDER BY salary ASC;
```

Captura de la sesión de SQL*Plus

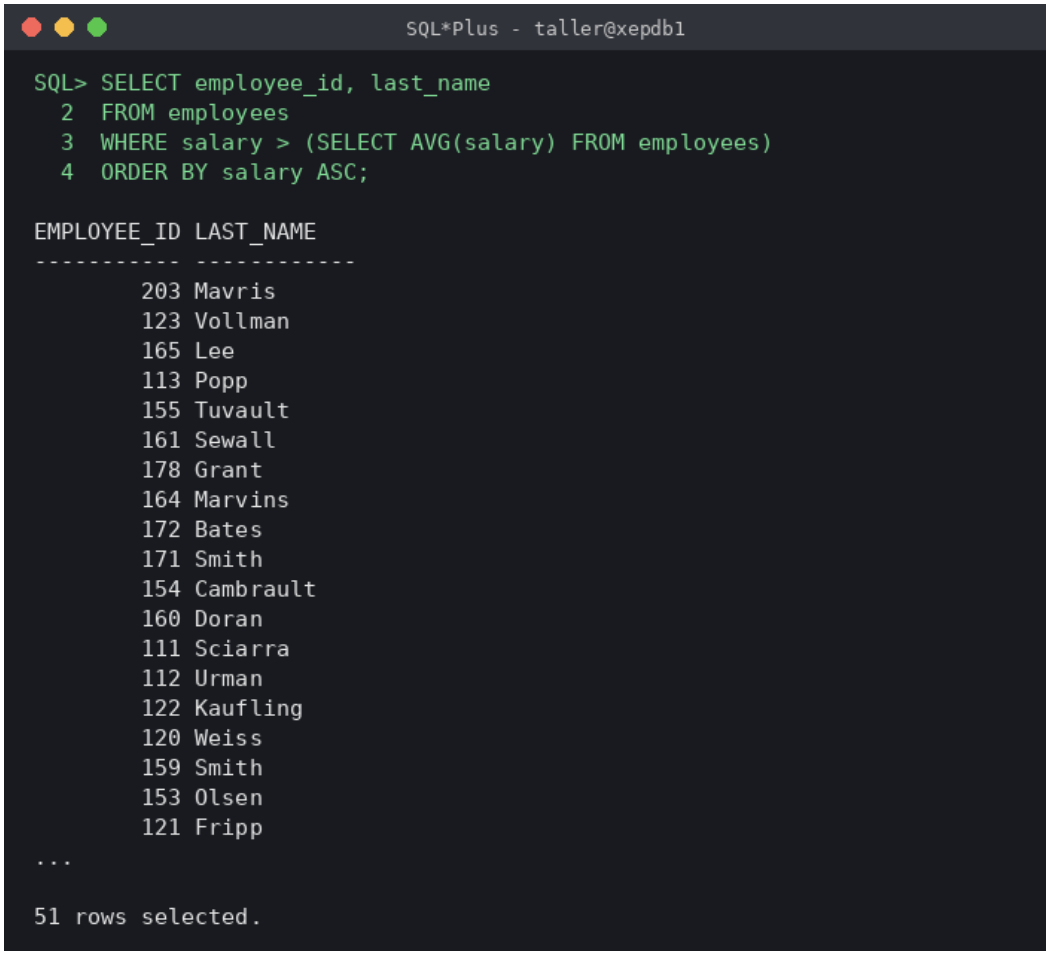


l) Empleados en departamentos con algún empleado cuyo apellido contiene la letra u

Código

```
SELECT employee_id, last_name
FROM employees
WHERE department_id IN (SELECT department_id FROM employees WHERE LOWER(last_name) LIKE '%u%');
```

Captura de la sesión de SQL*Plus

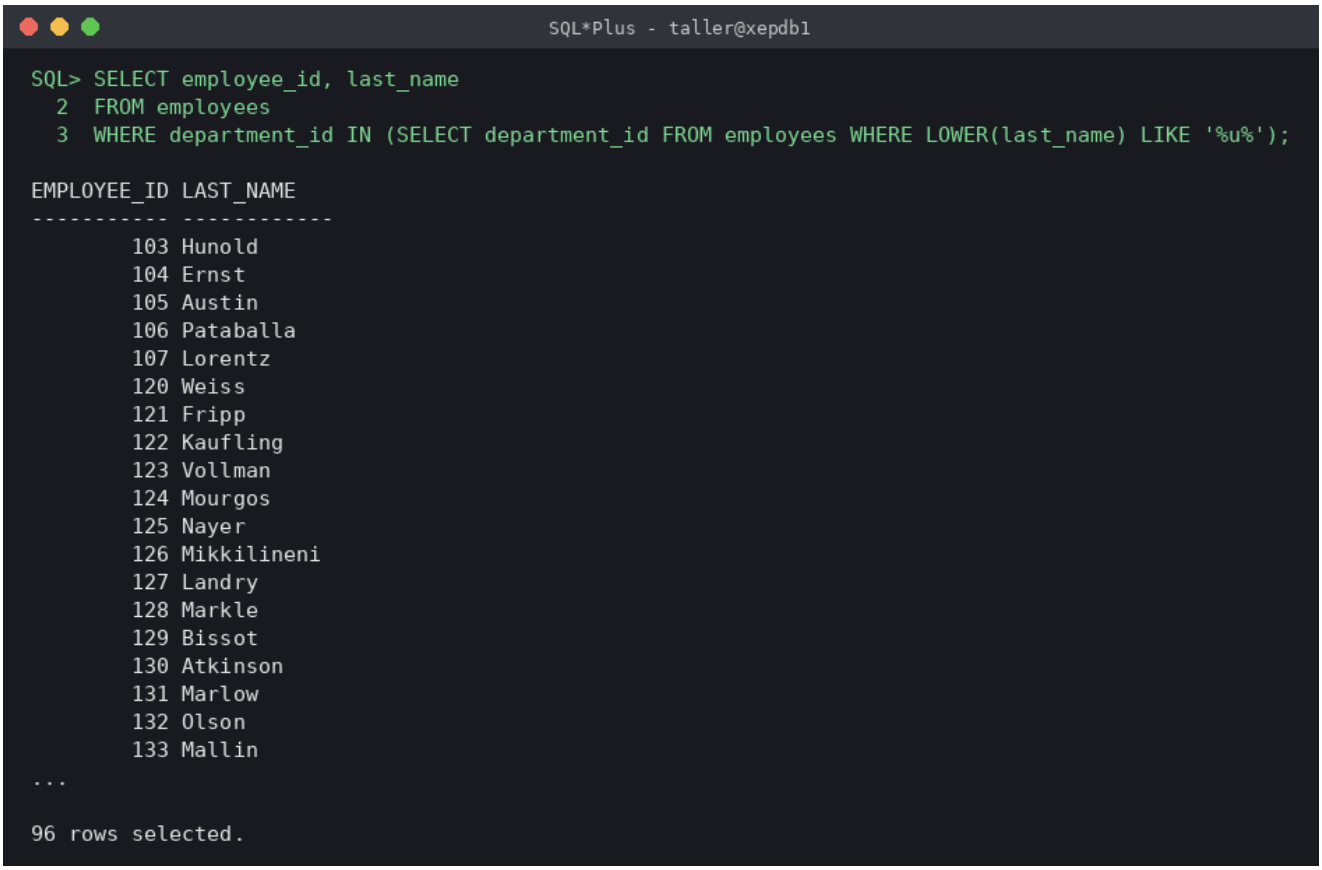


m) Empleados de departamentos ubicados en location_id 1700

Código

```
SELECT last_name, department_id, job_id
FROM employees
WHERE department_id IN (SELECT department_id FROM departments WHERE location_id = 1700);
```

Captura de la sesión de SQL*Plus

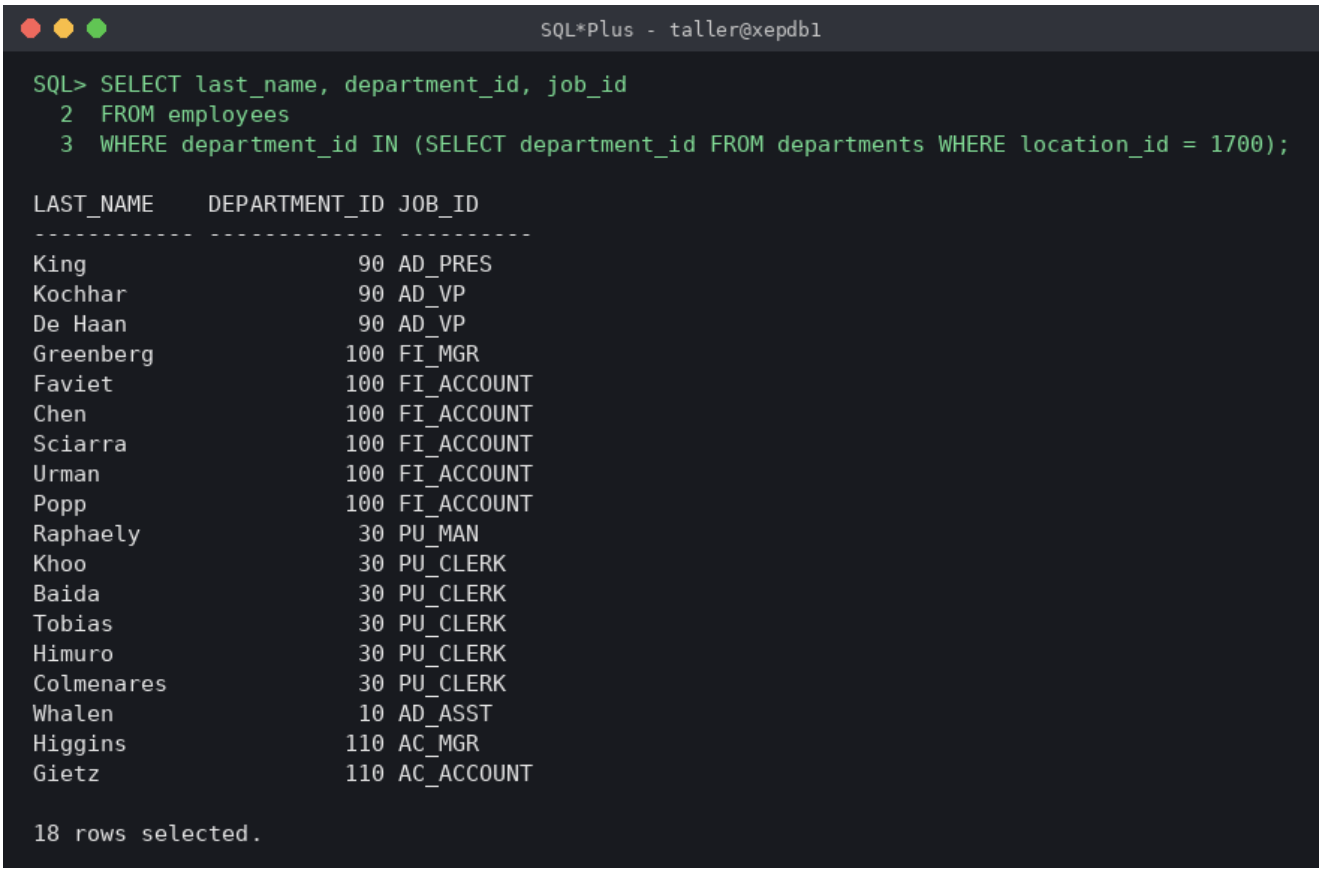


n) Empleados cuyo gerente es King

Código

```
SELECT last_name, salary
FROM employees
WHERE manager_id IN (SELECT employee_id FROM employees WHERE last_name = 'King');
```

Captura de la sesión de SQL*Plus

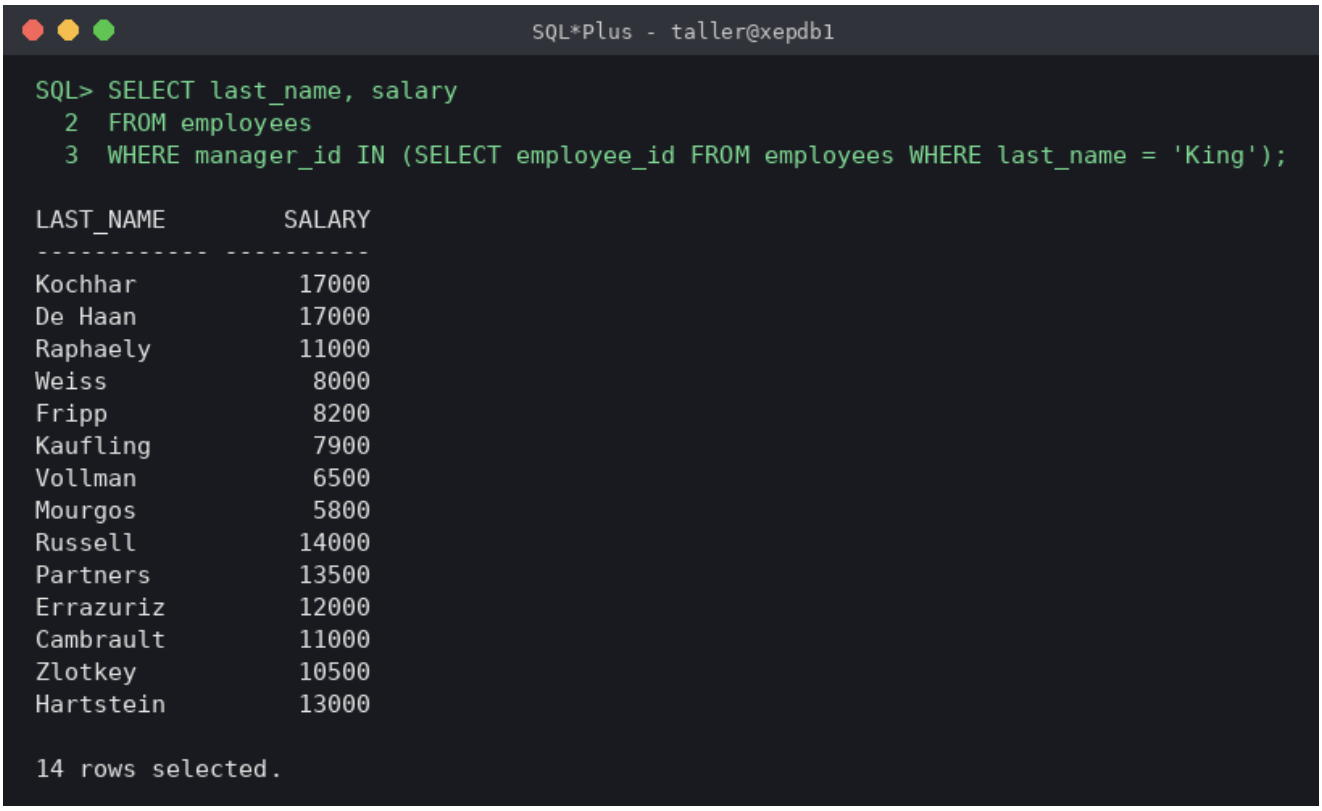

o) Empleados del departamento Executive

Código

```
SELECT e.department_id, e.last_name, e.job_id
FROM employees e
JOIN departments d ON e.department_id = d.department_id
WHERE d.department_name = 'Executive';
```

Captura de la sesión de SQL*Plus

