


Skill 2

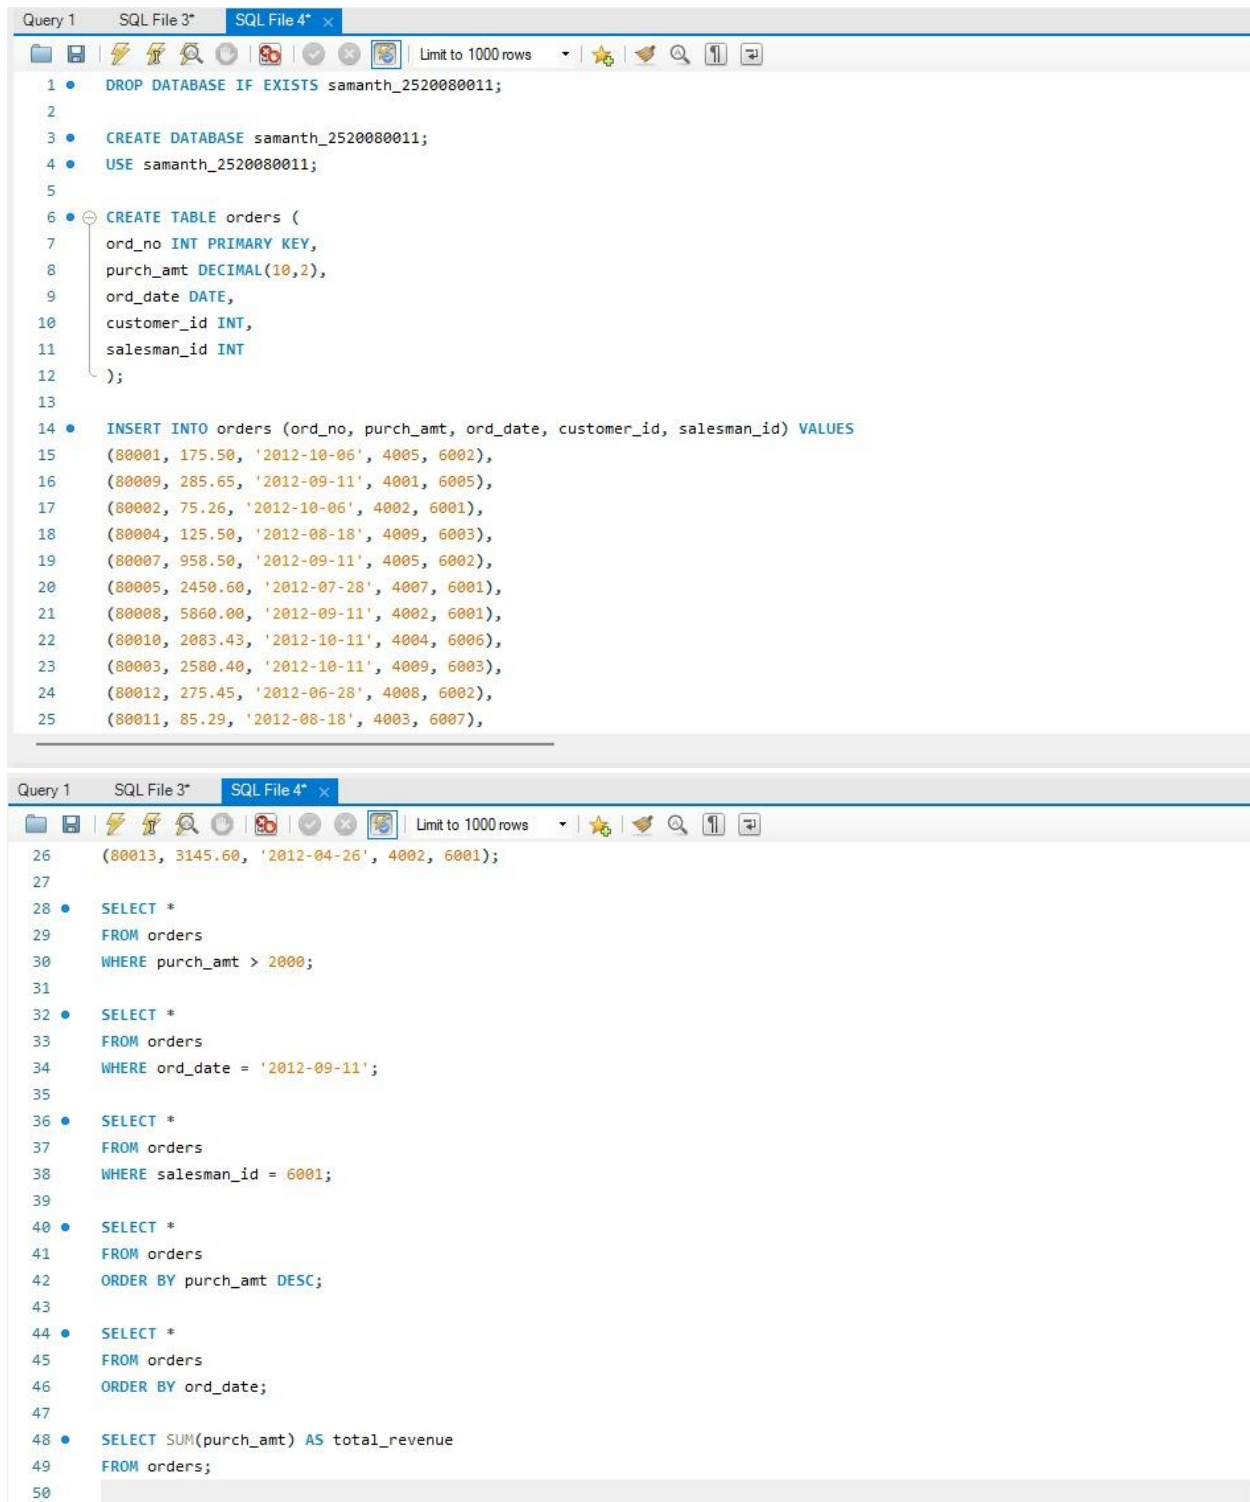

```
Query 1    SQL File 3*    SQL File 4* x
Limit to 1000 rows

1 DROP DATABASE IF EXISTS samanth_2520080011;
2
3 CREATE DATABASE samanth_2520080011;
4 USE samanth_2520080011;
5
6 CREATE TABLE orders (
7     ord_no INT PRIMARY KEY,
8     purch_amt DECIMAL(10,2),
9     ord_date DATE,
10    customer_id INT,
11    salesman_id INT
12 );
13
14 INSERT INTO orders (ord_no, purch_amt, ord_date, customer_id, salesman_id) VALUES
15 (80001, 175.50, '2012-10-06', 4005, 6002),
16 (80009, 285.65, '2012-09-11', 4001, 6005),
17 (80002, 75.26, '2012-10-06', 4002, 6001),
18 (80004, 125.50, '2012-08-18', 4009, 6003),
19 (80007, 958.50, '2012-09-11', 4005, 6002),
20 (80005, 2450.60, '2012-07-28', 4007, 6001),
21 (80008, 5860.00, '2012-09-11', 4002, 6001),
22 (80010, 2083.43, '2012-10-11', 4004, 6006),
23 (80003, 2580.40, '2012-10-11', 4009, 6003),
24 (80012, 275.45, '2012-06-28', 4008, 6002),
25 (80011, 85.29, '2012-08-18', 4003, 6007),

26 (80013, 3145.60, '2012-04-26', 4002, 6001);
27
28 SELECT *
29 FROM orders
30 WHERE purch_amt > 2000;
31
32 SELECT *
33 FROM orders
34 WHERE ord_date = '2012-09-11';
35
36 SELECT *
37 FROM orders
38 WHERE salesman_id = 6001;
39
40 SELECT *
41 FROM orders
42 ORDER BY purch_amt DESC;
43
44 SELECT *
45 FROM orders
46 ORDER BY ord_date;
47
48 SELECT SUM(purch_amt) AS total_revenue
49 FROM orders;
50
```

```
Query 1  SQL File 3*  SQL File 4* x
Limit to 1000 rows
51 • SELECT AVG(purch_amt) AS average_order
52 FROM orders;
53
54 • SELECT MAX(purch_amt) AS highest_order
55 FROM orders;
56
57 • SELECT MIN(purch_amt) AS lowest_order
58 FROM orders;
59
60 • SELECT COUNT(*) AS total_orders
61 FROM orders;
62
63 • SELECT salesman_id,
64 SUM(purch_amt) AS total_sales
65 FROM orders
66 GROUP BY salesman_id;
67
68 • SELECT customer_id,
69 SUM(purch_amt) AS total_purchase
70 FROM orders
71 GROUP BY customer_id;
72
73 • SELECT customer_id,
74 MAX(purch_amt) AS highest_purchase
75 FROM orders;
```

```
Query 1  SQL File 3*  SQL File 4* x
Limit to 1000 rows
76 GROUP BY customer_id;
77
78 • SELECT salesman_id,
79 SUM(purch_amt) AS total_sales
80 FROM orders
81 GROUP BY salesman_id
82 HAVING SUM(purch_amt) > 3000;
83
84 • SELECT customer_id,
85 SUM(purch_amt) AS total_purchase
86 FROM orders
87 GROUP BY customer_id
88 HAVING SUM(purch_amt) > 2500;
89
90 • SELECT customer_id,
91 COUNT(*) AS total_orders
92 FROM orders
93 GROUP BY customer_id
94 HAVING COUNT(*) > 1;
95
96 • SELECT customer_id,
97 SUM(purch_amt) AS total_purchase
98 FROM orders
99 GROUP BY customer_id
100 HAVING SUM(purch_amt) > 1000;
```

```
Query 1  SQL File 3*  SQL File 4* x
Limit to 1000 rows
96 • SELECT customer_id,
97     SUM(purch_amt) AS total_purchase
98 FROM orders
99 GROUP BY customer_id
100 HAVING SUM(purch_amt) > 1000
101 ORDER BY total_purchase DESC;
102
103 • SELECT customer_id,
104     MAX(purch_amt) AS max_purchase
105 FROM orders
106 GROUP BY customer_id
107 HAVING MAX(purch_amt) BETWEEN 2000 AND 6000;
108
109 • SELECT salesman_id,
110     COUNT(*) AS total_orders
111 FROM orders
112 GROUP BY salesman_id
113 HAVING COUNT(*) > 2;
114
115 • SELECT ord_date,
116     MAX(purch_amt) AS highest_purchase
117 FROM orders
118 GROUP BY ord_date
119 HAVING MAX(purch_amt) > 2000;
120
```

Output:

customer_id	total_purchase
4005	1134.00
4002	9080.86
4009	2705.90
4007	2450.60
4001	285.65
4004	2083.43
4003	85.29
4008	275.45

salesman_id	total_sales
6002	1409.45
6001	11531.46
6003	2705.90
6005	285.65
6006	2083.43
6007	85.29