

Name: Saman Waseem

ERP ID: 29258

1. Inspect a user-process page table

```
samanwaseem@DESKTOP-5H31PUS: ~/xv6-labs-2025
xv6 kernel is booting
hart 2 starting
hart 1 starting
init: starting sh
$ pgtbltest
print_pgtbl starting
va 0x0 pte 0x21FC8858 pa 0x87F22000 perm 0x5B
va 0x1000 pte 0x21FC7C5B pa 0x87F1F000 perm 0x5B
va 0x2000 pte 0x21FC7817 pa 0x87F1E000 perm 0x17
va 0x3000 pte 0x21FC7407 pa 0x87F1D000 perm 0x7
va 0x4000 pte 0x21FC70D7 pa 0x87F1C000 perm 0xD7
va 0x5000 pte 0x0 pa 0x0 perm 0x0
va 0x6000 pte 0x0 pa 0x0 perm 0x0
va 0x7000 pte 0x0 pa 0x0 perm 0x0
va 0x8000 pte 0x0 pa 0x0 perm 0x0
va 0x9000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFF6000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFF7000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFF8000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFF9000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFFA000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFFB000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFFC000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFFD000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFFE000 pte 0x21FD08C7 pa 0x87F42000 perm 0xC7
va 0xFFFFF000 pte 0x2000184B pa 0x80006000 perm 0x4B
print_pgtbl: OK
ugetpid_test starting
usertrap(): unexpected scause 0xd pid=4
sepc=0x782 stval=0x3fffffd000
$
```

Annotations:

- 0x5B: 00010001 user accessible and valid
- 0x17: 00000111 Readable writable valid
- 0xD7: 1101 0111 All except global and executable
- 0x0: none
- 0xC7: 0110 0111 Accessible global writable readable valid
- 0x4B: 0010 1011 Global, executable, readable, valid

in binary 0101 1011 DAGUXWRV the high bits (ptes): accessed, user accessible, executable, readable, valid mapping

Reference:


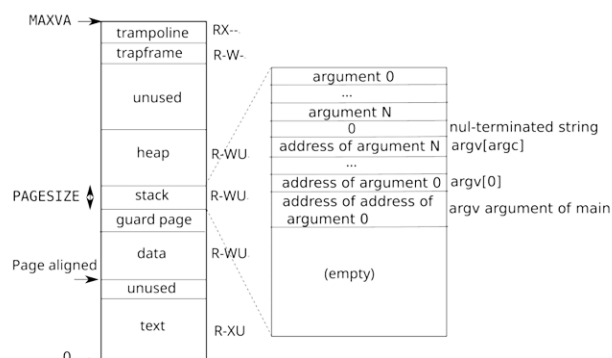


Figure 3.4: A process's user address space, with its initial stack.

2. Speed up system calls

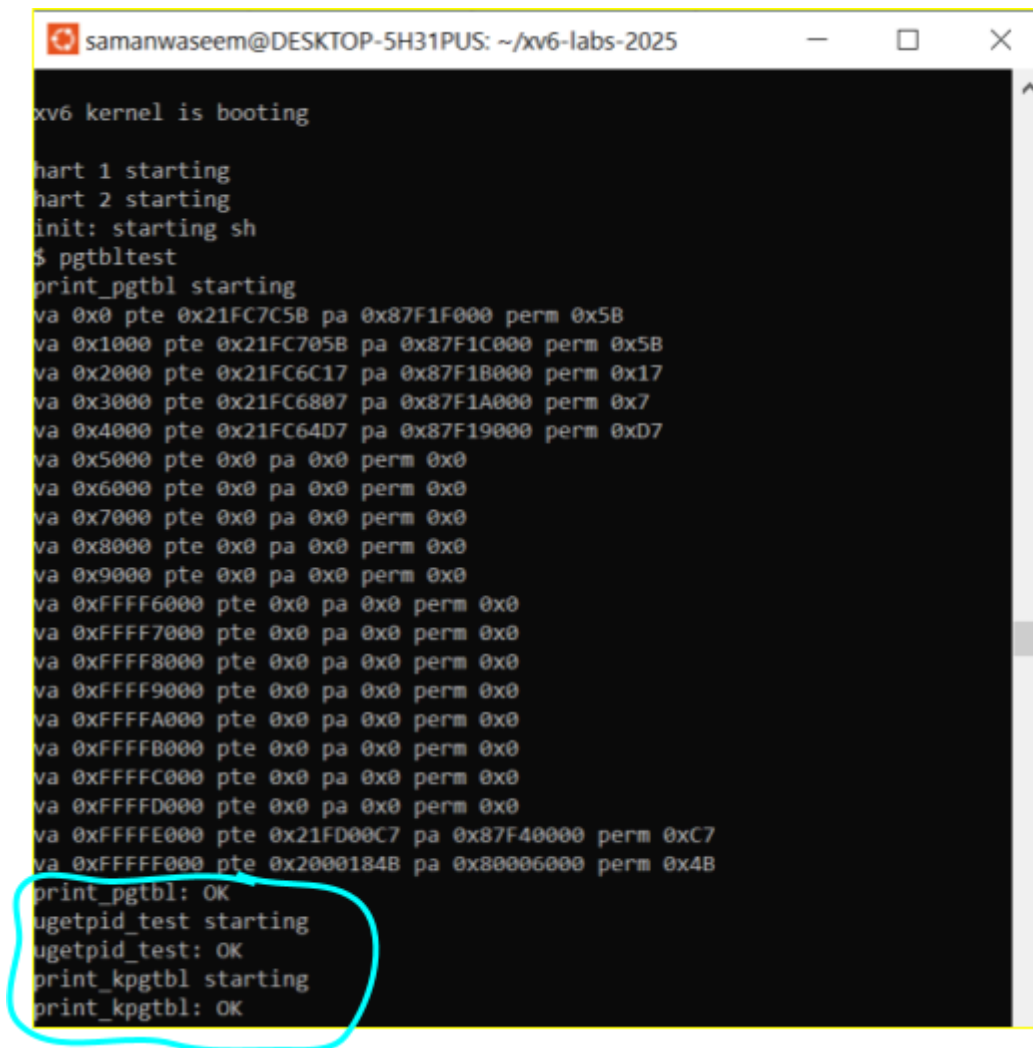

```
samanwaseem@DESKTOP-5H31PUS: ~/xv6-labs-2025
xv6 kernel is booting
hart 1 starting
hart 2 starting
init: starting sh
$ pgtbltest
print_pgtbl starting
va 0x0 pte 0x21FC7C5B pa 0x87F1F000 perm 0x5B
va 0x1000 pte 0x21FC705B pa 0x87F1C000 perm 0x5B
va 0x2000 pte 0x21FC6C17 pa 0x87F1B000 perm 0x17
va 0x3000 pte 0x21FC6807 pa 0x87F1A000 perm 0x7
va 0x4000 pte 0x21FC64D7 pa 0x87F19000 perm 0xD7
va 0x5000 pte 0x0 pa 0x0 perm 0x0
va 0x6000 pte 0x0 pa 0x0 perm 0x0
va 0x7000 pte 0x0 pa 0x0 perm 0x0
va 0x8000 pte 0x0 pa 0x0 perm 0x0
va 0x9000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFF6000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFF7000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFF8000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFF9000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFFA000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFFB000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFFC000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFFD000 pte 0x0 pa 0x0 perm 0x0
va 0xFFFFE000 pte 0x21FD00C7 pa 0x87F40000 perm 0xC7
va 0xFFFFF000 pte 0x2000184B pa 0x80006000 perm 0x4B
print_pgtbl: OK
ugetpid_test starting
ugetpid_test: OK
print_kpgtbl starting
print_kpgtbl: OK
```

```
print_pgtbl: OK
ugetpid_test starting
ugetpid_test: OK
print_kpgtbl starting
print_kpgtbl: OK
```

Which other xv6 system call(s) could be made faster using this shared page? Explain how.

getpid(), which fetched parent processes' pids could be made much faster through a shared page because it will be able to avoid 'round trips' to the kernel through ecalls. By allocating a field in the shared page, the kernel would be able to only update it during rare events. When getpid() is called, the wrapper function would read the value directly. We won't need to switch between user and kernel mode.

3. Print a page table

4. Use superpages
