R

C2 General

C2 General

C2 General

C2 General

Flutter works by providing a

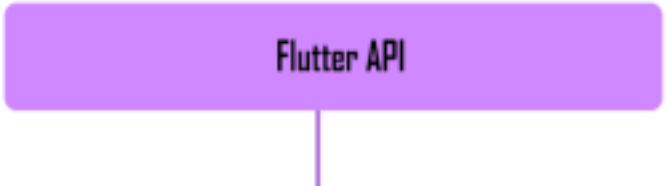

framework for building native interfaces for iOS, Android, and other platforms using a single codebase.

ANDROID: JAVA/KOTLIN

IOS:SWIFT

WEB:HTML-CSS_JAVASCRIPT

DESKTOP: C++

Android Studio Website

How to install Flutter on windows

How to install flutter on MAC

C2 General

C2 General

C2 General

C2 General

C2 General

C2 General

C2 General

C2 General

C2 General

```
if (condition) {
  // Code to execute if the condition is true
} else {
  // Code to execute if the condition is false
}
```

```
if (condition1) {
  // Code to execute if condition1 is true
} else if (condition2) {
  // Code to execute if condition2 is true
} else {
  // Code to execute if all conditions are false
}
```

C2 General

```
switch (expression) {
  case value1:
    // Code to execute if expression matches value1
    break;
  case value2:
    // Code to execute if expression matches value2
    break;
  // ...
  default:
    // Code to execute if expression doesn't match any case
}
```

```
for (initialization; condition; increment/decreme
  // Code to be executed in each iteration
}
```

```
for (var element in iterable) {
  // Code to be executed for each element
}
```

```
iterable.forEach((element) {
  // Code to be executed for each element
});
```

```
while (condition) {
  // Code to be executed in each iteration
}
```

C2 General

```
do {
  // Code to be executed
} while (condition);
```

C2 General

C2 General

```
void functionName ()
{
 //Body
}
```

C2 General

```
returnType functionName() {
  // Function body
  // Statements and logic
  return value; // Return the value
}
```

C2 General

```
returnType functionName(parameters) {
  // Function body
  // Statements and logic
  return value; // Optional
}
```

C2 General

```
int add(int a, int b) {
  int sum = a + b;
  return sum;
}
```

```
int result = add(3, 4); // result will be 7
```

```
String greet(String name, [String? title]) {
  if (title != null) {
    return "Hello, $title $name!";
  } else {
    return "Hello, $name!";
  }
}

// Calling the function
print(greet("Alice")); // Output: Hello, Alice!
print(greet("Alice", "Dr.")); // Output: Hello, Dr. Alice!
```

C2 General

C2 General