DYNACOUNT 3D Plus

everlife
CPCDiagnostics
Enabling Better Outcomes



3 PART
HEMATOLOGY ANALYZER


DYNACOUNT 3D Plus



- CBC+3 DIFF, 23 parameters + 3 Histograms
- Throughput upto 60 samples per hour
- 10.4 inch TFT touch screen
- Only three reagents needed
- Detailed flag information
- Large storage capacity: up to 400,000 samples
- Sample volume is only 9µL which is ideal for pediatrics

Accurate Reliable Results


Advanced detailed flag information provides warning in case of abnormal cell results.

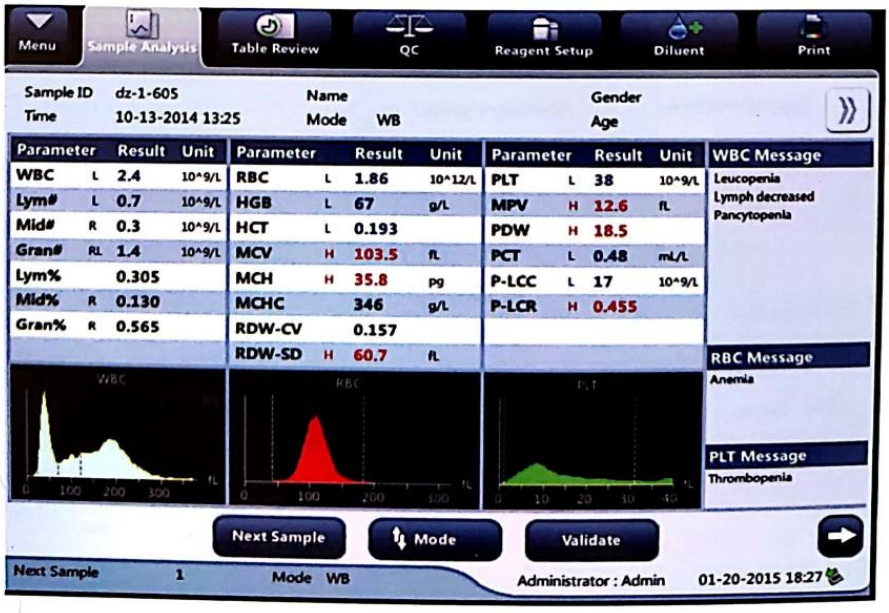



The perfect combination of precision and technology

- Smart and intuitive software brings your productivity to a new level.
- The 10.4 inch TFT touch screen for easy operations.
- 400,000 Result storage for Patient Data Management.
- Smart Maintenance with one click for troubleshooting.

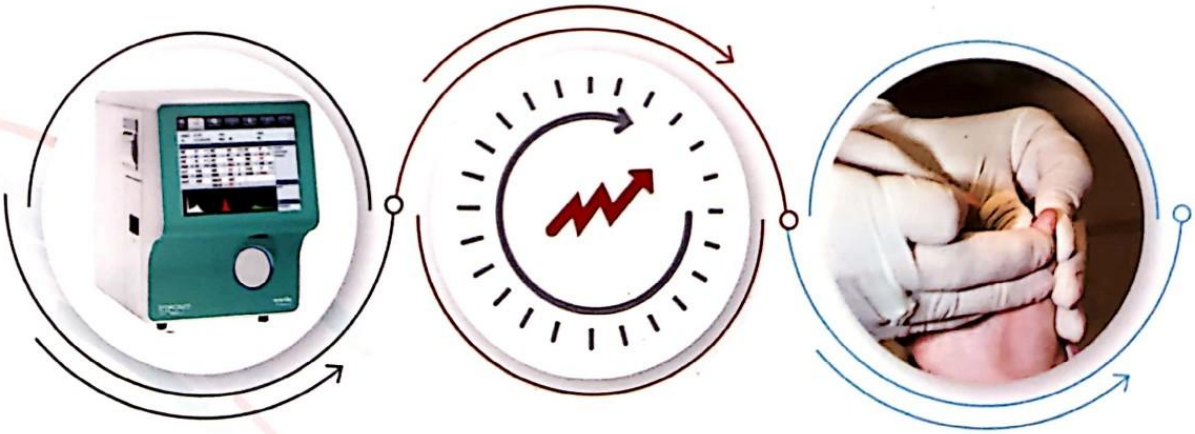

Smallest

Convenience fast

Perfect for pediatric samples

DYNACOUNT 3D Plus

Technical Specifications

Throughput
60 samples per hour

Principles
Impedance method for WBC, RBC and PLT counting
Cyanide free reagent for hemoglobin test

Parameters
21 parameters
Routine
WBC (Gran%, Lym%, Mid%, Gran#, Lym#, Mid#)
RBC (HGB, HCT, MCV, MCH, MCHC, RDW-CV, RDW-SD)
PLT(MPV, PDW, PCT, P-LCR, P-LCC)

Research Parameters
2 parameters: NLR, PLR

Graphics
3 histograms for WBC, RBC and PLT

Sample Volume
Whole blood mode ≤ 9 µL
Prediluted mode ≤ 20µL

Performance Characteristic

Parameter	Linearity Range	Precision (CV %)	Carryover
WBC	0-300(10^9/L)	≤3.5% (4.0-6.9) ≤2.0% (7.0-15.0)	≤0.5%
RBC	0-8.00(10^{12}/L)	≤1.5%(3.50-6.5)	≤0.5%
HGB	0-280(g/L)	≤1.5% (100-180)	≤0.5%
PLT	0-4000 (10^9/L)	≤5.0% (100-149) ≤4.0% (150-500)	≤1.0%

Display
10.4 inch TFT Touch Screen

Storage Capacity
Up to 400,000 results including graphical information.

Communication
LAN Port supports HL7 protocol support bi-directional LIS

Interface
4 USB ports (for external printer, software upgrade, barcode reader, external WIFI, keyboard and mouse), LAN port (1)

Printout
Supports Thermal & External printer

Power Requirement
(100V-240V)±10%
≤180VA (50Hz/60Hz) ±1Hz

Temperature Requirement
Temperature: 15°C~30°C
Humidity: 10%~90%

Foot print
Dimension: Depth (410 mm), width (300 mm), height (400 mm)

everlife
CPCDiagnostics
Enabling Better Outcomes

Samarth Agency
'Moreshwar', Plot No.10,
Abhiyantanagar, Islampur
Pin -415 409 Tal.Walwa,
Dist. Sangli, Maharastra

ph-
+918329160577 +919699637355
+918412821206 +919699627366

email-
sharadmore7517@gmail.com