


## Practical Test: 1


Create blank database from script

Created database named as Samarth

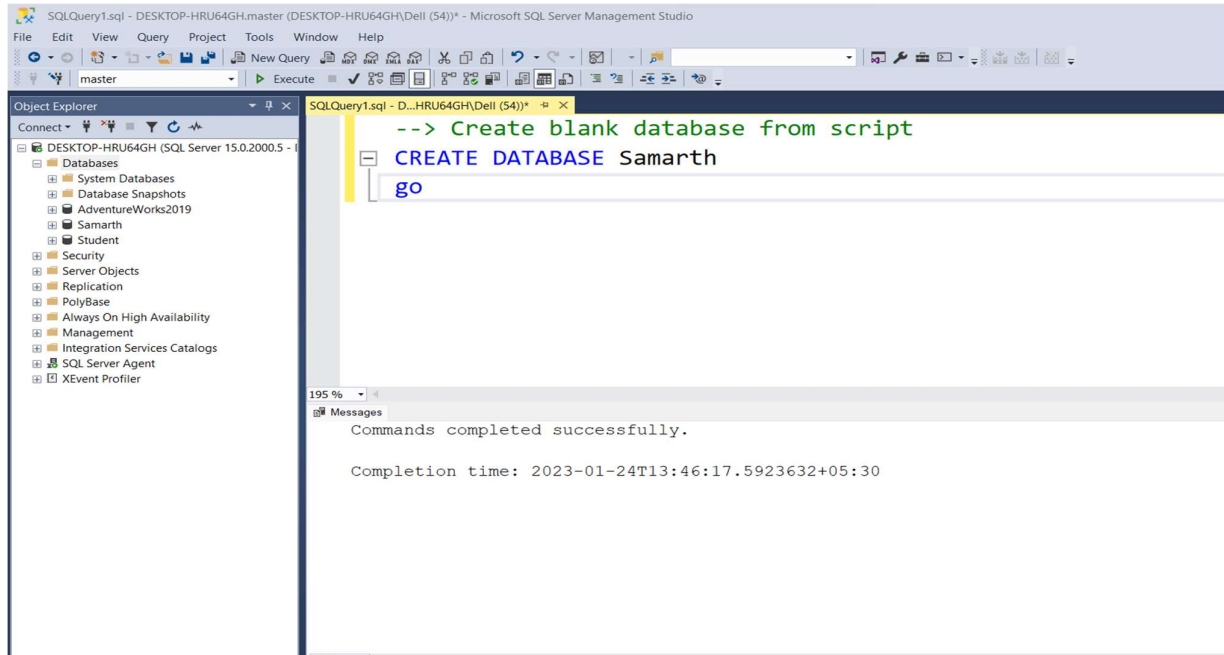


Create blank database from UI

Created database: SamarthSPatil

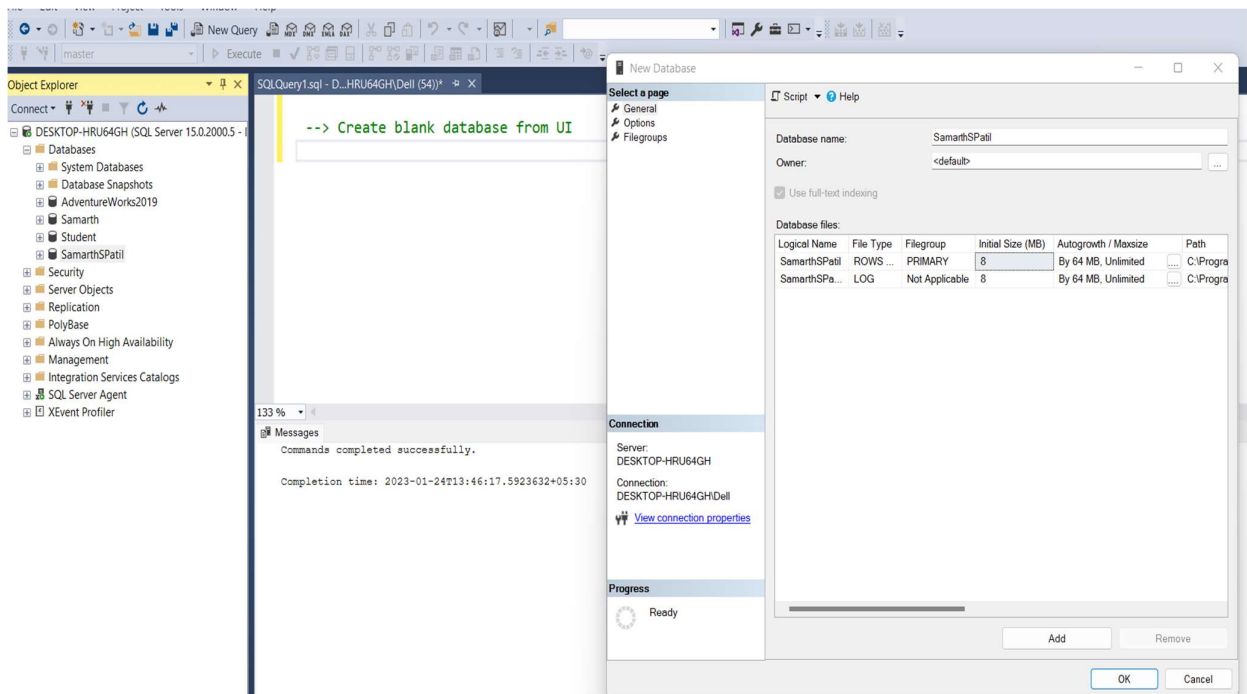


# DETACH AND ATTACH

## Detached database SamarthSPatil

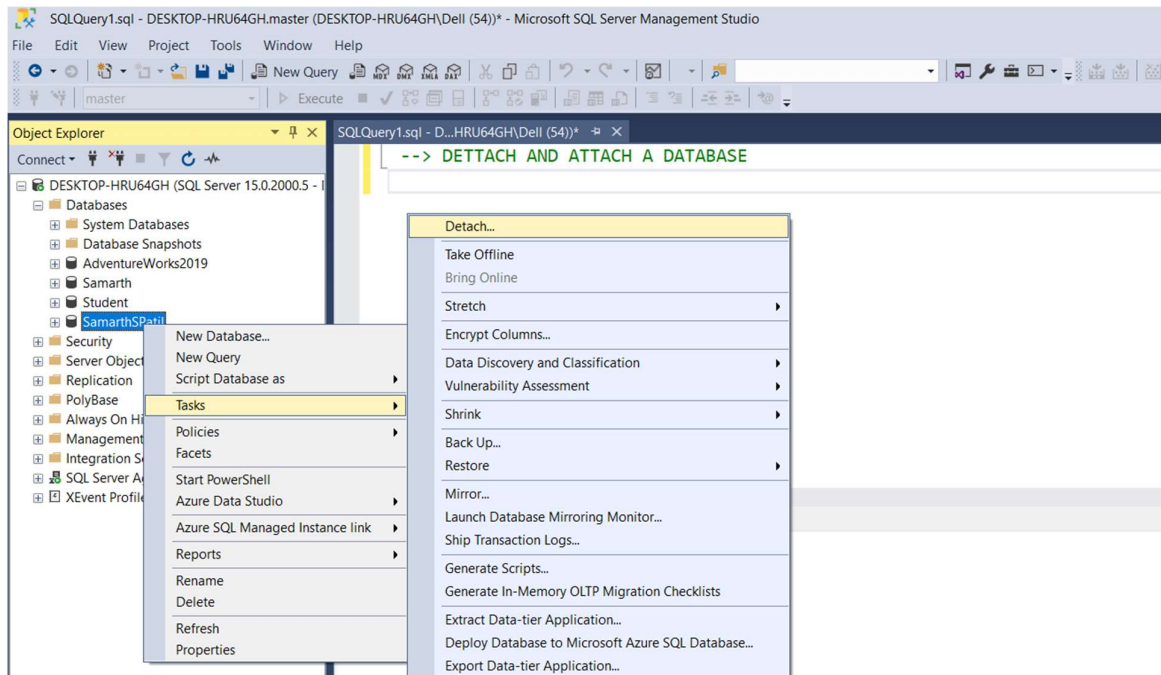


## Attached database SamarthSPatil

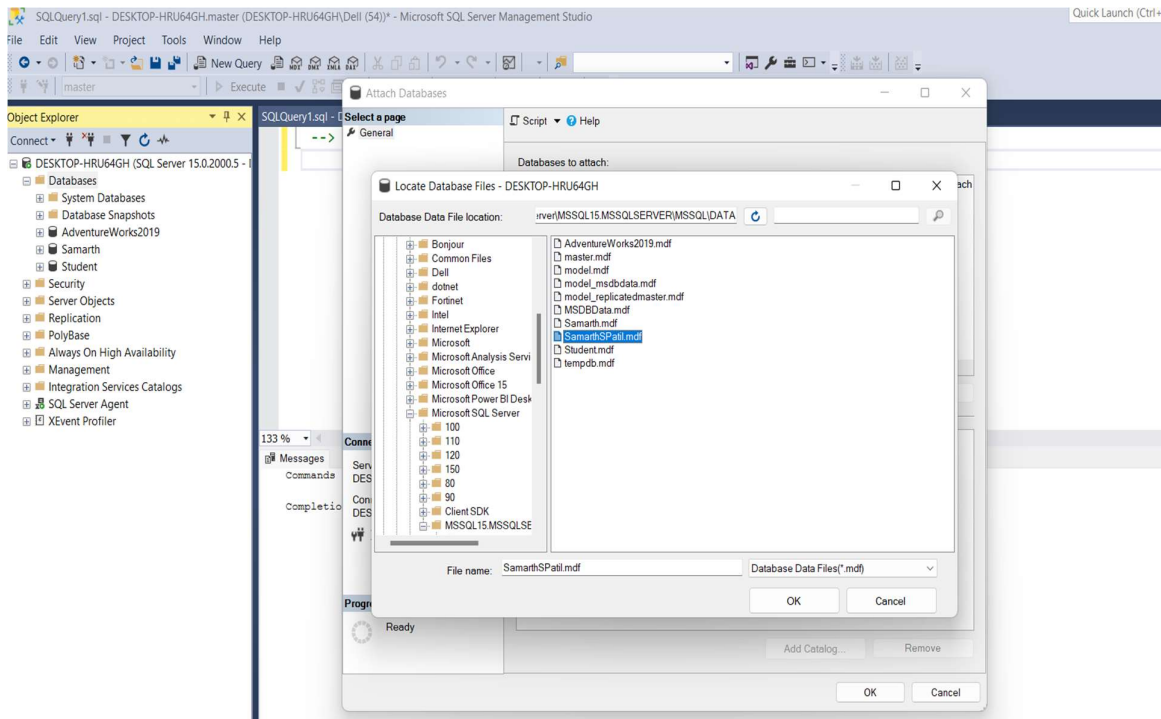


Perform back up using UI method Full, Differential, Transaction Log, Tail Log backup


## FULL BACKUP

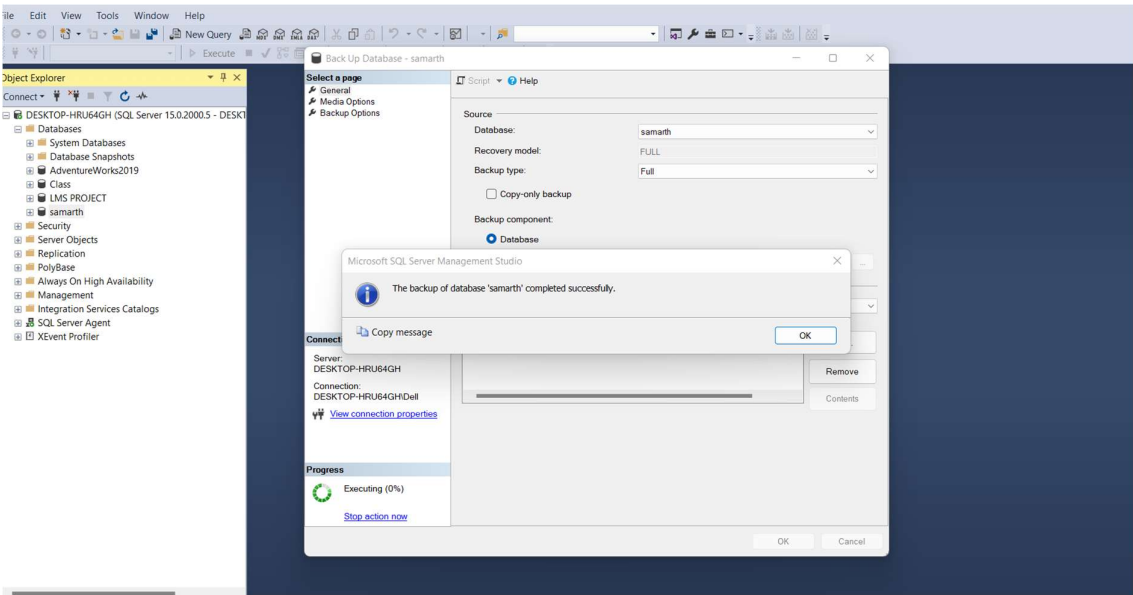



## DIFFERENTIAL BACKUP

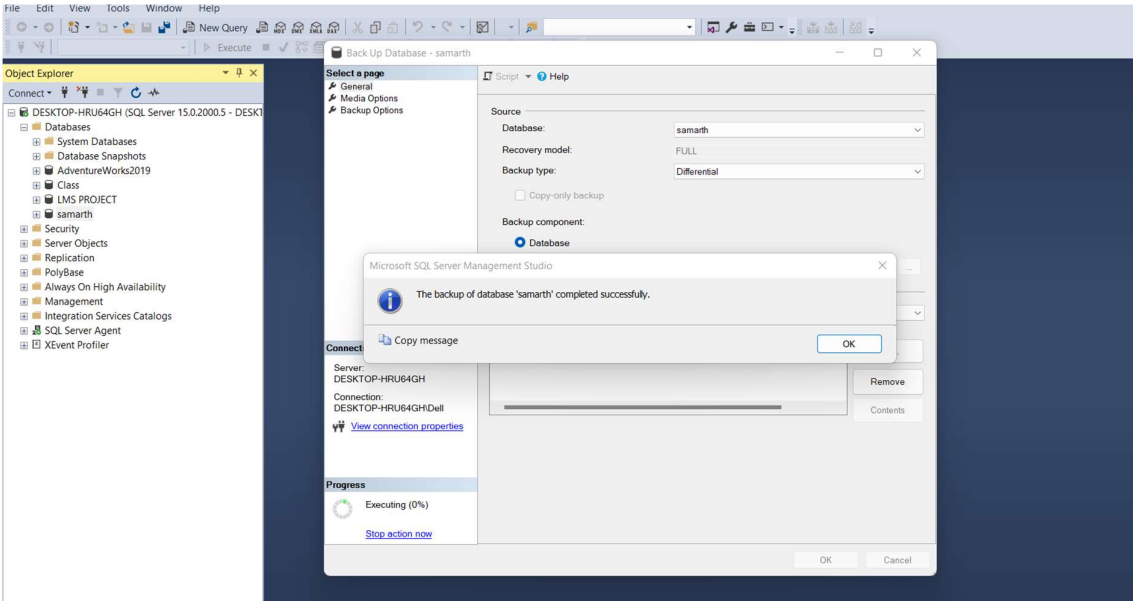


# TRANSACTION LOG BACKUP

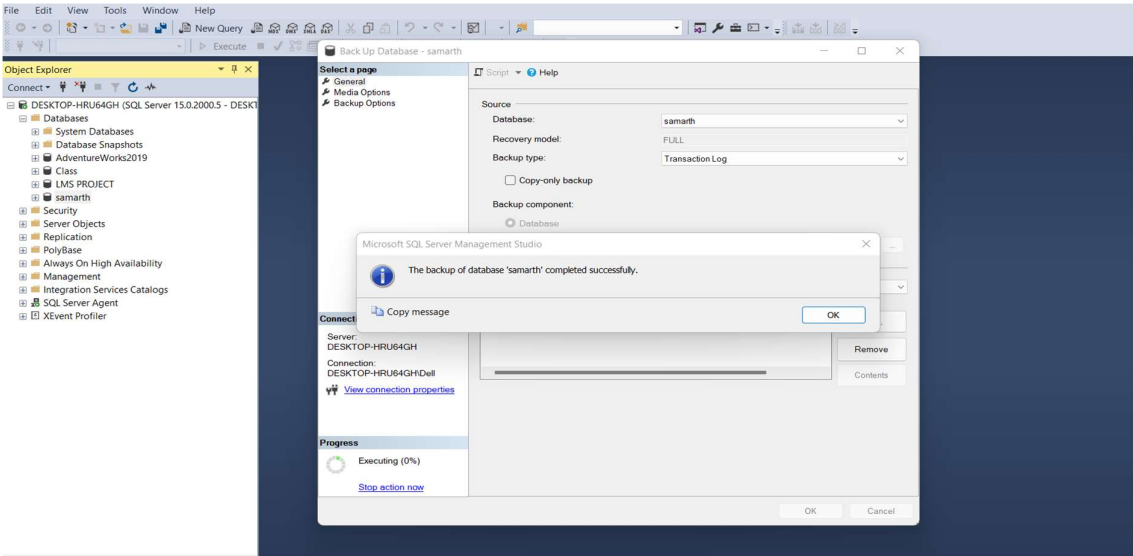


# TAIL LOG BACKUP

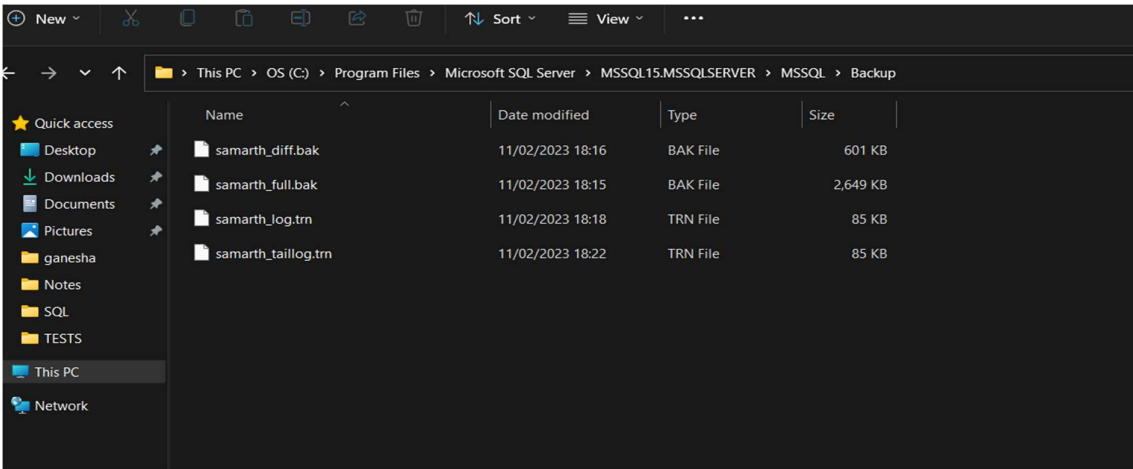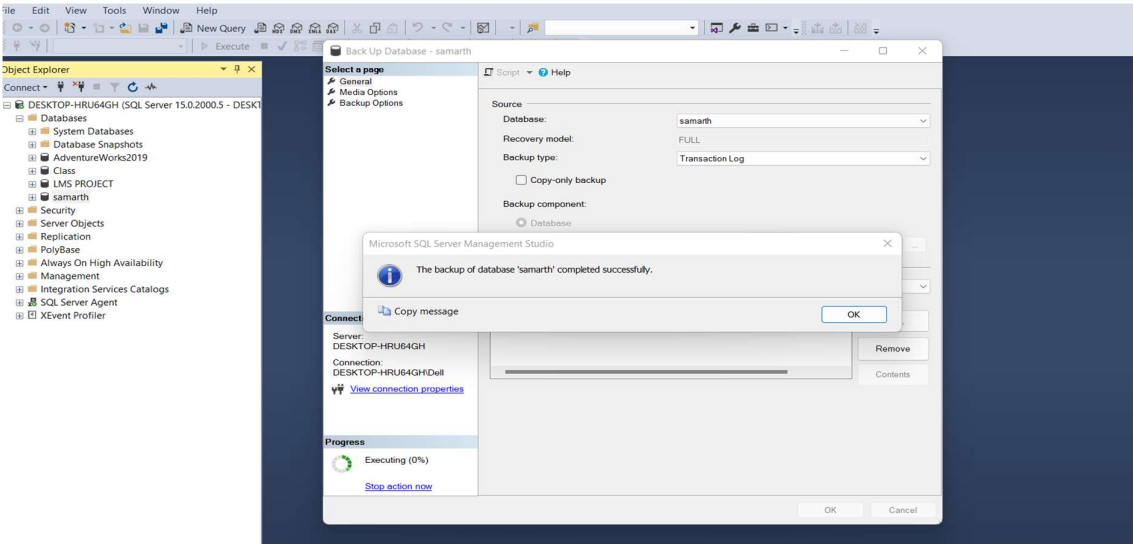


## Perform back up using Script method Full, Differential, Transaction Log, Tail Log backup

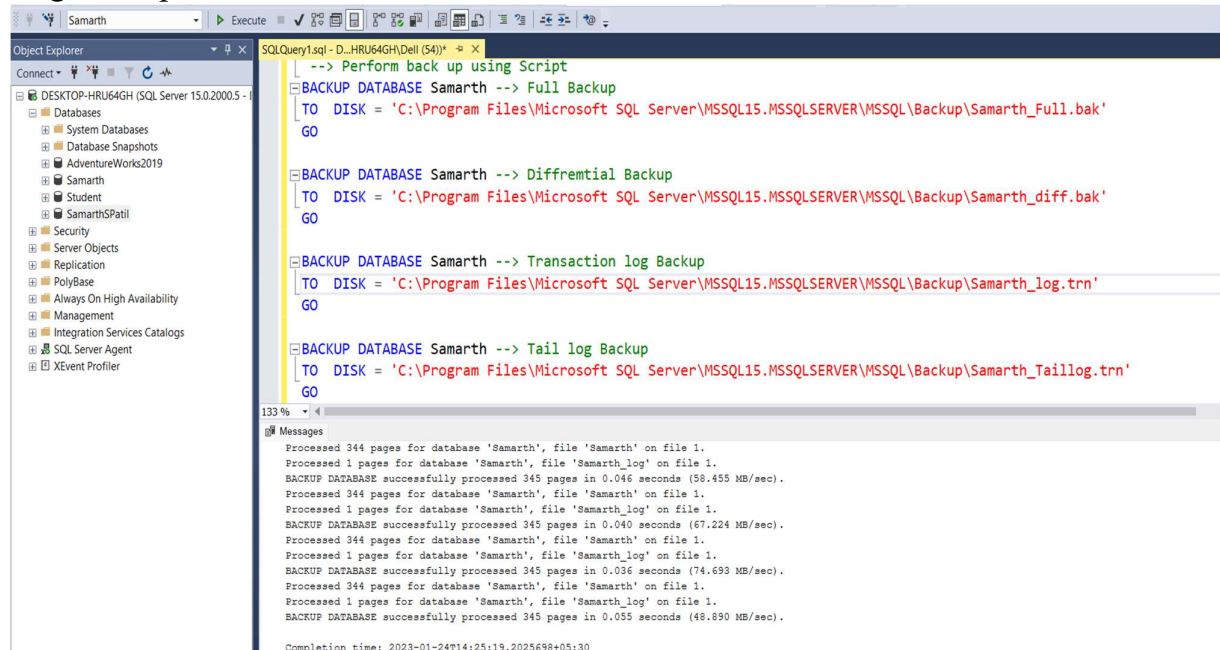


## Perform Restoring back up using UI Restore Full Backup

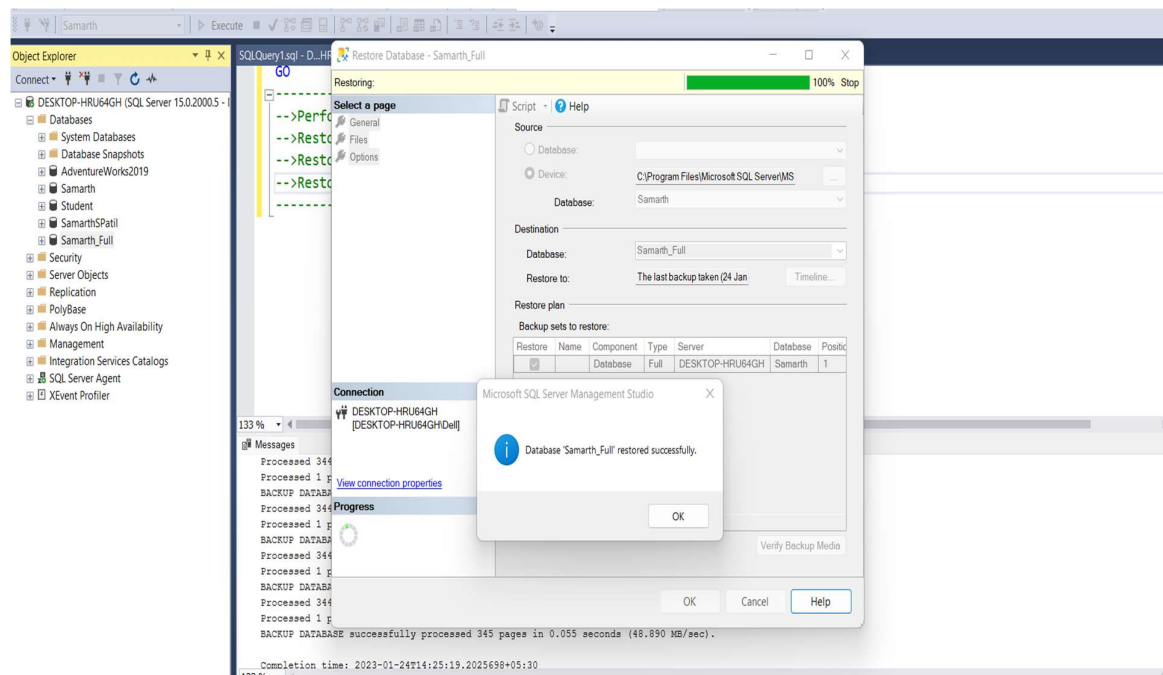

## Restore Differential Backup

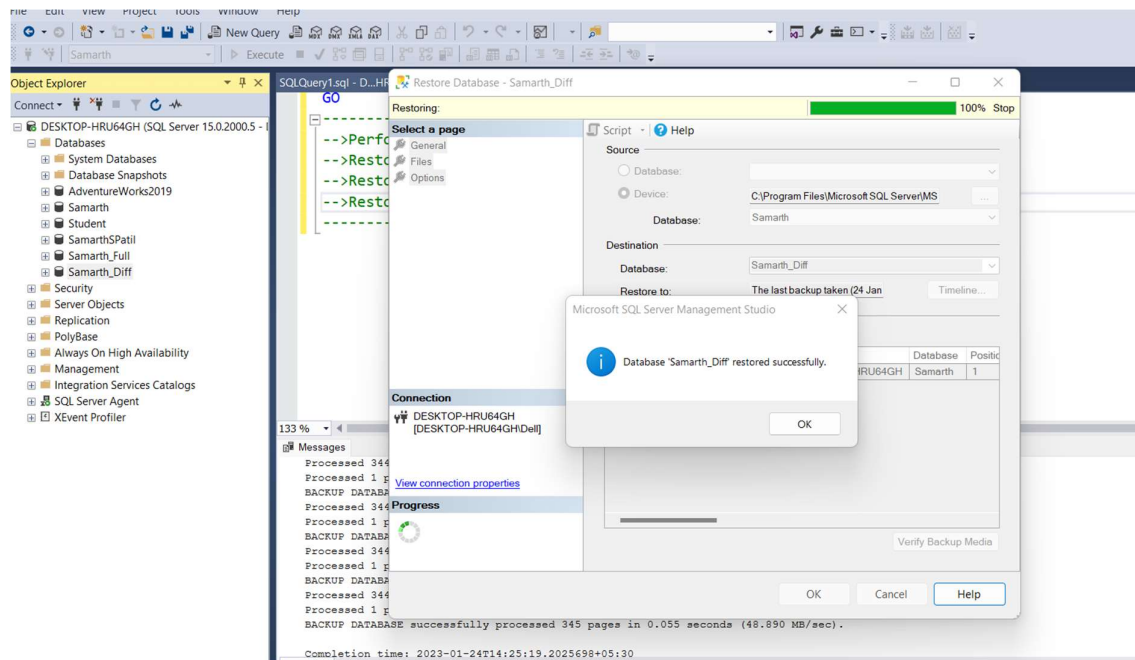


## Restore Transaction log Backup

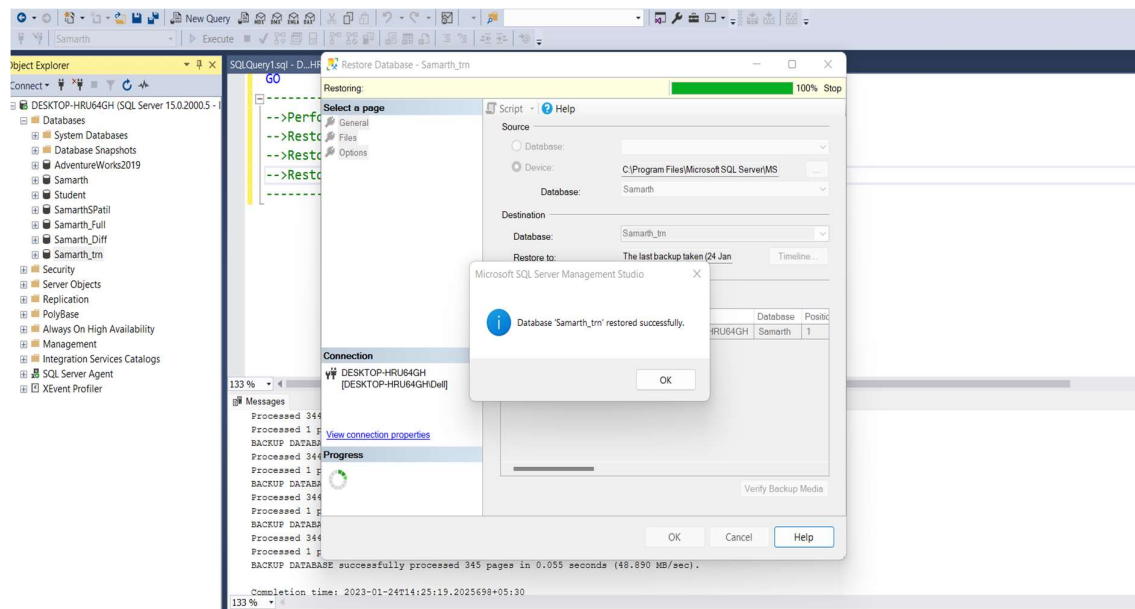



## Perform database copy only backup and restoration using UI

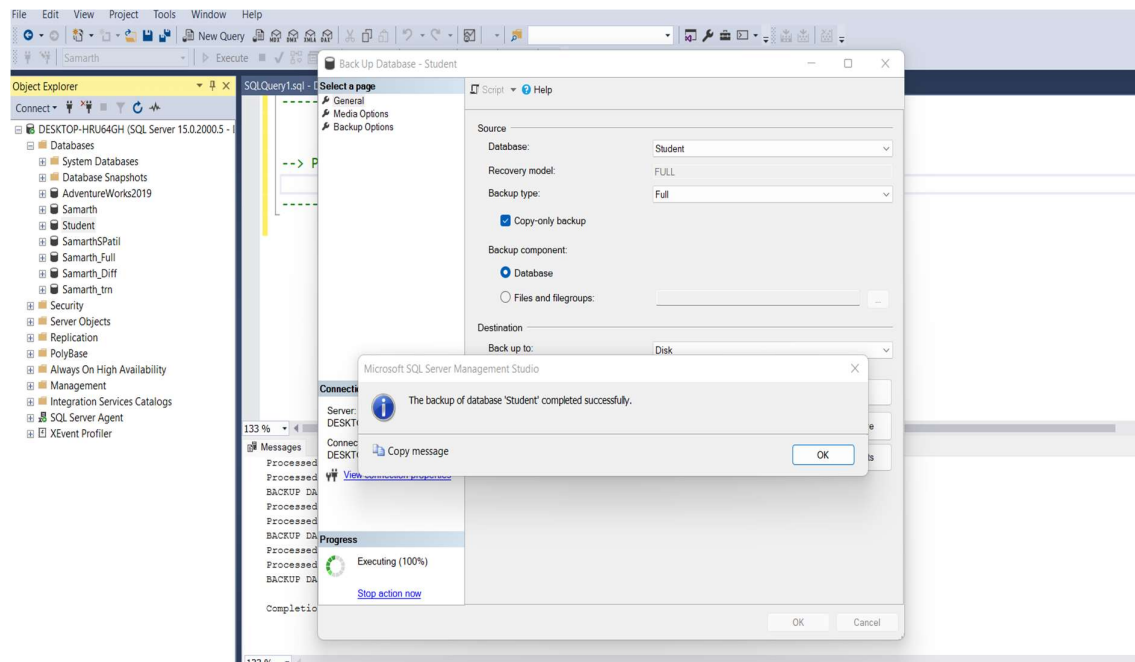

## Restoring

