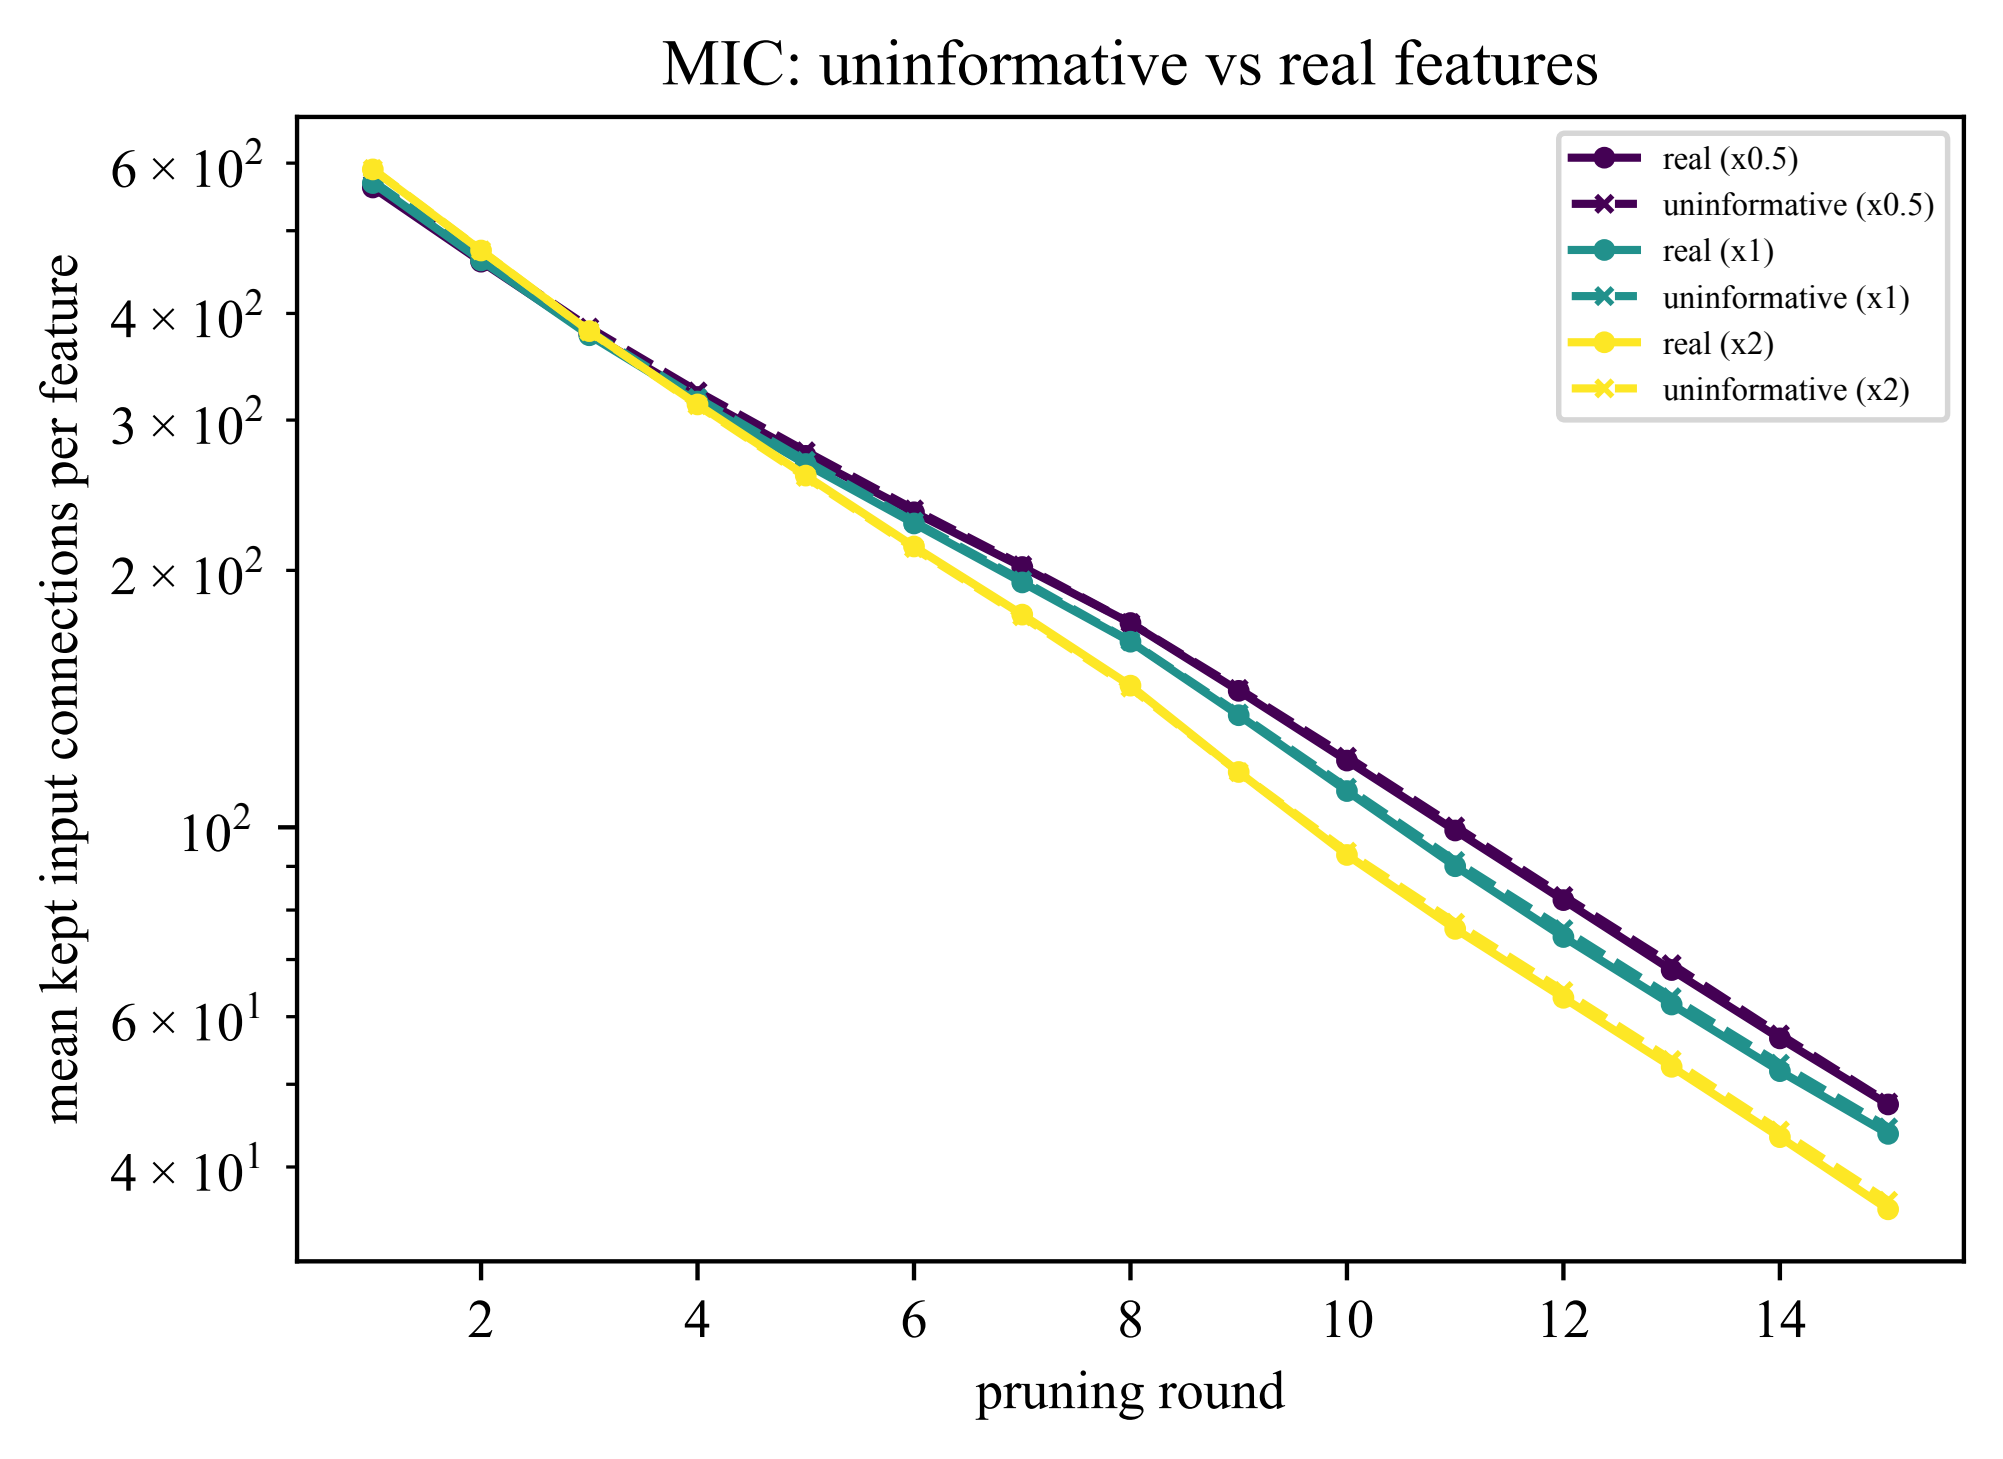
MIC: uninformative vs real features
mean kept input connections per feature
pruning round
real (x0.5)
uninformative (x0.5)
real (x1)
uninformative (x1)
real (x2)
uninformative (x2)