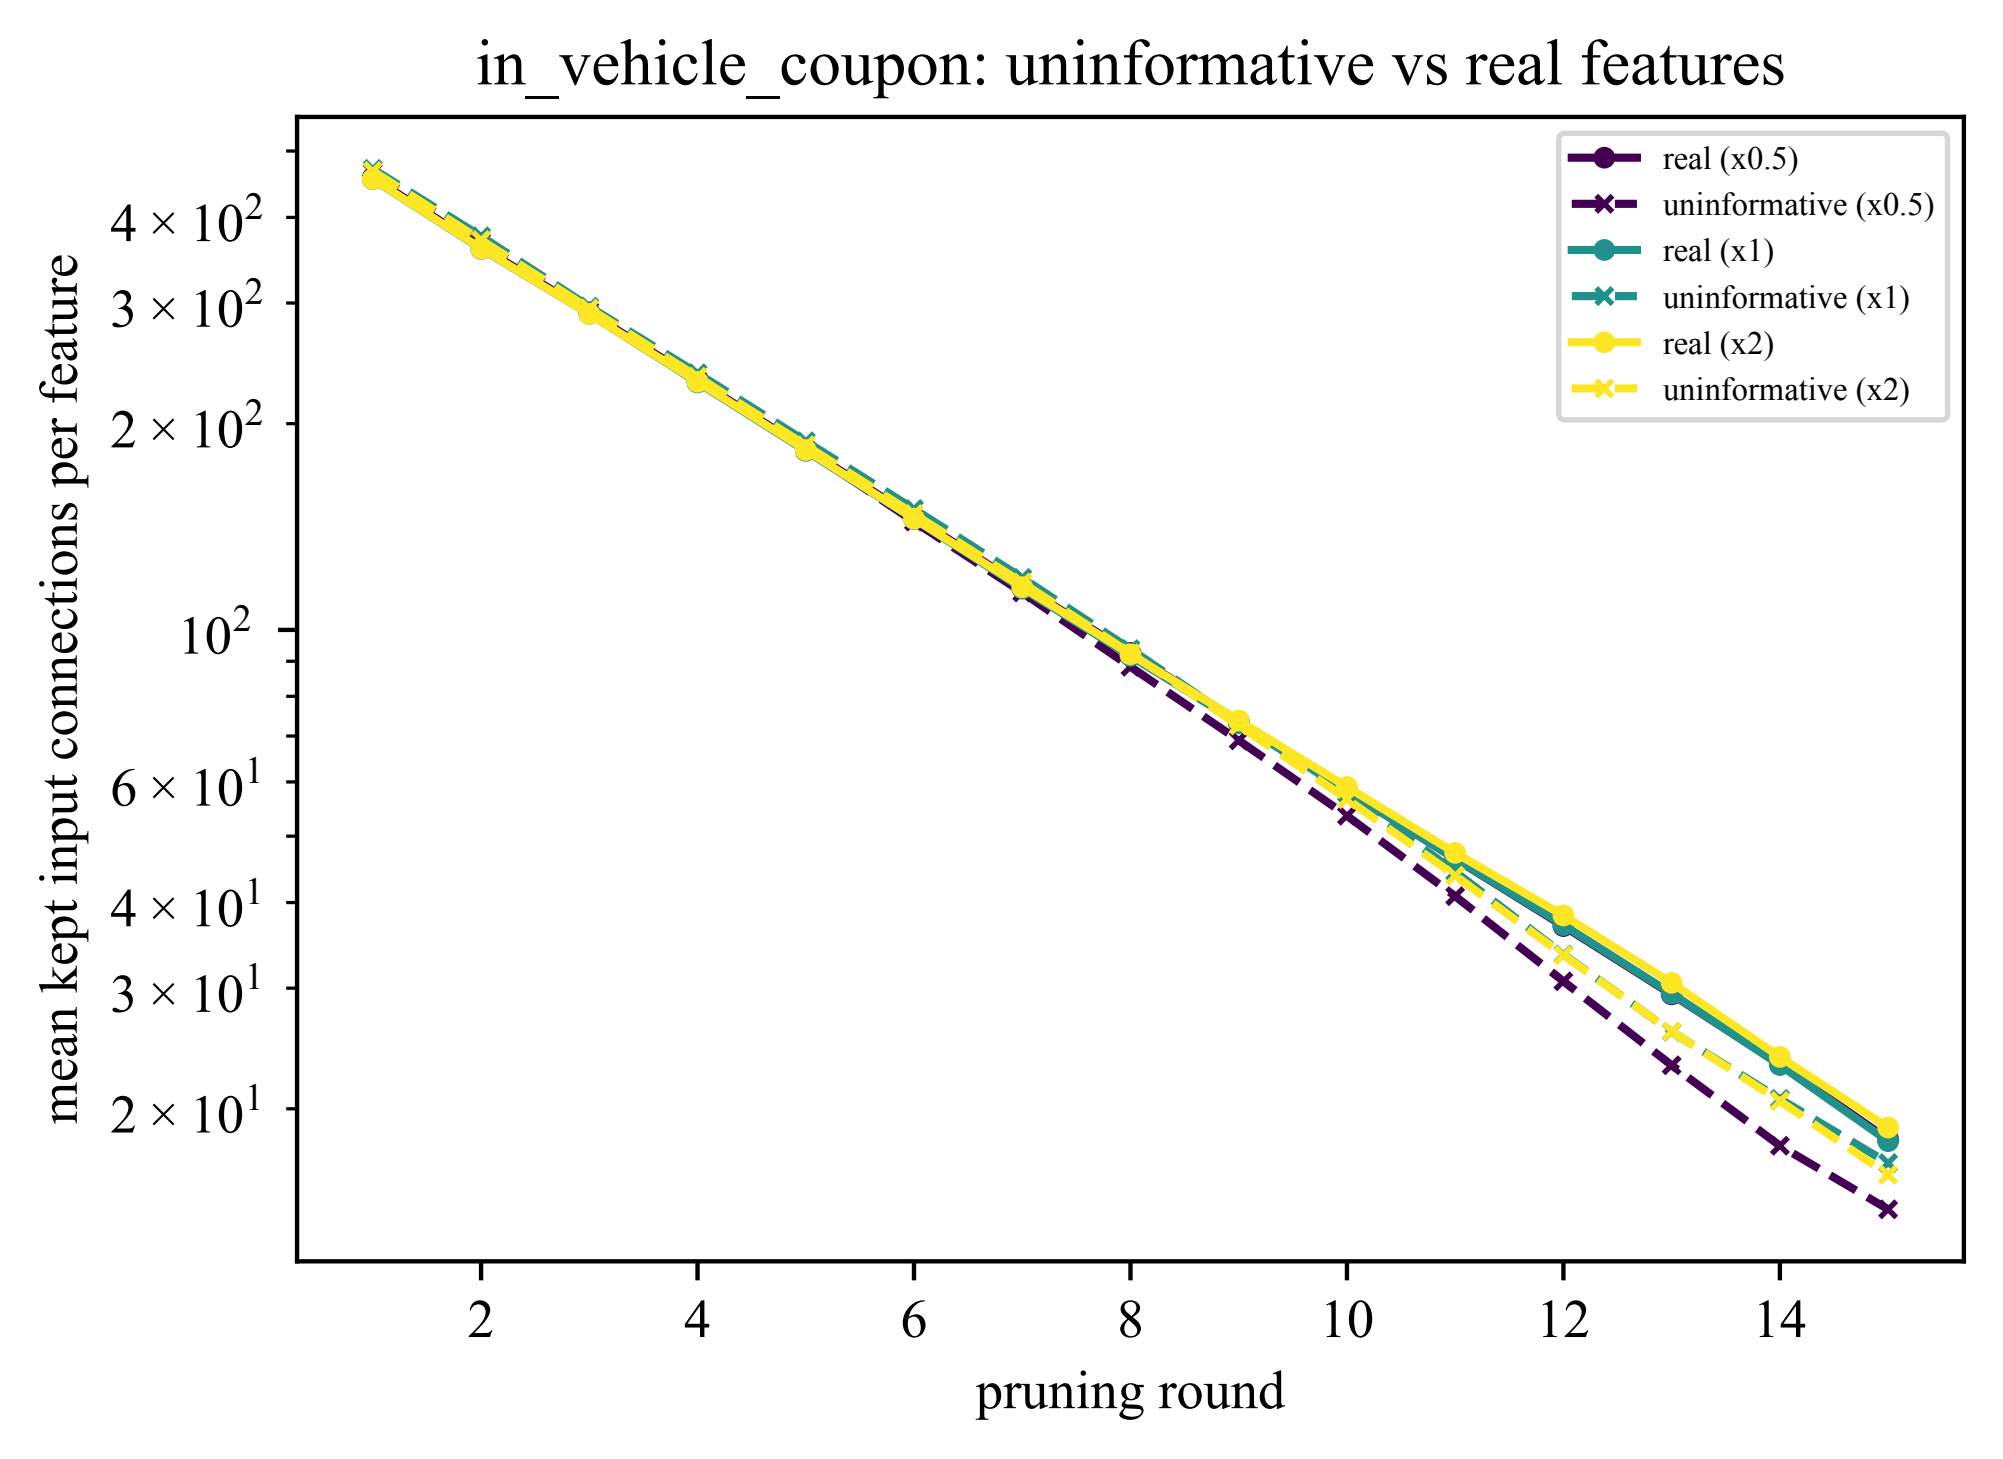
in_vehicle_coupon: uninformative vs real features
mean kept input connections per feature
pruning round
real (x0.5)
uninformative (x0.5)
real (x1)
uninformative (x1)
real (x2)
uninformative (x2)
4×10^2
3×10^2
2×10^2
10^2
6×10^1
4×10^1
3×10^1
2×10^1
2
4
6
8
10
12
14