


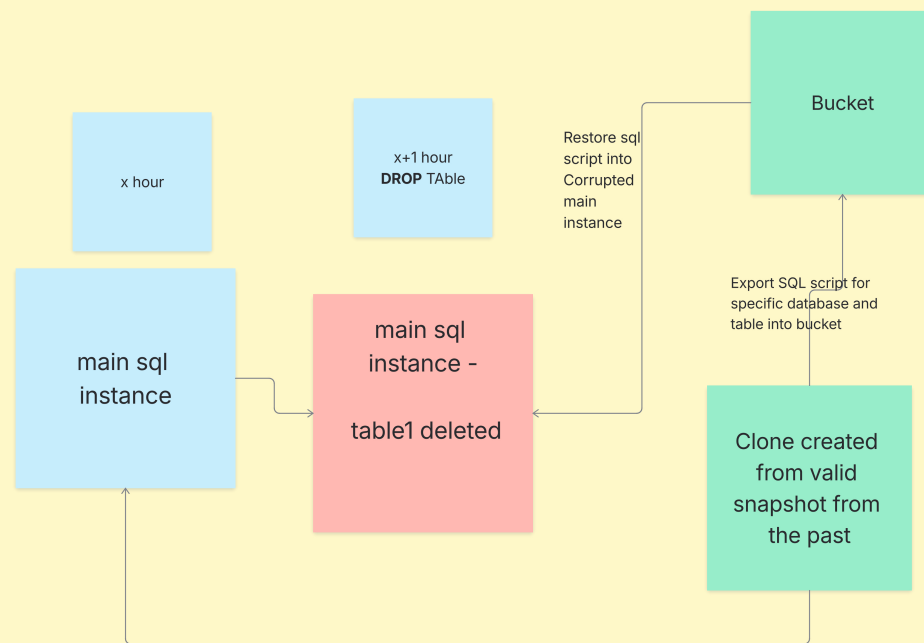

Cloud Function



Point-in-time
restore for
database tables

commit to the
repo, trigger
deploying new
version of CF

<https://github.com/ONSdigital/blaise-questionnaire-point-in-time-restore>

<https://github.com/ONSdigital/blaise-terraform/blob/BLAISS-4963/ci/tasks/deploy-point-in-time-restore/task.sh>

Payload to CF
{
 "table_name":
 "MAGNET_XX1",
 "timestamp": "2020-09-15
 10:19:00",
 "database_name": "blaise"
}



Cloud Function flow

1. Receives table_name, timestamp, and database_name through an authenticated HTTP request
2. Validates the required fields and parses the timestamp as UK local time.
3. Validates that the source and destination Cloud SQL instances exist.
4. Creates a temporary Cloud SQL clone of the source instance at the requested point in time.
5. Determines the tables to restore (<table>_Dml and <table>_Form for blaise; otherwise the supplied table).
6. Exports each table from the clone to Cloud Storage and imports it into the destination database.
7. Deletes the temporary clone after completion, including when the restore fails.
8. Returns 200 on success, 400 for invalid input, or 500 for restore failures with a request ID for logging.